NumPy Reference

Release 1.14.5

Written by the NumPy community

June 12, 2018

CONTENTS

1 Array objects **3**
- 1.1 The N-dimensional array (ndarray) . . . 3
- 1.2 Scalars . . . 47
- 1.3 Data type objects (dtype) . . . 63
- 1.4 Indexing . . . 77
- 1.5 Iterating Over Arrays . . . 85
- 1.6 Standard array subclasses . . . 97
- 1.7 Masked arrays . . . 225
- 1.8 The Array Interface . . . 373
- 1.9 Datetimes and Timedeltas . . . 378

2 Universal functions (ufunc) **387**
- 2.1 Broadcasting . . . 387
- 2.2 Output type determination . . . 388
- 2.3 Use of internal buffers . . . 388
- 2.4 Error handling . . . 389
- 2.5 Casting Rules . . . 391
- 2.6 Overriding Ufunc behavior . . . 393
- 2.7 ufunc . . . 393
- 2.8 Available ufuncs . . . 405

3 Routines **409**
- 3.1 Array creation routines . . . 409
- 3.2 Array manipulation routines . . . 446
- 3.3 Binary operations . . . 487
- 3.4 String operations . . . 496
- 3.5 C-Types Foreign Function Interface (numpy.ctypeslib) . . . 543
- 3.6 Datetime Support Functions . . . 545
- 3.7 Data type routines . . . 552
- 3.8 Optionally Scipy-accelerated routines (numpy.dual) . . . 567
- 3.9 Mathematical functions with automatic domain (numpy.emath) . . . 567
- 3.10 Floating point error handling . . . 568
- 3.11 Discrete Fourier Transform (numpy.fft) . . . 572
- 3.12 Financial functions . . . 596
- 3.13 Functional programming . . . 605
- 3.14 NumPy-specific help functions . . . 613
- 3.15 Indexing routines . . . 615
- 3.16 Input and output . . . 651
- 3.17 Linear algebra (numpy.linalg) . . . 676
- 3.18 Logic functions . . . 720

3.19 Mathematical functions . . . 742
3.20 Matrix library (numpy.matlib) . . . 834
3.21 Miscellaneous routines . . . 839
3.22 Padding Arrays . . . 843
3.23 Polynomials . . . 846
3.24 Random sampling (numpy.random) . . . 1029
3.25 Set routines . . . 1142
3.26 Sorting, searching, and counting . . . 1147
3.27 Statistics . . . 1162
3.28 Test Support (numpy.testing) . . . 1199
3.29 Window functions . . . 1215

4 Packaging (numpy.distutils) 1223
4.1 Modules in numpy.distutils . . . 1223
4.2 Building Installable C libraries . . . 1234
4.3 Conversion of .src files . . . 1235

5 NumPy C-API 1237
5.1 Python Types and C-Structures . . . 1237
5.2 System configuration . . . 1251
5.3 Data Type API . . . 1253
5.4 Array API . . . 1257
5.5 Array Iterator API . . . 1298
5.6 UFunc API . . . 1315
5.7 Generalized Universal Function API . . . 1320
5.8 NumPy core libraries . . . 1322
5.9 C API Deprecations . . . 1328

6 NumPy internals 1331
6.1 NumPy C Code Explanations . . . 1331
6.2 Internal organization of numpy arrays . . . 1338
6.3 Multidimensional Array Indexing Order Issues . . . 1339

7 NumPy and SWIG 1341
7.1 Testing the numpy.i Typemaps . . . 1356

8 Acknowledgements 1359

Bibliography 1361

Python Module Index 1371

Index 1373

Release 1.14

Date June 12, 2018

This reference manual details functions, modules, and objects included in NumPy, describing what they are and what they do. For learning how to use NumPy, see also user.

CHAPTER

ONE

ARRAY OBJECTS

NumPy provides an N-dimensional array type, the *ndarray*, which describes a collection of "items" of the same type. The items can be *indexed* using for example N integers.

All ndarrays are homogenous: every item takes up the same size block of memory, and all blocks are interpreted in exactly the same way. How each item in the array is to be interpreted is specified by a separate *data-type object*, one of which is associated with every array. In addition to basic types (integers, floats, *etc.*), the data type objects can also represent data structures.

An item extracted from an array, *e.g.*, by indexing, is represented by a Python object whose type is one of the *array scalar types* built in NumPy. The array scalars allow easy manipulation of also more complicated arrangements of data.

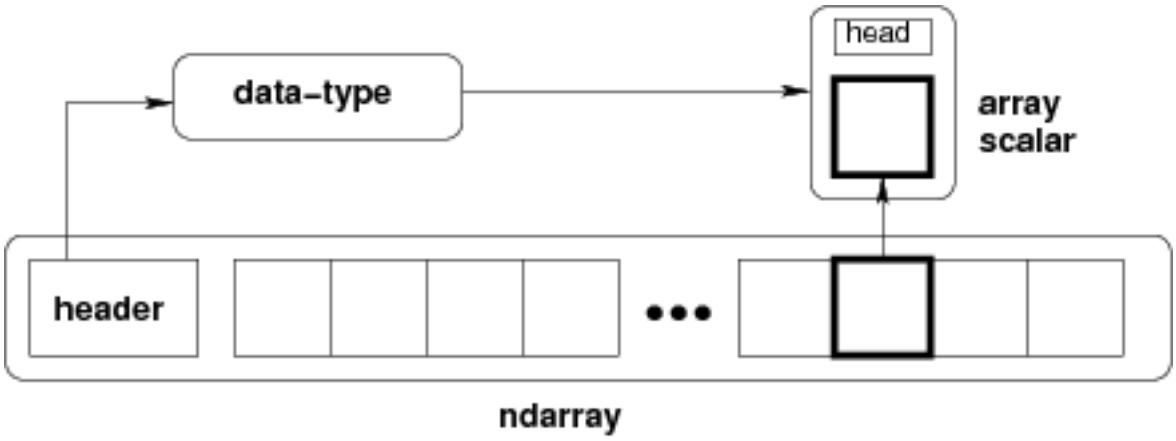

Fig. 1: **Figure** Conceptual diagram showing the relationship between the three fundamental objects used to describe the data in an array: 1) the ndarray itself, 2) the data-type object that describes the layout of a single fixed-size element of the array, 3) the array-scalar Python object that is returned when a single element of the array is accessed.

1.1 The N-dimensional array (`ndarray`)

An `ndarray` is a (usually fixed-size) multidimensional container of items of the same type and size. The number of dimensions and items in an array is defined by its `shape`, which is a `tuple` of *N* positive integers that specify the sizes of each dimension. The type of items in the array is specified by a separate *data-type object (dtype)*, one of which is associated with each ndarray.

As with other container objects in Python, the contents of an `ndarray` can be accessed and modified by *indexing or slicing* the array (using, for example, *N* integers), and via the methods and attributes of the `ndarray`.

Different *ndarrays* can share the same data, so that changes made in one *ndarray* may be visible in another. That is, an ndarray can be a *"view"* to another ndarray, and the data it is referring to is taken care of by the *"base"* ndarray. ndarrays can also be views to memory owned by Python `strings` or objects implementing the `buffer` or *array* interfaces.

Example

A 2-dimensional array of size 2 x 3, composed of 4-byte integer elements:

```
>>> x = np.array([[1, 2, 3], [4, 5, 6]], np.int32)
>>> type(x)
<type 'numpy.ndarray'>
>>> x.shape
(2, 3)
>>> x.dtype
dtype('int32')
```

The array can be indexed using Python container-like syntax:

```
>>> # The element of x in the *second* row, *third* column, namely, 6.
>>> x[1, 2]
```

For example *slicing* can produce views of the array:

```
>>> y = x[:,1]
>>> y
array([2, 5])
>>> y[0] = 9 # this also changes the corresponding element in x
>>> y
array([9, 5])
>>> x
array([[1, 9, 3],
       [4, 5, 6]])
```

1.1.1 Constructing arrays

New arrays can be constructed using the routines detailed in *Array creation routines*, and also by using the low-level *ndarray* constructor:

ndarray(shape[, dtype, buffer, offset, ...])	An array object represents a multidimensional, homogeneous array of fixed-size items.

class numpy.**ndarray**(*shape*, *dtype=float*, *buffer=None*, *offset=0*, *strides=None*, *order=None*)

An array object represents a multidimensional, homogeneous array of fixed-size items. An associated data-type object describes the format of each element in the array (its byte-order, how many bytes it occupies in memory, whether it is an integer, a floating point number, or something else, etc.)

Arrays should be constructed using *array*, *zeros* or *empty* (refer to the See Also section below). The parameters given here refer to a low-level method (*ndarray(...)*) for instantiating an array.

For more information, refer to the *numpy* module and examine the methods and attributes of an array.

Parameters (for the __new__ method; see Notes below)

shape : tuple of ints

Shape of created array.

dtype : data-type, optional

Any object that can be interpreted as a numpy data type.

buffer : object exposing buffer interface, optional

Used to fill the array with data.

offset : int, optional

Offset of array data in buffer.

strides : tuple of ints, optional

Strides of data in memory.

order : {'C', 'F'}, optional

Row-major (C-style) or column-major (Fortran-style) order.

See also:

array Construct an array.

zeros Create an array, each element of which is zero.

empty Create an array, but leave its allocated memory unchanged (i.e., it contains "garbage").

dtype Create a data-type.

Notes

There are two modes of creating an array using `__new__`:

1. If *buffer* is None, then only *shape*, *dtype*, and *order* are used.
2. If *buffer* is an object exposing the buffer interface, then all keywords are interpreted.

No `__init__` method is needed because the array is fully initialized after the `__new__` method.

Examples

These examples illustrate the low-level *ndarray* constructor. Refer to the *See Also* section above for easier ways of constructing an ndarray.

First mode, *buffer* is None:

```
>>> np.ndarray(shape=(2,2), dtype=float, order='F')
array([[ -1.13698227e+002,   4.25087011e-303],
       [  2.88528414e-306,   3.27025015e-309]])         #random
```

Second mode:

```
>>> np.ndarray((2,), buffer=np.array([1,2,3]),
...            offset=np.int_().itemsize,
...            dtype=int) # offset = 1*itemsize, i.e. skip first element
array([2, 3])
```

Attributes

T	Same as self.transpose(), except that self is returned if self.ndim < 2.
data	Python buffer object pointing to the start of the array's data.
dtype	Data-type of the array's elements.
flags	Information about the memory layout of the array.
flat	A 1-D iterator over the array.
imag	The imaginary part of the array.
real	The real part of the array.
size	Number of elements in the array.
itemsize	Length of one array element in bytes.
nbytes	Total bytes consumed by the elements of the array.
ndim	Number of array dimensions.
shape	Tuple of array dimensions.
strides	Tuple of bytes to step in each dimension when traversing an array.
ctypes	An object to simplify the interaction of the array with the ctypes module.
base	Base object if memory is from some other object.

ndarray.**T**
Same as self.transpose(), except that self is returned if self.ndim < 2.

Examples

```
>>> x = np.array([[1.,2.],[3.,4.]])
>>> x
array([[ 1.,  2.],
       [ 3.,  4.]])
>>> x.T
array([[ 1.,  3.],
       [ 2.,  4.]])
>>> x = np.array([1.,2.,3.,4.])
>>> x
array([ 1.,  2.,  3.,  4.])
>>> x.T
array([ 1.,  2.,  3.,  4.])
```

ndarray.**data**
Python buffer object pointing to the start of the array's data.

ndarray.**dtype**
Data-type of the array's elements.

Parameters None

Returns **d** : numpy dtype object

See also:

numpy.dtype

Examples

```
>>> x
array([[0, 1],
       [2, 3]])
>>> x.dtype
dtype('int32')
>>> type(x.dtype)
<type 'numpy.dtype'>
```

ndarray.**flags**
Information about the memory layout of the array.

Notes

The *flags* object can be accessed dictionary-like (as in `a.flags['WRITEABLE']`), or by using lowercased attribute names (as in `a.flags.writeable`). Short flag names are only supported in dictionary access.

Only the WRITEBACKIFCOPY, UPDATEIFCOPY, WRITEABLE, and ALIGNED flags can be changed by the user, via direct assignment to the attribute or dictionary entry, or by calling *ndarray.setflags*.

The array flags cannot be set arbitrarily:

- UPDATEIFCOPY can only be set `False`.
- WRITEBACKIFCOPY can only be set `False`.
- ALIGNED can only be set `True` if the data is truly aligned.
- WRITEABLE can only be set `True` if the array owns its own memory or the ultimate owner of the memory exposes a writeable buffer interface or is a string.

Arrays can be both C-style and Fortran-style contiguous simultaneously. This is clear for 1-dimensional arrays, but can also be true for higher dimensional arrays.

Even for contiguous arrays a stride for a given dimension `arr.strides[dim]` may be *arbitrary* if `arr.shape[dim] == 1` or the array has no elements. It does *not* generally hold that `self.strides[-1] == self.itemsize` for C-style contiguous arrays or `self.strides[0] == self.itemsize` for Fortran-style contiguous arrays is true.

Attributes

C_CONTIGUOUS (C)	The data is in a single, C-style contiguous segment.
F_CONTIGUOUS (F)	The data is in a single, Fortran-style contiguous segment.
OWNDATA (O)	The array owns the memory it uses or borrows it from another object.
WRITEABLE (W)	The data area can be written to. Setting this to False locks the data, making it read-only. A view (slice, etc.) inherits WRITEABLE from its base array at creation time, but a view of a writeable array may be subsequently locked while the base array remains writeable. (The opposite is not true, in that a view of a locked array may not be made writeable. However, currently, locking a base object does not lock any views that already reference it, so under that circumstance it is possible to alter the contents of a locked array via a previously created writeable view onto it.) Attempting to change a non-writeable array raises a RuntimeError exception.
ALIGNED (A)	The data and all elements are aligned appropriately for the hardware.
WRITEBACKIFCOPY (X)	This array is a copy of some other array. The C-API function PyArray_ResolveWritebackIfCopy must be called before deallocating to the base array will be updated with the contents of this array.
UPDATEIFCOPY (U)	(Deprecated, use WRITEBACKIFCOPY) This array is a copy of some other array. When this array is deallocated, the base array will be updated with the contents of this array.
FNC	F_CONTIGUOUS and not C_CONTIGUOUS.
FORC	F_CONTIGUOUS or C_CONTIGUOUS (one-segment test).
BEHAVED (B)	ALIGNED and WRITEABLE.
CARRAY (CA)	BEHAVED and C_CONTIGUOUS.
FARRAY (FA)	BEHAVED and F_CONTIGUOUS and not C_CONTIGUOUS.

ndarray.**flat**

A 1-D iterator over the array.

This is a *numpy.flatiter* instance, which acts similarly to, but is not a subclass of, Python's built-in iterator object.

See also:

flatten Return a copy of the array collapsed into one dimension.

flatiter

Examples

```
>>> x = np.arange(1, 7).reshape(2, 3)
>>> x
array([[1, 2, 3],
       [4, 5, 6]])
>>> x.flat[3]
4
>>> x.T
array([[1, 4],
       [2, 5],
       [3, 6]])
>>> x.T.flat[3]
5
>>> type(x.flat)
<type 'numpy.flatiter'>
```

An assignment example:

```
>>> x.flat = 3; x
array([[3, 3, 3],
       [3, 3, 3]])
>>> x.flat[[1,4]] = 1; x
array([[3, 1, 3],
       [3, 1, 3]])
```

ndarray.**imag**
The imaginary part of the array.

Examples

```
>>> x = np.sqrt([1+0j, 0+1j])
>>> x.imag
array([ 0.        ,  0.70710678])
>>> x.imag.dtype
dtype('float64')
```

ndarray.**real**
The real part of the array.

See also:

numpy.real equivalent function

Examples

```
>>> x = np.sqrt([1+0j, 0+1j])
>>> x.real
array([ 1.        ,  0.70710678])
>>> x.real.dtype
dtype('float64')
```

ndarray.**size**
Number of elements in the array.

Equivalent to `np.prod(a.shape)`, i.e., the product of the array's dimensions.

Examples

```
>>> x = np.zeros((3, 5, 2), dtype=np.complex128)
>>> x.size
30
>>> np.prod(x.shape)
30
```

ndarray.**itemsize**
Length of one array element in bytes.

Examples

```
>>> x = np.array([1,2,3], dtype=np.float64)
>>> x.itemsize
8
>>> x = np.array([1,2,3], dtype=np.complex128)
>>> x.itemsize
16
```

ndarray.**nbytes**
Total bytes consumed by the elements of the array.

Notes

Does not include memory consumed by non-element attributes of the array object.

Examples

```
>>> x = np.zeros((3,5,2), dtype=np.complex128)
>>> x.nbytes
480
>>> np.prod(x.shape) * x.itemsize
480
```

ndarray.**ndim**
Number of array dimensions.

Examples

```
>>> x = np.array([1, 2, 3])
>>> x.ndim
1
>>> y = np.zeros((2, 3, 4))
>>> y.ndim
3
```

ndarray.**shape**

Tuple of array dimensions.

The shape property is usually used to get the current shape of an array, but may also be used to reshape the array in-place by assigning a tuple of array dimensions to it. As with *numpy.reshape*, one of the new shape dimensions can be -1, in which case its value is inferred from the size of the array and the remaining dimensions. Reshaping an array in-place will fail if a copy is required.

See also:

numpy.reshape similar function

ndarray.reshape similar method

Examples

```
>>> x = np.array([1, 2, 3, 4])
>>> x.shape
(4,)
>>> y = np.zeros((2, 3, 4))
>>> y.shape
(2, 3, 4)
>>> y.shape = (3, 8)
>>> y
array([[ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.],
       [ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.],
       [ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.]])
>>> y.shape = (3, 6)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: total size of new array must be unchanged
>>> np.zeros((4,2))[::2].shape = (-1,)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
AttributeError: incompatible shape for a non-contiguous array
```

ndarray.**strides**

Tuple of bytes to step in each dimension when traversing an array.

The byte offset of element `(i[0], i[1], ..., i[n])` in an array *a* is:

```
offset = sum(np.array(i) * a.strides)
```

A more detailed explanation of strides can be found in the "ndarray.rst" file in the NumPy reference guide.

See also:

numpy.lib.stride_tricks.as_strided

Notes

Imagine an array of 32-bit integers (each 4 bytes):

```
x = np.array([[0, 1, 2, 3, 4],
              [5, 6, 7, 8, 9]], dtype=np.int32)
```

This array is stored in memory as 40 bytes, one after the other (known as a contiguous block of memory). The strides of an array tell us how many bytes we have to skip in memory to move to the next position along a certain axis. For example, we have to skip 4 bytes (1 value) to move to the next column, but 20 bytes (5 values) to get to the same position in the next row. As such, the strides for the array *x* will be `(20, 4)`.

Examples

```
>>> y = np.reshape(np.arange(2*3*4), (2,3,4))
>>> y
array([[[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]],
       [[12, 13, 14, 15],
        [16, 17, 18, 19],
        [20, 21, 22, 23]]])
>>> y.strides
(48, 16, 4)
>>> y[1,1,1]
17
>>> offset=sum(y.strides * np.array((1,1,1)))
>>> offset/y.itemsize
17
```

```
>>> x = np.reshape(np.arange(5*6*7*8), (5,6,7,8)).transpose(2,3,1,0)
>>> x.strides
(32, 4, 224, 1344)
>>> i = np.array([3,5,2,2])
>>> offset = sum(i * x.strides)
>>> x[3,5,2,2]
813
>>> offset / x.itemsize
813
```

ndarray.**ctypes**

An object to simplify the interaction of the array with the ctypes module.

This attribute creates an object that makes it easier to use arrays when calling shared libraries with the ctypes module. The returned object has, among others, data, shape, and strides attributes (see Notes below) which themselves return ctypes objects that can be used as arguments to a shared library.

Parameters None

Returns **c** : Python object

Possessing attributes data, shape, strides, etc.

See also:

`numpy.ctypeslib`

Notes

Below are the public attributes of this object which were documented in "Guide to NumPy" (we have omitted undocumented public attributes, as well as documented private attributes):

- data: A pointer to the memory area of the array as a Python integer. This memory area may contain data that is not aligned, or not in correct byte-order. The memory area may not even be writeable. The array flags and data-type of this array should be respected when passing this attribute to arbitrary C-code to avoid trouble that can include Python crashing. User Beware! The value of this attribute is exactly the same as self._array_interface_['data'][0].
- shape (c_intp*self.ndim): A ctypes array of length self.ndim where the basetype is the C-integer corresponding to dtype('p') on this platform. This base-type could be c_int, c_long, or c_longlong depending on the platform. The c_intp type is defined accordingly in numpy.ctypeslib. The ctypes array contains the shape of the underlying array.
- strides (c_intp*self.ndim): A ctypes array of length self.ndim where the basetype is the same as for the shape attribute. This ctypes array contains the strides information from the underlying array. This strides information is important for showing how many bytes must be jumped to get to the next element in the array.
- data_as(obj): Return the data pointer cast to a particular c-types object. For example, calling self._as_parameter_ is equivalent to self.data_as(ctypes.c_void_p). Perhaps you want to use the data as a pointer to a ctypes array of floating-point data: self.data_as(ctypes.POINTER(ctypes.c_double)).
- shape_as(obj): Return the shape tuple as an array of some other c-types type. For example: self.shape_as(ctypes.c_short).
- strides_as(obj): Return the strides tuple as an array of some other c-types type. For example: self.strides_as(ctypes.c_longlong).

Be careful using the ctypes attribute - especially on temporary arrays or arrays constructed on the fly. For example, calling `(a+b).ctypes.data_as(ctypes.c_void_p)` returns a pointer to memory that is invalid because the array created as (a+b) is deallocated before the next Python statement. You can avoid this problem using either `c=a+b` or `ct=(a+b).ctypes`. In the latter case, ct will hold a reference to the array until ct is deleted or re-assigned.

If the ctypes module is not available, then the ctypes attribute of array objects still returns something useful, but ctypes objects are not returned and errors may be raised instead. In particular, the object will still have the as parameter attribute which will return an integer equal to the data attribute.

Examples

```
>>> import ctypes
>>> x
array([[0, 1],
       [2, 3]])
>>> x.ctypes.data
30439712
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_long))
<ctypes.LP_c_long object at 0x01F01300>
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_long)).contents
c_long(0)
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_longlong)).contents
c_longlong(4294967296L)
>>> x.ctypes.shape
<numpy.core._internal.c_long_Array_2 object at 0x01FFD580>
>>> x.ctypes.shape_as(ctypes.c_long)
<numpy.core._internal.c_long_Array_2 object at 0x01FCE620>
>>> x.ctypes.strides
<numpy.core._internal.c_long_Array_2 object at 0x01FCE620>
```

(continues on next page)

(continued from previous page)

```
>>> x.ctypes.strides_as(ctypes.c_longlong)
<numpy.core._internal.c_longlong_Array_2 object at 0x01F01300>
```

ndarray.**base**
Base object if memory is from some other object.

Examples

The base of an array that owns its memory is None:

```
>>> x = np.array([1,2,3,4])
>>> x.base is None
True
```

Slicing creates a view, whose memory is shared with x:

```
>>> y = x[2:]
>>> y.base is x
True
```

Methods

all([axis, out, keepdims])	Returns True if all elements evaluate to True.
any([axis, out, keepdims])	Returns True if any of the elements of *a* evaluate to True.
argmax([axis, out])	Return indices of the maximum values along the given axis.
argmin([axis, out])	Return indices of the minimum values along the given axis of *a*.
argpartition(kth[, axis, kind, order])	Returns the indices that would partition this array.
argsort([axis, kind, order])	Returns the indices that would sort this array.
astype(dtype[, order, casting, subok, copy])	Copy of the array, cast to a specified type.
byteswap([inplace])	Swap the bytes of the array elements
choose(choices[, out, mode])	Use an index array to construct a new array from a set of choices.
clip([min, max, out])	Return an array whose values are limited to `[min, max]`.
compress(condition[, axis, out])	Return selected slices of this array along given axis.
conj()	Complex-conjugate all elements.
conjugate()	Return the complex conjugate, element-wise.
copy([order])	Return a copy of the array.
cumprod([axis, dtype, out])	Return the cumulative product of the elements along the given axis.
cumsum([axis, dtype, out])	Return the cumulative sum of the elements along the given axis.
diagonal([offset, axis1, axis2])	Return specified diagonals.
dot(b[, out])	Dot product of two arrays.
dump(file)	Dump a pickle of the array to the specified file.
dumps()	Returns the pickle of the array as a string.
fill(value)	Fill the array with a scalar value.

Continued on next page

Table 3 – continued from previous page

flatten([order])	Return a copy of the array collapsed into one dimension.
getfield(dtype[, offset])	Returns a field of the given array as a certain type.
item(*args)	Copy an element of an array to a standard Python scalar and return it.
itemset(*args)	Insert scalar into an array (scalar is cast to array's dtype, if possible)
max([axis, out, keepdims])	Return the maximum along a given axis.
mean([axis, dtype, out, keepdims])	Returns the average of the array elements along given axis.
min([axis, out, keepdims])	Return the minimum along a given axis.
newbyteorder([new_order])	Return the array with the same data viewed with a different byte order.
nonzero()	Return the indices of the elements that are non-zero.
partition(kth[, axis, kind, order])	Rearranges the elements in the array in such a way that value of the element in kth position is in the position it would be in a sorted array.
prod([axis, dtype, out, keepdims])	Return the product of the array elements over the given axis
ptp([axis, out])	Peak to peak (maximum - minimum) value along a given axis.
put(indices, values[, mode])	Set `a.flat[n] = values[n]` for all *n* in indices.
ravel([order])	Return a flattened array.
repeat(repeats[, axis])	Repeat elements of an array.
reshape(shape[, order])	Returns an array containing the same data with a new shape.
resize(new_shape[, refcheck])	Change shape and size of array in-place.
round([decimals, out])	Return *a* with each element rounded to the given number of decimals.
searchsorted(v[, side, sorter])	Find indices where elements of v should be inserted in a to maintain order.
setfield(val, dtype[, offset])	Put a value into a specified place in a field defined by a data-type.
setflags([write, align, uic])	Set array flags WRITEABLE, ALIGNED, (WRITEBACKIFCOPY and UPDATEIFCOPY), respectively.
sort([axis, kind, order])	Sort an array, in-place.
squeeze([axis])	Remove single-dimensional entries from the shape of *a*.
std([axis, dtype, out, ddof, keepdims])	Returns the standard deviation of the array elements along given axis.
sum([axis, dtype, out, keepdims])	Return the sum of the array elements over the given axis.
swapaxes(axis1, axis2)	Return a view of the array with *axis1* and *axis2* interchanged.
take(indices[, axis, out, mode])	Return an array formed from the elements of *a* at the given indices.
tobytes([order])	Construct Python bytes containing the raw data bytes in the array.
tofile(fid[, sep, format])	Write array to a file as text or binary (default).
tolist()	Return the array as a (possibly nested) list.
tostring([order])	Construct Python bytes containing the raw data bytes in the array.
trace([offset, axis1, axis2, dtype, out])	Return the sum along diagonals of the array.
transpose(*axes)	Returns a view of the array with axes transposed.

Continued on next page

Table 3 – continued from previous page

var([axis, dtype, out, ddof, keepdims])	Returns the variance of the array elements, along given axis.
view([dtype, type])	New view of array with the same data.

ndarray.**all**(*axis=None*, *out=None*, *keepdims=False*)
Returns True if all elements evaluate to True.

Refer to *numpy.all* for full documentation.

See also:

numpy.all equivalent function

ndarray.**any**(*axis=None*, *out=None*, *keepdims=False*)
Returns True if any of the elements of *a* evaluate to True.

Refer to *numpy.any* for full documentation.

See also:

numpy.any equivalent function

ndarray.**argmax**(*axis=None*, *out=None*)
Return indices of the maximum values along the given axis.

Refer to *numpy.argmax* for full documentation.

See also:

numpy.argmax equivalent function

ndarray.**argmin**(*axis=None*, *out=None*)
Return indices of the minimum values along the given axis of *a*.

Refer to *numpy.argmin* for detailed documentation.

See also:

numpy.argmin equivalent function

ndarray.**argpartition**(*kth*, *axis=-1*, *kind='introselect'*, *order=None*)
Returns the indices that would partition this array.

Refer to *numpy.argpartition* for full documentation.

New in version 1.8.0.

See also:

numpy.argpartition equivalent function

ndarray.**argsort**(*axis=-1*, *kind='quicksort'*, *order=None*)
Returns the indices that would sort this array.

Refer to *numpy.argsort* for full documentation.

See also:

numpy.argsort equivalent function

ndarray.**astype**(*dtype*, *order='K'*, *casting='unsafe'*, *subok=True*, *copy=True*)

Copy of the array, cast to a specified type.

Parameters **dtype** : str or dtype

Typecode or data-type to which the array is cast.

order : {'C', 'F', 'A', 'K'}, optional

Controls the memory layout order of the result. 'C' means C order, 'F' means Fortran order, 'A' means 'F' order if all the arrays are Fortran contiguous, 'C' order otherwise, and 'K' means as close to the order the array elements appear in memory as possible. Default is 'K'.

casting : {'no', 'equiv', 'safe', 'same_kind', 'unsafe'}, optional

Controls what kind of data casting may occur. Defaults to 'unsafe' for backwards compatibility.

- 'no' means the data types should not be cast at all.
- 'equiv' means only byte-order changes are allowed.
- 'safe' means only casts which can preserve values are allowed.
- 'same_kind' means only safe casts or casts within a kind, like float64 to float32, are allowed.
- 'unsafe' means any data conversions may be done.

subok : bool, optional

If True, then sub-classes will be passed-through (default), otherwise the returned array will be forced to be a base-class array.

copy : bool, optional

By default, astype always returns a newly allocated array. If this is set to false, and the `dtype`, *order*, and *subok* requirements are satisfied, the input array is returned instead of a copy.

Returns **arr_t** : ndarray

Unless `copy` is False and the other conditions for returning the input array are satisfied (see description for `copy` input parameter), *arr_t* is a new array of the same shape as the input array, with dtype, order given by `dtype`, *order*.

Raises **ComplexWarning**

When casting from complex to float or int. To avoid this, one should use `a.real.astype(t)`.

Notes

Starting in NumPy 1.9, astype method now returns an error if the string dtype to cast to is not long enough in 'safe' casting mode to hold the max value of integer/float array that is being casted. Previously the casting was allowed even if the result was truncated.

Examples

```
>>> x = np.array([1, 2, 2.5])
>>> x
array([ 1. ,  2. ,  2.5])
```

```
>>> x.astype(int)
array([1, 2, 2])
```

ndarray.**byteswap**(*inplace=False*)

Swap the bytes of the array elements

Toggle between low-endian and big-endian data representation by returning a byteswapped array, optionally swapped in-place.

Parameters **inplace** : bool, optional

If `True`, swap bytes in-place, default is `False`.

Returns **out** : ndarray

The byteswapped array. If *inplace* is `True`, this is a view to self.

Examples

```
>>> A = np.array([1, 256, 8755], dtype=np.int16)
>>> map(hex, A)
['0x1', '0x100', '0x2233']
>>> A.byteswap(inplace=True)
array([  256,     1, 13090], dtype=int16)
>>> map(hex, A)
['0x100', '0x1', '0x3322']
```

Arrays of strings are not swapped

```
>>> A = np.array(['ceg', 'fac'])
>>> A.byteswap()
array(['ceg', 'fac'],
      dtype='|S3')
```

ndarray.**choose**(*choices*, *out=None*, *mode='raise'*)

Use an index array to construct a new array from a set of choices.

Refer to *numpy.choose* for full documentation.

See also:

numpy.choose equivalent function

ndarray.**clip**(*min=None*, *max=None*, *out=None*)

Return an array whose values are limited to `[min, max]`. One of max or min must be given.

Refer to *numpy.clip* for full documentation.

See also:

numpy.clip equivalent function

ndarray.**compress**(*condition*, *axis=None*, *out=None*)
Return selected slices of this array along given axis.

Refer to *numpy.compress* for full documentation.

See also:

numpy.compress equivalent function

ndarray.**conj**()
Complex-conjugate all elements.

Refer to `numpy.conjugate` for full documentation.

See also:

numpy.conjugate equivalent function

ndarray.**conjugate**()
Return the complex conjugate, element-wise.

Refer to `numpy.conjugate` for full documentation.

See also:

numpy.conjugate equivalent function

ndarray.**copy**(*order='C'*)
Return a copy of the array.

Parameters **order** : {'C', 'F', 'A', 'K'}, optional

Controls the memory layout of the copy. 'C' means C-order, 'F' means F-order, 'A' means 'F' if *a* is Fortran contiguous, 'C' otherwise. 'K' means match the layout of *a* as closely as possible. (Note that this function and *numpy.copy* are very similar, but have different default values for their order= arguments.)

See also:

numpy.copy, *numpy.copyto*

Examples

```
>>> x = np.array([[1,2,3],[4,5,6]], order='F')
```

```
>>> y = x.copy()
```

```
>>> x.fill(0)
```

```
>>> x
array([[0, 0, 0],
       [0, 0, 0]])
```

```
>>> y
array([[1, 2, 3],
       [4, 5, 6]])
```

```
>>> y.flags['C_CONTIGUOUS']
True
```

ndarray.**cumprod**(*axis=None*, *dtype=None*, *out=None*)
Return the cumulative product of the elements along the given axis.

Refer to *numpy.cumprod* for full documentation.

See also:

numpy.cumprod equivalent function

ndarray.**cumsum**(*axis=None*, *dtype=None*, *out=None*)
Return the cumulative sum of the elements along the given axis.

Refer to *numpy.cumsum* for full documentation.

See also:

numpy.cumsum equivalent function

ndarray.**diagonal**(*offset=0*, *axis1=0*, *axis2=1*)
Return specified diagonals. In NumPy 1.9 the returned array is a read-only view instead of a copy as in previous NumPy versions. In a future version the read-only restriction will be removed.

Refer to *numpy.diagonal* for full documentation.

See also:

numpy.diagonal equivalent function

ndarray.**dot**(*b*, *out=None*)
Dot product of two arrays.

Refer to *numpy.dot* for full documentation.

See also:

numpy.dot equivalent function

Examples

```
>>> a = np.eye(2)
>>> b = np.ones((2, 2)) * 2
>>> a.dot(b)
array([[ 2.,  2.],
       [ 2.,  2.]])
```

This array method can be conveniently chained:

```
>>> a.dot(b).dot(b)
array([[ 8.,  8.],
       [ 8.,  8.]])
```

ndarray.**dump**(*file*)
Dump a pickle of the array to the specified file. The array can be read back with pickle.load or numpy.load.

Parameters **file** : str

A string naming the dump file.

ndarray.**dumps**()
Returns the pickle of the array as a string. pickle.loads or numpy.loads will convert the string back to an array.

Parameters None

ndarray.**fill**(*value*)
Fill the array with a scalar value.

Parameters **value** : scalar

All elements of *a* will be assigned this value.

Examples

```
>>> a = np.array([1, 2])
>>> a.fill(0)
>>> a
array([0, 0])
>>> a = np.empty(2)
>>> a.fill(1)
>>> a
array([ 1.,  1.])
```

ndarray.**flatten**(*order='C'*)
Return a copy of the array collapsed into one dimension.

Parameters **order** : {'C', 'F', 'A', 'K'}, optional

'C' means to flatten in row-major (C-style) order. 'F' means to flatten in column-major (Fortran- style) order. 'A' means to flatten in column-major order if *a* is Fortran *contiguous* in memory, row-major order otherwise. 'K' means to flatten *a* in the order the elements occur in memory. The default is 'C'.

Returns **y** : ndarray

A copy of the input array, flattened to one dimension.

See also:

ravel Return a flattened array.

flat A 1-D flat iterator over the array.

Examples

```
>>> a = np.array([[1,2], [3,4]])
>>> a.flatten()
array([1, 2, 3, 4])
>>> a.flatten('F')
array([1, 3, 2, 4])
```

ndarray.**getfield**(*dtype*, *offset=0*)
Returns a field of the given array as a certain type.

A field is a view of the array data with a given data-type. The values in the view are determined by the given type and the offset into the current array in bytes. The offset needs to be such that the view dtype fits

in the array dtype; for example an array of dtype complex128 has 16-byte elements. If taking a view with a 32-bit integer (4 bytes), the offset needs to be between 0 and 12 bytes.

Parameters **dtype** : str or dtype

The data type of the view. The dtype size of the view can not be larger than that of the array itself.

offset : int

Number of bytes to skip before beginning the element view.

Examples

```
>>> x = np.diag([1.+1.j]*2)
>>> x[1, 1] = 2 + 4.j
>>> x
array([[ 1.+1.j,  0.+0.j],
       [ 0.+0.j,  2.+4.j]])
>>> x.getfield(np.float64)
array([[ 1.,  0.],
       [ 0.,  2.]])
```

By choosing an offset of 8 bytes we can select the complex part of the array for our view:

```
>>> x.getfield(np.float64, offset=8)
array([[ 1.,  0.],
   [ 0.,  4.]])
```

ndarray.**item**(**args*)

Copy an element of an array to a standard Python scalar and return it.

Parameters ***args** : Arguments (variable number and type)

- none: in this case, the method only works for arrays with one element (*a.size == 1*), which element is copied into a standard Python scalar object and returned.
- int_type: this argument is interpreted as a flat index into the array, specifying which element to copy and return.
- tuple of int_types: functions as does a single int_type argument, except that the argument is interpreted as an nd-index into the array.

Returns **z** : Standard Python scalar object

A copy of the specified element of the array as a suitable Python scalar

Notes

When the data type of *a* is longdouble or clongdouble, item() returns a scalar array object because there is no available Python scalar that would not lose information. Void arrays return a buffer object for item(), unless fields are defined, in which case a tuple is returned.

item is very similar to a[args], except, instead of an array scalar, a standard Python scalar is returned. This can be useful for speeding up access to elements of the array and doing arithmetic on elements of the array using Python's optimized math.

Examples

```
>>> x = np.random.randint(9, size=(3, 3))
>>> x
array([[3, 1, 7],
       [2, 8, 3],
       [8, 5, 3]])
>>> x.item(3)
2
>>> x.item(7)
5
>>> x.item((0, 1))
1
>>> x.item((2, 2))
3
```

ndarray.**itemset**(**args*)

Insert scalar into an array (scalar is cast to array's dtype, if possible)

There must be at least 1 argument, and define the last argument as *item*. Then, `a.itemset(*args)` is equivalent to but faster than `a[args] = item`. The item should be a scalar value and *args* must select a single item in the array *a*.

Parameters ***args** : Arguments

If one argument: a scalar, only used in case *a* is of size 1. If two arguments: the last argument is the value to be set and must be a scalar, the first argument specifies a single array element location. It is either an int or a tuple.

Notes

Compared to indexing syntax, *itemset* provides some speed increase for placing a scalar into a particular location in an *ndarray*, if you must do this. However, generally this is discouraged: among other problems, it complicates the appearance of the code. Also, when using *itemset* (and *item*) inside a loop, be sure to assign the methods to a local variable to avoid the attribute look-up at each loop iteration.

Examples

```
>>> x = np.random.randint(9, size=(3, 3))
>>> x
array([[3, 1, 7],
       [2, 8, 3],
       [8, 5, 3]])
>>> x.itemset(4, 0)
>>> x.itemset((2, 2), 9)
>>> x
array([[3, 1, 7],
       [2, 0, 3],
       [8, 5, 9]])
```

ndarray.**max**(*axis=None*, *out=None*, *keepdims=False*)

Return the maximum along a given axis.

Refer to *numpy.amax* for full documentation.

See also:

numpy.amax equivalent function

ndarray.**mean**(*axis=None*, *dtype=None*, *out=None*, *keepdims=False*)
Returns the average of the array elements along given axis.

Refer to *numpy.mean* for full documentation.

See also:

numpy.mean equivalent function

ndarray.**min**(*axis=None*, *out=None*, *keepdims=False*)
Return the minimum along a given axis.

Refer to *numpy.amin* for full documentation.

See also:

numpy.amin equivalent function

ndarray.**newbyteorder**(*new_order='S'*)
Return the array with the same data viewed with a different byte order.

Equivalent to:

```
arr.view(arr.dtype.newbytorder(new_order))
```

Changes are also made in all fields and sub-arrays of the array data type.

Parameters **new_order** : string, optional

Byte order to force; a value from the byte order specifications below. *new_order* codes can be any of:

- 'S' - swap dtype from current to opposite endian
- {'<', 'L'} - little endian
- {'>', 'B'} - big endian
- {'=', 'N'} - native order
- {'|', 'I'} - ignore (no change to byte order)

The default value ('S') results in swapping the current byte order. The code does a case-insensitive check on the first letter of *new_order* for the alternatives above. For example, any of 'B' or 'b' or 'biggish' are valid to specify big-endian.

Returns **new_arr** : array

New array object with the dtype reflecting given change to the byte order.

ndarray.**nonzero**()
Return the indices of the elements that are non-zero.

Refer to *numpy.nonzero* for full documentation.

See also:

numpy.nonzero equivalent function

ndarray.**partition**(*kth*, *axis=-1*, *kind='introselect'*, *order=None*)

Rearranges the elements in the array in such a way that value of the element in kth position is in the position it would be in a sorted array. All elements smaller than the kth element are moved before this element and all equal or greater are moved behind it. The ordering of the elements in the two partitions is undefined.

New in version 1.8.0.

Parameters **kth** : int or sequence of ints

Element index to partition by. The kth element value will be in its final sorted position and all smaller elements will be moved before it and all equal or greater elements behind it. The order all elements in the partitions is undefined. If provided with a sequence of kth it will partition all elements indexed by kth of them into their sorted position at once.

axis : int, optional

Axis along which to sort. Default is -1, which means sort along the last axis.

kind : {'introselect'}, optional

Selection algorithm. Default is 'introselect'.

order : str or list of str, optional

When *a* is an array with fields defined, this argument specifies which fields to compare first, second, etc. A single field can be specified as a string, and not all fields need be specified, but unspecified fields will still be used, in the order in which they come up in the dtype, to break ties.

See also:

numpy.partition Return a parititioned copy of an array.

argpartition Indirect partition.

sort Full sort.

Notes

See `np.partition` for notes on the different algorithms.

Examples

```
>>> a = np.array([3, 4, 2, 1])
>>> a.partition(3)
>>> a
array([2, 1, 3, 4])
```

```
>>> a.partition((1, 3))
array([1, 2, 3, 4])
```

ndarray.**prod**(*axis=None*, *dtype=None*, *out=None*, *keepdims=False*)

Return the product of the array elements over the given axis

Refer to *numpy.prod* for full documentation.

See also:

numpy.prod equivalent function

ndarray.**ptp**(*axis=None*, *out=None*)
Peak to peak (maximum - minimum) value along a given axis.

Refer to *numpy.ptp* for full documentation.

See also:

numpy.ptp equivalent function

ndarray.**put**(*indices*, *values*, *mode='raise'*)
Set `a.flat[n] = values[n]` for all *n* in indices.

Refer to *numpy.put* for full documentation.

See also:

numpy.put equivalent function

ndarray.**ravel**([*order*])
Return a flattened array.

Refer to *numpy.ravel* for full documentation.

See also:

numpy.ravel equivalent function

ndarray.flat a flat iterator on the array.

ndarray.**repeat**(*repeats*, *axis=None*)
Repeat elements of an array.

Refer to *numpy.repeat* for full documentation.

See also:

numpy.repeat equivalent function

ndarray.**reshape**(*shape*, *order='C'*)
Returns an array containing the same data with a new shape.

Refer to *numpy.reshape* for full documentation.

See also:

numpy.reshape equivalent function

Notes

Unlike the free function *numpy.reshape*, this method on *ndarray* allows the elements of the shape parameter to be passed in as separate arguments. For example, `a.reshape(10, 11)` is equivalent to `a.reshape((10, 11))`.

ndarray.**resize**(*new_shape*, *refcheck=True*)
Change shape and size of array in-place.

Parameters **new_shape** : tuple of ints, or *n* ints

Shape of resized array.

refcheck : bool, optional

If False, reference count will not be checked. Default is True.

Returns None

Raises **ValueError**

If *a* does not own its own data or references or views to it exist, and the data memory must be changed. PyPy only: will always raise if the data memory must be changed, since there is no reliable way to determine if references or views to it exist.

SystemError

If the *order* keyword argument is specified. This behaviour is a bug in NumPy.

See also:

resize Return a new array with the specified shape.

Notes

This reallocates space for the data area if necessary.

Only contiguous arrays (data elements consecutive in memory) can be resized.

The purpose of the reference count check is to make sure you do not use this array as a buffer for another Python object and then reallocate the memory. However, reference counts can increase in other ways so if you are sure that you have not shared the memory for this array with another Python object, then you may safely set *refcheck* to False.

Examples

Shrinking an array: array is flattened (in the order that the data are stored in memory), resized, and reshaped:

```
>>> a = np.array([[0, 1], [2, 3]], order='C')
>>> a.resize((2, 1))
>>> a
array([[0],
       [1]])
```

```
>>> a = np.array([[0, 1], [2, 3]], order='F')
>>> a.resize((2, 1))
>>> a
array([[0],
       [2]])
```

Enlarging an array: as above, but missing entries are filled with zeros:

```
>>> b = np.array([[0, 1], [2, 3]])
>>> b.resize(2, 3) # new_shape parameter doesn't have to be a tuple
>>> b
array([[0, 1, 2],
       [3, 0, 0]])
```

Referencing an array prevents resizing...

```
>>> c = a
>>> a.resize((1, 1))
Traceback (most recent call last):
...
ValueError: cannot resize an array that has been referenced ...
```

Unless *refcheck* is False:

```
>>> a.resize((1, 1), refcheck=False)
>>> a
array([[0]])
>>> c
array([[0]])
```

ndarray.**round**(*decimals=0*, *out=None*)

Return *a* with each element rounded to the given number of decimals.

Refer to *numpy.around* for full documentation.

See also:

numpy.around equivalent function

ndarray.**searchsorted**(*v*, *side='left'*, *sorter=None*)

Find indices where elements of v should be inserted in a to maintain order.

For full documentation, see *numpy.searchsorted*

See also:

numpy.searchsorted equivalent function

ndarray.**setfield**(*val*, *dtype*, *offset=0*)

Put a value into a specified place in a field defined by a data-type.

Place *val* into *a*'s field defined by *dtype* and beginning *offset* bytes into the field.

Parameters **val** : object

Value to be placed in field.

dtype : dtype object

Data-type of the field in which to place *val*.

offset : int, optional

The number of bytes into the field at which to place *val*.

Returns None

See also:

getfield

Examples

```
>>> x = np.eye(3)
>>> x.getfield(np.float64)
array([[ 1.,  0.,  0.],
       [ 0.,  1.,  0.],
       [ 0.,  0.,  1.]])
>>> x.setfield(3, np.int32)
>>> x.getfield(np.int32)
array([[3, 3, 3],
       [3, 3, 3],
       [3, 3, 3]])
>>> x
array([[  1.00000000e+000,   1.48219694e-323,   1.48219694e-323],
       [  1.48219694e-323,   1.00000000e+000,   1.48219694e-323],
       [  1.48219694e-323,   1.48219694e-323,   1.00000000e+000]])
>>> x.setfield(np.eye(3), np.int32)
>>> x
array([[ 1.,  0.,  0.],
       [ 0.,  1.,  0.],
       [ 0.,  0.,  1.]])
```

ndarray.**setflags**(*write=None*, *align=None*, *uic=None*)

Set array flags WRITEABLE, ALIGNED, (WRITEBACKIFCOPY and UPDATEIFCOPY), respectively.

These Boolean-valued flags affect how numpy interprets the memory area used by *a* (see Notes below). The ALIGNED flag can only be set to True if the data is actually aligned according to the type. The WRITEBACKIFCOPY and (deprecated) UPDATEIFCOPY flags can never be set to True. The flag WRITEABLE can only be set to True if the array owns its own memory, or the ultimate owner of the memory exposes a writeable buffer interface, or is a string. (The exception for string is made so that unpickling can be done without copying memory.)

Parameters **write** : bool, optional

Describes whether or not *a* can be written to.

align : bool, optional

Describes whether or not *a* is aligned properly for its type.

uic : bool, optional

Describes whether or not *a* is a copy of another "base" array.

Notes

Array flags provide information about how the memory area used for the array is to be interpreted. There are 7 Boolean flags in use, only four of which can be changed by the user: WRITEBACKIFCOPY, UPDATEIFCOPY, WRITEABLE, and ALIGNED.

WRITEABLE (W) the data area can be written to;

ALIGNED (A) the data and strides are aligned appropriately for the hardware (as determined by the compiler);

UPDATEIFCOPY (U) (deprecated), replaced by WRITEBACKIFCOPY;

WRITEBACKIFCOPY (X) this array is a copy of some other array (referenced by .base). When the C-API function PyArray_ResolveWritebackIfCopy is called, the base array will be updated with the contents of this array.

All flags can be accessed using the single (upper case) letter as well as the full name.

Examples

```
>>> y
array([[3, 1, 7],
       [2, 0, 0],
       [8, 5, 9]])
>>> y.flags
  C_CONTIGUOUS : True
  F_CONTIGUOUS : False
  OWNDATA : True
  WRITEABLE : True
  ALIGNED : True
  WRITEBACKIFCOPY : False
  UPDATEIFCOPY : False
>>> y.setflags(write=0, align=0)
>>> y.flags
  C_CONTIGUOUS : True
  F_CONTIGUOUS : False
  OWNDATA : True
  WRITEABLE : False
  ALIGNED : False
  WRITEBACKIFCOPY : False
  UPDATEIFCOPY : False
>>> y.setflags(uic=1)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: cannot set WRITEBACKIFCOPY flag to True
```

ndarray.**sort**(*axis=-1*, *kind='quicksort'*, *order=None*)

Sort an array, in-place.

Parameters **axis** : int, optional

Axis along which to sort. Default is -1, which means sort along the last axis.

kind : {'quicksort', 'mergesort', 'heapsort'}, optional

Sorting algorithm. Default is 'quicksort'.

order : str or list of str, optional

When *a* is an array with fields defined, this argument specifies which fields to compare first, second, etc. A single field can be specified as a string, and not all fields need be specified, but unspecified fields will still be used, in the order in which they come up in the dtype, to break ties.

See also:

numpy.sort Return a sorted copy of an array.

argsort Indirect sort.

lexsort Indirect stable sort on multiple keys.

searchsorted Find elements in sorted array.

partition Partial sort.

Notes

See `sort` for notes on the different sorting algorithms.

Examples

```
>>> a = np.array([[1,4], [3,1]])
>>> a.sort(axis=1)
>>> a
array([[1, 4],
       [1, 3]])
>>> a.sort(axis=0)
>>> a
array([[1, 3],
       [1, 4]])
```

Use the *order* keyword to specify a field to use when sorting a structured array:

```
>>> a = np.array([('a', 2), ('c', 1)], dtype=[('x', 'S1'), ('y', int)])
>>> a.sort(order='y')
>>> a
array([('c', 1), ('a', 2)],
      dtype=[('x', '|S1'), ('y', '<i4')])
```

ndarray.**squeeze**(*axis=None*)
Remove single-dimensional entries from the shape of *a*.

Refer to *numpy.squeeze* for full documentation.

See also:

numpy.squeeze equivalent function

ndarray.**std**(*axis=None*, *dtype=None*, *out=None*, *ddof=0*, *keepdims=False*)
Returns the standard deviation of the array elements along given axis.

Refer to *numpy.std* for full documentation.

See also:

numpy.std equivalent function

ndarray.**sum**(*axis=None*, *dtype=None*, *out=None*, *keepdims=False*)
Return the sum of the array elements over the given axis.

Refer to *numpy.sum* for full documentation.

See also:

numpy.sum equivalent function

ndarray.**swapaxes**(*axis1*, *axis2*)
Return a view of the array with *axis1* and *axis2* interchanged.

Refer to *numpy.swapaxes* for full documentation.

See also:

numpy.swapaxes equivalent function

ndarray.**take**(*indices*, *axis=None*, *out=None*, *mode='raise'*)
Return an array formed from the elements of *a* at the given indices.

Refer to *numpy.take* for full documentation.

See also:

numpy.take equivalent function

ndarray.**tobytes**(*order='C'*)
Construct Python bytes containing the raw data bytes in the array.

Constructs Python bytes showing a copy of the raw contents of data memory. The bytes object can be produced in either 'C' or 'Fortran', or 'Any' order (the default is 'C'-order). 'Any' order means C-order unless the F_CONTIGUOUS flag in the array is set, in which case it means 'Fortran' order.

New in version 1.9.0.

Parameters **order** : {'C', 'F', None}, optional

Order of the data for multidimensional arrays: C, Fortran, or the same as for the original array.

Returns **s** : bytes

Python bytes exhibiting a copy of *a*'s raw data.

Examples

```
>>> x = np.array([[0, 1], [2, 3]])
>>> x.tobytes()
b'\x00\x00\x00\x00\x01\x00\x00\x00\x02\x00\x00\x00\x03\x00\x00\x00'
>>> x.tobytes('C') == x.tobytes()
True
>>> x.tobytes('F')
b'\x00\x00\x00\x00\x02\x00\x00\x00\x01\x00\x00\x00\x03\x00\x00\x00'
```

ndarray.**tofile**(*fid*, *sep=""*, *format="%s"*)
Write array to a file as text or binary (default).

Data is always written in 'C' order, independent of the order of *a*. The data produced by this method can be recovered using the function fromfile().

Parameters **fid** : file or str

An open file object, or a string containing a filename.

sep : str

Separator between array items for text output. If "" (empty), a binary file is written, equivalent to `file.write(a.tobytes())`.

format : str

Format string for text file output. Each entry in the array is formatted to text by first converting it to the closest Python type, and then using "format" % item.

Notes

This is a convenience function for quick storage of array data. Information on endianness and precision is lost, so this method is not a good choice for files intended to archive data or transport data between machines with different endianness. Some of these problems can be overcome by outputting the data as text files, at the expense of speed and file size.

ndarray.**tolist**()
Return the array as a (possibly nested) list.

Return a copy of the array data as a (nested) Python list. Data items are converted to the nearest compatible Python type.

Parameters **none**

Returns **y** : list

The possibly nested list of array elements.

Notes

The array may be recreated, `a = np.array(a.tolist())`.

Examples

```
>>> a = np.array([1, 2])
>>> a.tolist()
[1, 2]
>>> a = np.array([[1, 2], [3, 4]])
>>> list(a)
[array([1, 2]), array([3, 4])]
>>> a.tolist()
[[1, 2], [3, 4]]
```

ndarray.**tostring**(*order='C'*)
Construct Python bytes containing the raw data bytes in the array.

Constructs Python bytes showing a copy of the raw contents of data memory. The bytes object can be produced in either 'C' or 'Fortran', or 'Any' order (the default is 'C'-order). 'Any' order means C-order unless the F_CONTIGUOUS flag in the array is set, in which case it means 'Fortran' order.

This function is a compatibility alias for tobytes. Despite its name it returns bytes not strings.

Parameters **order** : {'C', 'F', None}, optional

Order of the data for multidimensional arrays: C, Fortran, or the same as for the original array.

Returns **s** : bytes

Python bytes exhibiting a copy of *a*'s raw data.

Examples

```
>>> x = np.array([[0, 1], [2, 3]])
>>> x.tobytes()
b'\x00\x00\x00\x00\x01\x00\x00\x00\x02\x00\x00\x00\x03\x00\x00\x00'
>>> x.tobytes('C') == x.tobytes()
True
>>> x.tobytes('F')
b'\x00\x00\x00\x00\x02\x00\x00\x00\x01\x00\x00\x00\x03\x00\x00\x00'
```

ndarray.**trace**(*offset=0*, *axis1=0*, *axis2=1*, *dtype=None*, *out=None*)

Return the sum along diagonals of the array.

Refer to *numpy.trace* for full documentation.

See also:

numpy.trace equivalent function

ndarray.**transpose**(**axes*)

Returns a view of the array with axes transposed.

For a 1-D array, this has no effect. (To change between column and row vectors, first cast the 1-D array into a matrix object.) For a 2-D array, this is the usual matrix transpose. For an n-D array, if axes are given, their order indicates how the axes are permuted (see Examples). If axes are not provided and `a.shape = (i[0], i[1], ... i[n-2], i[n-1])`, then `a.transpose().shape = (i[n-1], i[n-2], ... i[1], i[0])`.

Parameters **axes** : None, tuple of ints, or *n* ints

- None or no argument: reverses the order of the axes.
- tuple of ints: *i* in the *j*-th place in the tuple means *a*'s *i*-th axis becomes *a.transpose()*'s *j*-th axis.
- *n* ints: same as an n-tuple of the same ints (this form is intended simply as a "convenience" alternative to the tuple form)

Returns **out** : ndarray

View of *a*, with axes suitably permuted.

See also:

ndarray.T Array property returning the array transposed.

Examples

```
>>> a = np.array([[1, 2], [3, 4]])
>>> a
array([[1, 2],
       [3, 4]])
>>> a.transpose()
array([[1, 3],
       [2, 4]])
>>> a.transpose((1, 0))
array([[1, 3],
       [2, 4]])
>>> a.transpose(1, 0)
```

(continues on next page)

(continued from previous page)

```
array([[1, 3],
       [2, 4]])
```

ndarray.**var**(*axis=None*, *dtype=None*, *out=None*, *ddof=0*, *keepdims=False*)

Returns the variance of the array elements, along given axis.

Refer to *numpy.var* for full documentation.

See also:

numpy.var equivalent function

ndarray.**view**(*dtype=None*, *type=None*)

New view of array with the same data.

Parameters **dtype** : data-type or ndarray sub-class, optional

Data-type descriptor of the returned view, e.g., float32 or int16. The default, None, results in the view having the same data-type as *a*. This argument can also be specified as an ndarray sub-class, which then specifies the type of the returned object (this is equivalent to setting the `type` parameter).

type : Python type, optional

Type of the returned view, e.g., ndarray or matrix. Again, the default None results in type preservation.

Notes

`a.view()` is used two different ways:

`a.view(some_dtype)` or `a.view(dtype=some_dtype)` constructs a view of the array's memory with a different data-type. This can cause a reinterpretation of the bytes of memory.

`a.view(ndarray_subclass)` or `a.view(type=ndarray_subclass)` just returns an instance of *ndarray_subclass* that looks at the same array (same shape, dtype, etc.) This does not cause a reinterpretation of the memory.

For `a.view(some_dtype)`, if `some_dtype` has a different number of bytes per entry than the previous dtype (for example, converting a regular array to a structured array), then the behavior of the view cannot be predicted just from the superficial appearance of `a` (shown by `print(a)`). It also depends on exactly how `a` is stored in memory. Therefore if `a` is C-ordered versus fortran-ordered, versus defined as a slice or transpose, etc., the view may give different results.

Examples

```
>>> x = np.array([(1, 2)], dtype=[('a', np.int8), ('b', np.int8)])
```

Viewing array data using a different type and dtype:

```
>>> y = x.view(dtype=np.int16, type=np.matrix)
>>> y
matrix([[513]], dtype=int16)
>>> print(type(y))
<class 'numpy.matrixlib.defmatrix.matrix'>
```

Creating a view on a structured array so it can be used in calculations

```
>>> x = np.array([(1, 2),(3,4)], dtype=[('a', np.int8), ('b', np.int8)])
>>> xv = x.view(dtype=np.int8).reshape(-1,2)
>>> xv
array([[1, 2],
       [3, 4]], dtype=int8)
>>> xv.mean(0)
array([ 2.,  3.])
```

Making changes to the view changes the underlying array

```
>>> xv[0,1] = 20
>>> print(x)
[(1, 20) (3, 4)]
```

Using a view to convert an array to a recarray:

```
>>> z = x.view(np.recarray)
>>> z.a
array([1], dtype=int8)
```

Views share data:

```
>>> x[0] = (9, 10)
>>> z[0]
(9, 10)
```

Views that change the dtype size (bytes per entry) should normally be avoided on arrays defined by slices, transposes, fortran-ordering, etc.:

```
>>> x = np.array([[1,2,3],[4,5,6]], dtype=np.int16)
>>> y = x[:, 0:2]
>>> y
array([[1, 2],
       [4, 5]], dtype=int16)
>>> y.view(dtype=[('width', np.int16), ('length', np.int16)])
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: new type not compatible with array.
>>> z = y.copy()
>>> z.view(dtype=[('width', np.int16), ('length', np.int16)])
array([[(1, 2)],
       [(4, 5)]], dtype=[('width', '<i2'), ('length', '<i2')])
```

1.1.2 Indexing arrays

Arrays can be indexed using an extended Python slicing syntax, `array[selection]`. Similar syntax is also used for accessing fields in a structured array.

See also:

Array Indexing.

1.1.3 Internal memory layout of an ndarray

An instance of class *ndarray* consists of a contiguous one-dimensional segment of computer memory (owned by the array, or by some other object), combined with an indexing scheme that maps *N* integers into the location of an item in the block. The ranges in which the indices can vary is specified by the *shape* of the array. How many bytes each item takes and how the bytes are interpreted is defined by the *data-type object* associated with the array.

A segment of memory is inherently 1-dimensional, and there are many different schemes for arranging the items of an *N*-dimensional array in a 1-dimensional block. NumPy is flexible, and *ndarray* objects can accommodate any *strided indexing scheme*. In a strided scheme, the N-dimensional index $(n_0, n_1, ..., n_{N-1})$ corresponds to the offset (in bytes):

$$n_{\text{offset}} = \sum_{k=0}^{N-1} s_k n_k$$

from the beginning of the memory block associated with the array. Here, s_k are integers which specify the *strides* of the array. The column-major order (used, for example, in the Fortran language and in *Matlab*) and row-major order (used in C) schemes are just specific kinds of strided scheme, and correspond to memory that can be *addressed* by the strides:

$$s_k^{\text{column}} = \text{itemsize} \prod_{j=0}^{k-1} d_j, \quad s_k^{\text{row}} = \text{itemsize} \prod_{j=k+1}^{N-1} d_j.$$

where d_j = *self.shape[j]*.

Both the C and Fortran orders are contiguous, *i.e.,* single-segment, memory layouts, in which every part of the memory block can be accessed by some combination of the indices.

While a C-style and Fortran-style contiguous array, which has the corresponding flags set, can be addressed with the above strides, the actual strides may be different. This can happen in two cases:

1. If `self.shape[k] == 1` then for any legal index `index[k] == 0`. This means that in the formula for the offset $n_k = 0$ and thus $s_k n_k = 0$ and the value of s_k = *self.strides[k]* is arbitrary.
2. If an array has no elements (`self.size == 0`) there is no legal index and the strides are never used. Any array with no elements may be considered C-style and Fortran-style contiguous.

Point 1. means that `self` and `self.squeeze()` always have the same contiguity and aligned flags value. This also means that even a high dimensional array could be C-style and Fortran-style contiguous at the same time.

An array is considered aligned if the memory offsets for all elements and the base offset itself is a multiple of *self.itemsize*.

Note: Points (1) and (2) are not yet applied by default. Beginning with NumPy 1.8.0, they are applied consistently only if the environment variable `NPY_RELAXED_STRIDES_CHECKING=1` was defined when NumPy was built. Eventually this will become the default.

You can check whether this option was enabled when your NumPy was built by looking at the value of `np.ones((10,1), order='C').flags.f_contiguous`. If this is `True`, then your NumPy has relaxed strides checking enabled.

Warning: It does *not* generally hold that `self.strides[-1] == self.itemsize` for C-style contiguous arrays or `self.strides[0] == self.itemsize` for Fortran-style contiguous arrays is true.

Data in new *ndarrays* is in the row-major (C) order, unless otherwise specified, but, for example, *basic array slicing* often produces views in a different scheme.

Note: Several algorithms in NumPy work on arbitrarily strided arrays. However, some algorithms require single-segment arrays. When an irregularly strided array is passed in to such algorithms, a copy is automatically made.

1.1.4 Array attributes

Array attributes reflect information that is intrinsic to the array itself. Generally, accessing an array through its attributes allows you to get and sometimes set intrinsic properties of the array without creating a new array. The exposed attributes are the core parts of an array and only some of them can be reset meaningfully without creating a new array. Information on each attribute is given below.

Memory layout

The following attributes contain information about the memory layout of the array:

ndarray.flags	Information about the memory layout of the array.
ndarray.shape	Tuple of array dimensions.
ndarray.strides	Tuple of bytes to step in each dimension when traversing an array.
ndarray.ndim	Number of array dimensions.
ndarray.data	Python buffer object pointing to the start of the array's data.
ndarray.size	Number of elements in the array.
ndarray.itemsize	Length of one array element in bytes.
ndarray.nbytes	Total bytes consumed by the elements of the array.
ndarray.base	Base object if memory is from some other object.

Data type

See also:

Data type objects

The data type object associated with the array can be found in the *dtype* attribute:

ndarray.dtype	Data-type of the array's elements.

Other attributes

ndarray.T	Same as self.transpose(), except that self is returned if self.ndim < 2.
ndarray.real	The real part of the array.
ndarray.imag	The imaginary part of the array.
ndarray.flat	A 1-D iterator over the array.
ndarray.ctypes	An object to simplify the interaction of the array with the ctypes module.

Array interface

See also:

The Array Interface.

__array_interface__	Python-side of the array interface
__array_struct__	C-side of the array interface

ctypes foreign function interface

ndarray.ctypes	An object to simplify the interaction of the array with the ctypes module.

1.1.5 Array methods

An *ndarray* object has many methods which operate on or with the array in some fashion, typically returning an array result. These methods are briefly explained below. (Each method's docstring has a more complete description.)

For the following methods there are also corresponding functions in *numpy*: *all*, *any*, *argmax*, *argmin*, *argpartition*, *argsort*, *choose*, *clip*, *compress*, *copy*, *cumprod*, *cumsum*, *diagonal*, *imag*, *max*, *mean*, *min*, *nonzero*, *partition*, *prod*, *ptp*, *put*, *ravel*, *real*, *repeat*, *reshape*, *round*, *searchsorted*, *sort*, *squeeze*, *std*, *sum*, *swapaxes*, *take*, *trace*, *transpose*, *var*.

Array conversion

ndarray.item(*args)	Copy an element of an array to a standard Python scalar and return it.
ndarray.tolist()	Return the array as a (possibly nested) list.
ndarray.itemset(*args)	Insert scalar into an array (scalar is cast to array's dtype, if possible)
ndarray.tostring([order])	Construct Python bytes containing the raw data bytes in the array.
ndarray.tobytes([order])	Construct Python bytes containing the raw data bytes in the array.
ndarray.tofile(fid[, sep, format])	Write array to a file as text or binary (default).
ndarray.dump(file)	Dump a pickle of the array to the specified file.
ndarray.dumps()	Returns the pickle of the array as a string.
ndarray.astype(dtype[, order, casting, ...])	Copy of the array, cast to a specified type.
ndarray.byteswap([inplace])	Swap the bytes of the array elements
ndarray.copy([order])	Return a copy of the array.
ndarray.view([dtype, type])	New view of array with the same data.
ndarray.getfield(dtype[, offset])	Returns a field of the given array as a certain type.
ndarray.setflags([write, align, uic])	Set array flags WRITEABLE, ALIGNED, (WRITEBACKIFCOPY and UPDATEIFCOPY), respectively.
ndarray.fill(value)	Fill the array with a scalar value.

Shape manipulation

For reshape, resize, and transpose, the single tuple argument may be replaced with `n` integers which will be interpreted as an n-tuple.

ndarray.reshape(shape[, order])	Returns an array containing the same data with a new shape.
ndarray.resize(new_shape[, refcheck])	Change shape and size of array in-place.
ndarray.transpose(*axes)	Returns a view of the array with axes transposed.
ndarray.swapaxes(axis1, axis2)	Return a view of the array with *axis1* and *axis2* interchanged.
ndarray.flatten([order])	Return a copy of the array collapsed into one dimension.
ndarray.ravel([order])	Return a flattened array.
ndarray.squeeze([axis])	Remove single-dimensional entries from the shape of *a*.

Item selection and manipulation

For array methods that take an *axis* keyword, it defaults to `None`. If axis is *None*, then the array is treated as a 1-D array. Any other value for *axis* represents the dimension along which the operation should proceed.

ndarray.take(indices[, axis, out, mode])	Return an array formed from the elements of *a* at the given indices.
ndarray.put(indices, values[, mode])	Set `a.flat[n] = values[n]` for all *n* in indices.
ndarray.repeat(repeats[, axis])	Repeat elements of an array.
ndarray.choose(choices[, out, mode])	Use an index array to construct a new array from a set of choices.
ndarray.sort([axis, kind, order])	Sort an array, in-place.
ndarray.argsort([axis, kind, order])	Returns the indices that would sort this array.
ndarray.partition(kth[, axis, kind, order])	Rearranges the elements in the array in such a way that value of the element in kth position is in the position it would be in a sorted array.
ndarray.argpartition(kth[, axis, kind, order])	Returns the indices that would partition this array.
ndarray.searchsorted(v[, side, sorter])	Find indices where elements of v should be inserted in a to maintain order.
ndarray.nonzero()	Return the indices of the elements that are non-zero.
ndarray.compress(condition[, axis, out])	Return selected slices of this array along given axis.
ndarray.diagonal([offset, axis1, axis2])	Return specified diagonals.

Calculation

Many of these methods take an argument named *axis*. In such cases,

- If *axis* is *None* (the default), the array is treated as a 1-D array and the operation is performed over the entire array. This behavior is also the default if self is a 0-dimensional array or array scalar. (An array scalar is an instance of the types/classes float32, float64, etc., whereas a 0-dimensional array is an ndarray instance containing precisely one array scalar.)
- If *axis* is an integer, then the operation is done over the given axis (for each 1-D subarray that can be created along the given axis).

Example of the *axis* argument

A 3-dimensional array of size 3 x 3 x 3, summed over each of its three axes

```
>>> x
array([[[ 0,  1,  2],
        [ 3,  4,  5],
        [ 6,  7,  8]],
       [[ 9, 10, 11],
        [12, 13, 14],
        [15, 16, 17]],
       [[18, 19, 20],
        [21, 22, 23],
        [24, 25, 26]]])
>>> x.sum(axis=0)
array([[27, 30, 33],
       [36, 39, 42],
       [45, 48, 51]])
>>> # for sum, axis is the first keyword, so we may omit it,
>>> # specifying only its value
>>> x.sum(0), x.sum(1), x.sum(2)
(array([[27, 30, 33],
        [36, 39, 42],
        [45, 48, 51]]),
 array([[ 9, 12, 15],
        [36, 39, 42],
        [63, 66, 69]]),
 array([[ 3, 12, 21],
        [30, 39, 48],
        [57, 66, 75]]))
```

The parameter *dtype* specifies the data type over which a reduction operation (like summing) should take place. The default reduce data type is the same as the data type of *self*. To avoid overflow, it can be useful to perform the reduction using a larger data type.

For several methods, an optional *out* argument can also be provided and the result will be placed into the output array given. The *out* argument must be an *ndarray* and have the same number of elements. It can have a different data type in which case casting will be performed.

ndarray.argmax([axis, out])	Return indices of the maximum values along the given axis.
ndarray.min([axis, out, keepdims])	Return the minimum along a given axis.
ndarray.argmin([axis, out])	Return indices of the minimum values along the given axis of *a*.
ndarray.ptp([axis, out])	Peak to peak (maximum - minimum) value along a given axis.
ndarray.clip([min, max, out])	Return an array whose values are limited to `[min, max]`.
ndarray.conj()	Complex-conjugate all elements.
ndarray.round([decimals, out])	Return *a* with each element rounded to the given number of decimals.
ndarray.trace([offset, axis1, axis2, dtype, out])	Return the sum along diagonals of the array.
ndarray.sum([axis, dtype, out, keepdims])	Return the sum of the array elements over the given axis.
ndarray.cumsum([axis, dtype, out])	Return the cumulative sum of the elements along the given axis.
ndarray.mean([axis, dtype, out, keepdims])	Returns the average of the array elements along given axis.
ndarray.var([axis, dtype, out, ddof, keepdims])	Returns the variance of the array elements, along given axis.

Continued on next page

Table 11 – continued from previous page

ndarray.std([axis, dtype, out, ddof, keepdims])	Returns the standard deviation of the array elements along given axis.
ndarray.prod([axis, dtype, out, keepdims])	Return the product of the array elements over the given axis
ndarray.cumprod([axis, dtype, out])	Return the cumulative product of the elements along the given axis.
ndarray.all([axis, out, keepdims])	Returns True if all elements evaluate to True.
ndarray.any([axis, out, keepdims])	Returns True if any of the elements of *a* evaluate to True.

1.1.6 Arithmetic, matrix multiplication, and comparison operations

Arithmetic and comparison operations on *ndarrays* are defined as element-wise operations, and generally yield *ndarray* objects as results.

Each of the arithmetic operations (`+`, `-`, `*`, `/`, `//`, `%`, `divmod()`, `**` or `pow()`, `<<`, `>>`, `&`, `^`, `|`, `~`) and the comparisons (`==`, `<`, `>`, `<=`, `>=`, `!=`) is equivalent to the corresponding universal function (or ufunc for short) in NumPy. For more information, see the section on *Universal Functions*.

Comparison operators:

ndarray.__lt__($self, value, /)	Return self<value.
ndarray.__le__($self, value, /)	Return self<=value.
ndarray.__gt__($self, value, /)	Return self>value.
ndarray.__ge__($self, value, /)	Return self>=value.
ndarray.__eq__($self, value, /)	Return self==value.
ndarray.__ne__($self, value, /)	Return self!=value.

ndarray.**__lt__**(*$self*, *value*, */*)
Return self<value.

ndarray.**__le__**(*$self*, *value*, */*)
Return self<=value.

ndarray.**__gt__**(*$self*, *value*, */*)
Return self>value.

ndarray.**__ge__**(*$self*, *value*, */*)
Return self>=value.

ndarray.**__eq__**(*$self*, *value*, */*)
Return self==value.

ndarray.**__ne__**(*$self*, *value*, */*)
Return self!=value.

Truth value of an array (`bool`):

ndarray.__nonzero__

Note: Truth-value testing of an array invokes `ndarray.__nonzero__`, which raises an error if the number of elements in the array is larger than 1, because the truth value of such arrays is ambiguous. Use *.any()* and *.all()* instead to be clear about what is meant in such cases. (If the number of elements is 0, the array evaluates to `False`.)

Unary operations:

ndarray.__neg__($self, /)	-self
ndarray.__pos__($self, /)	+self
ndarray.__abs__(self)	
ndarray.__invert__($self, /)	~self

ndarray.**__neg__**(*$self*, */*)
-self

ndarray.**__pos__**(*$self*, */*)
+self

ndarray.**__abs__**(*self*)

ndarray.**__invert__**(*$self*, */*)
~self

Arithmetic:

ndarray.__add__($self, value, /)	Return self+value.
ndarray.__sub__($self, value, /)	Return self-value.
ndarray.__mul__($self, value, /)	Return self*value.
ndarray.__div__	
ndarray.__truediv__($self, value, /)	Return self/value.
ndarray.__floordiv__($self, value, /)	Return self//value.
ndarray.__mod__($self, value, /)	Return self%value.
ndarray.__divmod__($self, value, /)	Return divmod(self, value).
ndarray.__pow__($self, value[, mod])	Return pow(self, value, mod).
ndarray.__lshift__($self, value, /)	Return self<<value.
ndarray.__rshift__($self, value, /)	Return self>>value.
ndarray.__and__($self, value, /)	Return self&value.
ndarray.__or__($self, value, /)	Return selfvalue.
ndarray.__xor__($self, value, /)	Return self^value.

ndarray.**__add__**(*$self*, *value*, */*)
Return self+value.

ndarray.**__sub__**(*$self*, *value*, */*)
Return self-value.

ndarray.**__mul__**(*$self*, *value*, */*)
Return self*value.

ndarray.**__truediv__**(*$self*, *value*, */*)
Return self/value.

ndarray.**__floordiv__**(*$self*, *value*, */*)
Return self//value.

ndarray.**__mod__**(*$self*, *value*, */*)
Return self%value.

ndarray.**__divmod__**(*$self*, *value*, */*)
Return divmod(self, value).

ndarray.**__pow__**(*$self*, *value*, *mod=None*, */*)
Return pow(self, value, mod).

ndarray.__**lshift**__(*$self*, *value*, */*)
Return self<<value.

ndarray.__**rshift**__(*$self*, *value*, */*)
Return self>>value.

ndarray.__**and**__(*$self*, *value*, */*)
Return self&value.

ndarray.__**or**__(*$self*, *value*, */*)
Return selfIvalue.

ndarray.__**xor**__(*$self*, *value*, */*)
Return self^value.

Note:

- Any third argument to `pow` is silently ignored, as the underlying *ufunc* takes only two arguments.
- The three division operators are all defined; `div` is active by default, `truediv` is active when `__future__` division is in effect.
- Because *ndarray* is a built-in type (written in C), the `__r{op}__` special methods are not directly defined.
- The functions called to implement many arithmetic special methods for arrays can be modified using `set_numeric_ops`.

Arithmetic, in-place:

ndarray.__iadd__($self, value, /)	Return self+=value.
ndarray.__isub__($self, value, /)	Return self-=value.
ndarray.__imul__($self, value, /)	Return self*=value.
ndarray.__idiv__	
ndarray.__itruediv__($self, value, /)	Return self/=value.
ndarray.__ifloordiv__($self, value, /)	Return self//=value.
ndarray.__imod__($self, value, /)	Return self%=value.
ndarray.__ipow__($self, value, /)	Return self**=value.
ndarray.__ilshift__($self, value, /)	Return self<<=value.
ndarray.__irshift__($self, value, /)	Return self>>=value.
ndarray.__iand__($self, value, /)	Return self&=value.
ndarray.__ior__($self, value, /)	Return selfI=value.
ndarray.__ixor__($self, value, /)	Return self^=value.

ndarray.__**iadd**__(*$self*, *value*, */*)
Return self+=value.

ndarray.__**isub**__(*$self*, *value*, */*)
Return self-=value.

ndarray.__**imul**__(*$self*, *value*, */*)
Return self*=value.

ndarray.__**itruediv**__(*$self*, *value*, */*)
Return self/=value.

ndarray.__**ifloordiv**__(*$self*, *value*, */*)
Return self//=value.

ndarray.__**imod**__(*$self*, *value*, */*)
Return self%=value.

ndarray.__**ipow**__(*$self*, *value*, */*)
Return self**=value.

ndarray.__**ilshift**__(*$self*, *value*, */*)
Return self<<=value.

ndarray.__**irshift**__(*$self*, *value*, */*)
Return self>>=value.

ndarray.__**iand**__(*$self*, *value*, */*)
Return self&=value.

ndarray.__**ior**__(*$self*, *value*, */*)
Return selfl=value.

ndarray.__**ixor**__(*$self*, *value*, */*)
Return self^=value.

Warning: In place operations will perform the calculation using the precision decided by the data type of the two operands, but will silently downcast the result (if necessary) so it can fit back into the array. Therefore, for mixed precision calculations, `A {op}= B` can be different than `A = A {op} B`. For example, suppose `a = ones((3,3))`. Then, `a += 3j` is different than `a = a + 3j`: while they both perform the same computation, `a += 3` casts the result to fit back in `a`, whereas `a = a + 3j` re-binds the name `a` to the result.

Matrix Multiplication:

ndarray.__matmul__($self, value, /)	Return self@value.

ndarray.__**matmul**__(*$self*, *value*, */*)
Return self@value.

Note: Matrix operators `@` and `@=` were introduced in Python 3.5 following PEP465. NumPy 1.10.0 has a preliminary implementation of `@` for testing purposes. Further documentation can be found in the *matmul* documentation.

1.1.7 Special methods

For standard library functions:

ndarray.__copy__()	Used if `copy.copy` is called on an array.
ndarray.__deepcopy__(memo, /)	Used if `copy.deepcopy` is called on an array.
ndarray.__reduce__()	For pickling.
ndarray.__setstate__(state, /)	For unpickling.

ndarray.__**copy**__()
Used if `copy.copy` is called on an array. Returns a copy of the array.

Equivalent to `a.copy(order='K')`.

ndarray.__**deepcopy**__(*memo*, */*) → Deep copy of array.
Used if `copy.deepcopy` is called on an array.

ndarray.__reduce__()
For pickling.

ndarray.__setstate__(*state*, /)
For unpickling.

The *state* argument must be a sequence that contains the following elements:

Parameters **version** : int

optional pickle version. If omitted defaults to 0.

shape : tuple

dtype : data-type

isFortran : bool

rawdata : string or list

a binary string with the data (or a list if 'a' is an object array)

Basic customization:

ndarray.__new__($type, *args, **kwargs)	Create and return a new object.
ndarray.__array__(|dtype)	Returns either a new reference to self if dtype is not given or a new array of provided data type if dtype is different from the current dtype of the array.
ndarray.__array_wrap__(obj)	

ndarray.__new__(*$type*, **args*, ***kwargs*)
Create and return a new object. See help(type) for accurate signature.

ndarray.__array__(|*dtype*) → reference if type unchanged, copy otherwise.
Returns either a new reference to self if dtype is not given or a new array of provided data type if dtype is different from the current dtype of the array.

ndarray.__array_wrap__(*obj*) → Object of same type as ndarray object a.

Container customization: (see *Indexing*)

ndarray.__len__($self, /)	Return len(self).
ndarray.__getitem__($self, key, /)	Return self[key].
ndarray.__setitem__($self, key, value, /)	Set self[key] to value.
ndarray.__contains__($self, key, /)	Return key in self.

ndarray.__len__(*$self*, /)
Return len(self).

ndarray.__getitem__(*$self*, *key*, /)
Return self[key].

ndarray.__setitem__(*$self*, *key*, *value*, /)
Set self[key] to value.

ndarray.__contains__(*$self*, *key*, /)
Return key in self.

Conversion; the operations `complex`, `int`, `long`, `float`, `oct`, and `hex`. They work only on arrays that have one element in them and return the appropriate scalar.

ndarray.__int__(self)	
ndarray.__long__	
ndarray.__float__(self)	
ndarray.__oct__	
ndarray.__hex__	

ndarray.**__int__**(*self*)

ndarray.**__float__**(*self*)

String representations:

ndarray.__str__($self, /)	Return str(self).
ndarray.__repr__($self, /)	Return repr(self).

ndarray.**__str__**(*$self, /*)
Return str(self).

ndarray.**__repr__**(*$self, /*)
Return repr(self).

1.2 Scalars

Python defines only one type of a particular data class (there is only one integer type, one floating-point type, etc.). This can be convenient in applications that don't need to be concerned with all the ways data can be represented in a computer. For scientific computing, however, more control is often needed.

In NumPy, there are 24 new fundamental Python types to describe different types of scalars. These type descriptors are mostly based on the types available in the C language that CPython is written in, with several additional types compatible with Python's types.

Array scalars have the same attributes and methods as *ndarrays*.[1] This allows one to treat items of an array partly on the same footing as arrays, smoothing out rough edges that result when mixing scalar and array operations.

Array scalars live in a hierarchy (see the Figure below) of data types. They can be detected using the hierarchy: For example, `isinstance(val, np.generic)` will return `True` if *val* is an array scalar object. Alternatively, what kind of array scalar is present can be determined using other members of the data type hierarchy. Thus, for example `isinstance(val, np.complexfloating)` will return `True` if *val* is a complex valued type, while `isinstance(val, np.flexible)` will return true if *val* is one of the flexible itemsize array types (`string`, `unicode`, `void`).

1.2.1 Built-in scalar types

The built-in scalar types are shown below. Along with their (mostly) C-derived names, the integer, float, and complex data-types are also available using a bit-width convention so that an array of the right size can always be ensured (e.g. `int8`, `float64`, `complex128`). Two aliases (`intp` and `uintp`) pointing to the integer type that is sufficiently large to hold a C pointer are also provided. The C-like names are associated with character codes, which are shown in the table. Use of the character codes, however, is discouraged.

Some of the scalar types are essentially equivalent to fundamental Python types and therefore inherit from them as well as from the generic array scalar type:

[1] However, array scalars are immutable, so none of the array scalar attributes are settable.

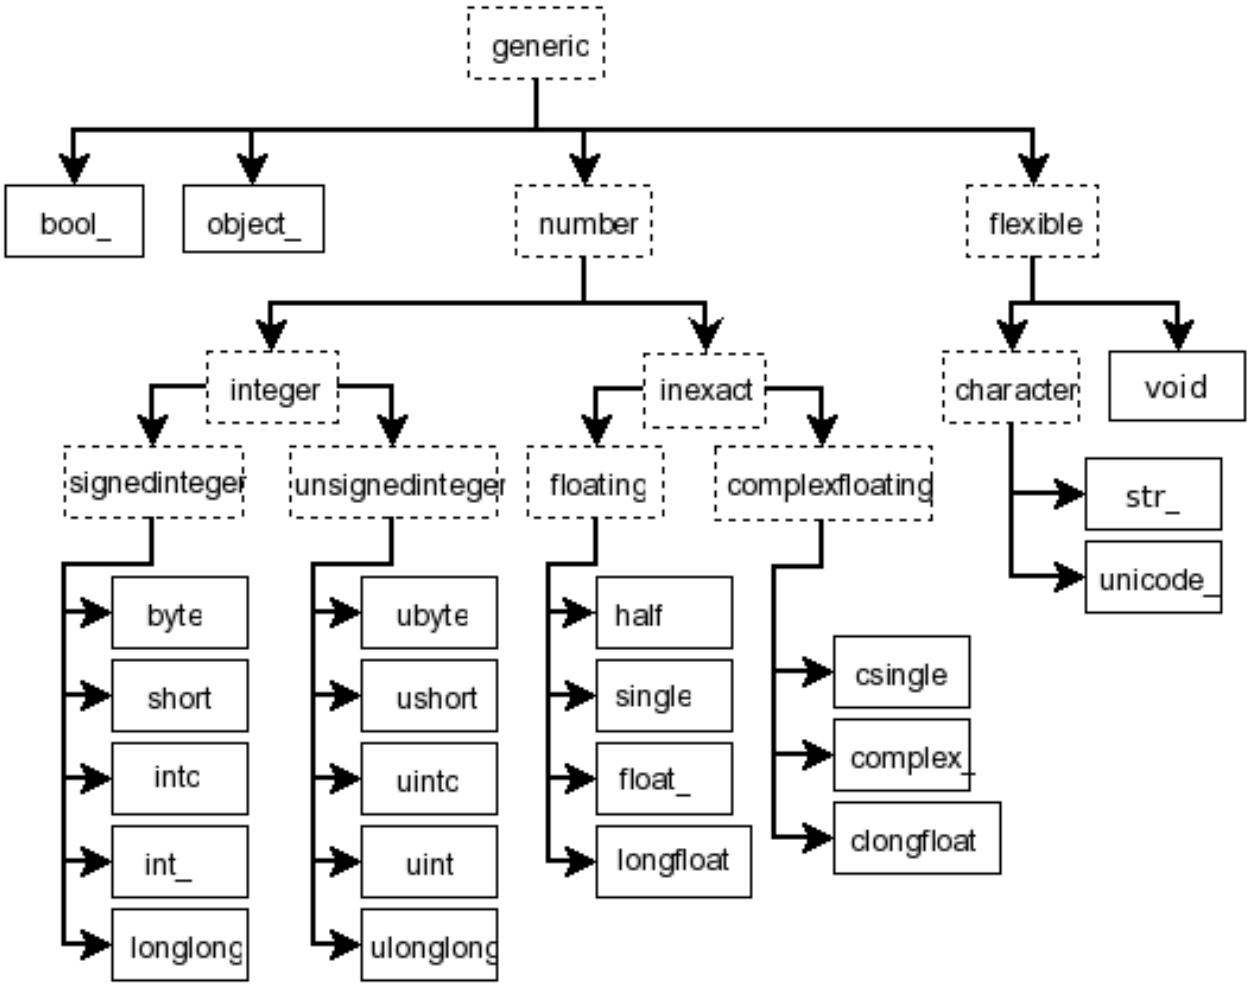

Fig. 2: **Figure:** Hierarchy of type objects representing the array data types. Not shown are the two integer types `intp` and `uintp` which just point to the integer type that holds a pointer for the platform. All the number types can be obtained using bit-width names as well.

Array scalar type	Related Python type
int_	IntType (Python 2 only)
float_	FloatType
complex_	ComplexType
bytes_	BytesType
unicode_	UnicodeType

The bool_ data type is very similar to the Python BooleanType but does not inherit from it because Python's BooleanType does not allow itself to be inherited from, and on the C-level the size of the actual bool data is not the same as a Python Boolean scalar.

Warning: The bool_ type is not a subclass of the int_ type (the bool_ is not even a number type). This is different than Python's default implementation of bool as a sub-class of int.

Warning: The int_ type does **not** inherit from the int built-in under Python 3, because type int is no longer a fixed-width integer type.

Tip: The default data type in NumPy is float_.

In the tables below, platform? means that the type may not be available on all platforms. Compatibility with different C or Python types is indicated: two types are compatible if their data is of the same size and interpreted in the same way.

Booleans:

Type	Remarks	Character code
bool_	compatible: Python bool	'?'
bool8	8 bits	

Integers:

byte	compatible: C char	'b'
short	compatible: C short	'h'
intc	compatible: C int	'i'
int_	compatible: Python int	'l'
longlong	compatible: C long long	'q'
intp	large enough to fit a pointer	'p'
int8	8 bits	
int16	16 bits	
int32	32 bits	
int64	64 bits	

Unsigned integers:

ubyte	compatible: C unsigned char	'B'
ushort	compatible: C unsigned short	'H'
uintc	compatible: C unsigned int	'I'
uint	compatible: Python int	'L'
ulonglong	compatible: C long long	'Q'
uintp	large enough to fit a pointer	'P'
uint8	8 bits	
uint16	16 bits	
uint32	32 bits	
uint64	64 bits	

Floating-point numbers:

half		'e'
single	compatible: C float	'f'
double	compatible: C double	
float_	compatible: Python float	'd'
longfloat	compatible: C long float	'g'
float16	16 bits	
float32	32 bits	
float64	64 bits	
float96	96 bits, platform?	
float128	128 bits, platform?	

Complex floating-point numbers:

csingle		'F'
complex_	compatible: Python complex	'D'
clongfloat		'G'
complex64	two 32-bit floats	
complex128	two 64-bit floats	
complex192	two 96-bit floats, platform?	
complex256	two 128-bit floats, platform?	

Any Python object:

object_	any Python object	'O'

Note: The data actually stored in object arrays (*i.e.*, arrays having dtype object_) are references to Python objects, not the objects themselves. Hence, object arrays behave more like usual Python lists, in the sense that their contents need not be of the same Python type.

The object type is also special because an array containing object_ items does not return an object_ object on item access, but instead returns the actual object that the array item refers to.

The following data types are flexible. They have no predefined size: the data they describe can be of different length in different arrays. (In the character codes # is an integer denoting how many elements the data type consists of.)

bytes_	compatible: Python bytes	'S#'
unicode_	compatible: Python unicode/str	'U#'
void		'V#'

Warning: See *Note on string types*.

Numeric Compatibility: If you used old typecode characters in your Numeric code (which was never recommended), you will need to change some of them to the new characters. In particular, the needed changes are `c -> S1`, `b -> B`, `1 -> b`, `s -> h`, `w -> H`, and `u -> I`. These changes make the type character convention more consistent with other Python modules such as the `struct` module.

1.2.2 Attributes

The array scalar objects have an `array priority` of *NPY_SCALAR_PRIORITY* (-1,000,000.0). They also do not (yet) have a *ctypes* attribute. Otherwise, they share the same attributes as arrays:

generic.flags	integer value of flags
generic.shape	tuple of array dimensions
generic.strides	tuple of bytes steps in each dimension
generic.ndim	number of array dimensions
generic.data	pointer to start of data
generic.size	number of elements in the gentype
generic.itemsize	length of one element in bytes
generic.base	base object
generic.dtype	get array data-descriptor
generic.real	real part of scalar
generic.imag	imaginary part of scalar
generic.flat	a 1-d view of scalar
generic.T	transpose
generic.__array_interface__	Array protocol: Python side
generic.__array_struct__	Array protocol: struct
generic.__array_priority__	Array priority.
generic.__array_wrap__	sc.__array_wrap__(obj) return scalar from array

generic.**flags**
: integer value of flags

generic.**shape**
: tuple of array dimensions

generic.**strides**
: tuple of bytes steps in each dimension

generic.**ndim**
: number of array dimensions

generic.**data**
: pointer to start of data

generic.**size**
: number of elements in the gentype

generic.**itemsize**
: length of one element in bytes

generic.**base**
: base object

generic.**dtype**
: get array data-descriptor

generic.**real**
: real part of scalar

generic.**imag**
: imaginary part of scalar

generic.**flat**
: a 1-d view of scalar

generic.**T**
: transpose

generic.**__array_interface__**
: Array protocol: Python side

generic.**__array_struct__**
: Array protocol: struct

generic.**__array_priority__**
: Array priority.

generic.**__array_wrap__**()
: sc.__array_wrap__(obj) return scalar from array

1.2.3 Indexing

See also:

Indexing, *Data type objects (dtype)*

Array scalars can be indexed like 0-dimensional arrays: if *x* is an array scalar,

- `x[()]` returns a copy of array scalar
- `x[...]` returns a 0-dimensional *ndarray*
- `x['field-name']` returns the array scalar in the field *field-name*. (*x* can have fields, for example, when it corresponds to a structured data type.)

1.2.4 Methods

Array scalars have exactly the same methods as arrays. The default behavior of these methods is to internally convert the scalar to an equivalent 0-dimensional array and to call the corresponding array method. In addition, math operations on array scalars are defined so that the same hardware flags are set and used to interpret the results as for *ufunc*, so that the error state used for ufuncs also carries over to the math on array scalars.

The exceptions to the above rules are given below:

generic	Base class for numpy scalar types.
generic.__array__	sc.__array__(|type) return 0-dim array

Continued on next page

Table 24 – continued from previous page

generic.__array_wrap__	sc.__array_wrap__(obj) return scalar from array
generic.squeeze	Not implemented (virtual attribute)
generic.byteswap	Not implemented (virtual attribute)
generic.__reduce__	helper for pickle
generic.__setstate__	
generic.setflags	Not implemented (virtual attribute)

class numpy.**generic**

Base class for numpy scalar types.

Class from which most (all?) numpy scalar types are derived. For consistency, exposes the same API as *ndarray*, despite many consequent attributes being either "get-only," or completely irrelevant. This is the class from which it is strongly suggested users should derive custom scalar types.

Attributes

T	transpose
base	base object
data	pointer to start of data
dtype	get array data-descriptor
flags	integer value of flags
flat	a 1-d view of scalar
imag	imaginary part of scalar
itemsize	length of one element in bytes
nbytes	length of item in bytes
ndim	number of array dimensions
real	real part of scalar
shape	tuple of array dimensions
size	number of elements in the gentype
strides	tuple of bytes steps in each dimension

generic.**nbytes**

length of item in bytes

Methods

all	Not implemented (virtual attribute)
any	Not implemented (virtual attribute)
argmax	Not implemented (virtual attribute)
argmin	Not implemented (virtual attribute)
argsort	Not implemented (virtual attribute)
astype	Not implemented (virtual attribute)
byteswap	Not implemented (virtual attribute)
choose	Not implemented (virtual attribute)
clip	Not implemented (virtual attribute)
compress	Not implemented (virtual attribute)
conj	

Continued on next page

Table 26 – continued from previous page

conjugate	Not implemented (virtual attribute)
copy	Not implemented (virtual attribute)
cumprod	Not implemented (virtual attribute)
cumsum	Not implemented (virtual attribute)
diagonal	Not implemented (virtual attribute)
dump	Not implemented (virtual attribute)
dumps	Not implemented (virtual attribute)
fill	Not implemented (virtual attribute)
flatten	Not implemented (virtual attribute)
getfield	Not implemented (virtual attribute)
item	Not implemented (virtual attribute)
itemset	Not implemented (virtual attribute)
max	Not implemented (virtual attribute)
mean	Not implemented (virtual attribute)
min	Not implemented (virtual attribute)
newbyteorder([new_order])	Return a new *dtype* with a different byte order.
nonzero	Not implemented (virtual attribute)
prod	Not implemented (virtual attribute)
ptp	Not implemented (virtual attribute)
put	Not implemented (virtual attribute)
ravel	Not implemented (virtual attribute)
repeat	Not implemented (virtual attribute)
reshape	Not implemented (virtual attribute)
resize	Not implemented (virtual attribute)
round	Not implemented (virtual attribute)
searchsorted	Not implemented (virtual attribute)
setfield	Not implemented (virtual attribute)
setflags	Not implemented (virtual attribute)
sort	Not implemented (virtual attribute)
squeeze	Not implemented (virtual attribute)
std	Not implemented (virtual attribute)
sum	Not implemented (virtual attribute)
swapaxes	Not implemented (virtual attribute)
take	Not implemented (virtual attribute)
tobytes	
tofile	Not implemented (virtual attribute)
tolist	Not implemented (virtual attribute)
tostring	Not implemented (virtual attribute)
trace	Not implemented (virtual attribute)
transpose	Not implemented (virtual attribute)
var	Not implemented (virtual attribute)
view	Not implemented (virtual attribute)

generic.**all**()

Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**any**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**argmax**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**argmin**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**argsort**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**astype**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**byteswap**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**choose**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**clip**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**compress**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**conj**()

generic.**conjugate**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**copy**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**cumprod**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**cumsum**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**diagonal**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**dump**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**dumps**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**fill**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**flatten**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**getfield**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**item**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**itemset**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**max**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**mean**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**min**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**newbyteorder**(*new_order='S'*)
Return a new *dtype* with a different byte order.

Changes are also made in all fields and sub-arrays of the data type.

The *new_order* code can be any from the following:

- 'S' - swap dtype from current to opposite endian
- {'<', 'L'} - little endian
- {'>', 'B'} - big endian
- {'=', 'N'} - native order
- {'|', 'I'} - ignore (no change to byte order)

Parameters **new_order** : str, optional

Byte order to force; a value from the byte order specifications above. The default value ('S') results in swapping the current byte order. The code does a case-insensitive check on the first letter of *new_order* for the alternatives above. For example, any of 'B' or 'b' or 'biggish' are valid to specify big-endian.

Returns **new_dtype** : dtype

New *dtype* object with the given change to the byte order.

generic.**nonzero**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**prod**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**ptp**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**put**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**ravel**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**repeat**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**reshape**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**resize**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**round**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**searchsorted**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**setfield**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**setflags**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**sort**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**squeeze**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**std**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**sum**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**swapaxes**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**take**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**tobytes**()

generic.**tofile**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**tolist**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**tostring**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**trace**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**transpose**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**var**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**view**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

generic.**__array__**()
sc.__array__(|type) return 0-dim array

generic.**__reduce__**()
helper for pickle

generic.**__setstate__**()

1.2.5 Defining new types

There are two ways to effectively define a new array scalar type (apart from composing structured types *dtypes* from the built-in scalar types): One way is to simply subclass the *ndarray* and overwrite the methods of interest. This will work to a degree, but internally certain behaviors are fixed by the data type of the array. To fully customize the

data type of an array you need to define a new data-type, and register it with NumPy. Such new types can only be defined in C, using the *NumPy C-API*.

1.3 Data type objects (`dtype`)

A data type object (an instance of `numpy.dtype` class) describes how the bytes in the fixed-size block of memory corresponding to an array item should be interpreted. It describes the following aspects of the data:

1. Type of the data (integer, float, Python object, etc.)
2. Size of the data (how many bytes is in *e.g.* the integer)
3. Byte order of the data (little-endian or big-endian)
4. If the data type is structured, an aggregate of other data types, (*e.g.*, describing an array item consisting of an integer and a float),
   (a) what are the names of the "fields" of the structure, by which they can be *accessed*,
   (b) what is the data-type of each field, and
   (c) which part of the memory block each field takes.
5. If the data type is a sub-array, what is its shape and data type.

To describe the type of scalar data, there are several *built-in scalar types* in NumPy for various precision of integers, floating-point numbers, *etc*. An item extracted from an array, *e.g.*, by indexing, will be a Python object whose type is the scalar type associated with the data type of the array.

Note that the scalar types are not `dtype` objects, even though they can be used in place of one whenever a data type specification is needed in NumPy.

Structured data types are formed by creating a data type whose fields contain other data types. Each field has a name by which it can be *accessed*. The parent data type should be of sufficient size to contain all its fields; the parent is nearly always based on the `void` type which allows an arbitrary item size. Structured data types may also contain nested structured sub-array data types in their fields.

Finally, a data type can describe items that are themselves arrays of items of another data type. These sub-arrays must, however, be of a fixed size.

If an array is created using a data-type describing a sub-array, the dimensions of the sub-array are appended to the shape of the array when the array is created. Sub-arrays in a field of a structured type behave differently, see *Field Access*.

Sub-arrays always have a C-contiguous memory layout.

Example

A simple data type containing a 32-bit big-endian integer: (see *Specifying and constructing data types* for details on construction)

```
>>> dt = np.dtype('>i4')
>>> dt.byteorder
'>'
>>> dt.itemsize
4
>>> dt.name
'int32'
>>> dt.type is np.int32
True
```

The corresponding array scalar type is `int32`.

Example

A structured data type containing a 16-character string (in field 'name') and a sub-array of two 64-bit floating-point number (in field 'grades'):

```
>>> dt = np.dtype([('name', np.unicode_, 16), ('grades', np.float64, (2,))])
>>> dt['name']
dtype('|U16')
>>> dt['grades']
dtype(('float64',(2,)))
```

Items of an array of this data type are wrapped in an *array scalar* type that also has two fields:

```
>>> x = np.array([('Sarah', (8.0, 7.0)), ('John', (6.0, 7.0))], dtype=dt)
>>> x[1]
('John', [6.0, 7.0])
>>> x[1]['grades']
array([ 6.,  7.])
>>> type(x[1])
<type 'numpy.void'>
>>> type(x[1]['grades'])
<type 'numpy.ndarray'>
```

1.3.1 Specifying and constructing data types

Whenever a data-type is required in a NumPy function or method, either a *dtype* object or something that can be converted to one can be supplied. Such conversions are done by the *dtype* constructor:

dtype(obj[, align, copy])	Create a data type object.

class numpy.**dtype**(*obj*, *align=False*, *copy=False*)

Create a data type object.

A numpy array is homogeneous, and contains elements described by a dtype object. A dtype object can be constructed from different combinations of fundamental numeric types.

Parameters **obj**

Object to be converted to a data type object.

align : bool, optional

Add padding to the fields to match what a C compiler would output for a similar C-struct. Can be `True` only if *obj* is a dictionary or a comma-separated string. If a struct dtype is being created, this also sets a sticky alignment flag `isalignedstruct`.

copy : bool, optional

Make a new copy of the data-type object. If `False`, the result may just be a reference to a built-in data-type object.

See also:

result_type

Examples

Using array-scalar type:

```
>>> np.dtype(np.int16)
dtype('int16')
```

Structured type, one field name 'f1', containing int16:

```
>>> np.dtype([('f1', np.int16)])
dtype([('f1', '<i2')])
```

Structured type, one field named 'f1', in itself containing a structured type with one field:

```
>>> np.dtype([('f1', [('f1', np.int16)])])
dtype([('f1', [('f1', '<i2')])])
```

Structured type, two fields: the first field contains an unsigned int, the second an int32:

```
>>> np.dtype([('f1', np.uint), ('f2', np.int32)])
dtype([('f1', '<u4'), ('f2', '<i4')])
```

Using array-protocol type strings:

```
>>> np.dtype([('a','f8'),('b','S10')])
dtype([('a', '<f8'), ('b', '|S10')])
```

Using comma-separated field formats. The shape is (2,3):

```
>>> np.dtype("i4, (2,3)f8")
dtype([('f0', '<i4'), ('f1', '<f8', (2, 3))])
```

Using tuples. `int` is a fixed type, 3 the field's shape. `void` is a flexible type, here of size 10:

```
>>> np.dtype([('hello',(int,3)),('world',np.void,10)])
dtype([('hello', '<i4', 3), ('world', '|V10')])
```

Subdivide `int16` into 2 `int8`'s, called x and y. 0 and 1 are the offsets in bytes:

```
>>> np.dtype((np.int16, {'x':(np.int8,0), 'y':(np.int8,1)}))
dtype(('<i2', [('x', '|i1'), ('y', '|i1')]))
```

Using dictionaries. Two fields named 'gender' and 'age':

```
>>> np.dtype({'names':['gender','age'], 'formats':['S1',np.uint8]})
dtype([('gender', '|S1'), ('age', '|u1')])
```

Offsets in bytes, here 0 and 25:

```
>>> np.dtype({'surname':('S25',0),'age':(np.uint8,25)})
dtype([('surname', '|S25'), ('age', '|u1')])
```

Attributes

base	
descr	PEP3118 interface description of the data-type.
fields	Dictionary of named fields defined for this data type, or None.
hasobject	Boolean indicating whether this dtype contains any reference-counted objects in any fields or sub-dtypes.
isalignedstruct	Boolean indicating whether the dtype is a struct which maintains field alignment.
isbuiltin	Integer indicating how this dtype relates to the built-in dtypes.
isnative	Boolean indicating whether the byte order of this dtype is native to the platform.
metadata	
name	A bit-width name for this data-type.
names	Ordered list of field names, or None if there are no fields.
ndim	Number of dimensions of the sub-array if this data type describes a sub-array, and 0 otherwise.
shape	Shape tuple of the sub-array if this data type describes a sub-array, and () otherwise.
str	The array-protocol typestring of this data-type object.
subdtype	Tuple (item_dtype, shape) if this *dtype* describes a sub-array, and None otherwise.

dtype.**base**

dtype.**descr**

PEP3118 interface description of the data-type.

The format is that required by the 'descr' key in the PEP3118 *__array_interface__* attribute.

Warning: This attribute exists specifically for PEP3118 compliance, and is not a datatype description compatible with *np.dtype*.

dtype.**fields**

Dictionary of named fields defined for this data type, or None.

The dictionary is indexed by keys that are the names of the fields. Each entry in the dictionary is a tuple fully describing the field:

```
(dtype, offset[, title])
```

If present, the optional title can be any object (if it is a string or unicode then it will also be a key in the fields dictionary, otherwise it's meta-data). Notice also that the first two elements of the tuple can be passed directly as arguments to the ndarray.getfield and ndarray.setfield methods.

See also:

ndarray.getfield, *ndarray.setfield*

Examples

```
>>> dt = np.dtype([('name', np.str_, 16), ('grades', np.float64, (2,))])
>>> print(dt.fields)
{'grades': (dtype(('float64',(2,))), 16), 'name': (dtype('|S16'), 0)}
```

dtype.**hasobject**
Boolean indicating whether this dtype contains any reference-counted objects in any fields or sub-dtypes.

Recall that what is actually in the ndarray memory representing the Python object is the memory address of that object (a pointer). Special handling may be required, and this attribute is useful for distinguishing data types that may contain arbitrary Python objects and data-types that won't.

dtype.**isalignedstruct**
Boolean indicating whether the dtype is a struct which maintains field alignment. This flag is sticky, so when combining multiple structs together, it is preserved and produces new dtypes which are also aligned.

dtype.**isbuiltin**
Integer indicating how this dtype relates to the built-in dtypes.

Read-only.

0	if this is a structured array type, with fields
1	if this is a dtype compiled into numpy (such as ints, floats etc)
2	if the dtype is for a user-defined numpy type A user-defined type uses the numpy C-API machinery to extend numpy to handle a new array type. See user.user-defined-data-types in the NumPy manual.

Examples

```
>>> dt = np.dtype('i2')
>>> dt.isbuiltin
1
>>> dt = np.dtype('f8')
>>> dt.isbuiltin
1
>>> dt = np.dtype([('field1', 'f8')])
>>> dt.isbuiltin
0
```

dtype.**isnative**
Boolean indicating whether the byte order of this dtype is native to the platform.

dtype.**metadata**

dtype.**name**
A bit-width name for this data-type.

Un-sized flexible data-type objects do not have this attribute.

dtype.**names**
Ordered list of field names, or None if there are no fields.

The names are ordered according to increasing byte offset. This can be used, for example, to walk through all of the named fields in offset order.

Examples

```
>>> dt = np.dtype([('name', np.str_, 16), ('grades', np.float64, (2,))])
>>> dt.names
('name', 'grades')
```

dtype.**ndim**
Number of dimensions of the sub-array if this data type describes a sub-array, and 0 otherwise.

New in version 1.13.0.

dtype.**shape**
Shape tuple of the sub-array if this data type describes a sub-array, and () otherwise.

dtype.**str**
The array-protocol typestring of this data-type object.

dtype.**subdtype**
Tuple (item_dtype, shape) if this *dtype* describes a sub-array, and None otherwise.

The *shape* is the fixed shape of the sub-array described by this data type, and *item_dtype* the data type of the array.

If a field whose dtype object has this attribute is retrieved, then the extra dimensions implied by *shape* are tacked on to the end of the retrieved array.

Methods

newbyteorder([new_order])	Return a new dtype with a different byte order.

dtype.**newbyteorder**(*new_order='S'*)
Return a new dtype with a different byte order.

Changes are also made in all fields and sub-arrays of the data type.

Parameters **new_order** : string, optional

Byte order to force; a value from the byte order specifications below. The default value ('S') results in swapping the current byte order. *new_order* codes can be any of:

- 'S' - swap dtype from current to opposite endian
- {'<', 'L'} - little endian
- {'>', 'B'} - big endian
- {'=', 'N'} - native order
- {'|', 'I'} - ignore (no change to byte order)

The code does a case-insensitive check on the first letter of *new_order* for these alternatives. For example, any of '>' or 'B' or 'b' or 'brian' are valid to specify big-endian.

Returns **new_dtype** : dtype

New dtype object with the given change to the byte order.

Notes

Changes are also made in all fields and sub-arrays of the data type.

Examples

```
>>> import sys
>>> sys_is_le = sys.byteorder == 'little'
>>> native_code = sys_is_le and '<' or '>'
>>> swapped_code = sys_is_le and '>' or '<'
>>> native_dt = np.dtype(native_code+'i2')
>>> swapped_dt = np.dtype(swapped_code+'i2')
>>> native_dt.newbyteorder('S') == swapped_dt
True
>>> native_dt.newbyteorder() == swapped_dt
True
>>> native_dt == swapped_dt.newbyteorder('S')
True
>>> native_dt == swapped_dt.newbyteorder('=')
True
>>> native_dt == swapped_dt.newbyteorder('N')
True
>>> native_dt == native_dt.newbyteorder('|')
True
>>> np.dtype('<i2') == native_dt.newbyteorder('<')
True
>>> np.dtype('<i2') == native_dt.newbyteorder('L')
True
>>> np.dtype('>i2') == native_dt.newbyteorder('>')
True
>>> np.dtype('>i2') == native_dt.newbyteorder('B')
True
```

What can be converted to a data-type object is described below:

dtype object

Used as-is.

None

The default data type: `float_`.

Array-scalar types

The 24 built-in *array scalar type objects* all convert to an associated data-type object. This is true for their sub-classes as well.

Note that not all data-type information can be supplied with a type-object: for example, flexible data-types have a default *itemsize* of 0, and require an explicitly given size to be useful.

Example

```
>>> dt = np.dtype(np.int32)      # 32-bit integer
>>> dt = np.dtype(np.complex128) # 128-bit complex floating-point number
```

Generic types

The generic hierarchical type objects convert to corresponding type objects according to the associations:

number, inexact, floating	float
complexfloating	cfloat
integer, signedinteger	int_
unsignedinteger	uint
character	string
generic, flexible	void

Built-in Python types

Several python types are equivalent to a corresponding array scalar when used to generate a *dtype* object:

int	int_
bool	bool_
float	float_
complex	cfloat
bytes	bytes_
str	bytes_ (Python2) or unicode_ (Python3)
unicode	unicode_
buffer	void
(all others)	object_

Note that str refers to either null terminated bytes or unicode strings depending on the Python version. In code targeting both Python 2 and 3 np.unicode_ should be used as a dtype for strings. See *Note on string types*.

Example

```
>>> dt = np.dtype(float)   # Python-compatible floating-point number
>>> dt = np.dtype(int)     # Python-compatible integer
>>> dt = np.dtype(object)  # Python object
```

Types with .dtype

Any type object with a dtype attribute: The attribute will be accessed and used directly. The attribute must return something that is convertible into a dtype object.

Several kinds of strings can be converted. Recognized strings can be prepended with '>' (big-endian), '<' (little-endian), or '=' (hardware-native, the default), to specify the byte order.

One-character strings

Each built-in data-type has a character code (the updated Numeric typecodes), that uniquely identifies it.

Example

```
>>> dt = np.dtype('b')  # byte, native byte order
>>> dt = np.dtype('>H') # big-endian unsigned short
>>> dt = np.dtype('<f') # little-endian single-precision float
>>> dt = np.dtype('d')  # double-precision floating-point number
```

Array-protocol type strings (see *The Array Interface*)

The first character specifies the kind of data and the remaining characters specify the number of bytes per item, except for Unicode, where it is interpreted as the number of characters. The item size must correspond to an existing type, or an error will be raised. The supported kinds are

`'?'`	boolean
`'b'`	(signed) byte
`'B'`	unsigned byte
`'i'`	(signed) integer
`'u'`	unsigned integer
`'f'`	floating-point
`'c'`	complex-floating point
`'m'`	timedelta
`'M'`	datetime
`'O'`	(Python) objects
`'S', 'a'`	zero-terminated bytes (not recommended)
`'U'`	Unicode string
`'V'`	raw data (`void`)

Example

```
>>> dt = np.dtype('i4')   # 32-bit signed integer
>>> dt = np.dtype('f8')   # 64-bit floating-point number
>>> dt = np.dtype('c16')  # 128-bit complex floating-point number
>>> dt = np.dtype('a25')  # 25-length zero-terminated bytes
>>> dt = np.dtype('U25')  # 25-character string
```

Note on string types

For backward compatibility with Python 2 the `S` and `a` typestrings remain zero-terminated bytes and `np.string_` continues to map to `np.bytes_`. To use actual strings in Python 3 use `U` or `np.unicode_`. For signed bytes that do not need zero-termination `b` or `i1` can be used.

String with comma-separated fields

A short-hand notation for specifying the format of a structured data type is a comma-separated string of basic formats.

A basic format in this context is an optional shape specifier followed by an array-protocol type string. Parenthesis are required on the shape if it has more than one dimension. NumPy allows a modification on the format in that any string that can uniquely identify the type can be used to specify the data-type in a field. The generated data-type fields are named `'f0'`, `'f1'`, ..., `'f<N-1>'` where N (>1) is the number of comma-separated basic formats in the string. If the optional shape specifier is provided, then the data-type for the corresponding field describes a sub-array.

Example

- field named `f0` containing a 32-bit integer
- field named `f1` containing a 2 x 3 sub-array of 64-bit floating-point numbers
- field named `f2` containing a 32-bit floating-point number

```
>>> dt = np.dtype("i4, (2,3)f8, f4")
```

- field named `f0` containing a 3-character string
- field named `f1` containing a sub-array of shape (3,) containing 64-bit unsigned integers
- field named `f2` containing a 3 x 4 sub-array containing 10-character strings

```
>>> dt = np.dtype("a3, 3u8, (3,4)a10")
```

Type strings

Any string in `numpy.sctypeDict`.keys():

Example

```
>>> dt = np.dtype('uint32')   # 32-bit unsigned integer
>>> dt = np.dtype('Float64')  # 64-bit floating-point number
```

`(flexible_dtype, itemsize)`

The first argument must be an object that is converted to a zero-sized flexible data-type object, the second argument is an integer providing the desired itemsize.

Example

```
>>> dt = np.dtype((np.void, 10))  # 10-byte wide data block
>>> dt = np.dtype(('U', 10))   # 10-character unicode string
```

`(fixed_dtype, shape)`

The first argument is any object that can be converted into a fixed-size data-type object. The second argument is the desired shape of this type. If the shape parameter is 1, then the data-type object is equivalent to fixed dtype. If *shape* is a tuple, then the new dtype defines a sub-array of the given shape.

Example

```
>>> dt = np.dtype((np.int32, (2,2)))          # 2 x 2 integer sub-array
>>> dt = np.dtype(('U10', 1))                 # 10-character string
>>> dt = np.dtype(('i4, (2,3)f8, f4', (2,3))) # 2 x 3 structured sub-array
```

`[(field_name, field_dtype, field_shape), ...]`

obj should be a list of fields where each field is described by a tuple of length 2 or 3. (Equivalent to the `descr` item in the *__array_interface__* attribute.)

The first element, *field_name*, is the field name (if this is `''` then a standard field name, `'f#'`, is assigned). The field name may also be a 2-tuple of strings where the first string is either a "title" (which may be any string or unicode string) or meta-data for the field which can be any object, and the second string is the "name" which must be a valid Python identifier.

The second element, *field_dtype*, can be anything that can be interpreted as a data-type.

The optional third element *field_shape* contains the shape if this field represents an array of the data-type in the second element. Note that a 3-tuple with a third argument equal to 1 is equivalent to a 2-tuple.

This style does not accept *align* in the `dtype` constructor as it is assumed that all of the memory is accounted for by the array interface description.

Example

Data-type with fields `big` (big-endian 32-bit integer) and `little` (little-endian 32-bit integer):

```
>>> dt = np.dtype([('big', '>i4'), ('little', '<i4')])
```

Data-type with fields `R`, `G`, `B`, `A`, each being an unsigned 8-bit integer:

```
>>> dt = np.dtype([('R','u1'), ('G','u1'), ('B','u1'), ('A','u1')])
```

`{'names': ..., 'formats': ..., 'offsets': ..., 'titles': ..., 'itemsize': ...}`

This style has two required and three optional keys. The *names* and *formats* keys are required. Their respective values are equal-length lists with the field names and the field formats. The field names must be strings and the field formats can be any object accepted by `dtype` constructor.

When the optional keys *offsets* and *titles* are provided, their values must each be lists of the same length as the *names* and *formats* lists. The *offsets* value is a list of byte offsets (integers) for each field, while the *titles* value is a list of titles for each field (`None` can be used if no title is desired for that field). The *titles* can be any `string` or `unicode` object and will add another entry to the fields dictionary keyed by the title and referencing the same field tuple which will contain the title as an additional tuple member.

The *itemsize* key allows the total size of the dtype to be set, and must be an integer large enough so all the fields are within the dtype. If the dtype being constructed is aligned, the *itemsize* must also be divisible by the struct alignment.

Example

Data type with fields `r`, `g`, `b`, `a`, each being an 8-bit unsigned integer:

```
>>> dt = np.dtype({'names': ['r','g','b','a'],
...                'formats': [uint8, uint8, uint8, uint8]})
```

Data type with fields `r` and `b` (with the given titles), both being 8-bit unsigned integers, the first at byte position 0 from the start of the field and the second at position 2:

```
>>> dt = np.dtype({'names': ['r','b'], 'formats': ['u1', 'u1'],
...                'offsets': [0, 2],
...                'titles': ['Red pixel', 'Blue pixel']})
```

`{'field1': ..., 'field2': ..., ...}`

This usage is discouraged, because it is ambiguous with the other dict-based construction method. If you have a field called 'names' and a field called 'formats' there will be a conflict.

This style allows passing in the `fields` attribute of a data-type object.

obj should contain string or unicode keys that refer to `(data-type, offset)` or `(data-type, offset, title)` tuples.

Example

Data type containing field `col1` (10-character string at byte position 0), `col2` (32-bit float at byte position 10), and `col3` (integers at byte position 14):

```
>>> dt = np.dtype({'col1': ('U10', 0), 'col2': (float32, 10),
    'col3': (int, 14)})
```

`(base_dtype, new_dtype)`

In NumPy 1.7 and later, this form allows *base_dtype* to be interpreted as a structured dtype. Arrays created with this dtype will have underlying dtype *base_dtype* but will have fields and flags taken from *new_dtype*. This is useful for creating custom structured dtypes, as done in *record arrays*.

This form also makes it possible to specify struct dtypes with overlapping fields, functioning like the 'union' type in C. This usage is discouraged, however, and the union mechanism is preferred.

Both arguments must be convertible to data-type objects with the same total size. .. admonition:: Example

32-bit integer, whose first two bytes are interpreted as an integer via field `real`, and the following two bytes via field `imag`.

```
>>> dt = np.dtype((np.int32,{'real':(np.int16, 0),'imag':(np.int16,␣
↪2)}))
```

32-bit integer, which is interpreted as consisting of a sub-array of shape `(4,)` containing 8-bit integers:

```
>>> dt = np.dtype((np.int32, (np.int8, 4)))
```

32-bit integer, containing fields `r`, `g`, `b`, `a` that interpret the 4 bytes in the integer as four unsigned integers:

```
>>> dt = np.dtype(('i4', [('r','u1'),('g','u1'),('b','u1'),('a','u1
↪')]))
```

1.3.2 `dtype`

NumPy data type descriptions are instances of the *dtype* class.

Attributes

The type of the data is described by the following *dtype* attributes:

dtype.type	The type object used to instantiate a scalar of this data-type.
dtype.kind	A character code (one of 'biufcmMOSUV') identifying the general kind of data.
dtype.char	A unique character code for each of the 21 different built-in types.
dtype.num	A unique number for each of the 21 different built-in types.
dtype.str	The array-protocol typestring of this data-type object.

`dtype.`**`type`**

The type object used to instantiate a scalar of this data-type.

`dtype.`**`kind`**
A character code (one of 'biufcmMOSUV') identifying the general kind of data.

b	boolean
i	signed integer
u	unsigned integer
f	floating-point
c	complex floating-point
m	timedelta
M	datetime
O	object
S	(byte-)string
U	Unicode
V	void

`dtype.`**`char`**
A unique character code for each of the 21 different built-in types.

`dtype.`**`num`**
A unique number for each of the 21 different built-in types.

These are roughly ordered from least-to-most precision.

Size of the data is in turn described by:

dtype.name	A bit-width name for this data-type.
dtype.itemsize	The element size of this data-type object.

`dtype.`**`itemsize`**
The element size of this data-type object.

For 18 of the 21 types this number is fixed by the data-type. For the flexible data-types, this number can be anything.

Endianness of this data:

dtype.byteorder	A character indicating the byte-order of this data-type object.

`dtype.`**`byteorder`**
A character indicating the byte-order of this data-type object.

One of:

'='	native
'<'	little-endian
'>'	big-endian
'I'	not applicable

All built-in data-type objects have byteorder either '=' or 'I'.

Examples

```
>>> dt = np.dtype('i2')
>>> dt.byteorder
'='
>>> # endian is not relevant for 8 bit numbers
>>> np.dtype('i1').byteorder
'|'
>>> # or ASCII strings
>>> np.dtype('S2').byteorder
'|'
>>> # Even if specific code is given, and it is native
>>> # '=' is the byteorder
>>> import sys
>>> sys_is_le = sys.byteorder == 'little'
>>> native_code = sys_is_le and '<' or '>'
>>> swapped_code = sys_is_le and '>' or '<'
>>> dt = np.dtype(native_code + 'i2')
>>> dt.byteorder
'='
>>> # Swapped code shows up as itself
>>> dt = np.dtype(swapped_code + 'i2')
>>> dt.byteorder == swapped_code
True
```

Information about sub-data-types in a structured data type:

dtype.fields	Dictionary of named fields defined for this data type, or None.
dtype.names	Ordered list of field names, or None if there are no fields.

For data types that describe sub-arrays:

dtype.subdtype	Tuple (item_dtype, shape) if this *dtype* describes a sub-array, and None otherwise.
dtype.shape	Shape tuple of the sub-array if this data type describes a sub-array, and () otherwise.

Attributes providing additional information:

dtype.hasobject	Boolean indicating whether this dtype contains any reference-counted objects in any fields or sub-dtypes.
dtype.flags	Bit-flags describing how this data type is to be interpreted.
dtype.isbuiltin	Integer indicating how this dtype relates to the built-in dtypes.
dtype.isnative	Boolean indicating whether the byte order of this dtype is native to the platform.
dtype.descr	PEP3118 interface description of the data-type.
dtype.alignment	The required alignment (bytes) of this data-type according to the compiler.

dtype.**flags**
: Bit-flags describing how this data type is to be interpreted.

Bit-masks are in `numpy.core.multiarray` as the constants *ITEM_HASOBJECT*, *LIST_PICKLE*, *ITEM_IS_POINTER*, *NEEDS_INIT*, *NEEDS_PYAPI*, *USE_GETITEM*, *USE_SETITEM*. A full explanation of these flags is in C-API documentation; they are largely useful for user-defined data-types.

`dtype.`**`alignment`**
The required alignment (bytes) of this data-type according to the compiler.

More information is available in the C-API section of the manual.

Methods

Data types have the following method for changing the byte order:

dtype.newbyteorder([new_order])	Return a new dtype with a different byte order.

The following methods implement the pickle protocol:

dtype.__reduce__	helper for pickle
dtype.__setstate__	

`dtype.`**`__reduce__`**`()`
helper for pickle

`dtype.`**`__setstate__`**`()`

1.4 Indexing

ndarrays can be indexed using the standard Python `x[obj]` syntax, where *x* is the array and *obj* the selection. There are three kinds of indexing available: field access, basic slicing, advanced indexing. Which one occurs depends on *obj*.

Note: In Python, `x[(exp1, exp2, ..., expN)]` is equivalent to `x[exp1, exp2, ..., expN]`; the latter is just syntactic sugar for the former.

1.4.1 Basic Slicing and Indexing

Basic slicing extends Python's basic concept of slicing to N dimensions. Basic slicing occurs when *obj* is a `slice` object (constructed by `start:stop:step` notation inside of brackets), an integer, or a tuple of slice objects and integers. `Ellipsis` and *newaxis* objects can be interspersed with these as well. In order to remain backward compatible with a common usage in Numeric, basic slicing is also initiated if the selection object is any non-ndarray sequence (such as a `list`) containing `slice` objects, the `Ellipsis` object, or the *newaxis* object, but not for integer arrays or other embedded sequences.

The simplest case of indexing with *N* integers returns an *array scalar* representing the corresponding item. As in Python, all indices are zero-based: for the *i*-th index n_i, the valid range is $0 \leq n_i < d_i$ where d_i is the *i*-th element of the shape of the array. Negative indices are interpreted as counting from the end of the array (*i.e.*, if $n_i < 0$, it means $n_i + d_i$).

All arrays generated by basic slicing are always views of the original array.

The standard rules of sequence slicing apply to basic slicing on a per-dimension basis (including using a step index). Some useful concepts to remember include:

- The basic slice syntax is `i:j:k` where *i* is the starting index, *j* is the stopping index, and *k* is the step ($k \neq 0$). This selects the *m* elements (in the corresponding dimension) with index values *i*, *i + k*, ..., *i + (m - 1) k* where $m = q + (r \neq 0)$ and *q* and *r* are the quotient and remainder obtained by dividing *j - i* by *k*: *j - i = q k + r*, so that *i + (m - 1) k < j*.

  Example

  ```
  >>> x = np.array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
  >>> x[1:7:2]
  array([1, 3, 5])
  ```

- Negative *i* and *j* are interpreted as *n + i* and *n + j* where *n* is the number of elements in the corresponding dimension. Negative *k* makes stepping go towards smaller indices.

  Example

  ```
  >>> x[-2:10]
  array([8, 9])
  >>> x[-3:3:-1]
  array([7, 6, 5, 4])
  ```

- Assume *n* is the number of elements in the dimension being sliced. Then, if *i* is not given it defaults to 0 for *k > 0* and *n - 1* for *k < 0* . If *j* is not given it defaults to *n* for *k > 0* and *-n-1* for *k < 0* . If *k* is not given it defaults to 1. Note that `::` is the same as `:` and means select all indices along this axis.

  Example

  ```
  >>> x[5:]
  array([5, 6, 7, 8, 9])
  ```

- If the number of objects in the selection tuple is less than *N* , then `:` is assumed for any subsequent dimensions.

  Example

  ```
  >>> x = np.array([[[1],[2],[3]], [[4],[5],[6]]])
  >>> x.shape
  (2, 3, 1)
  >>> x[1:2]
  array([[[4],
          [5],
          [6]]])
  ```

- `Ellipsis` expand to the number of `:` objects needed to make a selection tuple of the same length as `x.ndim`. There may only be a single ellipsis present.

  Example

```
>>> x[...,0]
array([[1, 2, 3],
       [4, 5, 6]])
```

- Each *newaxis* object in the selection tuple serves to expand the dimensions of the resulting selection by one unit-length dimension. The added dimension is the position of the *newaxis* object in the selection tuple.

Example

```
>>> x[:,np.newaxis,:,:].shape
(2, 1, 3, 1)
```

- An integer, *i*, returns the same values as `i:i+1` **except** the dimensionality of the returned object is reduced by 1. In particular, a selection tuple with the *p*-th element an integer (and all other entries `:`) returns the corresponding sub-array with dimension *N - 1*. If *N = 1* then the returned object is an array scalar. These objects are explained in *Scalars*.
- If the selection tuple has all entries `:` except the *p*-th entry which is a slice object `i:j:k`, then the returned array has dimension *N* formed by concatenating the sub-arrays returned by integer indexing of elements *i*, *i+k*, ..., *i + (m - 1) k < j*,
- Basic slicing with more than one non-`:` entry in the slicing tuple, acts like repeated application of slicing using a single non-`:` entry, where the non-`:` entries are successively taken (with all other non-`:` entries replaced by `:`). Thus, `x[ind1,...,ind2,:]` acts like `x[ind1][...,ind2,:]` under basic slicing.

> **Warning:** The above is **not** true for advanced indexing.

- You may use slicing to set values in the array, but (unlike lists) you can never grow the array. The size of the value to be set in `x[obj] = value` must be (broadcastable) to the same shape as `x[obj]`.

Note: Remember that a slicing tuple can always be constructed as *obj* and used in the `x[obj]` notation. Slice objects can be used in the construction in place of the `[start:stop:step]` notation. For example, `x[1:10:5,::-1]` can also be implemented as `obj = (slice(1,10,5), slice(None,None,-1)); x[obj]` . This can be useful for constructing generic code that works on arrays of arbitrary dimension.

`numpy.`**`newaxis`**
The *newaxis* object can be used in all slicing operations to create an axis of length one. *newaxis* is an alias for 'None', and 'None' can be used in place of this with the same result.

1.4.2 Advanced Indexing

Advanced indexing is triggered when the selection object, *obj*, is a non-tuple sequence object, an *ndarray* (of data type integer or bool), or a tuple with at least one sequence object or ndarray (of data type integer or bool). There are two types of advanced indexing: integer and Boolean.

Advanced indexing always returns a *copy* of the data (contrast with basic slicing that returns a view).

Warning: The definition of advanced indexing means that `x[(1,2,3),]` is fundamentally different than `x[(1,2,3)]`. The latter is equivalent to `x[1,2,3]` which will trigger basic selection while the former will trigger advanced indexing. Be sure to understand why this occurs.

Also recognize that `x[[1,2,3]]` will trigger advanced indexing, whereas `x[[1,2,slice(None)]]` will trigger basic slicing.

Integer array indexing

Integer array indexing allows selection of arbitrary items in the array based on their *N*-dimensional index. Each integer array represents a number of indexes into that dimension.

Purely integer array indexing

When the index consists of as many integer arrays as the array being indexed has dimensions, the indexing is straight forward, but different from slicing.

Advanced indexes always are *broadcast* and iterated as *one*:

```
result[i_1, ..., i_M] == x[ind_1[i_1, ..., i_M], ind_2[i_1, ..., i_M],
                           ..., ind_N[i_1, ..., i_M]]
```

Note that the result shape is identical to the (broadcast) indexing array shapes `ind_1, ..., ind_N`.

Example

From each row, a specific element should be selected. The row index is just `[0, 1, 2]` and the column index specifies the element to choose for the corresponding row, here `[0, 1, 0]`. Using both together the task can be solved using advanced indexing:

```
>>> x = np.array([[1, 2], [3, 4], [5, 6]])
>>> x[[0, 1, 2], [0, 1, 0]]
array([1, 4, 5])
```

To achieve a behaviour similar to the basic slicing above, broadcasting can be used. The function *ix_* can help with this broadcasting. This is best understood with an example.

Example

From a 4x3 array the corner elements should be selected using advanced indexing. Thus all elements for which the column is one of `[0, 2]` and the row is one of `[0, 3]` need to be selected. To use advanced indexing one needs to select all elements *explicitly*. Using the method explained previously one could write:

```
>>> x = array([[ 0,  1,  2],
...            [ 3,  4,  5],
...            [ 6,  7,  8],
...            [ 9, 10, 11]])
>>> rows = np.array([[0, 0],
...                  [3, 3]], dtype=np.intp)
>>> columns = np.array([[0, 2],
...                     [0, 2]], dtype=np.intp)
>>> x[rows, columns]
```

(continues on next page)

(continued from previous page)

```
array([[ 0,  2],
       [ 9, 11]])
```

However, since the indexing arrays above just repeat themselves, broadcasting can be used (compare operations such as `rows[:, np.newaxis] + columns`) to simplify this:

```
>>> rows = np.array([0, 3], dtype=np.intp)
>>> columns = np.array([0, 2], dtype=np.intp)
>>> rows[:, np.newaxis]
array([[0],
       [3]])
>>> x[rows[:, np.newaxis], columns]
array([[ 0,  2],
       [ 9, 11]])
```

This broadcasting can also be achieved using the function *ix_*:

```
>>> x[np.ix_(rows, columns)]
array([[ 0,  2],
       [ 9, 11]])
```

Note that without the `np.ix_` call, only the diagonal elements would be selected, as was used in the previous example. This difference is the most important thing to remember about indexing with multiple advanced indexes.

Combining advanced and basic indexing

When there is at least one slice (`:`), ellipsis (`...`) or `np.newaxis` in the index (or the array has more dimensions than there are advanced indexes), then the behaviour can be more complicated. It is like concatenating the indexing result for each advanced index element

In the simplest case, there is only a *single* advanced index. A single advanced index can for example replace a slice and the result array will be the same, however, it is a copy and may have a different memory layout. A slice is preferable when it is possible.

Example

```
>>> x[1:2, 1:3]
array([[4, 5]])
>>> x[1:2, [1, 2]]
array([[4, 5]])
```

The easiest way to understand the situation may be to think in terms of the result shape. There are two parts to the indexing operation, the subspace defined by the basic indexing (excluding integers) and the subspace from the advanced indexing part. Two cases of index combination need to be distinguished:

- The advanced indexes are separated by a slice, ellipsis or newaxis. For example `x[arr1, :, arr2]`.
- The advanced indexes are all next to each other. For example `x[..., arr1, arr2, :]` but *not* `x[arr1, :, 1]` since `1` is an advanced index in this regard.

In the first case, the dimensions resulting from the advanced indexing operation come first in the result array, and the subspace dimensions after that. In the second case, the dimensions from the advanced indexing operations are inserted

into the result array at the same spot as they were in the initial array (the latter logic is what makes simple advanced indexing behave just like slicing).

Example

Suppose `x.shape` is (10,20,30) and `ind` is a (2,3,4)-shaped indexing `intp` array, then `result = x[...,ind,:]` has shape (10,2,3,4,30) because the (20,)-shaped subspace has been replaced with a (2,3,4)-shaped broadcasted indexing subspace. If we let *i, j, k* loop over the (2,3,4)-shaped subspace then `result[...,i,j,k,:] = x[...,ind[i,j,k],:]`. This example produces the same result as *x.take(ind, axis=-2)*.

Example

Let `x.shape` be (10,20,30,40,50) and suppose `ind_1` and `ind_2` can be broadcast to the shape (2,3,4). Then `x[:,ind_1,ind_2]` has shape (10,2,3,4,40,50) because the (20,30)-shaped subspace from X has been replaced with the (2,3,4) subspace from the indices. However, `x[:,ind_1,:,ind_2]` has shape (2,3,4,10,30,50) because there is no unambiguous place to drop in the indexing subspace, thus it is tacked-on to the beginning. It is always possible to use *.transpose()* to move the subspace anywhere desired. Note that this example cannot be replicated using *take*.

Boolean array indexing

This advanced indexing occurs when obj is an array object of Boolean type, such as may be returned from comparison operators. A single boolean index array is practically identical to `x[obj.nonzero()]` where, as described above, *obj.nonzero()* returns a tuple (of length *obj.ndim*) of integer index arrays showing the `True` elements of *obj*. However, it is faster when `obj.shape == x.shape`.

If `obj.ndim == x.ndim`, `x[obj]` returns a 1-dimensional array filled with the elements of *x* corresponding to the `True` values of *obj*. The search order will be row-major, C-style. If *obj* has `True` values at entries that are outside of the bounds of *x*, then an index error will be raised. If *obj* is smaller than *x* it is identical to filling it with `False`.

Example

A common use case for this is filtering for desired element values. For example one may wish to select all entries from an array which are not NaN:

```
>>> x = np.array([[1., 2.], [np.nan, 3.], [np.nan, np.nan]])
>>> x[~np.isnan(x)]
array([ 1.,  2.,  3.])
```

Or wish to add a constant to all negative elements:

```
>>> x = np.array([1., -1., -2., 3])
>>> x[x < 0] += 20
>>> x
array([  1.,  19.,  18.,   3.])
```

In general if an index includes a Boolean array, the result will be identical to inserting `obj.nonzero()` into the same position and using the integer array indexing mechanism described above. `x[ind_1, boolean_array, ind_2]` is equivalent to `x[(ind_1,) + boolean_array.nonzero() + (ind_2,)]`.

If there is only one Boolean array and no integer indexing array present, this is straight forward. Care must only be taken to make sure that the boolean index has *exactly* as many dimensions as it is supposed to work with.

Example

From an array, select all rows which sum up to less or equal two:

```
>>> x = np.array([[0, 1], [1, 1], [2, 2]])
>>> rowsum = x.sum(-1)
>>> x[rowsum <= 2, :]
array([[0, 1],
       [1, 1]])
```

But if `rowsum` would have two dimensions as well:

```
>>> rowsum = x.sum(-1, keepdims=True)
>>> rowsum.shape
(3, 1)
>>> x[rowsum <= 2, :]     # fails
IndexError: too many indices
>>> x[rowsum <= 2]
array([0, 1])
```

The last one giving only the first elements because of the extra dimension. Compare `rowsum.nonzero()` to understand this example.

Combining multiple Boolean indexing arrays or a Boolean with an integer indexing array can best be understood with the *obj.nonzero()* analogy. The function *ix_* also supports boolean arrays and will work without any surprises.

Example

Use boolean indexing to select all rows adding up to an even number. At the same time columns 0 and 2 should be selected with an advanced integer index. Using the *ix_* function this can be done with:

```
>>> x = array([[ 0,  1,  2],
...            [ 3,  4,  5],
...            [ 6,  7,  8],
...            [ 9, 10, 11]])
>>> rows = (x.sum(-1) % 2) == 0
>>> rows
array([False,  True, False,  True])
>>> columns = [0, 2]
>>> x[np.ix_(rows, columns)]
array([[ 3,  5],
       [ 9, 11]])
```

Without the `np.ix_` call or only the diagonal elements would be selected.

Or without `np.ix_` (compare the integer array examples):

```
>>> rows = rows.nonzero()[0]
>>> x[rows[:, np.newaxis], columns]
array([[ 3,  5],
       [ 9, 11]])
```

1.4.3 Detailed notes

These are some detailed notes, which are not of importance for day to day indexing (in no particular order):

- The native NumPy indexing type is `intp` and may differ from the default integer array type. `intp` is the smallest data type sufficient to safely index any array; for advanced indexing it may be faster than other types.
- For advanced assignments, there is in general no guarantee for the iteration order. This means that if an element is set more than once, it is not possible to predict the final result.
- An empty (tuple) index is a full scalar index into a zero dimensional array. `x[()]` returns a *scalar* if `x` is zero dimensional and a view otherwise. On the other hand `x[...]` always returns a view.
- If a zero dimensional array is present in the index *and* it is a full integer index the result will be a *scalar* and not a zero dimensional array. (Advanced indexing is not triggered.)
- When an ellipsis (`...`) is present but has no size (i.e. replaces zero `:`) the result will still always be an array. A view if no advanced index is present, otherwise a copy.
- the `nonzero` equivalence for Boolean arrays does not hold for zero dimensional boolean arrays.
- When the result of an advanced indexing operation has no elements but an individual index is out of bounds, whether or not an `IndexError` is raised is undefined (e.g. `x[[], [123]]` with `123` being out of bounds).
- When a *casting* error occurs during assignment (for example updating a numerical array using a sequence of strings), the array being assigned to may end up in an unpredictable partially updated state. However, if any other error (such as an out of bounds index) occurs, the array will remain unchanged.
- The memory layout of an advanced indexing result is optimized for each indexing operation and no particular memory order can be assumed.
- When using a subclass (especially one which manipulates its shape), the default `ndarray.__setitem__` behaviour will call `__getitem__` for *basic* indexing but not for *advanced* indexing. For such a subclass it may be preferable to call `ndarray.__setitem__` with a *base class* ndarray view on the data. This *must* be done if the subclasses `__getitem__` does not return views.

1.4.4 Field Access

See also:

Data type objects (dtype), *Scalars*

If the *ndarray* object is a structured array the fields of the array can be accessed by indexing the array with strings, dictionary-like.

Indexing `x['field-name']` returns a new view to the array, which is of the same shape as *x* (except when the field is a sub-array) but of data type `x.dtype['field-name']` and contains only the part of the data in the specified field. Also *record array* scalars can be "indexed" this way.

Indexing into a structured array can also be done with a list of field names, *e.g.* `x[['field-name1', 'field-name2']]`. Currently this returns a new array containing a copy of the values in the fields specified in the list. As of NumPy 1.7, returning a copy is being deprecated in favor of returning a view. A copy will continue to be returned for now, but a FutureWarning will be issued when writing to the copy. If you depend on the current behavior, then we suggest copying the returned array explicitly, i.e. use x[['field-name1','field-name2']].copy(). This will work with both past and future versions of NumPy.

If the accessed field is a sub-array, the dimensions of the sub-array are appended to the shape of the result.

Example

```
>>> x = np.zeros((2,2), dtype=[('a', np.int32), ('b', np.float64, (3,3))])
>>> x['a'].shape
(2, 2)
>>> x['a'].dtype
dtype('int32')
>>> x['b'].shape
(2, 2, 3, 3)
>>> x['b'].dtype
dtype('float64')
```

1.4.5 Flat Iterator indexing

x.flat returns an iterator that will iterate over the entire array (in C-contiguous style with the last index varying the fastest). This iterator object can also be indexed using basic slicing or advanced indexing as long as the selection object is not a tuple. This should be clear from the fact that *x.flat* is a 1-dimensional view. It can be used for integer indexing with 1-dimensional C-style-flat indices. The shape of any returned array is therefore the shape of the integer indexing object.

1.5 Iterating Over Arrays

The iterator object *nditer*, introduced in NumPy 1.6, provides many flexible ways to visit all the elements of one or more arrays in a systematic fashion. This page introduces some basic ways to use the object for computations on arrays in Python, then concludes with how one can accelerate the inner loop in Cython. Since the Python exposure of *nditer* is a relatively straightforward mapping of the C array iterator API, these ideas will also provide help working with array iteration from C or C++.

1.5.1 Single Array Iteration

The most basic task that can be done with the *nditer* is to visit every element of an array. Each element is provided one by one using the standard Python iterator interface.

Example

```
>>> a = np.arange(6).reshape(2,3)
>>> for x in np.nditer(a):
...     print x,
...
0 1 2 3 4 5
```

An important thing to be aware of for this iteration is that the order is chosen to match the memory layout of the array instead of using a standard C or Fortran ordering. This is done for access efficiency, reflecting the idea that by default one simply wants to visit each element without concern for a particular ordering. We can see this by iterating over the transpose of our previous array, compared to taking a copy of that transpose in C order.

Example

```
>>> a = np.arange(6).reshape(2,3)
>>> for x in np.nditer(a.T):
...     print x,
...
0 1 2 3 4 5
```

```
>>> for x in np.nditer(a.T.copy(order='C')):
...     print x,
...
0 3 1 4 2 5
```

The elements of both *a* and *a.T* get traversed in the same order, namely the order they are stored in memory, whereas the elements of *a.T.copy(order='C')* get visited in a different order because they have been put into a different memory layout.

Controlling Iteration Order

There are times when it is important to visit the elements of an array in a specific order, irrespective of the layout of the elements in memory. The `nditer` object provides an *order* parameter to control this aspect of iteration. The default, having the behavior described above, is order='K' to keep the existing order. This can be overridden with order='C' for C order and order='F' for Fortran order.

Example

```
>>> a = np.arange(6).reshape(2,3)
>>> for x in np.nditer(a, order='F'):
...     print x,
...
0 3 1 4 2 5
>>> for x in np.nditer(a.T, order='C'):
...     print x,
...
0 3 1 4 2 5
```

Modifying Array Values

By default, the `nditer` treats the input array as a read-only object. To modify the array elements, you must specify either read-write or write-only mode. This is controlled with per-operand flags.

Regular assignment in Python simply changes a reference in the local or global variable dictionary instead of modifying an existing variable in place. This means that simply assigning to *x* will not place the value into the element of the array, but rather switch *x* from being an array element reference to being a reference to the value you assigned. To actually modify the element of the array, *x* should be indexed with the ellipsis.

Example

```
>>> a = np.arange(6).reshape(2,3)
>>> a
array([[0, 1, 2],
       [3, 4, 5]])
```

(continues on next page)

(continued from previous page)

```
>>> for x in np.nditer(a, op_flags=['readwrite']):
...     x[...] = 2 * x
...
>>> a
array([[ 0,  2,  4],
       [ 6,  8, 10]])
```

Using an External Loop

In all the examples so far, the elements of *a* are provided by the iterator one at a time, because all the looping logic is internal to the iterator. While this is simple and convenient, it is not very efficient. A better approach is to move the one-dimensional innermost loop into your code, external to the iterator. This way, NumPy's vectorized operations can be used on larger chunks of the elements being visited.

The *nditer* will try to provide chunks that are as large as possible to the inner loop. By forcing 'C' and 'F' order, we get different external loop sizes. This mode is enabled by specifying an iterator flag.

Observe that with the default of keeping native memory order, the iterator is able to provide a single one-dimensional chunk, whereas when forcing Fortran order, it has to provide three chunks of two elements each.

Example

```
>>> a = np.arange(6).reshape(2,3)
>>> for x in np.nditer(a, flags=['external_loop']):
...     print x,
...
[0 1 2 3 4 5]
```

```
>>> for x in np.nditer(a, flags=['external_loop'], order='F'):
...     print x,
...
[0 3] [1 4] [2 5]
```

Tracking an Index or Multi-Index

During iteration, you may want to use the index of the current element in a computation. For example, you may want to visit the elements of an array in memory order, but use a C-order, Fortran-order, or multidimensional index to look up values in a different array.

The Python iterator protocol doesn't have a natural way to query these additional values from the iterator, so we introduce an alternate syntax for iterating with an *nditer*. This syntax explicitly works with the iterator object itself, so its properties are readily accessible during iteration. With this looping construct, the current value is accessible by indexing into the iterator, and the index being tracked is the property *index* or *multi_index* depending on what was requested.

The Python interactive interpreter unfortunately prints out the values of expressions inside the while loop during each iteration of the loop. We have modified the output in the examples using this looping construct in order to be more readable.

Example

```
>>> a = np.arange(6).reshape(2,3)
>>> it = np.nditer(a, flags=['f_index'])
>>> while not it.finished:
...     print "%d <%d>" % (it[0], it.index),
...     it.iternext()
...
0 <0> 1 <2> 2 <4> 3 <1> 4 <3> 5 <5>
```

```
>>> it = np.nditer(a, flags=['multi_index'])
>>> while not it.finished:
...     print "%d <%s>" % (it[0], it.multi_index),
...     it.iternext()
...
0 <(0, 0)> 1 <(0, 1)> 2 <(0, 2)> 3 <(1, 0)> 4 <(1, 1)> 5 <(1, 2)>
```

```
>>> it = np.nditer(a, flags=['multi_index'], op_flags=['writeonly'])
>>> while not it.finished:
...     it[0] = it.multi_index[1] - it.multi_index[0]
...     it.iternext()
...
>>> a
array([[ 0,  1,  2],
       [-1,  0,  1]])
```

Tracking an index or multi-index is incompatible with using an external loop, because it requires a different index value per element. If you try to combine these flags, the *nditer* object will raise an exception

Example

```
>>> a = np.zeros((2,3))
>>> it = np.nditer(a, flags=['c_index', 'external_loop'])
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: Iterator flag EXTERNAL_LOOP cannot be used if an index or multi-index is␣
↪being tracked
```

Buffering the Array Elements

When forcing an iteration order, we observed that the external loop option may provide the elements in smaller chunks because the elements can't be visited in the appropriate order with a constant stride. When writing C code, this is generally fine, however in pure Python code this can cause a significant reduction in performance.

By enabling buffering mode, the chunks provided by the iterator to the inner loop can be made larger, significantly reducing the overhead of the Python interpreter. In the example forcing Fortran iteration order, the inner loop gets to see all the elements in one go when buffering is enabled.

Example

```
>>> a = np.arange(6).reshape(2,3)
>>> for x in np.nditer(a, flags=['external_loop'], order='F'):
...     print x,
```

(continues on next page)

(continued from previous page)

```
...
[0 3] [1 4] [2 5]
```

```
>>> for x in np.nditer(a, flags=['external_loop','buffered'], order='F'):
...     print x,
...
[0 3 1 4 2 5]
```

Iterating as a Specific Data Type

There are times when it is necessary to treat an array as a different data type than it is stored as. For instance, one may want to do all computations on 64-bit floats, even if the arrays being manipulated are 32-bit floats. Except when writing low-level C code, it's generally better to let the iterator handle the copying or buffering instead of casting the data type yourself in the inner loop.

There are two mechanisms which allow this to be done, temporary copies and buffering mode. With temporary copies, a copy of the entire array is made with the new data type, then iteration is done in the copy. Write access is permitted through a mode which updates the original array after all the iteration is complete. The major drawback of temporary copies is that the temporary copy may consume a large amount of memory, particularly if the iteration data type has a larger itemsize than the original one.

Buffering mode mitigates the memory usage issue and is more cache-friendly than making temporary copies. Except for special cases, where the whole array is needed at once outside the iterator, buffering is recommended over temporary copying. Within NumPy, buffering is used by the ufuncs and other functions to support flexible inputs with minimal memory overhead.

In our examples, we will treat the input array with a complex data type, so that we can take square roots of negative numbers. Without enabling copies or buffering mode, the iterator will raise an exception if the data type doesn't match precisely.

Example

```
>>> a = np.arange(6).reshape(2,3) - 3
>>> for x in np.nditer(a, op_dtypes=['complex128']):
...     print np.sqrt(x),
...
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
TypeError: Iterator operand required copying or buffering, but neither copying nor␣
↪buffering was enabled
```

In copying mode, 'copy' is specified as a per-operand flag. This is done to provide control in a per-operand fashion. Buffering mode is specified as an iterator flag.

Example

```
>>> a = np.arange(6).reshape(2,3) - 3
>>> for x in np.nditer(a, op_flags=['readonly','copy'],
...                    op_dtypes=['complex128']):
...     print np.sqrt(x),
```

(continues on next page)

(continued from previous page)

```
...
1.73205080757j 1.41421356237j 1j 0j (1+0j) (1.41421356237+0j)
```

```
>>> for x in np.nditer(a, flags=['buffered'], op_dtypes=['complex128']):
...     print np.sqrt(x),
...
1.73205080757j 1.41421356237j 1j 0j (1+0j) (1.41421356237+0j)
```

The iterator uses NumPy's casting rules to determine whether a specific conversion is permitted. By default, it enforces 'safe' casting. This means, for example, that it will raise an exception if you try to treat a 64-bit float array as a 32-bit float array. In many cases, the rule 'same_kind' is the most reasonable rule to use, since it will allow conversion from 64 to 32-bit float, but not from float to int or from complex to float.

Example

```
>>> a = np.arange(6.)
>>> for x in np.nditer(a, flags=['buffered'], op_dtypes=['float32']):
...     print x,
...
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
TypeError: Iterator operand 0 dtype could not be cast from dtype('float64') to dtype(
↪'float32') according to the rule 'safe'
```

```
>>> for x in np.nditer(a, flags=['buffered'], op_dtypes=['float32'],
...                    casting='same_kind'):
...     print x,
...
0.0 1.0 2.0 3.0 4.0 5.0
```

```
>>> for x in np.nditer(a, flags=['buffered'], op_dtypes=['int32'], casting='same_kind
↪'):
...     print x,
...
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
TypeError: Iterator operand 0 dtype could not be cast from dtype('float64') to dtype(
↪'int32') according to the rule 'same_kind'
```

One thing to watch out for is conversions back to the original data type when using a read-write or write-only operand. A common case is to implement the inner loop in terms of 64-bit floats, and use 'same_kind' casting to allow the other floating-point types to be processed as well. While in read-only mode, an integer array could be provided, read-write mode will raise an exception because conversion back to the array would violate the casting rule.

Example

```
>>> a = np.arange(6)
>>> for x in np.nditer(a, flags=['buffered'], op_flags=['readwrite'],
...                    op_dtypes=['float64'], casting='same_kind'):
...     x[...] = x / 2.0
...
```

(continues on next page)

(continued from previous page)

```
Traceback (most recent call last):
  File "<stdin>", line 2, in <module>
TypeError: Iterator requested dtype could not be cast from dtype('float64') to dtype(
↪'int64'), the operand 0 dtype, according to the rule 'same_kind'
```

1.5.2 Broadcasting Array Iteration

NumPy has a set of rules for dealing with arrays that have differing shapes which are applied whenever functions take multiple operands which combine element-wise. This is called *broadcasting*. The `nditer` object can apply these rules for you when you need to write such a function.

As an example, we print out the result of broadcasting a one and a two dimensional array together.

Example

```
>>> a = np.arange(3)
>>> b = np.arange(6).reshape(2,3)
>>> for x, y in np.nditer([a,b]):
...     print "%d:%d" % (x,y),
...
0:0 1:1 2:2 0:3 1:4 2:5
```

When a broadcasting error occurs, the iterator raises an exception which includes the input shapes to help diagnose the problem.

Example

```
>>> a = np.arange(2)
>>> b = np.arange(6).reshape(2,3)
>>> for x, y in np.nditer([a,b]):
...     print "%d:%d" % (x,y),
...
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: operands could not be broadcast together with shapes (2) (2,3)
```

Iterator-Allocated Output Arrays

A common case in NumPy functions is to have outputs allocated based on the broadcasting of the input, and additionally have an optional parameter called 'out' where the result will be placed when it is provided. The `nditer` object provides a convenient idiom that makes it very easy to support this mechanism.

We'll show how this works by creating a function `square` which squares its input. Let's start with a minimal function definition excluding 'out' parameter support.

Example

```
>>> def square(a):
...     it = np.nditer([a, None])
...     for x, y in it:
...         y[...] = x*x
...     return it.operands[1]
...
>>> square([1,2,3])
array([1, 4, 9])
```

By default, the *nditer* uses the flags 'allocate' and 'writeonly' for operands that are passed in as None. This means we were able to provide just the two operands to the iterator, and it handled the rest.

When adding the 'out' parameter, we have to explicitly provide those flags, because if someone passes in an array as 'out', the iterator will default to 'readonly', and our inner loop would fail. The reason 'readonly' is the default for input arrays is to prevent confusion about unintentionally triggering a reduction operation. If the default were 'readwrite', any broadcasting operation would also trigger a reduction, a topic which is covered later in this document.

While we're at it, let's also introduce the 'no_broadcast' flag, which will prevent the output from being broadcast. This is important, because we only want one input value for each output. Aggregating more than one input value is a reduction operation which requires special handling. It would already raise an error because reductions must be explicitly enabled in an iterator flag, but the error message that results from disabling broadcasting is much more understandable for end-users. To see how to generalize the square function to a reduction, look at the sum of squares function in the section about Cython.

For completeness, we'll also add the 'external_loop' and 'buffered' flags, as these are what you will typically want for performance reasons.

Example

```
>>> def square(a, out=None):
...     it = np.nditer([a, out],
...             flags = ['external_loop', 'buffered'],
...             op_flags = [['readonly'],
...                         ['writeonly', 'allocate', 'no_broadcast']])
...     for x, y in it:
...         y[...] = x*x
...     return it.operands[1]
...
```

```
>>> square([1,2,3])
array([1, 4, 9])
```

```
>>> b = np.zeros((3,))
>>> square([1,2,3], out=b)
array([ 1.,  4.,  9.])
>>> b
array([ 1.,  4.,  9.])
```

```
>>> square(np.arange(6).reshape(2,3), out=b)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
  File "<stdin>", line 4, in square
ValueError: non-broadcastable output operand with shape (3) doesn't match the␣
↪broadcast shape (2,3)
```

Outer Product Iteration

Any binary operation can be extended to an array operation in an outer product fashion like in *outer*, and the *nditer* object provides a way to accomplish this by explicitly mapping the axes of the operands. It is also possible to do this with *newaxis* indexing, but we will show you how to directly use the nditer *op_axes* parameter to accomplish this with no intermediate views.

We'll do a simple outer product, placing the dimensions of the first operand before the dimensions of the second operand. The *op_axes* parameter needs one list of axes for each operand, and provides a mapping from the iterator's axes to the axes of the operand.

Suppose the first operand is one dimensional and the second operand is two dimensional. The iterator will have three dimensions, so *op_axes* will have two 3-element lists. The first list picks out the one axis of the first operand, and is -1 for the rest of the iterator axes, with a final result of [0, -1, -1]. The second list picks out the two axes of the second operand, but shouldn't overlap with the axes picked out in the first operand. Its list is [-1, 0, 1]. The output operand maps onto the iterator axes in the standard manner, so we can provide None instead of constructing another list.

The operation in the inner loop is a straightforward multiplication. Everything to do with the outer product is handled by the iterator setup.

Example

```
>>> a = np.arange(3)
>>> b = np.arange(8).reshape(2,4)
>>> it = np.nditer([a, b, None], flags=['external_loop'],
...             op_axes=[[0, -1, -1], [-1, 0, 1], None])
>>> for x, y, z in it:
...     z[...] = x*y
...
>>> it.operands[2]
array([[[ 0,  0,  0,  0],
        [ 0,  0,  0,  0]],
       [[ 0,  1,  2,  3],
        [ 4,  5,  6,  7]],
       [[ 0,  2,  4,  6],
        [ 8, 10, 12, 14]]])
```

Reduction Iteration

Whenever a writeable operand has fewer elements than the full iteration space, that operand is undergoing a reduction. The *nditer* object requires that any reduction operand be flagged as read-write, and only allows reductions when 'reduce_ok' is provided as an iterator flag.

For a simple example, consider taking the sum of all elements in an array.

Example

```
>>> a = np.arange(24).reshape(2,3,4)
>>> b = np.array(0)
>>> for x, y in np.nditer([a, b], flags=['reduce_ok', 'external_loop'],
...                       op_flags=[['readonly'], ['readwrite']]):
...     y[...] += x
...
>>> b
```

(continues on next page)

(continued from previous page)

```
array(276)
>>> np.sum(a)
276
```

Things are a little bit more tricky when combining reduction and allocated operands. Before iteration is started, any reduction operand must be initialized to its starting values. Here's how we can do this, taking sums along the last axis of *a*.

Example

```
>>> a = np.arange(24).reshape(2,3,4)
>>> it = np.nditer([a, None], flags=['reduce_ok', 'external_loop'],
...             op_flags=[['readonly'], ['readwrite', 'allocate']],
...             op_axes=[None, [0,1,-1]])
>>> it.operands[1][...] = 0
>>> for x, y in it:
...     y[...] += x
...
>>> it.operands[1]
array([[ 6, 22, 38],
       [54, 70, 86]])
>>> np.sum(a, axis=2)
array([[ 6, 22, 38],
       [54, 70, 86]])
```

To do buffered reduction requires yet another adjustment during the setup. Normally the iterator construction involves copying the first buffer of data from the readable arrays into the buffer. Any reduction operand is readable, so it may be read into a buffer. Unfortunately, initialization of the operand after this buffering operation is complete will not be reflected in the buffer that the iteration starts with, and garbage results will be produced.

The iterator flag "delay_bufalloc" is there to allow iterator-allocated reduction operands to exist together with buffering. When this flag is set, the iterator will leave its buffers uninitialized until it receives a reset, after which it will be ready for regular iteration. Here's how the previous example looks if we also enable buffering.

Example

```
>>> a = np.arange(24).reshape(2,3,4)
>>> it = np.nditer([a, None], flags=['reduce_ok', 'external_loop',
...                                  'buffered', 'delay_bufalloc'],
...             op_flags=[['readonly'], ['readwrite', 'allocate']],
...             op_axes=[None, [0,1,-1]])
>>> it.operands[1][...] = 0
>>> it.reset()
>>> for x, y in it:
...     y[...] += x
...
>>> it.operands[1]
array([[ 6, 22, 38],
       [54, 70, 86]])
```

1.5.3 Putting the Inner Loop in Cython

Those who want really good performance out of their low level operations should strongly consider directly using the iteration API provided in C, but for those who are not comfortable with C or C++, Cython is a good middle ground with reasonable performance tradeoffs. For the *nditer* object, this means letting the iterator take care of broadcasting, dtype conversion, and buffering, while giving the inner loop to Cython.

For our example, we'll create a sum of squares function. To start, let's implement this function in straightforward Python. We want to support an 'axis' parameter similar to the numpy *sum* function, so we will need to construct a list for the *op_axes* parameter. Here's how this looks.

Example

```
>>> def axis_to_axeslist(axis, ndim):
...     if axis is None:
...         return [-1] * ndim
...     else:
...         if type(axis) is not tuple:
...             axis = (axis,)
...         axeslist = [1] * ndim
...         for i in axis:
...             axeslist[i] = -1
...         ax = 0
...         for i in range(ndim):
...             if axeslist[i] != -1:
...                 axeslist[i] = ax
...                 ax += 1
...         return axeslist
...
>>> def sum_squares_py(arr, axis=None, out=None):
...     axeslist = axis_to_axeslist(axis, arr.ndim)
...     it = np.nditer([arr, out], flags=['reduce_ok', 'external_loop',
...                                       'buffered', 'delay_bufalloc'],
...                 op_flags=[['readonly'], ['readwrite', 'allocate']],
...                 op_axes=[None, axeslist],
...                 op_dtypes=['float64', 'float64'])
...     it.operands[1][...] = 0
...     it.reset()
...     for x, y in it:
...         y[...] += x*x
...     return it.operands[1]
...
>>> a = np.arange(6).reshape(2,3)
>>> sum_squares_py(a)
array(55.0)
>>> sum_squares_py(a, axis=-1)
array([  5.,  50.])
```

To Cython-ize this function, we replace the inner loop (y[...] += x*x) with Cython code that's specialized for the float64 dtype. With the 'external_loop' flag enabled, the arrays provided to the inner loop will always be one-dimensional, so very little checking needs to be done.

Here's the listing of sum_squares.pyx:

```
import numpy as np
cimport numpy as np
```

(continues on next page)

(continued from previous page)

```
cimport cython

def axis_to_axeslist(axis, ndim):
    if axis is None:
        return [-1] * ndim
    else:
        if type(axis) is not tuple:
            axis = (axis,)
        axeslist = [1] * ndim
        for i in axis:
            axeslist[i] = -1
        ax = 0
        for i in range(ndim):
            if axeslist[i] != -1:
                axeslist[i] = ax
                ax += 1
        return axeslist

@cython.boundscheck(False)
def sum_squares_cy(arr, axis=None, out=None):
    cdef np.ndarray[double] x
    cdef np.ndarray[double] y
    cdef int size
    cdef double value

    axeslist = axis_to_axeslist(axis, arr.ndim)
    it = np.nditer([arr, out], flags=['reduce_ok', 'external_loop',
                                      'buffered', 'delay_bufalloc'],
                op_flags=[['readonly'], ['readwrite', 'allocate']],
                op_axes=[None, axeslist],
                op_dtypes=['float64', 'float64'])
    it.operands[1][...] = 0
    it.reset()
    for xarr, yarr in it:
        x = xarr
        y = yarr
        size = x.shape[0]
        for i in range(size):
           value = x[i]
           y[i] = y[i] + value * value
    return it.operands[1]
```

On this machine, building the .pyx file into a module looked like the following, but you may have to find some Cython tutorials to tell you the specifics for your system configuration.:

```
$ cython sum_squares.pyx
$ gcc -shared -pthread -fPIC -fwrapv -O2 -Wall -I/usr/include/python2.7 -fno-strict-
↪aliasing -o sum_squares.so sum_squares.c
```

Running this from the Python interpreter produces the same answers as our native Python/NumPy code did.

Example

```
>>> from sum_squares import sum_squares_cy
>>> a = np.arange(6).reshape(2,3)
>>> sum_squares_cy(a)
```

(continues on next page)

(continued from previous page)

```
array(55.0)
>>> sum_squares_cy(a, axis=-1)
array([  5.,  50.])
```

Doing a little timing in IPython shows that the reduced overhead and memory allocation of the Cython inner loop is providing a very nice speedup over both the straightforward Python code and an expression using NumPy's built-in sum function.:

```
>>> a = np.random.rand(1000,1000)

>>> timeit sum_squares_py(a, axis=-1)
10 loops, best of 3: 37.1 ms per loop

>>> timeit np.sum(a*a, axis=-1)
10 loops, best of 3: 20.9 ms per loop

>>> timeit sum_squares_cy(a, axis=-1)
100 loops, best of 3: 11.8 ms per loop

>>> np.all(sum_squares_cy(a, axis=-1) == np.sum(a*a, axis=-1))
True

>>> np.all(sum_squares_py(a, axis=-1) == np.sum(a*a, axis=-1))
True
```

1.6 Standard array subclasses

The *ndarray* in NumPy is a "new-style" Python built-in-type. Therefore, it can be inherited from (in Python or in C) if desired. Therefore, it can form a foundation for many useful classes. Often whether to sub-class the array object or to simply use the core array component as an internal part of a new class is a difficult decision, and can be simply a matter of choice. NumPy has several tools for simplifying how your new object interacts with other array objects, and so the choice may not be significant in the end. One way to simplify the question is by asking yourself if the object you are interested in can be replaced as a single array or does it really require two or more arrays at its core.

Note that *asarray* always returns the base-class ndarray. If you are confident that your use of the array object can handle any subclass of an ndarray, then *asanyarray* can be used to allow subclasses to propagate more cleanly through your subroutine. In principal a subclass could redefine any aspect of the array and therefore, under strict guidelines, *asanyarray* would rarely be useful. However, most subclasses of the array object will not redefine certain aspects of the array object such as the buffer interface, or the attributes of the array. One important example, however, of why your subroutine may not be able to handle an arbitrary subclass of an array is that matrices redefine the "*" operator to be matrix-multiplication, rather than element-by-element multiplication.

1.6.1 Special attributes and methods

See also:

Subclassing ndarray

NumPy provides several hooks that classes can customize:

`class.__array_ufunc__`(*ufunc*, *method*, **inputs*, ***kwargs*)
New in version 1.13.

Note: The API is provisional, i.e., we do not yet guarantee backward compatibility.

Any class, ndarray subclass or not, can define this method or set it to `None` in order to override the behavior of NumPy's ufuncs. This works quite similarly to Python's `__mul__` and other binary operation routines.

- *ufunc* is the ufunc object that was called.
- *method* is a string indicating which Ufunc method was called (one of `"__call__"`, `"reduce"`, `"reduceat"`, `"accumulate"`, `"outer"`, `"inner"`).
- *inputs* is a tuple of the input arguments to the `ufunc`.
- *kwargs* is a dictionary containing the optional input arguments of the ufunc. If given, any `out` arguments, both positional and keyword, are passed as a `tuple` in *kwargs*. See the discussion in *Universal functions (ufunc)* for details.

The method should return either the result of the operation, or `NotImplemented` if the operation requested is not implemented.

If one of the input or output arguments has a *`__array_ufunc__`* method, it is executed *instead* of the ufunc. If more than one of the arguments implements *`__array_ufunc__`*, they are tried in the order: subclasses before superclasses, inputs before outputs, otherwise left to right. The first routine returning something other than `NotImplemented` determines the result. If all of the *`__array_ufunc__`* operations return `NotImplemented`, a `TypeError` is raised.

Note: We intend to re-implement numpy functions as (generalized) Ufunc, in which case it will become possible for them to be overridden by the `__array_ufunc__` method. A prime candidate is *`matmul`*, which currently is not a Ufunc, but could be relatively easily be rewritten as a (set of) generalized Ufuncs. The same may happen with functions such as *`median`*, `min`, and *`argsort`*.

Like with some other special methods in python, such as `__hash__` and `__iter__`, it is possible to indicate that your class does *not* support ufuncs by setting `__array_ufunc__ = None`. Ufuncs always raise `TypeError` when called on an object that sets `__array_ufunc__ = None`.

The presence of *`__array_ufunc__`* also influences how *`ndarray`* handles binary operations like `arr + obj` and `arr < obj` when `arr` is an *`ndarray`* and `obj` is an instance of a custom class. There are two possibilities. If `obj.__array_ufunc__` is present and not `None`, then `ndarray.__add__` and friends will delegate to the ufunc machinery, meaning that `arr + obj` becomes `np.add(arr, obj)`, and then *`add`* invokes `obj.__array_ufunc__`. This is useful if you want to define an object that acts like an array.

Alternatively, if `obj.__array_ufunc__` is set to `None`, then as a special case, special methods like `ndarray.__add__` will notice this and *unconditionally* raise `TypeError`. This is useful if you want to create objects that interact with arrays via binary operations, but are not themselves arrays. For example, a units handling system might have an object `m` representing the "meters" unit, and want to support the syntax `arr * m` to represent that the array has units of "meters", but not want to otherwise interact with arrays via ufuncs or otherwise. This can be done by setting `__array_ufunc__ = None` and defining `__mul__` and `__rmul__` methods. (Note that this means that writing an `__array_ufunc__` that always returns `NotImplemented` is not quite the same as setting `__array_ufunc__ = None`: in the former case, `arr + obj` will raise `TypeError`, while in the latter case it is possible to define a `__radd__` method to prevent this.)

The above does not hold for in-place operators, for which *`ndarray`* never returns `NotImplemented`. Hence, `arr += obj` would always lead to a `TypeError`. This is because for arrays in-place operations cannot generically be replaced by a simple reverse operation. (For instance, by default, `arr += obj` would be translated to `arr = arr + obj`, i.e., `arr` would be replaced, contrary to what is expected for in-place array operations.)

Note: If you define `__array_ufunc__`:

- If you are not a subclass of *ndarray*, we recommend your class define special methods like `__add__` and `__lt__` that delegate to ufuncs just like ndarray does. An easy way to do this is to subclass from *NDArrayOperatorsMixin*.
- If you subclass *ndarray*, we recommend that you put all your override logic in `__array_ufunc__` and not also override special methods. This ensures the class hierarchy is determined in only one place rather than separately by the ufunc machinery and by the binary operation rules (which gives preference to special methods of subclasses; the alternative way to enforce a one-place only hierarchy, of setting *__array_ufunc__* to `None`, would seem very unexpected and thus confusing, as then the subclass would not work at all with ufuncs).
- *ndarray* defines its own *__array_ufunc__*, which, evaluates the ufunc if no arguments have overrides, and returns `NotImplemented` otherwise. This may be useful for subclasses for which *__array_ufunc__* converts any instances of its own class to *ndarray*: it can then pass these on to its superclass using `super().__array_ufunc__(*inputs, **kwargs)`, and finally return the results after possible back-conversion. The advantage of this practice is that it ensures that it is possible to have a hierarchy of subclasses that extend the behaviour. See Subclassing ndarray for details.

Note: If a class defines the *__array_ufunc__* method, this disables the *__array_wrap__*, *__array_prepare__*, *__array_priority__* mechanism described below for ufuncs (which may eventually be deprecated).

class.**__array_finalize__**(*obj*)
: This method is called whenever the system internally allocates a new array from *obj*, where *obj* is a subclass (subtype) of the *ndarray*. It can be used to change attributes of *self* after construction (so as to ensure a 2-d matrix for example), or to update meta-information from the "parent." Subclasses inherit a default implementation of this method that does nothing.

class.**__array_prepare__**(*array*, *context=None*)
: At the beginning of every *ufunc*, this method is called on the input object with the highest array priority, or the output object if one was specified. The output array is passed in and whatever is returned is passed to the ufunc. Subclasses inherit a default implementation of this method which simply returns the output array unmodified. Subclasses may opt to use this method to transform the output array into an instance of the subclass and update metadata before returning the array to the ufunc for computation.

Note: For ufuncs, it is hoped to eventually deprecate this method in favour of *__array_ufunc__*.

class.**__array_wrap__**(*array*, *context=None*)
: At the end of every *ufunc*, this method is called on the input object with the highest array priority, or the output object if one was specified. The ufunc-computed array is passed in and whatever is returned is passed to the user. Subclasses inherit a default implementation of this method, which transforms the array into a new instance of the object's class. Subclasses may opt to use this method to transform the output array into an instance of the subclass and update metadata before returning the array to the user.

Note: For ufuncs, it is hoped to eventually deprecate this method in favour of *__array_ufunc__*.

class.**__array_priority__**
: The value of this attribute is used to determine what type of object to return in situations where there is more

than one possibility for the Python type of the returned object. Subclasses inherit a default value of 0.0 for this attribute.

Note: For ufuncs, it is hoped to eventually deprecate this method in favour of *__array_ufunc__*.

class.**__array__**([*dtype*])
If a class (ndarray subclass or not) having the *__array__* method is used as the output object of an *ufunc*, results will be written to the object returned by *__array__*. Similar conversion is done on input arrays.

1.6.2 Matrix objects

matrix objects inherit from the ndarray and therefore, they have the same attributes and methods of ndarrays. There are six important differences of matrix objects, however, that may lead to unexpected results when you use matrices but expect them to act like arrays:

1. Matrix objects can be created using a string notation to allow Matlab-style syntax where spaces separate columns and semicolons (';') separate rows.
2. Matrix objects are always two-dimensional. This has far-reaching implications, in that m.ravel() is still two-dimensional (with a 1 in the first dimension) and item selection returns two-dimensional objects so that sequence behavior is fundamentally different than arrays.
3. Matrix objects over-ride multiplication to be matrix-multiplication. **Make sure you understand this for functions that you may want to receive matrices. Especially in light of the fact that asanyarray(m) returns a matrix when m is a matrix.**
4. Matrix objects over-ride power to be matrix raised to a power. The same warning about using power inside a function that uses asanyarray(...) to get an array object holds for this fact.
5. The default __array_priority__ of matrix objects is 10.0, and therefore mixed operations with ndarrays always produce matrices.
6. Matrices have special attributes which make calculations easier. These are

matrix.T	Returns the transpose of the matrix.
matrix.H	Returns the (complex) conjugate transpose of *self*.
matrix.I	Returns the (multiplicative) inverse of invertible *self*.
matrix.A	Return *self* as an *ndarray* object.

matrix.**T**
Returns the transpose of the matrix.

Does *not* conjugate! For the complex conjugate transpose, use `.H`.

Parameters **None**

Returns **ret** : matrix object

The (non-conjugated) transpose of the matrix.

See also:

transpose, *getH*

Examples

```
>>> m = np.matrix('[1, 2; 3, 4]')
>>> m
matrix([[1, 2],
        [3, 4]])
>>> m.getT()
matrix([[1, 3],
        [2, 4]])
```

`matrix.H`

Returns the (complex) conjugate transpose of *self*.

Equivalent to `np.transpose(self)` if *self* is real-valued.

Parameters **None**

Returns **ret** : matrix object

complex conjugate transpose of *self*

Examples

```
>>> x = np.matrix(np.arange(12).reshape((3,4)))
>>> z = x - 1j*x; z
matrix([[  0. +0.j,   1. -1.j,   2. -2.j,   3. -3.j],
        [  4. -4.j,   5. -5.j,   6. -6.j,   7. -7.j],
        [  8. -8.j,   9. -9.j,  10.-10.j,  11.-11.j]])
>>> z.getH()
matrix([[  0. +0.j,   4. +4.j,   8. +8.j],
        [  1. +1.j,   5. +5.j,   9. +9.j],
        [  2. +2.j,   6. +6.j,  10.+10.j],
        [  3. +3.j,   7. +7.j,  11.+11.j]])
```

`matrix.I`

Returns the (multiplicative) inverse of invertible *self*.

Parameters **None**

Returns **ret** : matrix object

If *self* is non-singular, *ret* is such that `ret * self == self * ret == np.matrix(np.eye(self[0,:].size)` all return `True`.

Raises **numpy.linalg.LinAlgError: Singular matrix**

If *self* is singular.

See also:

linalg.inv

Examples

```
>>> m = np.matrix('[1, 2; 3, 4]'); m
matrix([[1, 2],
        [3, 4]])
```

(continues on next page)

(continued from previous page)

```
>>> m.getI()
matrix([[-2. ,  1. ],
        [ 1.5, -0.5]])
>>> m.getI() * m
matrix([[ 1.,  0.],
        [ 0.,  1.]])
```

matrix.**A**

Return *self* as an *ndarray* object.

Equivalent to `np.asarray(self)`.

Parameters **None**

Returns **ret** : ndarray

self as an *ndarray*

Examples

```
>>> x = np.matrix(np.arange(12).reshape((3,4))); x
matrix([[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]])
>>> x.getA()
array([[ 0,  1,  2,  3],
       [ 4,  5,  6,  7],
       [ 8,  9, 10, 11]])
```

Warning: Matrix objects over-ride multiplication, '*', and power, '**', to be matrix-multiplication and matrix power, respectively. If your subroutine can accept sub-classes and you do not convert to base- class arrays, then you must use the ufuncs multiply and power to be sure that you are performing the correct operation for all inputs.

The matrix class is a Python subclass of the ndarray and can be used as a reference for how to construct your own subclass of the ndarray. Matrices can be created from other matrices, strings, and anything else that can be converted to an `ndarray` . The name "mat "is an alias for "matrix "in NumPy.

matrix(data[, dtype, copy])	Returns a matrix from an array-like object, or from a string of data.
asmatrix(data[, dtype])	Interpret the input as a matrix.
bmat(obj[, ldict, gdict])	Build a matrix object from a string, nested sequence, or array.

class numpy.**matrix**(*data*, *dtype=None*, *copy=True*)

Returns a matrix from an array-like object, or from a string of data. A matrix is a specialized 2-D array that retains its 2-D nature through operations. It has certain special operators, such as * (matrix multiplication) and ** (matrix power).

Parameters **data** : array_like or string

If *data* is a string, it is interpreted as a matrix with commas or spaces separating columns, and semicolons separating rows.

dtype : data-type

Data-type of the output matrix.

copy : bool

If *data* is already an *ndarray*, then this flag determines whether the data is copied (the default), or whether a view is constructed.

See also:

array

Examples

```
>>> a = np.matrix('1 2; 3 4')
>>> print(a)
[[1 2]
 [3 4]]
```

```
>>> np.matrix([[1, 2], [3, 4]])
matrix([[1, 2],
        [3, 4]])
```

Attributes

A	Return *self* as an *ndarray* object.
A1	Return *self* as a flattened *ndarray*.
H	Returns the (complex) conjugate transpose of *self*.
I	Returns the (multiplicative) inverse of invertible *self*.
T	Returns the transpose of the matrix.
base	Base object if memory is from some other object.
ctypes	An object to simplify the interaction of the array with the ctypes module.
data	Python buffer object pointing to the start of the array's data.
dtype	Data-type of the array's elements.
flags	Information about the memory layout of the array.
flat	A 1-D iterator over the array.
imag	The imaginary part of the array.
itemsize	Length of one array element in bytes.
nbytes	Total bytes consumed by the elements of the array.
ndim	Number of array dimensions.
real	The real part of the array.
shape	Tuple of array dimensions.
size	Number of elements in the array.
strides	Tuple of bytes to step in each dimension when traversing an array.

`matrix.`**`A1`**

Return *self* as a flattened *ndarray*.

Equivalent to `np.asarray(x).ravel()`

Parameters None

Returns **ret** : ndarray

self, 1-D, as an *ndarray*

Examples

```
>>> x = np.matrix(np.arange(12).reshape((3,4))); x
matrix([[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]])
>>> x.getA1()
array([ 0,  1,  2,  3,  4,  5,  6,  7,  8,  9, 10, 11])
```

matrix.**base**

Base object if memory is from some other object.

Examples

The base of an array that owns its memory is None:

```
>>> x = np.array([1,2,3,4])
>>> x.base is None
True
```

Slicing creates a view, whose memory is shared with x:

```
>>> y = x[2:]
>>> y.base is x
True
```

matrix.**ctypes**

An object to simplify the interaction of the array with the ctypes module.

This attribute creates an object that makes it easier to use arrays when calling shared libraries with the ctypes module. The returned object has, among others, data, shape, and strides attributes (see Notes below) which themselves return ctypes objects that can be used as arguments to a shared library.

Parameters None

Returns **c** : Python object

Possessing attributes data, shape, strides, etc.

See also:

numpy.ctypeslib

Notes

Below are the public attributes of this object which were documented in "Guide to NumPy" (we have omitted undocumented public attributes, as well as documented private attributes):

- data: A pointer to the memory area of the array as a Python integer. This memory area may contain data that is not aligned, or not in correct byte-order. The memory area may not even be writeable. The array flags and data-type of this array should be respected when passing this attribute to arbitrary

C-code to avoid trouble that can include Python crashing. User Beware! The value of this attribute is exactly the same as self._array_interface_['data'][0].

- shape (c_intp*self.ndim): A ctypes array of length self.ndim where the basetype is the C-integer corresponding to dtype('p') on this platform. This base-type could be c_int, c_long, or c_longlong depending on the platform. The c_intp type is defined accordingly in numpy.ctypeslib. The ctypes array contains the shape of the underlying array.
- strides (c_intp*self.ndim): A ctypes array of length self.ndim where the basetype is the same as for the shape attribute. This ctypes array contains the strides information from the underlying array. This strides information is important for showing how many bytes must be jumped to get to the next element in the array.
- data_as(obj): Return the data pointer cast to a particular c-types object. For example, calling self._as_parameter_ is equivalent to self.data_as(ctypes.c_void_p). Perhaps you want to use the data as a pointer to a ctypes array of floating-point data: self.data_as(ctypes.POINTER(ctypes.c_double)).
- shape_as(obj): Return the shape tuple as an array of some other c-types type. For example: self.shape_as(ctypes.c_short).
- strides_as(obj): Return the strides tuple as an array of some other c-types type. For example: self.strides_as(ctypes.c_longlong).

Be careful using the ctypes attribute - especially on temporary arrays or arrays constructed on the fly. For example, calling `(a+b).ctypes.data_as(ctypes.c_void_p)` returns a pointer to memory that is invalid because the array created as (a+b) is deallocated before the next Python statement. You can avoid this problem using either `c=a+b` or `ct=(a+b).ctypes`. In the latter case, ct will hold a reference to the array until ct is deleted or re-assigned.

If the ctypes module is not available, then the ctypes attribute of array objects still returns something useful, but ctypes objects are not returned and errors may be raised instead. In particular, the object will still have the as parameter attribute which will return an integer equal to the data attribute.

Examples

```
>>> import ctypes
>>> x
array([[0, 1],
       [2, 3]])
>>> x.ctypes.data
30439712
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_long))
<ctypes.LP_c_long object at 0x01F01300>
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_long)).contents
c_long(0)
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_longlong)).contents
c_longlong(4294967296L)
>>> x.ctypes.shape
<numpy.core._internal.c_long_Array_2 object at 0x01FFD580>
>>> x.ctypes.shape_as(ctypes.c_long)
<numpy.core._internal.c_long_Array_2 object at 0x01FCE620>
>>> x.ctypes.strides
<numpy.core._internal.c_long_Array_2 object at 0x01FCE620>
>>> x.ctypes.strides_as(ctypes.c_longlong)
<numpy.core._internal.c_longlong_Array_2 object at 0x01F01300>
```

matrix.**data**
Python buffer object pointing to the start of the array's data.

matrix.**dtype**
Data-type of the array's elements.

Parameters None

Returns **d** : numpy dtype object

See also:

numpy.dtype

Examples

```
>>> x
array([[0, 1],
       [2, 3]])
>>> x.dtype
dtype('int32')
>>> type(x.dtype)
<type 'numpy.dtype'>
```

matrix.**flags**
Information about the memory layout of the array.

Notes

The *flags* object can be accessed dictionary-like (as in `a.flags['WRITEABLE']`), or by using lowercased attribute names (as in `a.flags.writeable`). Short flag names are only supported in dictionary access.

Only the WRITEBACKIFCOPY, UPDATEIFCOPY, WRITEABLE, and ALIGNED flags can be changed by the user, via direct assignment to the attribute or dictionary entry, or by calling *ndarray.setflags*.

The array flags cannot be set arbitrarily:

- UPDATEIFCOPY can only be set `False`.
- WRITEBACKIFCOPY can only be set `False`.
- ALIGNED can only be set `True` if the data is truly aligned.
- WRITEABLE can only be set `True` if the array owns its own memory or the ultimate owner of the memory exposes a writeable buffer interface or is a string.

Arrays can be both C-style and Fortran-style contiguous simultaneously. This is clear for 1-dimensional arrays, but can also be true for higher dimensional arrays.

Even for contiguous arrays a stride for a given dimension `arr.strides[dim]` may be *arbitrary* if `arr.shape[dim] == 1` or the array has no elements. It does *not* generally hold that `self.strides[-1] == self.itemsize` for C-style contiguous arrays or `self.strides[0] == self.itemsize` for Fortran-style contiguous arrays is true.

Attributes

C_CONTIGUOUS (C)	The data is in a single, C-style contiguous segment.
F_CONTIGUOUS (F)	The data is in a single, Fortran-style contiguous segment.
OWNDATA (O)	The array owns the memory it uses or borrows it from another object.
WRITEABLE (W)	The data area can be written to. Setting this to False locks the data, making it read-only. A view (slice, etc.) inherits WRITEABLE from its base array at creation time, but a view of a writeable array may be subsequently locked while the base array remains writeable. (The opposite is not true, in that a view of a locked array may not be made writeable. However, currently, locking a base object does not lock any views that already reference it, so under that circumstance it is possible to alter the contents of a locked array via a previously created writeable view onto it.) Attempting to change a non-writeable array raises a RuntimeError exception.
ALIGNED (A)	The data and all elements are aligned appropriately for the hardware.
WRITEBACKIFCOPY (X)	This array is a copy of some other array. The C-API function PyArray_ResolveWritebackIfCopy must be called before deallocating to the base array will be updated with the contents of this array.
UPDATEIFCOPY (U)	(Deprecated, use WRITEBACKIFCOPY) This array is a copy of some other array. When this array is deallocated, the base array will be updated with the contents of this array.
FNC	F_CONTIGUOUS and not C_CONTIGUOUS.
FORC	F_CONTIGUOUS or C_CONTIGUOUS (one-segment test).
BEHAVED (B)	ALIGNED and WRITEABLE.
CARRAY (CA)	BEHAVED and C_CONTIGUOUS.
FARRAY (FA)	BEHAVED and F_CONTIGUOUS and not C_CONTIGUOUS.

matrix.**flat**
A 1-D iterator over the array.

This is a *numpy.flatiter* instance, which acts similarly to, but is not a subclass of, Python's built-in iterator object.

See also:

flatten Return a copy of the array collapsed into one dimension.

flatiter

Examples

```
>>> x = np.arange(1, 7).reshape(2, 3)
>>> x
array([[1, 2, 3],
       [4, 5, 6]])
>>> x.flat[3]
4
>>> x.T
array([[1, 4],
       [2, 5],
       [3, 6]])
>>> x.T.flat[3]
5
>>> type(x.flat)
<type 'numpy.flatiter'>
```

An assignment example:

```
>>> x.flat = 3; x
array([[3, 3, 3],
       [3, 3, 3]])
>>> x.flat[[1,4]] = 1; x
array([[3, 1, 3],
       [3, 1, 3]])
```

matrix.**imag**
The imaginary part of the array.

Examples

```
>>> x = np.sqrt([1+0j, 0+1j])
>>> x.imag
array([ 0.        ,  0.70710678])
>>> x.imag.dtype
dtype('float64')
```

matrix.**itemsize**
Length of one array element in bytes.

Examples

```
>>> x = np.array([1,2,3], dtype=np.float64)
>>> x.itemsize
8
>>> x = np.array([1,2,3], dtype=np.complex128)
>>> x.itemsize
16
```

matrix.**nbytes**
Total bytes consumed by the elements of the array.

Notes

Does not include memory consumed by non-element attributes of the array object.

Examples

```
>>> x = np.zeros((3,5,2), dtype=np.complex128)
>>> x.nbytes
480
>>> np.prod(x.shape) * x.itemsize
480
```

matrix.**ndim**
Number of array dimensions.

Examples

```
>>> x = np.array([1, 2, 3])
>>> x.ndim
1
>>> y = np.zeros((2, 3, 4))
>>> y.ndim
3
```

matrix.**real**
The real part of the array.

See also:

numpy.real equivalent function

Examples

```
>>> x = np.sqrt([1+0j, 0+1j])
>>> x.real
array([ 1.        ,  0.70710678])
>>> x.real.dtype
dtype('float64')
```

matrix.**shape**
Tuple of array dimensions.

The shape property is usually used to get the current shape of an array, but may also be used to reshape the array in-place by assigning a tuple of array dimensions to it. As with *numpy.reshape*, one of the new shape dimensions can be -1, in which case its value is inferred from the size of the array and the remaining dimensions. Reshaping an array in-place will fail if a copy is required.

See also:

numpy.reshape similar function

ndarray.reshape similar method

Examples

```
>>> x = np.array([1, 2, 3, 4])
>>> x.shape
(4,)
>>> y = np.zeros((2, 3, 4))
>>> y.shape
(2, 3, 4)
>>> y.shape = (3, 8)
>>> y
array([[ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.],
       [ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.],
       [ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.]])
>>> y.shape = (3, 6)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: total size of new array must be unchanged
>>> np.zeros((4,2))[::2].shape = (-1,)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
AttributeError: incompatible shape for a non-contiguous array
```

matrix.**size**

Number of elements in the array.

Equivalent to `np.prod(a.shape)`, i.e., the product of the array's dimensions.

Examples

```
>>> x = np.zeros((3, 5, 2), dtype=np.complex128)
>>> x.size
30
>>> np.prod(x.shape)
30
```

matrix.**strides**

Tuple of bytes to step in each dimension when traversing an array.

The byte offset of element `(i[0], i[1], ..., i[n])` in an array *a* is:

```
offset = sum(np.array(i) * a.strides)
```

A more detailed explanation of strides can be found in the "ndarray.rst" file in the NumPy reference guide.

See also:

numpy.lib.stride_tricks.as_strided

Notes

Imagine an array of 32-bit integers (each 4 bytes):

```
x = np.array([[0, 1, 2, 3, 4],
              [5, 6, 7, 8, 9]], dtype=np.int32)
```

This array is stored in memory as 40 bytes, one after the other (known as a contiguous block of memory). The strides of an array tell us how many bytes we have to skip in memory to move to the next position along a certain axis. For example, we have to skip 4 bytes (1 value) to move to the next column, but 20 bytes (5 values) to get to the same position in the next row. As such, the strides for the array *x* will be `(20, 4)`.

Examples

```
>>> y = np.reshape(np.arange(2*3*4), (2,3,4))
>>> y
array([[[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]],
       [[12, 13, 14, 15],
        [16, 17, 18, 19],
        [20, 21, 22, 23]]])
>>> y.strides
(48, 16, 4)
>>> y[1,1,1]
17
>>> offset=sum(y.strides * np.array((1,1,1)))
>>> offset/y.itemsize
17
```

```
>>> x = np.reshape(np.arange(5*6*7*8), (5,6,7,8)).transpose(2,3,1,0)
>>> x.strides
(32, 4, 224, 1344)
>>> i = np.array([3,5,2,2])
>>> offset = sum(i * x.strides)
>>> x[3,5,2,2]
813
>>> offset / x.itemsize
813
```

Methods

all([axis, out])	Test whether all matrix elements along a given axis evaluate to True.
any([axis, out])	Test whether any array element along a given axis evaluates to True.
argmax([axis, out])	Indexes of the maximum values along an axis.
argmin([axis, out])	Indexes of the minimum values along an axis.
argpartition(kth[, axis, kind, order])	Returns the indices that would partition this array.
argsort([axis, kind, order])	Returns the indices that would sort this array.
astype(dtype[, order, casting, subok, copy])	Copy of the array, cast to a specified type.
byteswap([inplace])	Swap the bytes of the array elements
choose(choices[, out, mode])	Use an index array to construct a new array from a set of choices.
clip([min, max, out])	Return an array whose values are limited to `[min, max]`.
compress(condition[, axis, out])	Return selected slices of this array along given axis.

Continued on next page

Table 41 – continued from previous page

conj()	Complex-conjugate all elements.
conjugate()	Return the complex conjugate, element-wise.
copy([order])	Return a copy of the array.
cumprod([axis, dtype, out])	Return the cumulative product of the elements along the given axis.
cumsum([axis, dtype, out])	Return the cumulative sum of the elements along the given axis.
diagonal([offset, axis1, axis2])	Return specified diagonals.
dot(b[, out])	Dot product of two arrays.
dump(file)	Dump a pickle of the array to the specified file.
dumps()	Returns the pickle of the array as a string.
fill(value)	Fill the array with a scalar value.
flatten([order])	Return a flattened copy of the matrix.
getA()	Return *self* as an *ndarray* object.
getA1()	Return *self* as a flattened *ndarray*.
getH()	Returns the (complex) conjugate transpose of *self*.
getI()	Returns the (multiplicative) inverse of invertible *self*.
getT()	Returns the transpose of the matrix.
getfield(dtype[, offset])	Returns a field of the given array as a certain type.
item(*args)	Copy an element of an array to a standard Python scalar and return it.
itemset(*args)	Insert scalar into an array (scalar is cast to array's dtype, if possible)
max([axis, out])	Return the maximum value along an axis.
mean([axis, dtype, out])	Returns the average of the matrix elements along the given axis.
min([axis, out])	Return the minimum value along an axis.
newbyteorder([new_order])	Return the array with the same data viewed with a different byte order.
nonzero()	Return the indices of the elements that are non-zero.
partition(kth[, axis, kind, order])	Rearranges the elements in the array in such a way that value of the element in kth position is in the position it would be in a sorted array.
prod([axis, dtype, out])	Return the product of the array elements over the given axis.
ptp([axis, out])	Peak-to-peak (maximum - minimum) value along the given axis.
put(indices, values[, mode])	Set `a.flat[n] = values[n]` for all *n* in indices.
ravel([order])	Return a flattened matrix.
repeat(repeats[, axis])	Repeat elements of an array.
reshape(shape[, order])	Returns an array containing the same data with a new shape.
resize(new_shape[, refcheck])	Change shape and size of array in-place.
round([decimals, out])	Return *a* with each element rounded to the given number of decimals.
searchsorted(v[, side, sorter])	Find indices where elements of v should be inserted in a to maintain order.
setfield(val, dtype[, offset])	Put a value into a specified place in a field defined by a data-type.
setflags([write, align, uic])	Set array flags WRITEABLE, ALIGNED, (WRITEBACKIFCOPY and UPDATEIFCOPY), respectively.

Continued on next page

Table 41 – continued from previous page

sort([axis, kind, order])	Sort an array, in-place.
squeeze([axis])	Return a possibly reshaped matrix.
std([axis, dtype, out, ddof])	Return the standard deviation of the array elements along the given axis.
sum([axis, dtype, out])	Returns the sum of the matrix elements, along the given axis.
swapaxes(axis1, axis2)	Return a view of the array with *axis1* and *axis2* interchanged.
take(indices[, axis, out, mode])	Return an array formed from the elements of *a* at the given indices.
tobytes([order])	Construct Python bytes containing the raw data bytes in the array.
tofile(fid[, sep, format])	Write array to a file as text or binary (default).
tolist()	Return the matrix as a (possibly nested) list.
tostring([order])	Construct Python bytes containing the raw data bytes in the array.
trace([offset, axis1, axis2, dtype, out])	Return the sum along diagonals of the array.
transpose(*axes)	Returns a view of the array with axes transposed.
var([axis, dtype, out, ddof])	Returns the variance of the matrix elements, along the given axis.
view([dtype, type])	New view of array with the same data.

matrix.**all**(*axis=None*, *out=None*)

Test whether all matrix elements along a given axis evaluate to True.

Parameters **See 'numpy.all' for complete descriptions**

See also:

numpy.all

Notes

This is the same as *ndarray.all*, but it returns a *matrix* object.

Examples

```
>>> x = np.matrix(np.arange(12).reshape((3,4))); x
matrix([[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]])
>>> y = x[0]; y
matrix([[0, 1, 2, 3]])
>>> (x == y)
matrix([[ True,  True,  True,  True],
        [False, False, False, False],
        [False, False, False, False]])
>>> (x == y).all()
False
>>> (x == y).all(0)
matrix([[False, False, False, False]])
>>> (x == y).all(1)
```

(continues on next page)

(continued from previous page)

```
matrix([[ True],
        [False],
        [False]])
```

matrix.**any**(*axis=None*, *out=None*)

Test whether any array element along a given axis evaluates to True.

Refer to *numpy.any* for full documentation.

Parameters **axis** : int, optional

Axis along which logical OR is performed

out : ndarray, optional

Output to existing array instead of creating new one, must have same shape as expected output

Returns **any** : bool, ndarray

Returns a single bool if *axis* is None; otherwise, returns *ndarray*

matrix.**argmax**(*axis=None*, *out=None*)

Indexes of the maximum values along an axis.

Return the indexes of the first occurrences of the maximum values along the specified axis. If axis is None, the index is for the flattened matrix.

Parameters **See 'numpy.argmax' for complete descriptions**

See also:

numpy.argmax

Notes

This is the same as *ndarray.argmax*, but returns a *matrix* object where *ndarray.argmax* would return an *ndarray*.

Examples

```
>>> x = np.matrix(np.arange(12).reshape((3,4))); x
matrix([[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]])
>>> x.argmax()
11
>>> x.argmax(0)
matrix([[2, 2, 2, 2]])
>>> x.argmax(1)
matrix([[3],
        [3],
        [3]])
```

matrix.**argmin**(*axis=None*, *out=None*)

Indexes of the minimum values along an axis.

Return the indexes of the first occurrences of the minimum values along the specified axis. If axis is None, the index is for the flattened matrix.

Parameters **See 'numpy.argmin' for complete descriptions.**

See also:

numpy.argmin

Notes

This is the same as *ndarray.argmin*, but returns a *matrix* object where *ndarray.argmin* would return an *ndarray*.

Examples

```
>>> x = -np.matrix(np.arange(12).reshape((3,4))); x
matrix([[  0,  -1,  -2,  -3],
        [ -4,  -5,  -6,  -7],
        [ -8,  -9, -10, -11]])
>>> x.argmin()
11
>>> x.argmin(0)
matrix([[2, 2, 2, 2]])
>>> x.argmin(1)
matrix([[3],
        [3],
        [3]])
```

matrix.**argpartition**(*kth*, *axis=-1*, *kind='introselect'*, *order=None*)
Returns the indices that would partition this array.

Refer to *numpy.argpartition* for full documentation.

New in version 1.8.0.

See also:

numpy.argpartition equivalent function

matrix.**argsort**(*axis=-1*, *kind='quicksort'*, *order=None*)
Returns the indices that would sort this array.

Refer to *numpy.argsort* for full documentation.

See also:

numpy.argsort equivalent function

matrix.**astype**(*dtype*, *order='K'*, *casting='unsafe'*, *subok=True*, *copy=True*)
Copy of the array, cast to a specified type.

Parameters **dtype** : str or dtype

Typecode or data-type to which the array is cast.

order : {'C', 'F', 'A', 'K'}, optional

Controls the memory layout order of the result. 'C' means C order, 'F' means Fortran order, 'A' means 'F' order if all the arrays are Fortran contiguous, 'C' order otherwise, and 'K' means as close to the order the array elements appear in memory as possible. Default is 'K'.

casting : {'no', 'equiv', 'safe', 'same_kind', 'unsafe'}, optional

Controls what kind of data casting may occur. Defaults to 'unsafe' for backwards compatibility.

- 'no' means the data types should not be cast at all.
- 'equiv' means only byte-order changes are allowed.
- 'safe' means only casts which can preserve values are allowed.
- 'same_kind' means only safe casts or casts within a kind, like float64 to float32, are allowed.
- 'unsafe' means any data conversions may be done.

subok : bool, optional

If True, then sub-classes will be passed-through (default), otherwise the returned array will be forced to be a base-class array.

copy : bool, optional

By default, astype always returns a newly allocated array. If this is set to false, and the *dtype*, *order*, and *subok* requirements are satisfied, the input array is returned instead of a copy.

Returns **arr_t** : ndarray

Unless *copy* is False and the other conditions for returning the input array are satisfied (see description for *copy* input parameter), *arr_t* is a new array of the same shape as the input array, with dtype, order given by *dtype*, *order*.

Raises **ComplexWarning**

When casting from complex to float or int. To avoid this, one should use `a.real.astype(t)`.

Notes

Starting in NumPy 1.9, astype method now returns an error if the string dtype to cast to is not long enough in 'safe' casting mode to hold the max value of integer/float array that is being casted. Previously the casting was allowed even if the result was truncated.

Examples

```
>>> x = np.array([1, 2, 2.5])
>>> x
array([ 1. ,  2. ,  2.5])
```

```
>>> x.astype(int)
array([1, 2, 2])
```

matrix.**byteswap**(*inplace=False*)
Swap the bytes of the array elements

Toggle between low-endian and big-endian data representation by returning a byteswapped array, optionally swapped in-place.

Parameters **inplace** : bool, optional

If `True`, swap bytes in-place, default is `False`.

Returns **out** : ndarray

The byteswapped array. If *inplace* is `True`, this is a view to self.

Examples

```
>>> A = np.array([1, 256, 8755], dtype=np.int16)
>>> map(hex, A)
['0x1', '0x100', '0x2233']
>>> A.byteswap(inplace=True)
array([  256,     1, 13090], dtype=int16)
>>> map(hex, A)
['0x100', '0x1', '0x3322']
```

Arrays of strings are not swapped

```
>>> A = np.array(['ceg', 'fac'])
>>> A.byteswap()
array(['ceg', 'fac'],
      dtype='|S3')
```

matrix.**choose**(*choices*, *out=None*, *mode='raise'*)
Use an index array to construct a new array from a set of choices.

Refer to *numpy.choose* for full documentation.

See also:

numpy.choose equivalent function

matrix.**clip**(*min=None*, *max=None*, *out=None*)
Return an array whose values are limited to `[min, max]`. One of max or min must be given.

Refer to *numpy.clip* for full documentation.

See also:

numpy.clip equivalent function

matrix.**compress**(*condition*, *axis=None*, *out=None*)
Return selected slices of this array along given axis.

Refer to *numpy.compress* for full documentation.

See also:

numpy.compress equivalent function

matrix.**conj**()
Complex-conjugate all elements.

Refer to numpy.conjugate for full documentation.

See also:

numpy.conjugate equivalent function

matrix.**conjugate**()
Return the complex conjugate, element-wise.

Refer to numpy.conjugate for full documentation.

See also:

numpy.conjugate equivalent function

matrix.**copy**(*order='C'*)
Return a copy of the array.

Parameters **order** : {'C', 'F', 'A', 'K'}, optional

Controls the memory layout of the copy. 'C' means C-order, 'F' means F-order, 'A' means 'F' if *a* is Fortran contiguous, 'C' otherwise. 'K' means match the layout of *a* as closely as possible. (Note that this function and *numpy.copy* are very similar, but have different default values for their order= arguments.)

See also:

numpy.copy, *numpy.copyto*

Examples

```
>>> x = np.array([[1,2,3],[4,5,6]], order='F')
```

```
>>> y = x.copy()
```

```
>>> x.fill(0)
```

```
>>> x
array([[0, 0, 0],
       [0, 0, 0]])
```

```
>>> y
array([[1, 2, 3],
       [4, 5, 6]])
```

```
>>> y.flags['C_CONTIGUOUS']
True
```

matrix.**cumprod**(*axis=None*, *dtype=None*, *out=None*)
Return the cumulative product of the elements along the given axis.

Refer to *numpy.cumprod* for full documentation.

See also:

numpy.cumprod equivalent function

matrix.**cumsum**(*axis=None*, *dtype=None*, *out=None*)
Return the cumulative sum of the elements along the given axis.

Refer to *numpy.cumsum* for full documentation.

See also:

numpy.cumsum equivalent function

matrix.**diagonal**(*offset=0*, *axis1=0*, *axis2=1*)
Return specified diagonals. In NumPy 1.9 the returned array is a read-only view instead of a copy as in previous NumPy versions. In a future version the read-only restriction will be removed.

Refer to *numpy.diagonal* for full documentation.

See also:

numpy.diagonal equivalent function

matrix.**dot**(*b*, *out=None*)
Dot product of two arrays.

Refer to *numpy.dot* for full documentation.

See also:

numpy.dot equivalent function

Examples

```
>>> a = np.eye(2)
>>> b = np.ones((2, 2)) * 2
>>> a.dot(b)
array([[ 2.,  2.],
       [ 2.,  2.]])
```

This array method can be conveniently chained:

```
>>> a.dot(b).dot(b)
array([[ 8.,  8.],
       [ 8.,  8.]])
```

matrix.**dump**(*file*)
Dump a pickle of the array to the specified file. The array can be read back with pickle.load or numpy.load.

Parameters **file** : str

A string naming the dump file.

matrix.**dumps**()
Returns the pickle of the array as a string. pickle.loads or numpy.loads will convert the string back to an array.

Parameters **None**

matrix.**fill**(*value*)
Fill the array with a scalar value.

Parameters **value** : scalar

All elements of *a* will be assigned this value.

Examples

```
>>> a = np.array([1, 2])
>>> a.fill(0)
>>> a
array([0, 0])
>>> a = np.empty(2)
>>> a.fill(1)
>>> a
array([ 1.,  1.])
```

`matrix.`**`flatten`**(*order='C'*)

Return a flattened copy of the matrix.

All *N* elements of the matrix are placed into a single row.

Parameters **order** : {'C', 'F', 'A', 'K'}, optional

'C' means to flatten in row-major (C-style) order. 'F' means to flatten in column-major (Fortran-style) order. 'A' means to flatten in column-major order if *m* is Fortran *contiguous* in memory, row-major order otherwise. 'K' means to flatten *m* in the order the elements occur in memory. The default is 'C'.

Returns **y** : matrix

A copy of the matrix, flattened to a *(1, N)* matrix where *N* is the number of elements in the original matrix.

See also:

ravel Return a flattened array.

flat A 1-D flat iterator over the matrix.

Examples

```
>>> m = np.matrix([[1,2], [3,4]])
>>> m.flatten()
matrix([[1, 2, 3, 4]])
>>> m.flatten('F')
matrix([[1, 3, 2, 4]])
```

`matrix.`**`getA`**()

Return *self* as an *ndarray* object.

Equivalent to `np.asarray(self)`.

Parameters **None**

Returns **ret** : ndarray

self as an *ndarray*

Examples

```
>>> x = np.matrix(np.arange(12).reshape((3,4))); x
matrix([[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]])
>>> x.getA()
array([[ 0,  1,  2,  3],
       [ 4,  5,  6,  7],
       [ 8,  9, 10, 11]])
```

matrix.**getA1**()

Return *self* as a flattened *ndarray*.

Equivalent to `np.asarray(x).ravel()`

Parameters None

Returns **ret** : ndarray

self, 1-D, as an *ndarray*

Examples

```
>>> x = np.matrix(np.arange(12).reshape((3,4))); x
matrix([[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]])
>>> x.getA1()
array([ 0,  1,  2,  3,  4,  5,  6,  7,  8,  9, 10, 11])
```

matrix.**getH**()

Returns the (complex) conjugate transpose of *self*.

Equivalent to `np.transpose(self)` if *self* is real-valued.

Parameters None

Returns **ret** : matrix object

complex conjugate transpose of *self*

Examples

```
>>> x = np.matrix(np.arange(12).reshape((3,4)))
>>> z = x - 1j*x; z
matrix([[  0. +0.j,   1. -1.j,   2. -2.j,   3. -3.j],
        [  4. -4.j,   5. -5.j,   6. -6.j,   7. -7.j],
        [  8. -8.j,   9. -9.j,  10.-10.j,  11.-11.j]])
>>> z.getH()
matrix([[  0. +0.j,   4. +4.j,   8. +8.j],
        [  1. +1.j,   5. +5.j,   9. +9.j],
        [  2. +2.j,   6. +6.j,  10.+10.j],
        [  3. +3.j,   7. +7.j,  11.+11.j]])
```

matrix.**getI**()

Returns the (multiplicative) inverse of invertible *self*.

Parameters None

Returns **ret** : matrix object

If *self* is non-singular, *ret* is such that `ret * self == self * ret == np.matrix(np.eye(self[0,:].size)` all return `True`.

Raises **numpy.linalg.LinAlgError: Singular matrix**

If *self* is singular.

See also:

linalg.inv

Examples

```
>>> m = np.matrix('[1, 2; 3, 4]'); m
matrix([[1, 2],
        [3, 4]])
>>> m.getI()
matrix([[-2. ,  1. ],
        [ 1.5, -0.5]])
>>> m.getI() * m
matrix([[ 1.,  0.],
        [ 0.,  1.]])
```

`matrix.`**`getT`**`()`

Returns the transpose of the matrix.

Does *not* conjugate! For the complex conjugate transpose, use `.H`.

Parameters None

Returns **ret** : matrix object

The (non-conjugated) transpose of the matrix.

See also:

transpose, *getH*

Examples

```
>>> m = np.matrix('[1, 2; 3, 4]')
>>> m
matrix([[1, 2],
        [3, 4]])
>>> m.getT()
matrix([[1, 3],
        [2, 4]])
```

`matrix.`**`getfield`**`(`*dtype*, *offset=0*`)`

Returns a field of the given array as a certain type.

A field is a view of the array data with a given data-type. The values in the view are determined by the given type and the offset into the current array in bytes. The offset needs to be such that the view dtype fits in the array dtype; for example an array of dtype complex128 has 16-byte elements. If taking a view with a 32-bit integer (4 bytes), the offset needs to be between 0 and 12 bytes.

Parameters **dtype** : str or dtype

The data type of the view. The dtype size of the view can not be larger than that of the array itself.

offset : int

Number of bytes to skip before beginning the element view.

Examples

```
>>> x = np.diag([1.+1.j]*2)
>>> x[1, 1] = 2 + 4.j
>>> x
array([[ 1.+1.j,  0.+0.j],
       [ 0.+0.j,  2.+4.j]])
>>> x.getfield(np.float64)
array([[ 1.,  0.],
       [ 0.,  2.]])
```

By choosing an offset of 8 bytes we can select the complex part of the array for our view:

```
>>> x.getfield(np.float64, offset=8)
array([[ 1.,  0.],
   [ 0.,  4.]])
```

`matrix.`**`item`**`(*args)`

Copy an element of an array to a standard Python scalar and return it.

Parameters ***args** : Arguments (variable number and type)

- none: in this case, the method only works for arrays with one element (*a.size == 1*), which element is copied into a standard Python scalar object and returned.
- int_type: this argument is interpreted as a flat index into the array, specifying which element to copy and return.
- tuple of int_types: functions as does a single int_type argument, except that the argument is interpreted as an nd-index into the array.

Returns **z** : Standard Python scalar object

A copy of the specified element of the array as a suitable Python scalar

Notes

When the data type of *a* is longdouble or clongdouble, item() returns a scalar array object because there is no available Python scalar that would not lose information. Void arrays return a buffer object for item(), unless fields are defined, in which case a tuple is returned.

item is very similar to a[args], except, instead of an array scalar, a standard Python scalar is returned. This can be useful for speeding up access to elements of the array and doing arithmetic on elements of the array using Python's optimized math.

Examples

```
>>> x = np.random.randint(9, size=(3, 3))
>>> x
array([[3, 1, 7],
       [2, 8, 3],
       [8, 5, 3]])
>>> x.item(3)
2
>>> x.item(7)
5
>>> x.item((0, 1))
1
>>> x.item((2, 2))
3
```

matrix.**itemset**(**args*)

Insert scalar into an array (scalar is cast to array's dtype, if possible)

There must be at least 1 argument, and define the last argument as *item*. Then, `a.itemset(*args)` is equivalent to but faster than `a[args] = item`. The item should be a scalar value and *args* must select a single item in the array *a*.

Parameters ***args** : Arguments

If one argument: a scalar, only used in case *a* is of size 1. If two arguments: the last argument is the value to be set and must be a scalar, the first argument specifies a single array element location. It is either an int or a tuple.

Notes

Compared to indexing syntax, *itemset* provides some speed increase for placing a scalar into a particular location in an *ndarray*, if you must do this. However, generally this is discouraged: among other problems, it complicates the appearance of the code. Also, when using *itemset* (and *item*) inside a loop, be sure to assign the methods to a local variable to avoid the attribute look-up at each loop iteration.

Examples

```
>>> x = np.random.randint(9, size=(3, 3))
>>> x
array([[3, 1, 7],
       [2, 8, 3],
       [8, 5, 3]])
>>> x.itemset(4, 0)
>>> x.itemset((2, 2), 9)
>>> x
array([[3, 1, 7],
       [2, 0, 3],
       [8, 5, 9]])
```

matrix.**max**(*axis=None*, *out=None*)

Return the maximum value along an axis.

Parameters **See 'amax' for complete descriptions**

See also:

amax, *ndarray.max*

Notes

This is the same as *ndarray.max*, but returns a *matrix* object where *ndarray.max* would return an ndarray.

Examples

```
>>> x = np.matrix(np.arange(12).reshape((3,4))); x
matrix([[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]])
>>> x.max()
11
>>> x.max(0)
matrix([[ 8,  9, 10, 11]])
>>> x.max(1)
matrix([[ 3],
        [ 7],
        [11]])
```

matrix.**mean**(*axis=None*, *dtype=None*, *out=None*)

Returns the average of the matrix elements along the given axis.

Refer to *numpy.mean* for full documentation.

See also:

numpy.mean

Notes

Same as *ndarray.mean* except that, where that returns an *ndarray*, this returns a *matrix* object.

Examples

```
>>> x = np.matrix(np.arange(12).reshape((3, 4)))
>>> x
matrix([[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]])
>>> x.mean()
5.5
>>> x.mean(0)
matrix([[ 4.,  5.,  6.,  7.]])
>>> x.mean(1)
matrix([[ 1.5],
        [ 5.5],
        [ 9.5]])
```

matrix.**min**(*axis=None*, *out=None*)

Return the minimum value along an axis.

Parameters **See 'amin' for complete descriptions.**

See also:

amin, *ndarray.min*

Notes

This is the same as *ndarray.min*, but returns a *matrix* object where *ndarray.min* would return an ndarray.

Examples

```
>>> x = -np.matrix(np.arange(12).reshape((3,4))); x
matrix([[  0,  -1,  -2,  -3],
        [ -4,  -5,  -6,  -7],
        [ -8,  -9, -10, -11]])
>>> x.min()
-11
>>> x.min(0)
matrix([[ -8,  -9, -10, -11]])
>>> x.min(1)
matrix([[ -3],
        [ -7],
        [-11]])
```

matrix.**newbyteorder**(*new_order='S'*)

Return the array with the same data viewed with a different byte order.

Equivalent to:

```
arr.view(arr.dtype.newbytorder(new_order))
```

Changes are also made in all fields and sub-arrays of the array data type.

Parameters **new_order** : string, optional

Byte order to force; a value from the byte order specifications below. *new_order* codes can be any of:

- 'S' - swap dtype from current to opposite endian
- {'<', 'L'} - little endian
- {'>', 'B'} - big endian
- {'=', 'N'} - native order
- {'|', 'I'} - ignore (no change to byte order)

The default value ('S') results in swapping the current byte order. The code does a case-insensitive check on the first letter of *new_order* for the alternatives above. For example, any of 'B' or 'b' or 'biggish' are valid to specify big-endian.

Returns **new_arr** : array

New array object with the dtype reflecting given change to the byte order.

matrix.**nonzero**()
Return the indices of the elements that are non-zero.

Refer to *numpy.nonzero* for full documentation.

See also:

numpy.nonzero equivalent function

matrix.**partition**(*kth*, *axis=-1*, *kind='introselect'*, *order=None*)
Rearranges the elements in the array in such a way that value of the element in kth position is in the position it would be in a sorted array. All elements smaller than the kth element are moved before this element and all equal or greater are moved behind it. The ordering of the elements in the two partitions is undefined.

New in version 1.8.0.

Parameters **kth** : int or sequence of ints

Element index to partition by. The kth element value will be in its final sorted position and all smaller elements will be moved before it and all equal or greater elements behind it. The order all elements in the partitions is undefined. If provided with a sequence of kth it will partition all elements indexed by kth of them into their sorted position at once.

axis : int, optional

Axis along which to sort. Default is -1, which means sort along the last axis.

kind : {'introselect'}, optional

Selection algorithm. Default is 'introselect'.

order : str or list of str, optional

When *a* is an array with fields defined, this argument specifies which fields to compare first, second, etc. A single field can be specified as a string, and not all fields need be specified, but unspecified fields will still be used, in the order in which they come up in the dtype, to break ties.

See also:

numpy.partition Return a parititioned copy of an array.

argpartition Indirect partition.

sort Full sort.

Notes

See `np.partition` for notes on the different algorithms.

Examples

```
>>> a = np.array([3, 4, 2, 1])
>>> a.partition(3)
>>> a
array([2, 1, 3, 4])
```

```
>>> a.partition((1, 3))
array([1, 2, 3, 4])
```

matrix.**prod**(*axis=None*, *dtype=None*, *out=None*)

Return the product of the array elements over the given axis.

Refer to *prod* for full documentation.

See also:

prod, *ndarray.prod*

Notes

Same as *ndarray.prod*, except, where that returns an *ndarray*, this returns a *matrix* object instead.

Examples

```
>>> x = np.matrix(np.arange(12).reshape((3,4))); x
matrix([[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]])
>>> x.prod()
0
>>> x.prod(0)
matrix([[  0,  45, 120, 231]])
>>> x.prod(1)
matrix([[   0],
        [ 840],
        [7920]])
```

matrix.**ptp**(*axis=None*, *out=None*)

Peak-to-peak (maximum - minimum) value along the given axis.

Refer to *numpy.ptp* for full documentation.

See also:

numpy.ptp

Notes

Same as *ndarray.ptp*, except, where that would return an *ndarray* object, this returns a *matrix* object.

Examples

```
>>> x = np.matrix(np.arange(12).reshape((3,4))); x
matrix([[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]])
>>> x.ptp()
11
```

(continues on next page)

(continued from previous page)

```
>>> x.ptp(0)
matrix([[8, 8, 8, 8]])
>>> x.ptp(1)
matrix([[3],
        [3],
        [3]])
```

matrix.**put**(*indices*, *values*, *mode='raise'*)
Set `a.flat[n] = values[n]` for all *n* in indices.

Refer to *numpy.put* for full documentation.

See also:

numpy.put equivalent function

matrix.**ravel**(*order='C'*)
Return a flattened matrix.

Refer to *numpy.ravel* for more documentation.

Parameters **order** : {'C', 'F', 'A', 'K'}, optional

The elements of *m* are read using this index order. 'C' means to index the elements in C-like order, with the last axis index changing fastest, back to the first axis index changing slowest. 'F' means to index the elements in Fortran-like index order, with the first index changing fastest, and the last index changing slowest. Note that the 'C' and 'F' options take no account of the memory layout of the underlying array, and only refer to the order of axis indexing. 'A' means to read the elements in Fortran-like index order if *m* is Fortran *contiguous* in memory, C-like order otherwise. 'K' means to read the elements in the order they occur in memory, except for reversing the data when strides are negative. By default, 'C' index order is used.

Returns **ret** : matrix

Return the matrix flattened to shape *(1, N)* where *N* is the number of elements in the original matrix. A copy is made only if necessary.

See also:

matrix.flatten returns a similar output matrix but always a copy

matrix.flat a flat iterator on the array.

numpy.ravel related function which returns an ndarray

matrix.**repeat**(*repeats*, *axis=None*)
Repeat elements of an array.

Refer to *numpy.repeat* for full documentation.

See also:

numpy.repeat equivalent function

matrix.**reshape**(*shape*, *order='C'*)
Returns an array containing the same data with a new shape.

Refer to *numpy.reshape* for full documentation.

See also:

numpy.reshape equivalent function

Notes

Unlike the free function *numpy.reshape*, this method on *ndarray* allows the elements of the shape parameter to be passed in as separate arguments. For example, `a.reshape(10, 11)` is equivalent to `a.reshape((10, 11))`.

matrix.**resize**(*new_shape*, *refcheck=True*)

Change shape and size of array in-place.

Parameters **new_shape** : tuple of ints, or *n* ints

Shape of resized array.

refcheck : bool, optional

If False, reference count will not be checked. Default is True.

Returns None

Raises **ValueError**

If *a* does not own its own data or references or views to it exist, and the data memory must be changed. PyPy only: will always raise if the data memory must be changed, since there is no reliable way to determine if references or views to it exist.

SystemError

If the *order* keyword argument is specified. This behaviour is a bug in NumPy.

See also:

resize Return a new array with the specified shape.

Notes

This reallocates space for the data area if necessary.

Only contiguous arrays (data elements consecutive in memory) can be resized.

The purpose of the reference count check is to make sure you do not use this array as a buffer for another Python object and then reallocate the memory. However, reference counts can increase in other ways so if you are sure that you have not shared the memory for this array with another Python object, then you may safely set *refcheck* to False.

Examples

Shrinking an array: array is flattened (in the order that the data are stored in memory), resized, and reshaped:

```
>>> a = np.array([[0, 1], [2, 3]], order='C')
>>> a.resize((2, 1))
>>> a
array([[0],
       [1]])
```

```
>>> a = np.array([[0, 1], [2, 3]], order='F')
>>> a.resize((2, 1))
>>> a
array([[0],
       [2]])
```

Enlarging an array: as above, but missing entries are filled with zeros:

```
>>> b = np.array([[0, 1], [2, 3]])
>>> b.resize(2, 3) # new_shape parameter doesn't have to be a tuple
>>> b
array([[0, 1, 2],
       [3, 0, 0]])
```

Referencing an array prevents resizing...

```
>>> c = a
>>> a.resize((1, 1))
Traceback (most recent call last):
...
ValueError: cannot resize an array that has been referenced ...
```

Unless *refcheck* is False:

```
>>> a.resize((1, 1), refcheck=False)
>>> a
array([[0]])
>>> c
array([[0]])
```

matrix.**round**(*decimals=0*, *out=None*)

Return *a* with each element rounded to the given number of decimals.

Refer to *numpy.around* for full documentation.

See also:

numpy.around equivalent function

matrix.**searchsorted**(*v*, *side='left'*, *sorter=None*)

Find indices where elements of v should be inserted in a to maintain order.

For full documentation, see *numpy.searchsorted*

See also:

numpy.searchsorted equivalent function

matrix.**setfield**(*val*, *dtype*, *offset=0*)

Put a value into a specified place in a field defined by a data-type.

Place *val* into *a*'s field defined by *dtype* and beginning *offset* bytes into the field.

Parameters **val** : object

Value to be placed in field.

dtype : dtype object

Data-type of the field in which to place *val*.

offset : int, optional

The number of bytes into the field at which to place *val*.

Returns None

See also:

getfield

Examples

```
>>> x = np.eye(3)
>>> x.getfield(np.float64)
array([[ 1.,  0.,  0.],
       [ 0.,  1.,  0.],
       [ 0.,  0.,  1.]])
>>> x.setfield(3, np.int32)
>>> x.getfield(np.int32)
array([[3, 3, 3],
       [3, 3, 3],
       [3, 3, 3]])
>>> x
array([[  1.00000000e+000,   1.48219694e-323,   1.48219694e-323],
       [  1.48219694e-323,   1.00000000e+000,   1.48219694e-323],
       [  1.48219694e-323,   1.48219694e-323,   1.00000000e+000]])
>>> x.setfield(np.eye(3), np.int32)
>>> x
array([[ 1.,  0.,  0.],
       [ 0.,  1.,  0.],
       [ 0.,  0.,  1.]])
```

matrix.**setflags**(*write=None*, *align=None*, *uic=None*)

Set array flags WRITEABLE, ALIGNED, (WRITEBACKIFCOPY and UPDATEIFCOPY), respectively.

These Boolean-valued flags affect how numpy interprets the memory area used by *a* (see Notes below). The ALIGNED flag can only be set to True if the data is actually aligned according to the type. The WRITEBACKIFCOPY and (deprecated) UPDATEIFCOPY flags can never be set to True. The flag WRITEABLE can only be set to True if the array owns its own memory, or the ultimate owner of the memory exposes a writeable buffer interface, or is a string. (The exception for string is made so that unpickling can be done without copying memory.)

Parameters **write** : bool, optional

Describes whether or not *a* can be written to.

align : bool, optional

Describes whether or not *a* is aligned properly for its type.

uic : bool, optional

Describes whether or not *a* is a copy of another "base" array.

Notes

Array flags provide information about how the memory area used for the array is to be interpreted. There are 7 Boolean flags in use, only four of which can be changed by the user: WRITEBACKIFCOPY, UPDATEIFCOPY, WRITEABLE, and ALIGNED.

WRITEABLE (W) the data area can be written to;

ALIGNED (A) the data and strides are aligned appropriately for the hardware (as determined by the compiler);

UPDATEIFCOPY (U) (deprecated), replaced by WRITEBACKIFCOPY;

WRITEBACKIFCOPY (X) this array is a copy of some other array (referenced by .base). When the C-API function PyArray_ResolveWritebackIfCopy is called, the base array will be updated with the contents of this array.

All flags can be accessed using the single (upper case) letter as well as the full name.

Examples

```
>>> y
array([[3, 1, 7],
       [2, 0, 0],
       [8, 5, 9]])
>>> y.flags
  C_CONTIGUOUS : True
  F_CONTIGUOUS : False
  OWNDATA : True
  WRITEABLE : True
  ALIGNED : True
  WRITEBACKIFCOPY : False
  UPDATEIFCOPY : False
>>> y.setflags(write=0, align=0)
>>> y.flags
  C_CONTIGUOUS : True
  F_CONTIGUOUS : False
  OWNDATA : True
  WRITEABLE : False
  ALIGNED : False
  WRITEBACKIFCOPY : False
  UPDATEIFCOPY : False
>>> y.setflags(uic=1)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: cannot set WRITEBACKIFCOPY flag to True
```

matrix.**sort**(*axis=-1*, *kind='quicksort'*, *order=None*)

Sort an array, in-place.

Parameters **axis** : int, optional

Axis along which to sort. Default is -1, which means sort along the last axis.

kind : {'quicksort', 'mergesort', 'heapsort'}, optional

Sorting algorithm. Default is 'quicksort'.

order : str or list of str, optional

When *a* is an array with fields defined, this argument specifies which fields to compare first, second, etc. A single field can be specified as a string, and not all fields need be specified, but unspecified fields will still be used, in the order in which they come up in the dtype, to break ties.

See also:

numpy.sort Return a sorted copy of an array.

argsort Indirect sort.

lexsort Indirect stable sort on multiple keys.

searchsorted Find elements in sorted array.

partition Partial sort.

Notes

See `sort` for notes on the different sorting algorithms.

Examples

```
>>> a = np.array([[1,4], [3,1]])
>>> a.sort(axis=1)
>>> a
array([[1, 4],
       [1, 3]])
>>> a.sort(axis=0)
>>> a
array([[1, 3],
       [1, 4]])
```

Use the *order* keyword to specify a field to use when sorting a structured array:

```
>>> a = np.array([('a', 2), ('c', 1)], dtype=[('x', 'S1'), ('y', int)])
>>> a.sort(order='y')
>>> a
array([('c', 1), ('a', 2)],
      dtype=[('x', '|S1'), ('y', '<i4')])
```

`matrix.`**`squeeze`**(*axis=None*)

Return a possibly reshaped matrix.

Refer to *numpy.squeeze* for more documentation.

Parameters **axis** : None or int or tuple of ints, optional

Selects a subset of the single-dimensional entries in the shape. If an axis is selected with shape entry greater than one, an error is raised.

Returns **squeezed** : matrix

The matrix, but as a (1, N) matrix if it had shape (N, 1).

See also:

numpy.squeeze related function

Notes

If *m* has a single column then that column is returned as the single row of a matrix. Otherwise *m* is returned. The returned matrix is always either *m* itself or a view into *m*. Supplying an axis keyword argument will not affect the returned matrix but it may cause an error to be raised.

Examples

```
>>> c = np.matrix([[1], [2]])
>>> c
matrix([[1],
        [2]])
>>> c.squeeze()
matrix([[1, 2]])
>>> r = c.T
>>> r
matrix([[1, 2]])
>>> r.squeeze()
matrix([[1, 2]])
>>> m = np.matrix([[1, 2], [3, 4]])
>>> m.squeeze()
matrix([[1, 2],
        [3, 4]])
```

matrix.**std**(*axis=None*, *dtype=None*, *out=None*, *ddof=0*)

Return the standard deviation of the array elements along the given axis.

Refer to *numpy.std* for full documentation.

See also:

numpy.std

Notes

This is the same as *ndarray.std*, except that where an *ndarray* would be returned, a *matrix* object is returned instead.

Examples

```
>>> x = np.matrix(np.arange(12).reshape((3, 4)))
>>> x
matrix([[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]])
>>> x.std()
3.4520525295346629
>>> x.std(0)
matrix([[ 3.26598632,  3.26598632,  3.26598632,  3.26598632]])
>>> x.std(1)
matrix([[ 1.11803399],
        [ 1.11803399],
        [ 1.11803399]])
```

matrix.**sum**(*axis=None*, *dtype=None*, *out=None*)

Returns the sum of the matrix elements, along the given axis.

Refer to *numpy.sum* for full documentation.

See also:

numpy.sum

Notes

This is the same as *ndarray.sum*, except that where an *ndarray* would be returned, a *matrix* object is returned instead.

Examples

```
>>> x = np.matrix([[1, 2], [4, 3]])
>>> x.sum()
10
>>> x.sum(axis=1)
matrix([[3],
        [7]])
>>> x.sum(axis=1, dtype='float')
matrix([[ 3.],
        [ 7.]])
>>> out = np.zeros((1, 2), dtype='float')
>>> x.sum(axis=1, dtype='float', out=out)
matrix([[ 3.],
        [ 7.]])
```

`matrix.`**`swapaxes`**(*axis1*, *axis2*)

Return a view of the array with *axis1* and *axis2* interchanged.

Refer to *numpy.swapaxes* for full documentation.

See also:

numpy.swapaxes equivalent function

`matrix.`**`take`**(*indices*, *axis=None*, *out=None*, *mode='raise'*)

Return an array formed from the elements of *a* at the given indices.

Refer to *numpy.take* for full documentation.

See also:

numpy.take equivalent function

`matrix.`**`tobytes`**(*order='C'*)

Construct Python bytes containing the raw data bytes in the array.

Constructs Python bytes showing a copy of the raw contents of data memory. The bytes object can be produced in either 'C' or 'Fortran', or 'Any' order (the default is 'C'-order). 'Any' order means C-order unless the F_CONTIGUOUS flag in the array is set, in which case it means 'Fortran' order.

New in version 1.9.0.

Parameters **order** : {'C', 'F', None}, optional

Order of the data for multidimensional arrays: C, Fortran, or the same as for the original array.

Returns **s** : bytes

Python bytes exhibiting a copy of *a*'s raw data.

Examples

```
>>> x = np.array([[0, 1], [2, 3]])
>>> x.tobytes()
b'\x00\x00\x00\x00\x01\x00\x00\x00\x02\x00\x00\x00\x03\x00\x00\x00'
>>> x.tobytes('C') == x.tobytes()
True
>>> x.tobytes('F')
b'\x00\x00\x00\x00\x02\x00\x00\x00\x01\x00\x00\x00\x03\x00\x00\x00'
```

matrix.**tofile**(*fid*, *sep=""*, *format="%s"*)

Write array to a file as text or binary (default).

Data is always written in 'C' order, independent of the order of *a*. The data produced by this method can be recovered using the function fromfile().

Parameters **fid** : file or str

An open file object, or a string containing a filename.

sep : str

Separator between array items for text output. If "" (empty), a binary file is written, equivalent to `file.write(a.tobytes())`.

format : str

Format string for text file output. Each entry in the array is formatted to text by first converting it to the closest Python type, and then using "format" % item.

Notes

This is a convenience function for quick storage of array data. Information on endianness and precision is lost, so this method is not a good choice for files intended to archive data or transport data between machines with different endianness. Some of these problems can be overcome by outputting the data as text files, at the expense of speed and file size.

matrix.**tolist**()

Return the matrix as a (possibly nested) list.

See *ndarray.tolist* for full documentation.

See also:

ndarray.tolist

Examples

```
>>> x = np.matrix(np.arange(12).reshape((3,4))); x
matrix([[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]])
>>> x.tolist()
[[0, 1, 2, 3], [4, 5, 6, 7], [8, 9, 10, 11]]
```

matrix.**tostring**(*order='C'*)

Construct Python bytes containing the raw data bytes in the array.

Constructs Python bytes showing a copy of the raw contents of data memory. The bytes object can be produced in either 'C' or 'Fortran', or 'Any' order (the default is 'C'-order). 'Any' order means C-order unless the F_CONTIGUOUS flag in the array is set, in which case it means 'Fortran' order.

This function is a compatibility alias for tobytes. Despite its name it returns bytes not strings.

Parameters **order** : {'C', 'F', None}, optional

Order of the data for multidimensional arrays: C, Fortran, or the same as for the original array.

Returns **s** : bytes

Python bytes exhibiting a copy of *a*'s raw data.

Examples

```
>>> x = np.array([[0, 1], [2, 3]])
>>> x.tobytes()
b'\x00\x00\x00\x00\x01\x00\x00\x00\x02\x00\x00\x00\x03\x00\x00\x00'
>>> x.tobytes('C') == x.tobytes()
True
>>> x.tobytes('F')
b'\x00\x00\x00\x00\x02\x00\x00\x00\x01\x00\x00\x00\x03\x00\x00\x00'
```

`matrix.`**`trace`**(*offset=0*, *axis1=0*, *axis2=1*, *dtype=None*, *out=None*)

Return the sum along diagonals of the array.

Refer to *numpy.trace* for full documentation.

See also:

numpy.trace equivalent function

`matrix.`**`transpose`**(**axes*)

Returns a view of the array with axes transposed.

For a 1-D array, this has no effect. (To change between column and row vectors, first cast the 1-D array into a matrix object.) For a 2-D array, this is the usual matrix transpose. For an n-D array, if axes are given, their order indicates how the axes are permuted (see Examples). If axes are not provided and `a.shape = (i[0], i[1], ... i[n-2], i[n-1])`, then `a.transpose().shape = (i[n-1], i[n-2], ... i[1], i[0])`.

Parameters **axes** : None, tuple of ints, or *n* ints

- None or no argument: reverses the order of the axes.
- tuple of ints: *i* in the *j*-th place in the tuple means *a*'s *i*-th axis becomes *a.transpose()*'s *j*-th axis.
- *n* ints: same as an n-tuple of the same ints (this form is intended simply as a "convenience" alternative to the tuple form)

Returns **out** : ndarray

View of *a*, with axes suitably permuted.

See also:

ndarray.T Array property returning the array transposed.

Examples

```
>>> a = np.array([[1, 2], [3, 4]])
>>> a
array([[1, 2],
       [3, 4]])
>>> a.transpose()
array([[1, 3],
       [2, 4]])
>>> a.transpose((1, 0))
array([[1, 3],
       [2, 4]])
>>> a.transpose(1, 0)
array([[1, 3],
       [2, 4]])
```

matrix.**var**(*axis=None*, *dtype=None*, *out=None*, *ddof=0*)

Returns the variance of the matrix elements, along the given axis.

Refer to *numpy.var* for full documentation.

See also:

numpy.var

Notes

This is the same as *ndarray.var*, except that where an *ndarray* would be returned, a *matrix* object is returned instead.

Examples

```
>>> x = np.matrix(np.arange(12).reshape((3, 4)))
>>> x
matrix([[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]])
>>> x.var()
11.916666666666666
>>> x.var(0)
matrix([[ 10.66666667,  10.66666667,  10.66666667,  10.66666667]])
>>> x.var(1)
matrix([[ 1.25],
        [ 1.25],
        [ 1.25]])
```

matrix.**view**(*dtype=None*, *type=None*)

New view of array with the same data.

Parameters **dtype** : data-type or ndarray sub-class, optional

Data-type descriptor of the returned view, e.g., float32 or int16. The default, None, results in the view having the same data-type as *a*. This argument can also be specified as an ndarray sub-class, which then specifies the type of the returned object (this is equivalent to setting the `type` parameter).

type : Python type, optional

Type of the returned view, e.g., ndarray or matrix. Again, the default None results in type preservation.

Notes

`a.view()` is used two different ways:

`a.view(some_dtype)` or `a.view(dtype=some_dtype)` constructs a view of the array's memory with a different data-type. This can cause a reinterpretation of the bytes of memory.

`a.view(ndarray_subclass)` or `a.view(type=ndarray_subclass)` just returns an instance of *ndarray_subclass* that looks at the same array (same shape, dtype, etc.) This does not cause a reinterpretation of the memory.

For `a.view(some_dtype)`, if `some_dtype` has a different number of bytes per entry than the previous dtype (for example, converting a regular array to a structured array), then the behavior of the view cannot be predicted just from the superficial appearance of `a` (shown by `print(a)`). It also depends on exactly how `a` is stored in memory. Therefore if `a` is C-ordered versus fortran-ordered, versus defined as a slice or transpose, etc., the view may give different results.

Examples

```
>>> x = np.array([(1, 2)], dtype=[('a', np.int8), ('b', np.int8)])
```

Viewing array data using a different type and dtype:

```
>>> y = x.view(dtype=np.int16, type=np.matrix)
>>> y
matrix([[513]], dtype=int16)
>>> print(type(y))
<class 'numpy.matrixlib.defmatrix.matrix'>
```

Creating a view on a structured array so it can be used in calculations

```
>>> x = np.array([(1, 2),(3,4)], dtype=[('a', np.int8), ('b', np.int8)])
>>> xv = x.view(dtype=np.int8).reshape(-1,2)
>>> xv
array([[1, 2],
       [3, 4]], dtype=int8)
>>> xv.mean(0)
array([ 2.,  3.])
```

Making changes to the view changes the underlying array

```
>>> xv[0,1] = 20
>>> print(x)
[(1, 20) (3, 4)]
```

Using a view to convert an array to a recarray:

```
>>> z = x.view(np.recarray)
>>> z.a
array([1], dtype=int8)
```

Views share data:

```
>>> x[0] = (9, 10)
>>> z[0]
(9, 10)
```

Views that change the dtype size (bytes per entry) should normally be avoided on arrays defined by slices, transposes, fortran-ordering, etc.:

```
>>> x = np.array([[1,2,3],[4,5,6]], dtype=np.int16)
>>> y = x[:, 0:2]
>>> y
array([[1, 2],
       [4, 5]], dtype=int16)
>>> y.view(dtype=[('width', np.int16), ('length', np.int16)])
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: new type not compatible with array.
>>> z = y.copy()
>>> z.view(dtype=[('width', np.int16), ('length', np.int16)])
array([[(1, 2)],
       [(4, 5)]], dtype=[('width', '<i2'), ('length', '<i2')])
```

numpy.**asmatrix**(*data*, *dtype=None*)

Interpret the input as a matrix.

Unlike *matrix*, *asmatrix* does not make a copy if the input is already a matrix or an ndarray. Equivalent to `matrix(data, copy=False)`.

Parameters **data** : array_like

Input data.

dtype : data-type

Data-type of the output matrix.

Returns **mat** : matrix

data interpreted as a matrix.

Examples

```
>>> x = np.array([[1, 2], [3, 4]])
```

```
>>> m = np.asmatrix(x)
```

```
>>> x[0,0] = 5
```

```
>>> m
matrix([[5, 2],
        [3, 4]])
```

numpy.**bmat**(*obj*, *ldict=None*, *gdict=None*)

Build a matrix object from a string, nested sequence, or array.

Parameters **obj** : str or array_like

Input data. If a string, variables in the current scope may be referenced by name.

ldict : dict, optional

A dictionary that replaces local operands in current frame. Ignored if *obj* is not a string or *gdict* is *None*.

gdict : dict, optional

A dictionary that replaces global operands in current frame. Ignored if *obj* is not a string.

Returns **out** : matrix

Returns a matrix object, which is a specialized 2-D array.

See also:

block A generalization of this function for N-d arrays, that returns normal ndarrays.

Examples

```
>>> A = np.mat('1 1; 1 1')
>>> B = np.mat('2 2; 2 2')
>>> C = np.mat('3 4; 5 6')
>>> D = np.mat('7 8; 9 0')
```

All the following expressions construct the same block matrix:

```
>>> np.bmat([[A, B], [C, D]])
matrix([[1, 1, 2, 2],
        [1, 1, 2, 2],
        [3, 4, 7, 8],
        [5, 6, 9, 0]])
>>> np.bmat(np.r_[np.c_[A, B], np.c_[C, D]])
matrix([[1, 1, 2, 2],
        [1, 1, 2, 2],
        [3, 4, 7, 8],
        [5, 6, 9, 0]])
>>> np.bmat('A,B; C,D')
matrix([[1, 1, 2, 2],
        [1, 1, 2, 2],
        [3, 4, 7, 8],
        [5, 6, 9, 0]])
```

Example 1: Matrix creation from a string

```
>>> a=mat('1 2 3; 4 5 3')
>>> print (a*a.T).I
[[ 0.2924 -0.1345]
 [-0.1345  0.0819]]
```

Example 2: Matrix creation from nested sequence

```
>>> mat([[1,5,10],[1.0,3,4j]])
matrix([[  1.+0.j,   5.+0.j,  10.+0.j],
        [  1.+0.j,   3.+0.j,   0.+4.j]])
```

Example 3: Matrix creation from an array

```
>>> mat(random.rand(3,3)).T
matrix([[ 0.7699,  0.7922,  0.3294],
        [ 0.2792,  0.0101,  0.9219],
        [ 0.3398,  0.7571,  0.8197]])
```

1.6.3 Memory-mapped file arrays

Memory-mapped files are useful for reading and/or modifying small segments of a large file with regular layout, without reading the entire file into memory. A simple subclass of the ndarray uses a memory-mapped file for the data buffer of the array. For small files, the over-head of reading the entire file into memory is typically not significant, however for large files using memory mapping can save considerable resources.

Memory-mapped-file arrays have one additional method (besides those they inherit from the ndarray): *.flush()* which must be called manually by the user to ensure that any changes to the array actually get written to disk.

memmap	Create a memory-map to an array stored in a *binary* file on disk.
memmap.flush()	Write any changes in the array to the file on disk.

class numpy.**memmap**

Create a memory-map to an array stored in a *binary* file on disk.

Memory-mapped files are used for accessing small segments of large files on disk, without reading the entire file into memory. NumPy's memmap's are array-like objects. This differs from Python's `mmap` module, which uses file-like objects.

This subclass of ndarray has some unpleasant interactions with some operations, because it doesn't quite fit properly as a subclass. An alternative to using this subclass is to create the `mmap` object yourself, then create an ndarray with ndarray.__new__ directly, passing the object created in its 'buffer=' parameter.

This class may at some point be turned into a factory function which returns a view into an mmap buffer.

Delete the memmap instance to close.

Parameters **filename** : str, file-like object, or pathlib.Path instance

The file name or file object to be used as the array data buffer.

dtype : data-type, optional

The data-type used to interpret the file contents. Default is `uint8`.

mode : {'r+', 'r', 'w+', 'c'}, optional

The file is opened in this mode:

'r'	Open existing file for reading only.
'r+'	Open existing file for reading and writing.
'w+'	Create or overwrite existing file for reading and writing.
'c'	Copy-on-write: assignments affect data in memory, but changes are not saved to disk. The file on disk is read-only.

Default is 'r+'.

offset : int, optional

In the file, array data starts at this offset. Since *offset* is measured in bytes, it should normally be a multiple of the byte-size of *dtype*. When `mode != 'r'`, even positive offsets beyond end of file are valid; The file will be extended to accommodate the additional data. By default, `memmap` will start at the beginning of the file, even if `filename` is a file pointer `fp` and `fp.tell() != 0`.

shape : tuple, optional

The desired shape of the array. If `mode == 'r'` and the number of remaining bytes after *offset* is not a multiple of the byte-size of *dtype*, you must specify `shape`. By default, the returned array will be 1-D with the number of elements determined by file size and data-type.

order : {'C', 'F'}, optional

Specify the order of the ndarray memory layout: row-major, C-style or column-major, Fortran-style. This only has an effect if the shape is greater than 1-D. The default order is 'C'.

See also:

`lib.format.open_memmap` Create or load a memory-mapped `.npy` file.

Notes

The memmap object can be used anywhere an ndarray is accepted. Given a memmap `fp`, `isinstance(fp, numpy.ndarray)` returns `True`.

Memory-mapped files cannot be larger than 2GB on 32-bit systems.

When a memmap causes a file to be created or extended beyond its current size in the filesystem, the contents of the new part are unspecified. On systems with POSIX filesystem semantics, the extended part will be filled with zero bytes.

Examples

```
>>> data = np.arange(12, dtype='float32')
>>> data.resize((3,4))
```

This example uses a temporary file so that doctest doesn't write files to your directory. You would use a 'normal' filename.

```
>>> from tempfile import mkdtemp
>>> import os.path as path
>>> filename = path.join(mkdtemp(), 'newfile.dat')
```

Create a memmap with dtype and shape that matches our data:

```
>>> fp = np.memmap(filename, dtype='float32', mode='w+', shape=(3,4))
>>> fp
memmap([[ 0.,  0.,  0.,  0.],
        [ 0.,  0.,  0.,  0.],
        [ 0.,  0.,  0.,  0.]], dtype=float32)
```

Write data to memmap array:

```
>>> fp[:] = data[:]
>>> fp
memmap([[  0.,   1.,   2.,   3.],
        [  4.,   5.,   6.,   7.],
        [  8.,   9.,  10.,  11.]], dtype=float32)
```

```
>>> fp.filename == path.abspath(filename)
True
```

Deletion flushes memory changes to disk before removing the object:

```
>>> del fp
```

Load the memmap and verify data was stored:

```
>>> newfp = np.memmap(filename, dtype='float32', mode='r', shape=(3,4))
>>> newfp
memmap([[  0.,   1.,   2.,   3.],
        [  4.,   5.,   6.,   7.],
        [  8.,   9.,  10.,  11.]], dtype=float32)
```

Read-only memmap:

```
>>> fpr = np.memmap(filename, dtype='float32', mode='r', shape=(3,4))
>>> fpr.flags.writeable
False
```

Copy-on-write memmap:

```
>>> fpc = np.memmap(filename, dtype='float32', mode='c', shape=(3,4))
>>> fpc.flags.writeable
True
```

It's possible to assign to copy-on-write array, but values are only written into the memory copy of the array, and not written to disk:

```
>>> fpc
memmap([[  0.,   1.,   2.,   3.],
        [  4.,   5.,   6.,   7.],
        [  8.,   9.,  10.,  11.]], dtype=float32)
>>> fpc[0,:] = 0
>>> fpc
memmap([[  0.,   0.,   0.,   0.],
        [  4.,   5.,   6.,   7.],
        [  8.,   9.,  10.,  11.]], dtype=float32)
```

File on disk is unchanged:

```
>>> fpr
memmap([[  0.,   1.,   2.,   3.],
        [  4.,   5.,   6.,   7.],
        [  8.,   9.,  10.,  11.]], dtype=float32)
```

Offset into a memmap:

```
>>> fpo = np.memmap(filename, dtype='float32', mode='r', offset=16)
>>> fpo
memmap([  4.,   5.,   6.,   7.,   8.,   9.,  10.,  11.], dtype=float32)
```

Attributes

filename	(str or pathlib.Path instance) Path to the mapped file.
offset	(int) Offset position in the file.
mode	(str) File mode.

Methods

flush()	Write any changes in the array to the file on disk.

memmap.**flush**()

Write any changes in the array to the file on disk.

For further information, see *memmap*.

Parameters None

See also:

memmap

Example:

```
>>> a = memmap('newfile.dat', dtype=float, mode='w+', shape=1000)
>>> a[10] = 10.0
>>> a[30] = 30.0
>>> del a
>>> b = fromfile('newfile.dat', dtype=float)
>>> print b[10], b[30]
10.0 30.0
>>> a = memmap('newfile.dat', dtype=float)
>>> print a[10], a[30]
10.0 30.0
```

1.6.4 Character arrays (numpy.char)

See also:

Creating character arrays (numpy.char)

Note: The *chararray* class exists for backwards compatibility with Numarray, it is not recommended for new development. Starting from numpy 1.4, if one needs arrays of strings, it is recommended to use arrays of *dtype* `object_`, `string_` or `unicode_`, and use the free functions in the `numpy.char` module for fast vectorized string operations.

These are enhanced arrays of either `string_` type or `unicode_` type. These arrays inherit from the *ndarray*, but specially-define the operations `+`, `*`, and `%` on a (broadcasting) element-by-element basis. These operations are

not available on the standard *ndarray* of character type. In addition, the *chararray* has all of the standard string (and unicode) methods, executing them on an element-by-element basis. Perhaps the easiest way to create a chararray is to use *self.view(chararray)* where *self* is an ndarray of str or unicode data-type. However, a chararray can also be created using the *numpy.chararray* constructor, or via the *numpy.char.array* function:

chararray(shape[, itemsize, unicode, ...])	Provides a convenient view on arrays of string and unicode values.
core.defchararray.array(obj[, itemsize, ...])	Create a *chararray*.

class numpy.**chararray**(*shape*, *itemsize=1*, *unicode=False*, *buffer=None*, *offset=0*, *strides=None*, *order=None*)

Provides a convenient view on arrays of string and unicode values.

Note: The *chararray* class exists for backwards compatibility with Numarray, it is not recommended for new development. Starting from numpy 1.4, if one needs arrays of strings, it is recommended to use arrays of *dtype* object_, string_ or unicode_, and use the free functions in the numpy.char module for fast vectorized string operations.

Versus a regular NumPy array of type str or unicode, this class adds the following functionality:

1. values automatically have whitespace removed from the end when indexed
2. comparison operators automatically remove whitespace from the end when comparing values
3. vectorized string operations are provided as methods (e.g. *endswith*) and infix operators (e.g. "+", "*", "%")

chararrays should be created using numpy.char.array or numpy.char.asarray, rather than this constructor directly.

This constructor creates the array, using *buffer* (with *offset* and *strides*) if it is not None. If *buffer* is None, then constructs a new array with *strides* in "C order", unless both len(shape) >= 2 and order='Fortran', in which case *strides* is in "Fortran order".

Parameters **shape** : tuple

Shape of the array.

itemsize : int, optional

Length of each array element, in number of characters. Default is 1.

unicode : bool, optional

Are the array elements of type unicode (True) or string (False). Default is False.

buffer : int, optional

Memory address of the start of the array data. Default is None, in which case a new array is created.

offset : int, optional

Fixed stride displacement from the beginning of an axis? Default is 0. Needs to be >=0.

strides : array_like of ints, optional

Strides for the array (see *ndarray.strides* for full description). Default is None.

order : {'C', 'F'}, optional

The order in which the array data is stored in memory: 'C' -> "row major" order (the default), 'F' -> "column major" (Fortran) order.

Examples

```
>>> charar = np.chararray((3, 3))
>>> charar[:] = 'a'
>>> charar
chararray([['a', 'a', 'a'],
       ['a', 'a', 'a'],
       ['a', 'a', 'a']],
      dtype='|S1')
```

```
>>> charar = np.chararray(charar.shape, itemsize=5)
>>> charar[:] = 'abc'
>>> charar
chararray([['abc', 'abc', 'abc'],
       ['abc', 'abc', 'abc'],
       ['abc', 'abc', 'abc']],
      dtype='|S5')
```

Attributes

T	Same as self.transpose(), except that self is returned if self.ndim < 2.
base	Base object if memory is from some other object.
ctypes	An object to simplify the interaction of the array with the ctypes module.
data	Python buffer object pointing to the start of the array's data.
dtype	Data-type of the array's elements.
flags	Information about the memory layout of the array.
flat	A 1-D iterator over the array.
imag	The imaginary part of the array.
itemsize	Length of one array element in bytes.
nbytes	Total bytes consumed by the elements of the array.
ndim	Number of array dimensions.
real	The real part of the array.
shape	Tuple of array dimensions.
size	Number of elements in the array.
strides	Tuple of bytes to step in each dimension when traversing an array.

chararray.**T**
: Same as self.transpose(), except that self is returned if self.ndim < 2.

Examples

```
>>> x = np.array([[1.,2.],[3.,4.]])
>>> x
array([[ 1.,  2.],
       [ 3.,  4.]])
>>> x.T
array([[ 1.,  3.],
       [ 2.,  4.]])
>>> x = np.array([1.,2.,3.,4.])
>>> x
array([ 1.,  2.,  3.,  4.])
>>> x.T
array([ 1.,  2.,  3.,  4.])
```

chararray.**base**

Base object if memory is from some other object.

Examples

The base of an array that owns its memory is None:

```
>>> x = np.array([1,2,3,4])
>>> x.base is None
True
```

Slicing creates a view, whose memory is shared with x:

```
>>> y = x[2:]
>>> y.base is x
True
```

chararray.**ctypes**

An object to simplify the interaction of the array with the ctypes module.

This attribute creates an object that makes it easier to use arrays when calling shared libraries with the ctypes module. The returned object has, among others, data, shape, and strides attributes (see Notes below) which themselves return ctypes objects that can be used as arguments to a shared library.

Parameters None

Returns **c** : Python object

Possessing attributes data, shape, strides, etc.

See also:

numpy.ctypeslib

Notes

Below are the public attributes of this object which were documented in "Guide to NumPy" (we have omitted undocumented public attributes, as well as documented private attributes):

- data: A pointer to the memory area of the array as a Python integer. This memory area may contain data that is not aligned, or not in correct byte-order. The memory area may not even be writeable. The array flags and data-type of this array should be respected when passing this attribute to arbitrary

C-code to avoid trouble that can include Python crashing. User Beware! The value of this attribute is exactly the same as self._array_interface_['data'][0].

- shape (c_intp*self.ndim): A ctypes array of length self.ndim where the basetype is the C-integer corresponding to dtype('p') on this platform. This base-type could be c_int, c_long, or c_longlong depending on the platform. The c_intp type is defined accordingly in numpy.ctypeslib. The ctypes array contains the shape of the underlying array.
- strides (c_intp*self.ndim): A ctypes array of length self.ndim where the basetype is the same as for the shape attribute. This ctypes array contains the strides information from the underlying array. This strides information is important for showing how many bytes must be jumped to get to the next element in the array.
- data_as(obj): Return the data pointer cast to a particular c-types object. For example, calling self._as_parameter_ is equivalent to self.data_as(ctypes.c_void_p). Perhaps you want to use the data as a pointer to a ctypes array of floating-point data: self.data_as(ctypes.POINTER(ctypes.c_double)).
- shape_as(obj): Return the shape tuple as an array of some other c-types type. For example: self.shape_as(ctypes.c_short).
- strides_as(obj): Return the strides tuple as an array of some other c-types type. For example: self.strides_as(ctypes.c_longlong).

Be careful using the ctypes attribute - especially on temporary arrays or arrays constructed on the fly. For example, calling `(a+b).ctypes.data_as(ctypes.c_void_p)` returns a pointer to memory that is invalid because the array created as (a+b) is deallocated before the next Python statement. You can avoid this problem using either `c=a+b` or `ct=(a+b).ctypes`. In the latter case, ct will hold a reference to the array until ct is deleted or re-assigned.

If the ctypes module is not available, then the ctypes attribute of array objects still returns something useful, but ctypes objects are not returned and errors may be raised instead. In particular, the object will still have the as parameter attribute which will return an integer equal to the data attribute.

Examples

```
>>> import ctypes
>>> x
array([[0, 1],
       [2, 3]])
>>> x.ctypes.data
30439712
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_long))
<ctypes.LP_c_long object at 0x01F01300>
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_long)).contents
c_long(0)
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_longlong)).contents
c_longlong(4294967296L)
>>> x.ctypes.shape
<numpy.core._internal.c_long_Array_2 object at 0x01FFD580>
>>> x.ctypes.shape_as(ctypes.c_long)
<numpy.core._internal.c_long_Array_2 object at 0x01FCE620>
>>> x.ctypes.strides
<numpy.core._internal.c_long_Array_2 object at 0x01FCE620>
>>> x.ctypes.strides_as(ctypes.c_longlong)
<numpy.core._internal.c_longlong_Array_2 object at 0x01F01300>
```

chararray.**data**
Python buffer object pointing to the start of the array's data.

chararray.**dtype**
Data-type of the array's elements.

Parameters None

Returns **d** : numpy dtype object

See also:

numpy.dtype

Examples

```
>>> x
array([[0, 1],
       [2, 3]])
>>> x.dtype
dtype('int32')
>>> type(x.dtype)
<type 'numpy.dtype'>
```

chararray.**flags**
Information about the memory layout of the array.

Notes

The *flags* object can be accessed dictionary-like (as in `a.flags['WRITEABLE']`), or by using lowercased attribute names (as in `a.flags.writeable`). Short flag names are only supported in dictionary access.

Only the WRITEBACKIFCOPY, UPDATEIFCOPY, WRITEABLE, and ALIGNED flags can be changed by the user, via direct assignment to the attribute or dictionary entry, or by calling *ndarray.setflags*.

The array flags cannot be set arbitrarily:

- UPDATEIFCOPY can only be set `False`.
- WRITEBACKIFCOPY can only be set `False`.
- ALIGNED can only be set `True` if the data is truly aligned.
- WRITEABLE can only be set `True` if the array owns its own memory or the ultimate owner of the memory exposes a writeable buffer interface or is a string.

Arrays can be both C-style and Fortran-style contiguous simultaneously. This is clear for 1-dimensional arrays, but can also be true for higher dimensional arrays.

Even for contiguous arrays a stride for a given dimension `arr.strides[dim]` may be *arbitrary* if `arr.shape[dim] == 1` or the array has no elements. It does *not* generally hold that `self.strides[-1] == self.itemsize` for C-style contiguous arrays or `self.strides[0] == self.itemsize` for Fortran-style contiguous arrays is true.

Attributes

C_CONTIGUOUS (C)	The data is in a single, C-style contiguous segment.
F_CONTIGUOUS (F)	The data is in a single, Fortran-style contiguous segment.
OWNDATA (O)	The array owns the memory it uses or borrows it from another object.
WRITEABLE (W)	The data area can be written to. Setting this to False locks the data, making it read-only. A view (slice, etc.) inherits WRITEABLE from its base array at creation time, but a view of a writeable array may be subsequently locked while the base array remains writeable. (The opposite is not true, in that a view of a locked array may not be made writeable. However, currently, locking a base object does not lock any views that already reference it, so under that circumstance it is possible to alter the contents of a locked array via a previously created writeable view onto it.) Attempting to change a non-writeable array raises a RuntimeError exception.
ALIGNED (A)	The data and all elements are aligned appropriately for the hardware.
WRITEBACKIFCOPY (X)	This array is a copy of some other array. The C-API function PyArray_ResolveWritebackIfCopy must be called before deallocating to the base array will be updated with the contents of this array.
UPDATEIFCOPY (U)	(Deprecated, use WRITEBACKIFCOPY) This array is a copy of some other array. When this array is deallocated, the base array will be updated with the contents of this array.
FNC	F_CONTIGUOUS and not C_CONTIGUOUS.
FORC	F_CONTIGUOUS or C_CONTIGUOUS (one-segment test).
BEHAVED (B)	ALIGNED and WRITEABLE.
CARRAY (CA)	BEHAVED and C_CONTIGUOUS.
FARRAY (FA)	BEHAVED and F_CONTIGUOUS and not C_CONTIGUOUS.

chararray.**flat**

A 1-D iterator over the array.

This is a *numpy.flatiter* instance, which acts similarly to, but is not a subclass of, Python's built-in iterator object.

See also:

flatten Return a copy of the array collapsed into one dimension.

flatiter

Examples

```
>>> x = np.arange(1, 7).reshape(2, 3)
>>> x
array([[1, 2, 3],
       [4, 5, 6]])
>>> x.flat[3]
4
>>> x.T
array([[1, 4],
       [2, 5],
       [3, 6]])
>>> x.T.flat[3]
5
>>> type(x.flat)
<type 'numpy.flatiter'>
```

An assignment example:

```
>>> x.flat = 3; x
array([[3, 3, 3],
       [3, 3, 3]])
>>> x.flat[[1,4]] = 1; x
array([[3, 1, 3],
       [3, 1, 3]])
```

chararray.**imag**
The imaginary part of the array.

Examples

```
>>> x = np.sqrt([1+0j, 0+1j])
>>> x.imag
array([ 0.        ,  0.70710678])
>>> x.imag.dtype
dtype('float64')
```

chararray.**itemsize**
Length of one array element in bytes.

Examples

```
>>> x = np.array([1,2,3], dtype=np.float64)
>>> x.itemsize
8
>>> x = np.array([1,2,3], dtype=np.complex128)
>>> x.itemsize
16
```

chararray.**nbytes**
Total bytes consumed by the elements of the array.

Notes

Does not include memory consumed by non-element attributes of the array object.

Examples

```
>>> x = np.zeros((3,5,2), dtype=np.complex128)
>>> x.nbytes
480
>>> np.prod(x.shape) * x.itemsize
480
```

chararray.**ndim**
Number of array dimensions.

Examples

```
>>> x = np.array([1, 2, 3])
>>> x.ndim
1
>>> y = np.zeros((2, 3, 4))
>>> y.ndim
3
```

chararray.**real**
The real part of the array.

See also:

numpy.real equivalent function

Examples

```
>>> x = np.sqrt([1+0j, 0+1j])
>>> x.real
array([ 1.        ,  0.70710678])
>>> x.real.dtype
dtype('float64')
```

chararray.**shape**
Tuple of array dimensions.

The shape property is usually used to get the current shape of an array, but may also be used to reshape the array in-place by assigning a tuple of array dimensions to it. As with *numpy.reshape*, one of the new shape dimensions can be -1, in which case its value is inferred from the size of the array and the remaining dimensions. Reshaping an array in-place will fail if a copy is required.

See also:

numpy.reshape similar function

ndarray.reshape similar method

Examples

```
>>> x = np.array([1, 2, 3, 4])
>>> x.shape
(4,)
>>> y = np.zeros((2, 3, 4))
>>> y.shape
(2, 3, 4)
>>> y.shape = (3, 8)
>>> y
array([[ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.],
       [ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.],
       [ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.]])
>>> y.shape = (3, 6)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: total size of new array must be unchanged
>>> np.zeros((4,2))[::2].shape = (-1,)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
AttributeError: incompatible shape for a non-contiguous array
```

chararray.**size**

Number of elements in the array.

Equivalent to `np.prod(a.shape)`, i.e., the product of the array's dimensions.

Examples

```
>>> x = np.zeros((3, 5, 2), dtype=np.complex128)
>>> x.size
30
>>> np.prod(x.shape)
30
```

chararray.**strides**

Tuple of bytes to step in each dimension when traversing an array.

The byte offset of element `(i[0], i[1], ..., i[n])` in an array *a* is:

```
offset = sum(np.array(i) * a.strides)
```

A more detailed explanation of strides can be found in the "ndarray.rst" file in the NumPy reference guide.

See also:

numpy.lib.stride_tricks.as_strided

Notes

Imagine an array of 32-bit integers (each 4 bytes):

```
x = np.array([[0, 1, 2, 3, 4],
              [5, 6, 7, 8, 9]], dtype=np.int32)
```

This array is stored in memory as 40 bytes, one after the other (known as a contiguous block of memory). The strides of an array tell us how many bytes we have to skip in memory to move to the next position along a certain axis. For example, we have to skip 4 bytes (1 value) to move to the next column, but 20 bytes (5 values) to get to the same position in the next row. As such, the strides for the array *x* will be `(20, 4)`.

Examples

```
>>> y = np.reshape(np.arange(2*3*4), (2,3,4))
>>> y
array([[[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]],
       [[12, 13, 14, 15],
        [16, 17, 18, 19],
        [20, 21, 22, 23]]])
>>> y.strides
(48, 16, 4)
>>> y[1,1,1]
17
>>> offset=sum(y.strides * np.array((1,1,1)))
>>> offset/y.itemsize
17
```

```
>>> x = np.reshape(np.arange(5*6*7*8), (5,6,7,8)).transpose(2,3,1,0)
>>> x.strides
(32, 4, 224, 1344)
>>> i = np.array([3,5,2,2])
>>> offset = sum(i * x.strides)
>>> x[3,5,2,2]
813
>>> offset / x.itemsize
813
```

Methods

astype(dtype[, order, casting, subok, copy])	Copy of the array, cast to a specified type.
argsort([axis, kind, order])	Returns the indices that would sort this array.
copy([order])	Return a copy of the array.
count(sub[, start, end])	Returns an array with the number of non-overlapping occurrences of substring *sub* in the range [*start*, *end*].
decode([encoding, errors])	Calls *str.decode* element-wise.
dump(file)	Dump a pickle of the array to the specified file.
dumps()	Returns the pickle of the array as a string.
encode([encoding, errors])	Calls `str.encode` element-wise.
endswith(suffix[, start, end])	Returns a boolean array which is *True* where the string element in *self* ends with *suffix*, otherwise *False*.
expandtabs([tabsize])	Return a copy of each string element where all tab characters are replaced by one or more spaces.
fill(value)	Fill the array with a scalar value.

Continued on next page

Table 46 – continued from previous page

find(sub[, start, end])	For each element, return the lowest index in the string where substring *sub* is found.
flatten([order])	Return a copy of the array collapsed into one dimension.
getfield(dtype[, offset])	Returns a field of the given array as a certain type.
index(sub[, start, end])	Like *find*, but raises *ValueError* when the substring is not found.
isalnum()	Returns true for each element if all characters in the string are alphanumeric and there is at least one character, false otherwise.
isalpha()	Returns true for each element if all characters in the string are alphabetic and there is at least one character, false otherwise.
isdecimal()	For each element in *self*, return True if there are only decimal characters in the element.
isdigit()	Returns true for each element if all characters in the string are digits and there is at least one character, false otherwise.
islower()	Returns true for each element if all cased characters in the string are lowercase and there is at least one cased character, false otherwise.
isnumeric()	For each element in *self*, return True if there are only numeric characters in the element.
isspace()	Returns true for each element if there are only whitespace characters in the string and there is at least one character, false otherwise.
istitle()	Returns true for each element if the element is a titlecased string and there is at least one character, false otherwise.
isupper()	Returns true for each element if all cased characters in the string are uppercase and there is at least one character, false otherwise.
item(*args)	Copy an element of an array to a standard Python scalar and return it.
join(seq)	Return a string which is the concatenation of the strings in the sequence *seq*.
ljust(width[, fillchar])	Return an array with the elements of *self* left-justified in a string of length *width*.
lower()	Return an array with the elements of *self* converted to lowercase.
lstrip([chars])	For each element in *self*, return a copy with the leading characters removed.
nonzero()	Return the indices of the elements that are non-zero.
put(indices, values[, mode])	Set `a.flat[n] = values[n]` for all *n* in indices.
ravel([order])	Return a flattened array.
repeat(repeats[, axis])	Repeat elements of an array.
replace(old, new[, count])	For each element in *self*, return a copy of the string with all occurrences of substring *old* replaced by *new*.
reshape(shape[, order])	Returns an array containing the same data with a new shape.
resize(new_shape[, refcheck])	Change shape and size of array in-place.

Continued on next page

Table 46 – continued from previous page

rfind(sub[, start, end])	For each element in *self*, return the highest index in the string where substring *sub* is found, such that *sub* is contained within [*start*, *end*].
rindex(sub[, start, end])	Like rfind, but raises *ValueError* when the substring *sub* is not found.
rjust(width[, fillchar])	Return an array with the elements of *self* right-justified in a string of length *width*.
rsplit([sep, maxsplit])	For each element in *self*, return a list of the words in the string, using *sep* as the delimiter string.
rstrip([chars])	For each element in *self*, return a copy with the trailing characters removed.
searchsorted(v[, side, sorter])	Find indices where elements of v should be inserted in a to maintain order.
setfield(val, dtype[, offset])	Put a value into a specified place in a field defined by a data-type.
setflags([write, align, uic])	Set array flags WRITEABLE, ALIGNED, (WRITEBACKIFCOPY and UPDATEIFCOPY), respectively.
sort([axis, kind, order])	Sort an array, in-place.
split([sep, maxsplit])	For each element in *self*, return a list of the words in the string, using *sep* as the delimiter string.
splitlines([keepends])	For each element in *self*, return a list of the lines in the element, breaking at line boundaries.
squeeze([axis])	Remove single-dimensional entries from the shape of *a*.
startswith(prefix[, start, end])	Returns a boolean array which is *True* where the string element in *self* starts with *prefix*, otherwise *False*.
strip([chars])	For each element in *self*, return a copy with the leading and trailing characters removed.
swapaxes(axis1, axis2)	Return a view of the array with *axis1* and *axis2* interchanged.
swapcase()	For each element in *self*, return a copy of the string with uppercase characters converted to lowercase and vice versa.
take(indices[, axis, out, mode])	Return an array formed from the elements of *a* at the given indices.
title()	For each element in *self*, return a titlecased version of the string: words start with uppercase characters, all remaining cased characters are lowercase.
tofile(fid[, sep, format])	Write array to a file as text or binary (default).
tolist()	Return the array as a (possibly nested) list.
tostring([order])	Construct Python bytes containing the raw data bytes in the array.
translate(table[, deletechars])	For each element in *self*, return a copy of the string where all characters occurring in the optional argument *deletechars* are removed, and the remaining characters have been mapped through the given translation table.
transpose(*axes)	Returns a view of the array with axes transposed.
upper()	Return an array with the elements of *self* converted to uppercase.
view([dtype, type])	New view of array with the same data.
zfill(width)	Return the numeric string left-filled with zeros in a string of length *width*.

chararray.**astype**(*dtype*, *order='K'*, *casting='unsafe'*, *subok=True*, *copy=True*)

Copy of the array, cast to a specified type.

Parameters **dtype** : str or dtype

Typecode or data-type to which the array is cast.

order : {'C', 'F', 'A', 'K'}, optional

Controls the memory layout order of the result. 'C' means C order, 'F' means Fortran order, 'A' means 'F' order if all the arrays are Fortran contiguous, 'C' order otherwise, and 'K' means as close to the order the array elements appear in memory as possible. Default is 'K'.

casting : {'no', 'equiv', 'safe', 'same_kind', 'unsafe'}, optional

Controls what kind of data casting may occur. Defaults to 'unsafe' for backwards compatibility.

- 'no' means the data types should not be cast at all.
- 'equiv' means only byte-order changes are allowed.
- 'safe' means only casts which can preserve values are allowed.
- 'same_kind' means only safe casts or casts within a kind, like float64 to float32, are allowed.
- 'unsafe' means any data conversions may be done.

subok : bool, optional

If True, then sub-classes will be passed-through (default), otherwise the returned array will be forced to be a base-class array.

copy : bool, optional

By default, astype always returns a newly allocated array. If this is set to false, and the `dtype`, *order*, and *subok* requirements are satisfied, the input array is returned instead of a copy.

Returns **arr_t** : ndarray

Unless `copy` is False and the other conditions for returning the input array are satisfied (see description for `copy` input parameter), *arr_t* is a new array of the same shape as the input array, with dtype, order given by `dtype`, *order*.

Raises **ComplexWarning**

When casting from complex to float or int. To avoid this, one should use `a.real.astype(t)`.

Notes

Starting in NumPy 1.9, astype method now returns an error if the string dtype to cast to is not long enough in 'safe' casting mode to hold the max value of integer/float array that is being casted. Previously the casting was allowed even if the result was truncated.

Examples

```
>>> x = np.array([1, 2, 2.5])
>>> x
array([ 1. ,  2. ,  2.5])
```

```
>>> x.astype(int)
array([1, 2, 2])
```

chararray.**argsort**(*axis=-1*, *kind='quicksort'*, *order=None*)

Returns the indices that would sort this array.

Refer to *numpy.argsort* for full documentation.

See also:

numpy.argsort equivalent function

chararray.**copy**(*order='C'*)

Return a copy of the array.

Parameters **order** : {'C', 'F', 'A', 'K'}, optional

Controls the memory layout of the copy. 'C' means C-order, 'F' means F-order, 'A' means 'F' if *a* is Fortran contiguous, 'C' otherwise. 'K' means match the layout of *a* as closely as possible. (Note that this function and *numpy.copy* are very similar, but have different default values for their order= arguments.)

See also:

numpy.copy, *numpy.copyto*

Examples

```
>>> x = np.array([[1,2,3],[4,5,6]], order='F')
```

```
>>> y = x.copy()
```

```
>>> x.fill(0)
```

```
>>> x
array([[0, 0, 0],
       [0, 0, 0]])
```

```
>>> y
array([[1, 2, 3],
       [4, 5, 6]])
```

```
>>> y.flags['C_CONTIGUOUS']
True
```

chararray.**count**(*sub*, *start=0*, *end=None*)

Returns an array with the number of non-overlapping occurrences of substring *sub* in the range [*start*, *end*].

See also:

`char.count`

`chararray.`**`decode`**(*encoding=None*, *errors=None*)
Calls *str.decode* element-wise.

See also:

`char.decode`

`chararray.`**`dump`**(*file*)
Dump a pickle of the array to the specified file. The array can be read back with pickle.load or numpy.load.

Parameters **file** : str

A string naming the dump file.

`chararray.`**`dumps`**()
Returns the pickle of the array as a string. pickle.loads or numpy.loads will convert the string back to an array.

Parameters **None**

`chararray.`**`encode`**(*encoding=None*, *errors=None*)
Calls `str.encode` element-wise.

See also:

`char.encode`

`chararray.`**`endswith`**(*suffix*, *start=0*, *end=None*)
Returns a boolean array which is *True* where the string element in *self* ends with *suffix*, otherwise *False*.

See also:

`char.endswith`

`chararray.`**`expandtabs`**(*tabsize=8*)
Return a copy of each string element where all tab characters are replaced by one or more spaces.

See also:

`char.expandtabs`

`chararray.`**`fill`**(*value*)
Fill the array with a scalar value.

Parameters **value** : scalar

All elements of *a* will be assigned this value.

Examples

```
>>> a = np.array([1, 2])
>>> a.fill(0)
>>> a
array([0, 0])
>>> a = np.empty(2)
>>> a.fill(1)
>>> a
array([ 1.,  1.])
```

`chararray.`**`find`**(*sub*, *start=0*, *end=None*)
For each element, return the lowest index in the string where substring *sub* is found.

See also:

`char.find`

`chararray.`**`flatten`**(*order='C'*)

Return a copy of the array collapsed into one dimension.

Parameters **order** : {'C', 'F', 'A', 'K'}, optional

'C' means to flatten in row-major (C-style) order. 'F' means to flatten in column-major (Fortran- style) order. 'A' means to flatten in column-major order if *a* is Fortran *contiguous* in memory, row-major order otherwise. 'K' means to flatten *a* in the order the elements occur in memory. The default is 'C'.

Returns **y** : ndarray

A copy of the input array, flattened to one dimension.

See also:

ravel Return a flattened array.

flat A 1-D flat iterator over the array.

Examples

```
>>> a = np.array([[1,2], [3,4]])
>>> a.flatten()
array([1, 2, 3, 4])
>>> a.flatten('F')
array([1, 3, 2, 4])
```

`chararray.`**`getfield`**(*dtype*, *offset=0*)

Returns a field of the given array as a certain type.

A field is a view of the array data with a given data-type. The values in the view are determined by the given type and the offset into the current array in bytes. The offset needs to be such that the view dtype fits in the array dtype; for example an array of dtype complex128 has 16-byte elements. If taking a view with a 32-bit integer (4 bytes), the offset needs to be between 0 and 12 bytes.

Parameters **dtype** : str or dtype

The data type of the view. The dtype size of the view can not be larger than that of the array itself.

offset : int

Number of bytes to skip before beginning the element view.

Examples

```
>>> x = np.diag([1.+1.j]*2)
>>> x[1, 1] = 2 + 4.j
>>> x
array([[ 1.+1.j,  0.+0.j],
       [ 0.+0.j,  2.+4.j]])
>>> x.getfield(np.float64)
array([[ 1.,  0.],
       [ 0.,  2.]])
```

By choosing an offset of 8 bytes we can select the complex part of the array for our view:

```
>>> x.getfield(np.float64, offset=8)
array([[ 1.,  0.],
   [ 0.,  4.]])
```

chararray.**index**(*sub*, *start=0*, *end=None*)
Like *find*, but raises *ValueError* when the substring is not found.

See also:

char.index

chararray.**isalnum**()
Returns true for each element if all characters in the string are alphanumeric and there is at least one character, false otherwise.

See also:

char.isalnum

chararray.**isalpha**()
Returns true for each element if all characters in the string are alphabetic and there is at least one character, false otherwise.

See also:

char.isalpha

chararray.**isdecimal**()
For each element in *self*, return True if there are only decimal characters in the element.

See also:

char.isdecimal

chararray.**isdigit**()
Returns true for each element if all characters in the string are digits and there is at least one character, false otherwise.

See also:

char.isdigit

chararray.**islower**()
Returns true for each element if all cased characters in the string are lowercase and there is at least one cased character, false otherwise.

See also:

char.islower

chararray.**isnumeric**()
For each element in *self*, return True if there are only numeric characters in the element.

See also:

char.isnumeric

chararray.**isspace**()
Returns true for each element if there are only whitespace characters in the string and there is at least one character, false otherwise.

See also:

char.isspace

chararray.**istitle**()
Returns true for each element if the element is a titlecased string and there is at least one character, false otherwise.

See also:

`char.istitle`

chararray.**isupper**()
Returns true for each element if all cased characters in the string are uppercase and there is at least one character, false otherwise.

See also:

`char.isupper`

chararray.**item**(**args*)
Copy an element of an array to a standard Python scalar and return it.

Parameters ***args** : Arguments (variable number and type)

- none: in this case, the method only works for arrays with one element (*a.size == 1*), which element is copied into a standard Python scalar object and returned.
- int_type: this argument is interpreted as a flat index into the array, specifying which element to copy and return.
- tuple of int_types: functions as does a single int_type argument, except that the argument is interpreted as an nd-index into the array.

Returns **z** : Standard Python scalar object

A copy of the specified element of the array as a suitable Python scalar

Notes

When the data type of *a* is longdouble or clongdouble, item() returns a scalar array object because there is no available Python scalar that would not lose information. Void arrays return a buffer object for item(), unless fields are defined, in which case a tuple is returned.

item is very similar to a[args], except, instead of an array scalar, a standard Python scalar is returned. This can be useful for speeding up access to elements of the array and doing arithmetic on elements of the array using Python's optimized math.

Examples

```
>>> x = np.random.randint(9, size=(3, 3))
>>> x
array([[3, 1, 7],
       [2, 8, 3],
       [8, 5, 3]])
>>> x.item(3)
2
>>> x.item(7)
5
>>> x.item((0, 1))
1
>>> x.item((2, 2))
3
```

chararray.**join**(*seq*)
Return a string which is the concatenation of the strings in the sequence *seq*.

See also:

`char.join`

chararray.**ljust**(*width*, *fillchar=' '*)
Return an array with the elements of *self* left-justified in a string of length *width*.

See also:

`char.ljust`

chararray.**lower**()
Return an array with the elements of *self* converted to lowercase.

See also:

`char.lower`

chararray.**lstrip**(*chars=None*)
For each element in *self*, return a copy with the leading characters removed.

See also:

`char.lstrip`

chararray.**nonzero**()
Return the indices of the elements that are non-zero.

Refer to *numpy.nonzero* for full documentation.

See also:

numpy.nonzero equivalent function

chararray.**put**(*indices*, *values*, *mode='raise'*)
Set `a.flat[n] = values[n]` for all *n* in indices.

Refer to *numpy.put* for full documentation.

See also:

numpy.put equivalent function

chararray.**ravel**([*order*])
Return a flattened array.

Refer to *numpy.ravel* for full documentation.

See also:

numpy.ravel equivalent function

ndarray.flat a flat iterator on the array.

chararray.**repeat**(*repeats*, *axis=None*)
Repeat elements of an array.

Refer to *numpy.repeat* for full documentation.

See also:

numpy.repeat equivalent function

chararray.**replace**(*old*, *new*, *count=None*)
For each element in *self*, return a copy of the string with all occurrences of substring *old* replaced by *new*.

See also:

`char.replace`

chararray.**reshape**(*shape*, *order='C'*)
Returns an array containing the same data with a new shape.

Refer to *numpy.reshape* for full documentation.

See also:

numpy.reshape equivalent function

Notes

Unlike the free function *numpy.reshape*, this method on *ndarray* allows the elements of the shape parameter to be passed in as separate arguments. For example, `a.reshape(10, 11)` is equivalent to `a.reshape((10, 11))`.

chararray.**resize**(*new_shape*, *refcheck=True*)
Change shape and size of array in-place.

Parameters **new_shape** : tuple of ints, or *n* ints

Shape of resized array.

refcheck : bool, optional

If False, reference count will not be checked. Default is True.

Returns None

Raises **ValueError**

If *a* does not own its own data or references or views to it exist, and the data memory must be changed. PyPy only: will always raise if the data memory must be changed, since there is no reliable way to determine if references or views to it exist.

SystemError

If the *order* keyword argument is specified. This behaviour is a bug in NumPy.

See also:

resize Return a new array with the specified shape.

Notes

This reallocates space for the data area if necessary.

Only contiguous arrays (data elements consecutive in memory) can be resized.

The purpose of the reference count check is to make sure you do not use this array as a buffer for another Python object and then reallocate the memory. However, reference counts can increase in other ways so if you are sure that you have not shared the memory for this array with another Python object, then you may safely set *refcheck* to False.

Examples

Shrinking an array: array is flattened (in the order that the data are stored in memory), resized, and reshaped:

```
>>> a = np.array([[0, 1], [2, 3]], order='C')
>>> a.resize((2, 1))
>>> a
array([[0],
       [1]])
```

```
>>> a = np.array([[0, 1], [2, 3]], order='F')
>>> a.resize((2, 1))
>>> a
array([[0],
       [2]])
```

Enlarging an array: as above, but missing entries are filled with zeros:

```
>>> b = np.array([[0, 1], [2, 3]])
>>> b.resize(2, 3) # new_shape parameter doesn't have to be a tuple
>>> b
array([[0, 1, 2],
       [3, 0, 0]])
```

Referencing an array prevents resizing...

```
>>> c = a
>>> a.resize((1, 1))
Traceback (most recent call last):
...
ValueError: cannot resize an array that has been referenced ...
```

Unless *refcheck* is False:

```
>>> a.resize((1, 1), refcheck=False)
>>> a
array([[0]])
>>> c
array([[0]])
```

`chararray.`**`rfind`**(*sub*, *start=0*, *end=None*)

For each element in *self*, return the highest index in the string where substring *sub* is found, such that *sub* is contained within [*start*, *end*].

See also:

`char.rfind`

`chararray.`**`rindex`**(*sub*, *start=0*, *end=None*)

Like *rfind*, but raises *ValueError* when the substring *sub* is not found.

See also:

`char.rindex`

`chararray.`**`rjust`**(*width*, *fillchar=' '*)

Return an array with the elements of *self* right-justified in a string of length *width*.

See also:

`char.rjust`

chararray.**rsplit**(*sep=None*, *maxsplit=None*)
For each element in *self*, return a list of the words in the string, using *sep* as the delimiter string.

See also:

`char.rsplit`

chararray.**rstrip**(*chars=None*)
For each element in *self*, return a copy with the trailing characters removed.

See also:

`char.rstrip`

chararray.**searchsorted**(*v*, *side='left'*, *sorter=None*)
Find indices where elements of v should be inserted in a to maintain order.

For full documentation, see *numpy.searchsorted*

See also:

numpy.searchsorted equivalent function

chararray.**setfield**(*val*, *dtype*, *offset=0*)
Put a value into a specified place in a field defined by a data-type.

Place *val* into *a*'s field defined by *dtype* and beginning *offset* bytes into the field.

Parameters **val** : object

Value to be placed in field.

dtype : dtype object

Data-type of the field in which to place *val*.

offset : int, optional

The number of bytes into the field at which to place *val*.

Returns None

See also:

getfield

Examples

```
>>> x = np.eye(3)
>>> x.getfield(np.float64)
array([[ 1.,  0.,  0.],
       [ 0.,  1.,  0.],
       [ 0.,  0.,  1.]])
>>> x.setfield(3, np.int32)
>>> x.getfield(np.int32)
array([[3, 3, 3],
       [3, 3, 3],
       [3, 3, 3]])
>>> x
array([[  1.00000000e+000,   1.48219694e-323,   1.48219694e-323],
```

(continues on next page)

(continued from previous page)

```
       [  1.48219694e-323,   1.00000000e+000,   1.48219694e-323],
       [  1.48219694e-323,   1.48219694e-323,   1.00000000e+000]])
>>> x.setfield(np.eye(3), np.int32)
>>> x
array([[ 1.,  0.,  0.],
       [ 0.,  1.,  0.],
       [ 0.,  0.,  1.]])
```

chararray.**setflags**(*write=None*, *align=None*, *uic=None*)

Set array flags WRITEABLE, ALIGNED, (WRITEBACKIFCOPY and UPDATEIFCOPY), respectively.

These Boolean-valued flags affect how numpy interprets the memory area used by *a* (see Notes below). The ALIGNED flag can only be set to True if the data is actually aligned according to the type. The WRITEBACKIFCOPY and (deprecated) UPDATEIFCOPY flags can never be set to True. The flag WRITEABLE can only be set to True if the array owns its own memory, or the ultimate owner of the memory exposes a writeable buffer interface, or is a string. (The exception for string is made so that unpickling can be done without copying memory.)

Parameters **write** : bool, optional

Describes whether or not *a* can be written to.

align : bool, optional

Describes whether or not *a* is aligned properly for its type.

uic : bool, optional

Describes whether or not *a* is a copy of another "base" array.

Notes

Array flags provide information about how the memory area used for the array is to be interpreted. There are 7 Boolean flags in use, only four of which can be changed by the user: WRITEBACKIFCOPY, UPDATEIFCOPY, WRITEABLE, and ALIGNED.

WRITEABLE (W) the data area can be written to;

ALIGNED (A) the data and strides are aligned appropriately for the hardware (as determined by the compiler);

UPDATEIFCOPY (U) (deprecated), replaced by WRITEBACKIFCOPY;

WRITEBACKIFCOPY (X) this array is a copy of some other array (referenced by .base). When the C-API function PyArray_ResolveWritebackIfCopy is called, the base array will be updated with the contents of this array.

All flags can be accessed using the single (upper case) letter as well as the full name.

Examples

```
>>> y
array([[3, 1, 7],
       [2, 0, 0],
       [8, 5, 9]])
>>> y.flags
  C_CONTIGUOUS : True
```

(continues on next page)

(continued from previous page)

```
  F_CONTIGUOUS : False
  OWNDATA : True
  WRITEABLE : True
  ALIGNED : True
  WRITEBACKIFCOPY : False
  UPDATEIFCOPY : False
>>> y.setflags(write=0, align=0)
>>> y.flags
  C_CONTIGUOUS : True
  F_CONTIGUOUS : False
  OWNDATA : True
  WRITEABLE : False
  ALIGNED : False
  WRITEBACKIFCOPY : False
  UPDATEIFCOPY : False
>>> y.setflags(uic=1)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: cannot set WRITEBACKIFCOPY flag to True
```

chararray.**sort**(*axis=-1*, *kind='quicksort'*, *order=None*)

Sort an array, in-place.

Parameters **axis** : int, optional

Axis along which to sort. Default is -1, which means sort along the last axis.

kind : {'quicksort', 'mergesort', 'heapsort'}, optional

Sorting algorithm. Default is 'quicksort'.

order : str or list of str, optional

When *a* is an array with fields defined, this argument specifies which fields to compare first, second, etc. A single field can be specified as a string, and not all fields need be specified, but unspecified fields will still be used, in the order in which they come up in the dtype, to break ties.

See also:

numpy.sort Return a sorted copy of an array.

argsort Indirect sort.

lexsort Indirect stable sort on multiple keys.

searchsorted Find elements in sorted array.

partition Partial sort.

Notes

See `sort` for notes on the different sorting algorithms.

Examples

```
>>> a = np.array([[1,4], [3,1]])
>>> a.sort(axis=1)
>>> a
array([[1, 4],
       [1, 3]])
>>> a.sort(axis=0)
>>> a
array([[1, 3],
       [1, 4]])
```

Use the *order* keyword to specify a field to use when sorting a structured array:

```
>>> a = np.array([('a', 2), ('c', 1)], dtype=[('x', 'S1'), ('y', int)])
>>> a.sort(order='y')
>>> a
array([('c', 1), ('a', 2)],
      dtype=[('x', '|S1'), ('y', '<i4')])
```

chararray.**split**(*sep=None*, *maxsplit=None*)
For each element in *self*, return a list of the words in the string, using *sep* as the delimiter string.

See also:

`char.split`

chararray.**splitlines**(*keepends=None*)
For each element in *self*, return a list of the lines in the element, breaking at line boundaries.

See also:

`char.splitlines`

chararray.**squeeze**(*axis=None*)
Remove single-dimensional entries from the shape of *a*.

Refer to *numpy.squeeze* for full documentation.

See also:

numpy.squeeze equivalent function

chararray.**startswith**(*prefix*, *start=0*, *end=None*)
Returns a boolean array which is *True* where the string element in *self* starts with *prefix*, otherwise *False*.

See also:

`char.startswith`

chararray.**strip**(*chars=None*)
For each element in *self*, return a copy with the leading and trailing characters removed.

See also:

`char.strip`

chararray.**swapaxes**(*axis1*, *axis2*)
Return a view of the array with *axis1* and *axis2* interchanged.

Refer to *numpy.swapaxes* for full documentation.

See also:

numpy.swapaxes equivalent function

chararray.**swapcase**()
For each element in *self*, return a copy of the string with uppercase characters converted to lowercase and vice versa.

See also:

`char.swapcase`

chararray.**take**(*indices*, *axis=None*, *out=None*, *mode='raise'*)
Return an array formed from the elements of *a* at the given indices.

Refer to *numpy.take* for full documentation.

See also:

numpy.take equivalent function

chararray.**title**()
For each element in *self*, return a titlecased version of the string: words start with uppercase characters, all remaining cased characters are lowercase.

See also:

`char.title`

chararray.**tofile**(*fid*, *sep=""*, *format="%s"*)
Write array to a file as text or binary (default).

Data is always written in 'C' order, independent of the order of *a*. The data produced by this method can be recovered using the function fromfile().

Parameters **fid** : file or str

An open file object, or a string containing a filename.

sep : str

Separator between array items for text output. If "" (empty), a binary file is written, equivalent to `file.write(a.tobytes())`.

format : str

Format string for text file output. Each entry in the array is formatted to text by first converting it to the closest Python type, and then using "format" % item.

Notes

This is a convenience function for quick storage of array data. Information on endianness and precision is lost, so this method is not a good choice for files intended to archive data or transport data between machines with different endianness. Some of these problems can be overcome by outputting the data as text files, at the expense of speed and file size.

chararray.**tolist**()
Return the array as a (possibly nested) list.

Return a copy of the array data as a (nested) Python list. Data items are converted to the nearest compatible Python type.

Parameters **none**

Returns **y** : list

The possibly nested list of array elements.

Notes

The array may be recreated, `a = np.array(a.tolist())`.

Examples

```
>>> a = np.array([1, 2])
>>> a.tolist()
[1, 2]
>>> a = np.array([[1, 2], [3, 4]])
>>> list(a)
[array([1, 2]), array([3, 4])]
>>> a.tolist()
[[1, 2], [3, 4]]
```

chararray.**tostring**(*order='C'*)

Construct Python bytes containing the raw data bytes in the array.

Constructs Python bytes showing a copy of the raw contents of data memory. The bytes object can be produced in either 'C' or 'Fortran', or 'Any' order (the default is 'C'-order). 'Any' order means C-order unless the F_CONTIGUOUS flag in the array is set, in which case it means 'Fortran' order.

This function is a compatibility alias for tobytes. Despite its name it returns bytes not strings.

Parameters **order** : {'C', 'F', None}, optional

Order of the data for multidimensional arrays: C, Fortran, or the same as for the original array.

Returns **s** : bytes

Python bytes exhibiting a copy of *a*'s raw data.

Examples

```
>>> x = np.array([[0, 1], [2, 3]])
>>> x.tobytes()
b'\x00\x00\x00\x00\x01\x00\x00\x00\x02\x00\x00\x00\x03\x00\x00\x00'
>>> x.tobytes('C') == x.tobytes()
True
>>> x.tobytes('F')
b'\x00\x00\x00\x00\x02\x00\x00\x00\x01\x00\x00\x00\x03\x00\x00\x00'
```

chararray.**translate**(*table*, *deletechars=None*)

For each element in *self*, return a copy of the string where all characters occurring in the optional argument *deletechars* are removed, and the remaining characters have been mapped through the given translation table.

See also:

`char.translate`

chararray.**transpose**(**axes*)

Returns a view of the array with axes transposed.

For a 1-D array, this has no effect. (To change between column and row vectors, first cast the 1-D array into a matrix object.) For a 2-D array, this is the usual matrix transpose. For an n-D array, if axes are given, their order indicates how the axes are permuted (see Examples). If axes are not provided and `a.shape = (i[0], i[1], ... i[n-2], i[n-1])`, then `a.transpose().shape = (i[n-1], i[n-2], ... i[1], i[0])`.

Parameters **axes** : None, tuple of ints, or *n* ints

- None or no argument: reverses the order of the axes.
- tuple of ints: *i* in the *j*-th place in the tuple means *a*'s *i*-th axis becomes *a.transpose()*'s *j*-th axis.
- *n* ints: same as an n-tuple of the same ints (this form is intended simply as a "convenience" alternative to the tuple form)

Returns **out** : ndarray

View of *a*, with axes suitably permuted.

See also:

ndarray.T Array property returning the array transposed.

Examples

```
>>> a = np.array([[1, 2], [3, 4]])
>>> a
array([[1, 2],
       [3, 4]])
>>> a.transpose()
array([[1, 3],
       [2, 4]])
>>> a.transpose((1, 0))
array([[1, 3],
       [2, 4]])
>>> a.transpose(1, 0)
array([[1, 3],
       [2, 4]])
```

chararray.**upper**()

Return an array with the elements of *self* converted to uppercase.

See also:

`char.upper`

chararray.**view**(*dtype=None*, *type=None*)

New view of array with the same data.

Parameters **dtype** : data-type or ndarray sub-class, optional

Data-type descriptor of the returned view, e.g., float32 or int16. The default, None, results in the view having the same data-type as *a*. This argument can also be specified as an ndarray sub-class, which then specifies the type of the returned object (this is equivalent to setting the `type` parameter).

type : Python type, optional

Type of the returned view, e.g., ndarray or matrix. Again, the default None results in type preservation.

Notes

`a.view()` is used two different ways:

`a.view(some_dtype)` or `a.view(dtype=some_dtype)` constructs a view of the array's memory with a different data-type. This can cause a reinterpretation of the bytes of memory.

`a.view(ndarray_subclass)` or `a.view(type=ndarray_subclass)` just returns an instance of *ndarray_subclass* that looks at the same array (same shape, dtype, etc.) This does not cause a reinterpretation of the memory.

For `a.view(some_dtype)`, if `some_dtype` has a different number of bytes per entry than the previous dtype (for example, converting a regular array to a structured array), then the behavior of the view cannot be predicted just from the superficial appearance of `a` (shown by `print(a)`). It also depends on exactly how `a` is stored in memory. Therefore if `a` is C-ordered versus fortran-ordered, versus defined as a slice or transpose, etc., the view may give different results.

Examples

```
>>> x = np.array([(1, 2)], dtype=[('a', np.int8), ('b', np.int8)])
```

Viewing array data using a different type and dtype:

```
>>> y = x.view(dtype=np.int16, type=np.matrix)
>>> y
matrix([[513]], dtype=int16)
>>> print(type(y))
<class 'numpy.matrixlib.defmatrix.matrix'>
```

Creating a view on a structured array so it can be used in calculations

```
>>> x = np.array([(1, 2),(3,4)], dtype=[('a', np.int8), ('b', np.int8)])
>>> xv = x.view(dtype=np.int8).reshape(-1,2)
>>> xv
array([[1, 2],
       [3, 4]], dtype=int8)
>>> xv.mean(0)
array([ 2.,  3.])
```

Making changes to the view changes the underlying array

```
>>> xv[0,1] = 20
>>> print(x)
[(1, 20) (3, 4)]
```

Using a view to convert an array to a recarray:

```
>>> z = x.view(np.recarray)
>>> z.a
array([1], dtype=int8)
```

Views share data:

```
>>> x[0] = (9, 10)
>>> z[0]
(9, 10)
```

Views that change the dtype size (bytes per entry) should normally be avoided on arrays defined by slices, transposes, fortran-ordering, etc.:

```
>>> x = np.array([[1,2,3],[4,5,6]], dtype=np.int16)
>>> y = x[:, 0:2]
>>> y
array([[1, 2],
       [4, 5]], dtype=int16)
>>> y.view(dtype=[('width', np.int16), ('length', np.int16)])
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: new type not compatible with array.
>>> z = y.copy()
>>> z.view(dtype=[('width', np.int16), ('length', np.int16)])
array([[(1, 2)],
       [(4, 5)]], dtype=[('width', '<i2'), ('length', '<i2')])
```

chararray.**zfill**(*width*)

Return the numeric string left-filled with zeros in a string of length *width*.

See also:

`char.zfill`

numpy.core.defchararray.**array**(*obj*, *itemsize=None*, *copy=True*, *unicode=None*, *order=None*)

Create a *chararray*.

Note: This class is provided for numarray backward-compatibility. New code (not concerned with numarray compatibility) should use arrays of type `string_` or `unicode_` and use the free functions in `numpy.char` for fast vectorized string operations instead.

Versus a regular NumPy array of type *str* or *unicode*, this class adds the following functionality:

1. values automatically have whitespace removed from the end when indexed
2. comparison operators automatically remove whitespace from the end when comparing values
3. vectorized string operations are provided as methods (e.g. *str.endswith*) and infix operators (e.g. `+, *, %`)

Parameters **obj** : array of str or unicode-like

itemsize : int, optional

itemsize is the number of characters per scalar in the resulting array. If *itemsize* is None, and *obj* is an object array or a Python list, the *itemsize* will be automatically determined. If *itemsize* is provided and *obj* is of type str or unicode, then the *obj* string will be chunked into *itemsize* pieces.

copy : bool, optional

If true (default), then the object is copied. Otherwise, a copy will only be made if __array__ returns a copy, if obj is a nested sequence, or if a copy is needed to satisfy any of the other requirements (*itemsize*, unicode, *order*, etc.).

unicode : bool, optional

When true, the resulting *chararray* can contain Unicode characters, when false only 8-bit characters. If unicode is *None* and *obj* is one of the following:

- a *chararray*,
- an ndarray of type *str* or *unicode*
- a Python str or unicode object,

then the unicode setting of the output array will be automatically determined.

order : {'C', 'F', 'A'}, optional

Specify the order of the array. If order is 'C' (default), then the array will be in C-contiguous order (last-index varies the fastest). If order is 'F', then the returned array will be in Fortran-contiguous order (first-index varies the fastest). If order is 'A', then the returned array may be in any order (either C-, Fortran-contiguous, or even discontiguous).

Another difference with the standard ndarray of str data-type is that the chararray inherits the feature introduced by Numarray that white-space at the end of any element in the array will be ignored on item retrieval and comparison operations.

1.6.5 Record arrays (`numpy.rec`)

See also:

Creating record arrays (numpy.rec), *Data type routines*, *Data type objects (dtype)*.

NumPy provides the *recarray* class which allows accessing the fields of a structured array as attributes, and a corresponding scalar data type object *record*.

recarray	Construct an ndarray that allows field access using attributes.
record	A data-type scalar that allows field access as attribute lookup.

class numpy.**recarray**

Construct an ndarray that allows field access using attributes.

Arrays may have a data-types containing fields, analogous to columns in a spread sheet. An example is `[(x, int), (y, float)]`, where each entry in the array is a pair of `(int, float)`. Normally, these attributes are accessed using dictionary lookups such as `arr['x']` and `arr['y']`. Record arrays allow the fields to be accessed as members of the array, using `arr.x` and `arr.y`.

Parameters **shape** : tuple

Shape of output array.

dtype : data-type, optional

The desired data-type. By default, the data-type is determined from *formats*, *names*, *titles*, *aligned* and *byteorder*.

formats : list of data-types, optional

A list containing the data-types for the different columns, e.g. `['i4', 'f8', 'i4']`. *formats* does *not* support the new convention of using types directly, i.e.

`(int, float, int)`. Note that *formats* must be a list, not a tuple. Given that *formats* is somewhat limited, we recommend specifying *dtype* instead.

names : tuple of str, optional

The name of each column, e.g. `('x', 'y', 'z')`.

buf : buffer, optional

By default, a new array is created of the given shape and data-type. If *buf* is specified and is an object exposing the buffer interface, the array will use the memory from the existing buffer. In this case, the *offset* and *strides* keywords are available.

Returns **rec** : recarray

Empty array of the given shape and type.

Other Parameters **titles** : tuple of str, optional

Aliases for column names. For example, if *names* were `('x', 'y', 'z')` and *titles* is `('x_coordinate', 'y_coordinate', 'z_coordinate')`, then `arr['x']` is equivalent to both `arr.x` and `arr.x_coordinate`.

byteorder : {'<', '>', '='}, optional

Byte-order for all fields.

aligned : bool, optional

Align the fields in memory as the C-compiler would.

strides : tuple of ints, optional

Buffer (*buf*) is interpreted according to these strides (strides define how many bytes each array element, row, column, etc. occupy in memory).

offset : int, optional

Start reading buffer (*buf*) from this offset onwards.

order : {'C', 'F'}, optional

Row-major (C-style) or column-major (Fortran-style) order.

See also:

`rec.fromrecords` Construct a record array from data.

record fundamental data-type for *recarray*.

format_parser determine a data-type from formats, names, titles.

Notes

This constructor can be compared to `empty`: it creates a new record array but does not fill it with data. To create a record array from data, use one of the following methods:

1. Create a standard ndarray and convert it to a record array, using `arr.view(np.recarray)`
2. Use the *buf* keyword.
3. Use *np.rec.fromrecords*.

Examples

Create an array with two fields, x and y:

```
>>> x = np.array([(1.0, 2), (3.0, 4)], dtype=[('x', float), ('y', int)])
>>> x
array([(1.0, 2), (3.0, 4)],
      dtype=[('x', '<f8'), ('y', '<i4')])
```

```
>>> x['x']
array([ 1.,  3.])
```

View the array as a record array:

```
>>> x = x.view(np.recarray)
```

```
>>> x.x
array([ 1.,  3.])
```

```
>>> x.y
array([2, 4])
```

Create a new, empty record array:

```
>>> np.recarray((2,),
... dtype=[('x', int), ('y', float), ('z', int)])
rec.array([(-1073741821, 1.2249118382103472e-301, 24547520),
       (3471280, 1.2134086255804012e-316, 0)],
      dtype=[('x', '<i4'), ('y', '<f8'), ('z', '<i4')])
```

Attributes

T	Same as self.transpose(), except that self is returned if self.ndim < 2.
base	Base object if memory is from some other object.
ctypes	An object to simplify the interaction of the array with the ctypes module.
data	Python buffer object pointing to the start of the array's data.
dtype	Data-type of the array's elements.
flags	Information about the memory layout of the array.
flat	A 1-D iterator over the array.
imag	The imaginary part of the array.
itemsize	Length of one array element in bytes.
nbytes	Total bytes consumed by the elements of the array.
ndim	Number of array dimensions.
real	The real part of the array.
shape	Tuple of array dimensions.
size	Number of elements in the array.
strides	Tuple of bytes to step in each dimension when traversing an array.

recarray.**T**
Same as self.transpose(), except that self is returned if self.ndim < 2.

Examples

```
>>> x = np.array([[1.,2.],[3.,4.]])
>>> x
array([[ 1.,  2.],
       [ 3.,  4.]])
>>> x.T
array([[ 1.,  3.],
       [ 2.,  4.]])
>>> x = np.array([1.,2.,3.,4.])
>>> x
array([ 1.,  2.,  3.,  4.])
>>> x.T
array([ 1.,  2.,  3.,  4.])
```

recarray.**base**
Base object if memory is from some other object.

Examples

The base of an array that owns its memory is None:

```
>>> x = np.array([1,2,3,4])
>>> x.base is None
True
```

Slicing creates a view, whose memory is shared with x:

```
>>> y = x[2:]
>>> y.base is x
True
```

recarray.**ctypes**
An object to simplify the interaction of the array with the ctypes module.

This attribute creates an object that makes it easier to use arrays when calling shared libraries with the ctypes module. The returned object has, among others, data, shape, and strides attributes (see Notes below) which themselves return ctypes objects that can be used as arguments to a shared library.

Parameters None

Returns **c** : Python object

Possessing attributes data, shape, strides, etc.

See also:

numpy.ctypeslib

Notes

Below are the public attributes of this object which were documented in "Guide to NumPy" (we have omitted undocumented public attributes, as well as documented private attributes):

- data: A pointer to the memory area of the array as a Python integer. This memory area may contain data that is not aligned, or not in correct byte-order. The memory area may not even be writeable. The array flags and data-type of this array should be respected when passing this attribute to arbitrary C-code to avoid trouble that can include Python crashing. User Beware! The value of this attribute is exactly the same as self._array_interface_['data'][0].
- shape (c_intp*self.ndim): A ctypes array of length self.ndim where the basetype is the C-integer corresponding to dtype('p') on this platform. This base-type could be c_int, c_long, or c_longlong depending on the platform. The c_intp type is defined accordingly in numpy.ctypeslib. The ctypes array contains the shape of the underlying array.
- strides (c_intp*self.ndim): A ctypes array of length self.ndim where the basetype is the same as for the shape attribute. This ctypes array contains the strides information from the underlying array. This strides information is important for showing how many bytes must be jumped to get to the next element in the array.
- data_as(obj): Return the data pointer cast to a particular c-types object. For example, calling self._as_parameter_ is equivalent to self.data_as(ctypes.c_void_p). Perhaps you want to use the data as a pointer to a ctypes array of floating-point data: self.data_as(ctypes.POINTER(ctypes.c_double)).
- shape_as(obj): Return the shape tuple as an array of some other c-types type. For example: self.shape_as(ctypes.c_short).
- strides_as(obj): Return the strides tuple as an array of some other c-types type. For example: self.strides_as(ctypes.c_longlong).

Be careful using the ctypes attribute - especially on temporary arrays or arrays constructed on the fly. For example, calling `(a+b).ctypes.data_as(ctypes.c_void_p)` returns a pointer to memory that is invalid because the array created as (a+b) is deallocated before the next Python statement. You can avoid this problem using either `c=a+b` or `ct=(a+b).ctypes`. In the latter case, ct will hold a reference to the array until ct is deleted or re-assigned.

If the ctypes module is not available, then the ctypes attribute of array objects still returns something useful, but ctypes objects are not returned and errors may be raised instead. In particular, the object will still have the as parameter attribute which will return an integer equal to the data attribute.

Examples

```
>>> import ctypes
>>> x
array([[0, 1],
       [2, 3]])
>>> x.ctypes.data
30439712
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_long))
<ctypes.LP_c_long object at 0x01F01300>
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_long)).contents
c_long(0)
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_longlong)).contents
c_longlong(4294967296L)
>>> x.ctypes.shape
<numpy.core._internal.c_long_Array_2 object at 0x01FFD580>
>>> x.ctypes.shape_as(ctypes.c_long)
<numpy.core._internal.c_long_Array_2 object at 0x01FCE620>
>>> x.ctypes.strides
<numpy.core._internal.c_long_Array_2 object at 0x01FCE620>
```

(continues on next page)

(continued from previous page)

```
>>> x.ctypes.strides_as(ctypes.c_longlong)
<numpy.core._internal.c_longlong_Array_2 object at 0x01F01300>
```

recarray.**data**
Python buffer object pointing to the start of the array's data.

recarray.**dtype**
Data-type of the array's elements.

Parameters None

Returns **d** : numpy dtype object

See also:

numpy.dtype

Examples

```
>>> x
array([[0, 1],
       [2, 3]])
>>> x.dtype
dtype('int32')
>>> type(x.dtype)
<type 'numpy.dtype'>
```

recarray.**flags**
Information about the memory layout of the array.

Notes

The *flags* object can be accessed dictionary-like (as in `a.flags['WRITEABLE']`), or by using lowercased attribute names (as in `a.flags.writeable`). Short flag names are only supported in dictionary access.

Only the WRITEBACKIFCOPY, UPDATEIFCOPY, WRITEABLE, and ALIGNED flags can be changed by the user, via direct assignment to the attribute or dictionary entry, or by calling *ndarray.setflags*.

The array flags cannot be set arbitrarily:

- UPDATEIFCOPY can only be set `False`.
- WRITEBACKIFCOPY can only be set `False`.
- ALIGNED can only be set `True` if the data is truly aligned.
- WRITEABLE can only be set `True` if the array owns its own memory or the ultimate owner of the memory exposes a writeable buffer interface or is a string.

Arrays can be both C-style and Fortran-style contiguous simultaneously. This is clear for 1-dimensional arrays, but can also be true for higher dimensional arrays.

Even for contiguous arrays a stride for a given dimension `arr.strides[dim]` may be *arbitrary* if `arr.shape[dim] == 1` or the array has no elements. It does *not* generally hold that `self.strides[-1] == self.itemsize` for C-style contiguous arrays or `self.strides[0] == self.itemsize` for Fortran-style contiguous arrays is true.

Attributes

C_CONTIGUOUS (C)	The data is in a single, C-style contiguous segment.
F_CONTIGUOUS (F)	The data is in a single, Fortran-style contiguous segment.
OWNDATA (O)	The array owns the memory it uses or borrows it from another object.
WRITEABLE (W)	The data area can be written to. Setting this to False locks the data, making it read-only. A view (slice, etc.) inherits WRITEABLE from its base array at creation time, but a view of a writeable array may be subsequently locked while the base array remains writeable. (The opposite is not true, in that a view of a locked array may not be made writeable. However, currently, locking a base object does not lock any views that already reference it, so under that circumstance it is possible to alter the contents of a locked array via a previously created writeable view onto it.) Attempting to change a non-writeable array raises a RuntimeError exception.
ALIGNED (A)	The data and all elements are aligned appropriately for the hardware.
WRITEBACKIFCOPY (X)	This array is a copy of some other array. The C-API function PyArray_ResolveWritebackIfCopy must be called before deallocating to the base array will be updated with the contents of this array.
UPDATEIFCOPY (U)	(Deprecated, use WRITEBACKIFCOPY) This array is a copy of some other array. When this array is deallocated, the base array will be updated with the contents of this array.
FNC	F_CONTIGUOUS and not C_CONTIGUOUS.
FORC	F_CONTIGUOUS or C_CONTIGUOUS (one-segment test).
BEHAVED (B)	ALIGNED and WRITEABLE.
CARRAY (CA)	BEHAVED and C_CONTIGUOUS.
FARRAY (FA)	BEHAVED and F_CONTIGUOUS and not C_CONTIGUOUS.

recarray.**flat**
A 1-D iterator over the array.

This is a *numpy.flatiter* instance, which acts similarly to, but is not a subclass of, Python's built-in iterator object.

See also:

flatten Return a copy of the array collapsed into one dimension.

flatiter

Examples

```
>>> x = np.arange(1, 7).reshape(2, 3)
>>> x
array([[1, 2, 3],
       [4, 5, 6]])
>>> x.flat[3]
4
>>> x.T
array([[1, 4],
       [2, 5],
       [3, 6]])
>>> x.T.flat[3]
5
>>> type(x.flat)
<type 'numpy.flatiter'>
```

An assignment example:

```
>>> x.flat = 3; x
array([[3, 3, 3],
       [3, 3, 3]])
>>> x.flat[[1,4]] = 1; x
array([[3, 1, 3],
       [3, 1, 3]])
```

recarray.**imag**
The imaginary part of the array.

Examples

```
>>> x = np.sqrt([1+0j, 0+1j])
>>> x.imag
array([ 0.        ,  0.70710678])
>>> x.imag.dtype
dtype('float64')
```

recarray.**itemsize**
Length of one array element in bytes.

Examples

```
>>> x = np.array([1,2,3], dtype=np.float64)
>>> x.itemsize
8
>>> x = np.array([1,2,3], dtype=np.complex128)
>>> x.itemsize
16
```

recarray.**nbytes**
Total bytes consumed by the elements of the array.

Notes

Does not include memory consumed by non-element attributes of the array object.

Examples

```
>>> x = np.zeros((3,5,2), dtype=np.complex128)
>>> x.nbytes
480
>>> np.prod(x.shape) * x.itemsize
480
```

recarray.**ndim**
Number of array dimensions.

Examples

```
>>> x = np.array([1, 2, 3])
>>> x.ndim
1
>>> y = np.zeros((2, 3, 4))
>>> y.ndim
3
```

recarray.**real**
The real part of the array.

See also:

numpy.real equivalent function

Examples

```
>>> x = np.sqrt([1+0j, 0+1j])
>>> x.real
array([ 1.        ,  0.70710678])
>>> x.real.dtype
dtype('float64')
```

recarray.**shape**
Tuple of array dimensions.

The shape property is usually used to get the current shape of an array, but may also be used to reshape the array in-place by assigning a tuple of array dimensions to it. As with *numpy.reshape*, one of the new shape dimensions can be -1, in which case its value is inferred from the size of the array and the remaining dimensions. Reshaping an array in-place will fail if a copy is required.

See also:

numpy.reshape similar function

ndarray.reshape similar method

Examples

```
>>> x = np.array([1, 2, 3, 4])
>>> x.shape
(4,)
>>> y = np.zeros((2, 3, 4))
>>> y.shape
(2, 3, 4)
>>> y.shape = (3, 8)
>>> y
array([[ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.],
       [ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.],
       [ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.]])
>>> y.shape = (3, 6)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: total size of new array must be unchanged
>>> np.zeros((4,2))[::2].shape = (-1,)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
AttributeError: incompatible shape for a non-contiguous array
```

recarray.**size**

Number of elements in the array.

Equivalent to `np.prod(a.shape)`, i.e., the product of the array's dimensions.

Examples

```
>>> x = np.zeros((3, 5, 2), dtype=np.complex128)
>>> x.size
30
>>> np.prod(x.shape)
30
```

recarray.**strides**

Tuple of bytes to step in each dimension when traversing an array.

The byte offset of element `(i[0], i[1], ..., i[n])` in an array *a* is:

```
offset = sum(np.array(i) * a.strides)
```

A more detailed explanation of strides can be found in the "ndarray.rst" file in the NumPy reference guide.

See also:

numpy.lib.stride_tricks.as_strided

Notes

Imagine an array of 32-bit integers (each 4 bytes):

```
x = np.array([[0, 1, 2, 3, 4],
              [5, 6, 7, 8, 9]], dtype=np.int32)
```

This array is stored in memory as 40 bytes, one after the other (known as a contiguous block of memory). The strides of an array tell us how many bytes we have to skip in memory to move to the next position along a certain axis. For example, we have to skip 4 bytes (1 value) to move to the next column, but 20 bytes (5 values) to get to the same position in the next row. As such, the strides for the array *x* will be `(20, 4)`.

Examples

```
>>> y = np.reshape(np.arange(2*3*4), (2,3,4))
>>> y
array([[[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]],
       [[12, 13, 14, 15],
        [16, 17, 18, 19],
        [20, 21, 22, 23]]])
>>> y.strides
(48, 16, 4)
>>> y[1,1,1]
17
>>> offset=sum(y.strides * np.array((1,1,1)))
>>> offset/y.itemsize
17
```

```
>>> x = np.reshape(np.arange(5*6*7*8), (5,6,7,8)).transpose(2,3,1,0)
>>> x.strides
(32, 4, 224, 1344)
>>> i = np.array([3,5,2,2])
>>> offset = sum(i * x.strides)
>>> x[3,5,2,2]
813
>>> offset / x.itemsize
813
```

Methods

all([axis, out, keepdims])	Returns True if all elements evaluate to True.
any([axis, out, keepdims])	Returns True if any of the elements of *a* evaluate to True.
argmax([axis, out])	Return indices of the maximum values along the given axis.
argmin([axis, out])	Return indices of the minimum values along the given axis of *a*.
argpartition(kth[, axis, kind, order])	Returns the indices that would partition this array.
argsort([axis, kind, order])	Returns the indices that would sort this array.
astype(dtype[, order, casting, subok, copy])	Copy of the array, cast to a specified type.
byteswap([inplace])	Swap the bytes of the array elements
choose(choices[, out, mode])	Use an index array to construct a new array from a set of choices.
clip([min, max, out])	Return an array whose values are limited to `[min, max]`.
compress(condition[, axis, out])	Return selected slices of this array along given axis.

Continued on next page

Table 49 – continued from previous page

conj()	Complex-conjugate all elements.
conjugate()	Return the complex conjugate, element-wise.
copy([order])	Return a copy of the array.
cumprod([axis, dtype, out])	Return the cumulative product of the elements along the given axis.
cumsum([axis, dtype, out])	Return the cumulative sum of the elements along the given axis.
diagonal([offset, axis1, axis2])	Return specified diagonals.
dot(b[, out])	Dot product of two arrays.
dump(file)	Dump a pickle of the array to the specified file.
dumps()	Returns the pickle of the array as a string.
field(attr[, val])	
fill(value)	Fill the array with a scalar value.
flatten([order])	Return a copy of the array collapsed into one dimension.
getfield(dtype[, offset])	Returns a field of the given array as a certain type.
item(*args)	Copy an element of an array to a standard Python scalar and return it.
itemset(*args)	Insert scalar into an array (scalar is cast to array's dtype, if possible)
max([axis, out, keepdims])	Return the maximum along a given axis.
mean([axis, dtype, out, keepdims])	Returns the average of the array elements along given axis.
min([axis, out, keepdims])	Return the minimum along a given axis.
newbyteorder([new_order])	Return the array with the same data viewed with a different byte order.
nonzero()	Return the indices of the elements that are non-zero.
partition(kth[, axis, kind, order])	Rearranges the elements in the array in such a way that value of the element in kth position is in the position it would be in a sorted array.
prod([axis, dtype, out, keepdims])	Return the product of the array elements over the given axis
ptp([axis, out])	Peak to peak (maximum - minimum) value along a given axis.
put(indices, values[, mode])	Set `a.flat[n] = values[n]` for all *n* in indices.
ravel([order])	Return a flattened array.
repeat(repeats[, axis])	Repeat elements of an array.
reshape(shape[, order])	Returns an array containing the same data with a new shape.
resize(new_shape[, refcheck])	Change shape and size of array in-place.
round([decimals, out])	Return *a* with each element rounded to the given number of decimals.
searchsorted(v[, side, sorter])	Find indices where elements of v should be inserted in a to maintain order.
setfield(val, dtype[, offset])	Put a value into a specified place in a field defined by a data-type.
setflags([write, align, uic])	Set array flags WRITEABLE, ALIGNED, (WRITEBACKIFCOPY and UPDATEIFCOPY), respectively.
sort([axis, kind, order])	Sort an array, in-place.
squeeze([axis])	Remove single-dimensional entries from the shape of *a*.
std([axis, dtype, out, ddof, keepdims])	Returns the standard deviation of the array elements along given axis.

Continued on next page

Table 49 – continued from previous page

sum([axis, dtype, out, keepdims])	Return the sum of the array elements over the given axis.
swapaxes(axis1, axis2)	Return a view of the array with *axis1* and *axis2* interchanged.
take(indices[, axis, out, mode])	Return an array formed from the elements of *a* at the given indices.
tobytes([order])	Construct Python bytes containing the raw data bytes in the array.
tofile(fid[, sep, format])	Write array to a file as text or binary (default).
tolist()	Return the array as a (possibly nested) list.
tostring([order])	Construct Python bytes containing the raw data bytes in the array.
trace([offset, axis1, axis2, dtype, out])	Return the sum along diagonals of the array.
transpose(*axes)	Returns a view of the array with axes transposed.
var([axis, dtype, out, ddof, keepdims])	Returns the variance of the array elements, along given axis.
view([dtype, type])	New view of array with the same data.

recarray.**all**(*axis=None*, *out=None*, *keepdims=False*)
Returns True if all elements evaluate to True.

Refer to *numpy.all* for full documentation.

See also:

numpy.all equivalent function

recarray.**any**(*axis=None*, *out=None*, *keepdims=False*)
Returns True if any of the elements of *a* evaluate to True.

Refer to *numpy.any* for full documentation.

See also:

numpy.any equivalent function

recarray.**argmax**(*axis=None*, *out=None*)
Return indices of the maximum values along the given axis.

Refer to *numpy.argmax* for full documentation.

See also:

numpy.argmax equivalent function

recarray.**argmin**(*axis=None*, *out=None*)
Return indices of the minimum values along the given axis of *a*.

Refer to *numpy.argmin* for detailed documentation.

See also:

numpy.argmin equivalent function

recarray.**argpartition**(*kth*, *axis=-1*, *kind='introselect'*, *order=None*)
Returns the indices that would partition this array.

Refer to *numpy.argpartition* for full documentation.

New in version 1.8.0.

See also:

numpy.argpartition equivalent function

recarray.**argsort**(*axis=-1*, *kind='quicksort'*, *order=None*)
Returns the indices that would sort this array.

Refer to *numpy.argsort* for full documentation.

See also:

numpy.argsort equivalent function

recarray.**astype**(*dtype*, *order='K'*, *casting='unsafe'*, *subok=True*, *copy=True*)
Copy of the array, cast to a specified type.

Parameters **dtype** : str or dtype

Typecode or data-type to which the array is cast.

order : {'C', 'F', 'A', 'K'}, optional

Controls the memory layout order of the result. 'C' means C order, 'F' means Fortran order, 'A' means 'F' order if all the arrays are Fortran contiguous, 'C' order otherwise, and 'K' means as close to the order the array elements appear in memory as possible. Default is 'K'.

casting : {'no', 'equiv', 'safe', 'same_kind', 'unsafe'}, optional

Controls what kind of data casting may occur. Defaults to 'unsafe' for backwards compatibility.

- 'no' means the data types should not be cast at all.
- 'equiv' means only byte-order changes are allowed.
- 'safe' means only casts which can preserve values are allowed.
- 'same_kind' means only safe casts or casts within a kind, like float64 to float32, are allowed.
- 'unsafe' means any data conversions may be done.

subok : bool, optional

If True, then sub-classes will be passed-through (default), otherwise the returned array will be forced to be a base-class array.

copy : bool, optional

By default, astype always returns a newly allocated array. If this is set to false, and the *dtype*, *order*, and *subok* requirements are satisfied, the input array is returned instead of a copy.

Returns **arr_t** : ndarray

Unless *copy* is False and the other conditions for returning the input array are satisfied (see description for *copy* input parameter), *arr_t* is a new array of the same shape as the input array, with dtype, order given by *dtype*, *order*.

Raises **ComplexWarning**

When casting from complex to float or int. To avoid this, one should use `a.real.astype(t)`.

Notes

Starting in NumPy 1.9, astype method now returns an error if the string dtype to cast to is not long enough in 'safe' casting mode to hold the max value of integer/float array that is being casted. Previously the casting was allowed even if the result was truncated.

Examples

```
>>> x = np.array([1, 2, 2.5])
>>> x
array([ 1. ,  2. ,  2.5])
```

```
>>> x.astype(int)
array([1, 2, 2])
```

`recarray.`**`byteswap`**(*inplace=False*)

Swap the bytes of the array elements

Toggle between low-endian and big-endian data representation by returning a byteswapped array, optionally swapped in-place.

Parameters **inplace** : bool, optional

If `True`, swap bytes in-place, default is `False`.

Returns **out** : ndarray

The byteswapped array. If *inplace* is `True`, this is a view to self.

Examples

```
>>> A = np.array([1, 256, 8755], dtype=np.int16)
>>> map(hex, A)
['0x1', '0x100', '0x2233']
>>> A.byteswap(inplace=True)
array([  256,     1, 13090], dtype=int16)
>>> map(hex, A)
['0x100', '0x1', '0x3322']
```

Arrays of strings are not swapped

```
>>> A = np.array(['ceg', 'fac'])
>>> A.byteswap()
array(['ceg', 'fac'],
      dtype='|S3')
```

`recarray.`**`choose`**(*choices*, *out=None*, *mode='raise'*)

Use an index array to construct a new array from a set of choices.

Refer to *numpy.choose* for full documentation.

See also:

numpy.choose equivalent function

recarray.**clip**(*min=None*, *max=None*, *out=None*)
Return an array whose values are limited to `[min, max]`. One of max or min must be given.

Refer to *numpy.clip* for full documentation.

See also:

numpy.clip equivalent function

recarray.**compress**(*condition*, *axis=None*, *out=None*)
Return selected slices of this array along given axis.

Refer to *numpy.compress* for full documentation.

See also:

numpy.compress equivalent function

recarray.**conj**()
Complex-conjugate all elements.

Refer to `numpy.conjugate` for full documentation.

See also:

numpy.conjugate equivalent function

recarray.**conjugate**()
Return the complex conjugate, element-wise.

Refer to `numpy.conjugate` for full documentation.

See also:

numpy.conjugate equivalent function

recarray.**copy**(*order='C'*)
Return a copy of the array.

Parameters **order** : {'C', 'F', 'A', 'K'}, optional

Controls the memory layout of the copy. 'C' means C-order, 'F' means F-order, 'A' means 'F' if *a* is Fortran contiguous, 'C' otherwise. 'K' means match the layout of *a* as closely as possible. (Note that this function and *numpy.copy* are very similar, but have different default values for their order= arguments.)

See also:

numpy.copy, *numpy.copyto*

Examples

```
>>> x = np.array([[1,2,3],[4,5,6]], order='F')
```

```
>>> y = x.copy()
```

```
>>> x.fill(0)
```

```
>>> x
array([[0, 0, 0],
       [0, 0, 0]])
```

```
>>> y
array([[1, 2, 3],
       [4, 5, 6]])
```

```
>>> y.flags['C_CONTIGUOUS']
True
```

recarray.**cumprod**(*axis=None*, *dtype=None*, *out=None*)
Return the cumulative product of the elements along the given axis.

Refer to *numpy.cumprod* for full documentation.

See also:

numpy.cumprod equivalent function

recarray.**cumsum**(*axis=None*, *dtype=None*, *out=None*)
Return the cumulative sum of the elements along the given axis.

Refer to *numpy.cumsum* for full documentation.

See also:

numpy.cumsum equivalent function

recarray.**diagonal**(*offset=0*, *axis1=0*, *axis2=1*)
Return specified diagonals. In NumPy 1.9 the returned array is a read-only view instead of a copy as in previous NumPy versions. In a future version the read-only restriction will be removed.

Refer to *numpy.diagonal* for full documentation.

See also:

numpy.diagonal equivalent function

recarray.**dot**(*b*, *out=None*)
Dot product of two arrays.

Refer to *numpy.dot* for full documentation.

See also:

numpy.dot equivalent function

Examples

```
>>> a = np.eye(2)
>>> b = np.ones((2, 2)) * 2
>>> a.dot(b)
```

(continues on next page)

(continued from previous page)

```
array([[ 2.,  2.],
       [ 2.,  2.]])
```

This array method can be conveniently chained:

```
>>> a.dot(b).dot(b)
array([[ 8.,  8.],
       [ 8.,  8.]])
```

recarray.**dump**(*file*)

Dump a pickle of the array to the specified file. The array can be read back with pickle.load or numpy.load.

Parameters **file** : str

A string naming the dump file.

recarray.**dumps**()

Returns the pickle of the array as a string. pickle.loads or numpy.loads will convert the string back to an array.

Parameters **None**

recarray.**field**(*attr*, *val=None*)

recarray.**fill**(*value*)

Fill the array with a scalar value.

Parameters **value** : scalar

All elements of *a* will be assigned this value.

Examples

```
>>> a = np.array([1, 2])
>>> a.fill(0)
>>> a
array([0, 0])
>>> a = np.empty(2)
>>> a.fill(1)
>>> a
array([ 1.,  1.])
```

recarray.**flatten**(*order='C'*)

Return a copy of the array collapsed into one dimension.

Parameters **order** : {'C', 'F', 'A', 'K'}, optional

'C' means to flatten in row-major (C-style) order. 'F' means to flatten in column-major (Fortran- style) order. 'A' means to flatten in column-major order if *a* is Fortran *contiguous* in memory, row-major order otherwise. 'K' means to flatten *a* in the order the elements occur in memory. The default is 'C'.

Returns **y** : ndarray

A copy of the input array, flattened to one dimension.

See also:

ravel Return a flattened array.

flat A 1-D flat iterator over the array.

Examples

```
>>> a = np.array([[1,2], [3,4]])
>>> a.flatten()
array([1, 2, 3, 4])
>>> a.flatten('F')
array([1, 3, 2, 4])
```

recarray.**getfield**(*dtype*, *offset=0*)

Returns a field of the given array as a certain type.

A field is a view of the array data with a given data-type. The values in the view are determined by the given type and the offset into the current array in bytes. The offset needs to be such that the view dtype fits in the array dtype; for example an array of dtype complex128 has 16-byte elements. If taking a view with a 32-bit integer (4 bytes), the offset needs to be between 0 and 12 bytes.

Parameters **dtype** : str or dtype

The data type of the view. The dtype size of the view can not be larger than that of the array itself.

offset : int

Number of bytes to skip before beginning the element view.

Examples

```
>>> x = np.diag([1.+1.j]*2)
>>> x[1, 1] = 2 + 4.j
>>> x
array([[ 1.+1.j,  0.+0.j],
       [ 0.+0.j,  2.+4.j]])
>>> x.getfield(np.float64)
array([[ 1.,  0.],
       [ 0.,  2.]])
```

By choosing an offset of 8 bytes we can select the complex part of the array for our view:

```
>>> x.getfield(np.float64, offset=8)
array([[ 1.,  0.],
   [ 0.,  4.]])
```

recarray.**item**(**args*)

Copy an element of an array to a standard Python scalar and return it.

Parameters ***args** : Arguments (variable number and type)

- none: in this case, the method only works for arrays with one element (*a.size == 1*), which element is copied into a standard Python scalar object and returned.
- int_type: this argument is interpreted as a flat index into the array, specifying which element to copy and return.
- tuple of int_types: functions as does a single int_type argument, except that the argument is interpreted as an nd-index into the array.

Returns **z** : Standard Python scalar object

A copy of the specified element of the array as a suitable Python scalar

Notes

When the data type of *a* is longdouble or clongdouble, item() returns a scalar array object because there is no available Python scalar that would not lose information. Void arrays return a buffer object for item(), unless fields are defined, in which case a tuple is returned.

item is very similar to a[args], except, instead of an array scalar, a standard Python scalar is returned. This can be useful for speeding up access to elements of the array and doing arithmetic on elements of the array using Python's optimized math.

Examples

```
>>> x = np.random.randint(9, size=(3, 3))
>>> x
array([[3, 1, 7],
       [2, 8, 3],
       [8, 5, 3]])
>>> x.item(3)
2
>>> x.item(7)
5
>>> x.item((0, 1))
1
>>> x.item((2, 2))
3
```

recarray.**itemset**(**args*)

Insert scalar into an array (scalar is cast to array's dtype, if possible)

There must be at least 1 argument, and define the last argument as *item*. Then, `a.itemset(*args)` is equivalent to but faster than `a[args] = item`. The item should be a scalar value and *args* must select a single item in the array *a*.

Parameters ***args** : Arguments

If one argument: a scalar, only used in case *a* is of size 1. If two arguments: the last argument is the value to be set and must be a scalar, the first argument specifies a single array element location. It is either an int or a tuple.

Notes

Compared to indexing syntax, *itemset* provides some speed increase for placing a scalar into a particular location in an *ndarray*, if you must do this. However, generally this is discouraged: among other problems, it complicates the appearance of the code. Also, when using *itemset* (and *item*) inside a loop, be sure to assign the methods to a local variable to avoid the attribute look-up at each loop iteration.

Examples

```
>>> x = np.random.randint(9, size=(3, 3))
>>> x
array([[3, 1, 7],
       [2, 8, 3],
       [8, 5, 3]])
>>> x.itemset(4, 0)
>>> x.itemset((2, 2), 9)
>>> x
array([[3, 1, 7],
       [2, 0, 3],
       [8, 5, 9]])
```

recarray.**max**(*axis=None*, *out=None*, *keepdims=False*)
Return the maximum along a given axis.

Refer to *numpy.amax* for full documentation.

See also:

numpy.amax equivalent function

recarray.**mean**(*axis=None*, *dtype=None*, *out=None*, *keepdims=False*)
Returns the average of the array elements along given axis.

Refer to *numpy.mean* for full documentation.

See also:

numpy.mean equivalent function

recarray.**min**(*axis=None*, *out=None*, *keepdims=False*)
Return the minimum along a given axis.

Refer to *numpy.amin* for full documentation.

See also:

numpy.amin equivalent function

recarray.**newbyteorder**(*new_order='S'*)
Return the array with the same data viewed with a different byte order.

Equivalent to:

```
arr.view(arr.dtype.newbytorder(new_order))
```

Changes are also made in all fields and sub-arrays of the array data type.

Parameters **new_order** : string, optional

Byte order to force; a value from the byte order specifications below. *new_order* codes can be any of:

- 'S' - swap dtype from current to opposite endian
- {'<', 'L'} - little endian
- {'>', 'B'} - big endian

- {'=', 'N'} - native order
- {'|', 'I'} - ignore (no change to byte order)

The default value ('S') results in swapping the current byte order. The code does a case-insensitive check on the first letter of *new_order* for the alternatives above. For example, any of 'B' or 'b' or 'biggish' are valid to specify big-endian.

Returns **new_arr** : array

New array object with the dtype reflecting given change to the byte order.

recarray.**nonzero**()

Return the indices of the elements that are non-zero.

Refer to *numpy.nonzero* for full documentation.

See also:

numpy.nonzero equivalent function

recarray.**partition**(*kth*, *axis=-1*, *kind='introselect'*, *order=None*)

Rearranges the elements in the array in such a way that value of the element in kth position is in the position it would be in a sorted array. All elements smaller than the kth element are moved before this element and all equal or greater are moved behind it. The ordering of the elements in the two partitions is undefined.

New in version 1.8.0.

Parameters **kth** : int or sequence of ints

Element index to partition by. The kth element value will be in its final sorted position and all smaller elements will be moved before it and all equal or greater elements behind it. The order all elements in the partitions is undefined. If provided with a sequence of kth it will partition all elements indexed by kth of them into their sorted position at once.

axis : int, optional

Axis along which to sort. Default is -1, which means sort along the last axis.

kind : {'introselect'}, optional

Selection algorithm. Default is 'introselect'.

order : str or list of str, optional

When *a* is an array with fields defined, this argument specifies which fields to compare first, second, etc. A single field can be specified as a string, and not all fields need be specified, but unspecified fields will still be used, in the order in which they come up in the dtype, to break ties.

See also:

numpy.partition Return a parititioned copy of an array.

argpartition Indirect partition.

sort Full sort.

Notes

See `np.partition` for notes on the different algorithms.

Examples

```
>>> a = np.array([3, 4, 2, 1])
>>> a.partition(3)
>>> a
array([2, 1, 3, 4])
```

```
>>> a.partition((1, 3))
array([1, 2, 3, 4])
```

recarray.**prod**(*axis=None*, *dtype=None*, *out=None*, *keepdims=False*)
Return the product of the array elements over the given axis

Refer to *numpy.prod* for full documentation.

See also:

numpy.prod equivalent function

recarray.**ptp**(*axis=None*, *out=None*)
Peak to peak (maximum - minimum) value along a given axis.

Refer to *numpy.ptp* for full documentation.

See also:

numpy.ptp equivalent function

recarray.**put**(*indices*, *values*, *mode='raise'*)
Set `a.flat[n] = values[n]` for all *n* in indices.

Refer to *numpy.put* for full documentation.

See also:

numpy.put equivalent function

recarray.**ravel**([*order*])
Return a flattened array.

Refer to *numpy.ravel* for full documentation.

See also:

numpy.ravel equivalent function

ndarray.flat a flat iterator on the array.

recarray.**repeat**(*repeats*, *axis=None*)
Repeat elements of an array.

Refer to *numpy.repeat* for full documentation.

See also:

numpy.repeat equivalent function

recarray.**reshape**(*shape*, *order='C'*)

Returns an array containing the same data with a new shape.

Refer to *numpy.reshape* for full documentation.

See also:

numpy.reshape equivalent function

Notes

Unlike the free function *numpy.reshape*, this method on *ndarray* allows the elements of the shape parameter to be passed in as separate arguments. For example, `a.reshape(10, 11)` is equivalent to `a.reshape((10, 11))`.

recarray.**resize**(*new_shape*, *refcheck=True*)

Change shape and size of array in-place.

Parameters **new_shape** : tuple of ints, or *n* ints

Shape of resized array.

refcheck : bool, optional

If False, reference count will not be checked. Default is True.

Returns None

Raises **ValueError**

If *a* does not own its own data or references or views to it exist, and the data memory must be changed. PyPy only: will always raise if the data memory must be changed, since there is no reliable way to determine if references or views to it exist.

SystemError

If the *order* keyword argument is specified. This behaviour is a bug in NumPy.

See also:

resize Return a new array with the specified shape.

Notes

This reallocates space for the data area if necessary.

Only contiguous arrays (data elements consecutive in memory) can be resized.

The purpose of the reference count check is to make sure you do not use this array as a buffer for another Python object and then reallocate the memory. However, reference counts can increase in other ways so if you are sure that you have not shared the memory for this array with another Python object, then you may safely set *refcheck* to False.

Examples

Shrinking an array: array is flattened (in the order that the data are stored in memory), resized, and reshaped:

```
>>> a = np.array([[0, 1], [2, 3]], order='C')
>>> a.resize((2, 1))
>>> a
array([[0],
       [1]])
```

```
>>> a = np.array([[0, 1], [2, 3]], order='F')
>>> a.resize((2, 1))
>>> a
array([[0],
       [2]])
```

Enlarging an array: as above, but missing entries are filled with zeros:

```
>>> b = np.array([[0, 1], [2, 3]])
>>> b.resize(2, 3) # new_shape parameter doesn't have to be a tuple
>>> b
array([[0, 1, 2],
       [3, 0, 0]])
```

Referencing an array prevents resizing...

```
>>> c = a
>>> a.resize((1, 1))
Traceback (most recent call last):
...
ValueError: cannot resize an array that has been referenced ...
```

Unless *refcheck* is False:

```
>>> a.resize((1, 1), refcheck=False)
>>> a
array([[0]])
>>> c
array([[0]])
```

recarray.**round**(*decimals=0*, *out=None*)

Return *a* with each element rounded to the given number of decimals.

Refer to *numpy.around* for full documentation.

See also:

numpy.around equivalent function

recarray.**searchsorted**(*v*, *side='left'*, *sorter=None*)

Find indices where elements of v should be inserted in a to maintain order.

For full documentation, see *numpy.searchsorted*

See also:

numpy.searchsorted equivalent function

recarray.**setfield**(*val*, *dtype*, *offset=0*)

Put a value into a specified place in a field defined by a data-type.

Place *val* into *a*'s field defined by *dtype* and beginning *offset* bytes into the field.

Parameters **val** : object

Value to be placed in field.

dtype : dtype object

Data-type of the field in which to place *val*.

offset : int, optional

The number of bytes into the field at which to place *val*.

Returns None

See also:

getfield

Examples

```
>>> x = np.eye(3)
>>> x.getfield(np.float64)
array([[ 1.,  0.,  0.],
       [ 0.,  1.,  0.],
       [ 0.,  0.,  1.]])
>>> x.setfield(3, np.int32)
>>> x.getfield(np.int32)
array([[3, 3, 3],
       [3, 3, 3],
       [3, 3, 3]])
>>> x
array([[  1.00000000e+000,   1.48219694e-323,   1.48219694e-323],
       [  1.48219694e-323,   1.00000000e+000,   1.48219694e-323],
       [  1.48219694e-323,   1.48219694e-323,   1.00000000e+000]])
>>> x.setfield(np.eye(3), np.int32)
>>> x
array([[ 1.,  0.,  0.],
       [ 0.,  1.,  0.],
       [ 0.,  0.,  1.]])
```

recarray.**setflags**(*write=None*, *align=None*, *uic=None*)

Set array flags WRITEABLE, ALIGNED, (WRITEBACKIFCOPY and UPDATEIFCOPY), respectively.

These Boolean-valued flags affect how numpy interprets the memory area used by *a* (see Notes below). The ALIGNED flag can only be set to True if the data is actually aligned according to the type. The WRITEBACKIFCOPY and (deprecated) UPDATEIFCOPY flags can never be set to True. The flag WRITEABLE can only be set to True if the array owns its own memory, or the ultimate owner of the memory exposes a writeable buffer interface, or is a string. (The exception for string is made so that unpickling can be done without copying memory.)

Parameters **write** : bool, optional

Describes whether or not *a* can be written to.

align : bool, optional

Describes whether or not *a* is aligned properly for its type.

uic : bool, optional

Describes whether or not *a* is a copy of another "base" array.

Notes

Array flags provide information about how the memory area used for the array is to be interpreted. There are 7 Boolean flags in use, only four of which can be changed by the user: WRITEBACKIFCOPY, UPDATEIFCOPY, WRITEABLE, and ALIGNED.

WRITEABLE (W) the data area can be written to;

ALIGNED (A) the data and strides are aligned appropriately for the hardware (as determined by the compiler);

UPDATEIFCOPY (U) (deprecated), replaced by WRITEBACKIFCOPY;

WRITEBACKIFCOPY (X) this array is a copy of some other array (referenced by .base). When the C-API function PyArray_ResolveWritebackIfCopy is called, the base array will be updated with the contents of this array.

All flags can be accessed using the single (upper case) letter as well as the full name.

Examples

```
>>> y
array([[3, 1, 7],
       [2, 0, 0],
       [8, 5, 9]])
>>> y.flags
  C_CONTIGUOUS : True
  F_CONTIGUOUS : False
  OWNDATA : True
  WRITEABLE : True
  ALIGNED : True
  WRITEBACKIFCOPY : False
  UPDATEIFCOPY : False
>>> y.setflags(write=0, align=0)
>>> y.flags
  C_CONTIGUOUS : True
  F_CONTIGUOUS : False
  OWNDATA : True
  WRITEABLE : False
  ALIGNED : False
  WRITEBACKIFCOPY : False
  UPDATEIFCOPY : False
>>> y.setflags(uic=1)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: cannot set WRITEBACKIFCOPY flag to True
```

recarray.**sort**(*axis=-1*, *kind='quicksort'*, *order=None*)

Sort an array, in-place.

Parameters **axis** : int, optional

Axis along which to sort. Default is -1, which means sort along the last axis.

kind : {'quicksort', 'mergesort', 'heapsort'}, optional

Sorting algorithm. Default is 'quicksort'.

order : str or list of str, optional

When *a* is an array with fields defined, this argument specifies which fields to compare first, second, etc. A single field can be specified as a string, and not all fields need be specified, but unspecified fields will still be used, in the order in which they come up in the dtype, to break ties.

See also:

numpy.sort Return a sorted copy of an array.

argsort Indirect sort.

lexsort Indirect stable sort on multiple keys.

searchsorted Find elements in sorted array.

partition Partial sort.

Notes

See `sort` for notes on the different sorting algorithms.

Examples

```
>>> a = np.array([[1,4], [3,1]])
>>> a.sort(axis=1)
>>> a
array([[1, 4],
       [1, 3]])
>>> a.sort(axis=0)
>>> a
array([[1, 3],
       [1, 4]])
```

Use the *order* keyword to specify a field to use when sorting a structured array:

```
>>> a = np.array([('a', 2), ('c', 1)], dtype=[('x', 'S1'), ('y', int)])
>>> a.sort(order='y')
>>> a
array([('c', 1), ('a', 2)],
      dtype=[('x', '|S1'), ('y', '<i4')])
```

`recarray.`**`squeeze`**(*axis=None*)

Remove single-dimensional entries from the shape of *a*.

Refer to *numpy.squeeze* for full documentation.

See also:

numpy.squeeze equivalent function

`recarray.`**`std`**(*axis=None*, *dtype=None*, *out=None*, *ddof=0*, *keepdims=False*)

Returns the standard deviation of the array elements along given axis.

Refer to *numpy.std* for full documentation.

See also:

numpy.std equivalent function

recarray.**sum**(*axis=None*, *dtype=None*, *out=None*, *keepdims=False*)
Return the sum of the array elements over the given axis.

Refer to *numpy.sum* for full documentation.

See also:

numpy.sum equivalent function

recarray.**swapaxes**(*axis1*, *axis2*)
Return a view of the array with *axis1* and *axis2* interchanged.

Refer to *numpy.swapaxes* for full documentation.

See also:

numpy.swapaxes equivalent function

recarray.**take**(*indices*, *axis=None*, *out=None*, *mode='raise'*)
Return an array formed from the elements of *a* at the given indices.

Refer to *numpy.take* for full documentation.

See also:

numpy.take equivalent function

recarray.**tobytes**(*order='C'*)
Construct Python bytes containing the raw data bytes in the array.

Constructs Python bytes showing a copy of the raw contents of data memory. The bytes object can be produced in either 'C' or 'Fortran', or 'Any' order (the default is 'C'-order). 'Any' order means C-order unless the F_CONTIGUOUS flag in the array is set, in which case it means 'Fortran' order.

New in version 1.9.0.

Parameters **order** : {'C', 'F', None}, optional

Order of the data for multidimensional arrays: C, Fortran, or the same as for the original array.

Returns **s** : bytes

Python bytes exhibiting a copy of *a*'s raw data.

Examples

```
>>> x = np.array([[0, 1], [2, 3]])
>>> x.tobytes()
b'\x00\x00\x00\x00\x01\x00\x00\x00\x02\x00\x00\x00\x03\x00\x00\x00'
>>> x.tobytes('C') == x.tobytes()
True
>>> x.tobytes('F')
b'\x00\x00\x00\x00\x02\x00\x00\x00\x01\x00\x00\x00\x03\x00\x00\x00'
```

recarray.**tofile**(*fid*, *sep=""*, *format="%s"*)
Write array to a file as text or binary (default).

Data is always written in 'C' order, independent of the order of *a*. The data produced by this method can be recovered using the function fromfile().

Parameters **fid** : file or str

An open file object, or a string containing a filename.

sep : str

Separator between array items for text output. If "" (empty), a binary file is written, equivalent to `file.write(a.tobytes())`.

format : str

Format string for text file output. Each entry in the array is formatted to text by first converting it to the closest Python type, and then using "format" % item.

Notes

This is a convenience function for quick storage of array data. Information on endianness and precision is lost, so this method is not a good choice for files intended to archive data or transport data between machines with different endianness. Some of these problems can be overcome by outputting the data as text files, at the expense of speed and file size.

`recarray.`**`tolist`**`()`

Return the array as a (possibly nested) list.

Return a copy of the array data as a (nested) Python list. Data items are converted to the nearest compatible Python type.

Parameters **none**

Returns **y** : list

The possibly nested list of array elements.

Notes

The array may be recreated, `a = np.array(a.tolist())`.

Examples

```
>>> a = np.array([1, 2])
>>> a.tolist()
[1, 2]
>>> a = np.array([[1, 2], [3, 4]])
>>> list(a)
[array([1, 2]), array([3, 4])]
>>> a.tolist()
[[1, 2], [3, 4]]
```

`recarray.`**`tostring`**`(`*order='C'*`)`

Construct Python bytes containing the raw data bytes in the array.

Constructs Python bytes showing a copy of the raw contents of data memory. The bytes object can be produced in either 'C' or 'Fortran', or 'Any' order (the default is 'C'-order). 'Any' order means C-order unless the F_CONTIGUOUS flag in the array is set, in which case it means 'Fortran' order.

This function is a compatibility alias for tobytes. Despite its name it returns bytes not strings.

Parameters **order** : {'C', 'F', None}, optional

Order of the data for multidimensional arrays: C, Fortran, or the same as for the original array.

Returns **s** : bytes

Python bytes exhibiting a copy of *a*'s raw data.

Examples

```
>>> x = np.array([[0, 1], [2, 3]])
>>> x.tobytes()
b'\x00\x00\x00\x00\x01\x00\x00\x00\x02\x00\x00\x00\x03\x00\x00\x00'
>>> x.tobytes('C') == x.tobytes()
True
>>> x.tobytes('F')
b'\x00\x00\x00\x00\x02\x00\x00\x00\x01\x00\x00\x00\x03\x00\x00\x00'
```

recarray.**trace**(*offset=0*, *axis1=0*, *axis2=1*, *dtype=None*, *out=None*)

Return the sum along diagonals of the array.

Refer to *numpy.trace* for full documentation.

See also:

numpy.trace equivalent function

recarray.**transpose**(**axes*)

Returns a view of the array with axes transposed.

For a 1-D array, this has no effect. (To change between column and row vectors, first cast the 1-D array into a matrix object.) For a 2-D array, this is the usual matrix transpose. For an n-D array, if axes are given, their order indicates how the axes are permuted (see Examples). If axes are not provided and `a.shape = (i[0], i[1], ... i[n-2], i[n-1])`, then `a.transpose().shape = (i[n-1], i[n-2], ... i[1], i[0])`.

Parameters **axes** : None, tuple of ints, or *n* ints

- None or no argument: reverses the order of the axes.
- tuple of ints: *i* in the *j*-th place in the tuple means *a*'s *i*-th axis becomes *a.transpose()*'s *j*-th axis.
- *n* ints: same as an n-tuple of the same ints (this form is intended simply as a "convenience" alternative to the tuple form)

Returns **out** : ndarray

View of *a*, with axes suitably permuted.

See also:

ndarray.T Array property returning the array transposed.

Examples

```
>>> a = np.array([[1, 2], [3, 4]])
>>> a
array([[1, 2],
       [3, 4]])
>>> a.transpose()
array([[1, 3],
       [2, 4]])
>>> a.transpose((1, 0))
array([[1, 3],
       [2, 4]])
>>> a.transpose(1, 0)
array([[1, 3],
       [2, 4]])
```

recarray.**var**(*axis=None*, *dtype=None*, *out=None*, *ddof=0*, *keepdims=False*)

Returns the variance of the array elements, along given axis.

Refer to *numpy.var* for full documentation.

See also:

numpy.var equivalent function

recarray.**view**(*dtype=None*, *type=None*)

New view of array with the same data.

Parameters **dtype** : data-type or ndarray sub-class, optional

Data-type descriptor of the returned view, e.g., float32 or int16. The default, None, results in the view having the same data-type as *a*. This argument can also be specified as an ndarray sub-class, which then specifies the type of the returned object (this is equivalent to setting the `type` parameter).

type : Python type, optional

Type of the returned view, e.g., ndarray or matrix. Again, the default None results in type preservation.

Notes

`a.view()` is used two different ways:

`a.view(some_dtype)` or `a.view(dtype=some_dtype)` constructs a view of the array's memory with a different data-type. This can cause a reinterpretation of the bytes of memory.

`a.view(ndarray_subclass)` or `a.view(type=ndarray_subclass)` just returns an instance of *ndarray_subclass* that looks at the same array (same shape, dtype, etc.) This does not cause a reinterpretation of the memory.

For `a.view(some_dtype)`, if `some_dtype` has a different number of bytes per entry than the previous dtype (for example, converting a regular array to a structured array), then the behavior of the view cannot be predicted just from the superficial appearance of `a` (shown by `print(a)`). It also depends on exactly how `a` is stored in memory. Therefore if `a` is C-ordered versus fortran-ordered, versus defined as a slice or transpose, etc., the view may give different results.

Examples

```
>>> x = np.array([(1, 2)], dtype=[('a', np.int8), ('b', np.int8)])
```

Viewing array data using a different type and dtype:

```
>>> y = x.view(dtype=np.int16, type=np.matrix)
>>> y
matrix([[513]], dtype=int16)
>>> print(type(y))
<class 'numpy.matrixlib.defmatrix.matrix'>
```

Creating a view on a structured array so it can be used in calculations

```
>>> x = np.array([(1, 2),(3,4)], dtype=[('a', np.int8), ('b', np.int8)])
>>> xv = x.view(dtype=np.int8).reshape(-1,2)
>>> xv
array([[1, 2],
       [3, 4]], dtype=int8)
>>> xv.mean(0)
array([ 2.,  3.])
```

Making changes to the view changes the underlying array

```
>>> xv[0,1] = 20
>>> print(x)
[(1, 20) (3, 4)]
```

Using a view to convert an array to a recarray:

```
>>> z = x.view(np.recarray)
>>> z.a
array([1], dtype=int8)
```

Views share data:

```
>>> x[0] = (9, 10)
>>> z[0]
(9, 10)
```

Views that change the dtype size (bytes per entry) should normally be avoided on arrays defined by slices, transposes, fortran-ordering, etc.:

```
>>> x = np.array([[1,2,3],[4,5,6]], dtype=np.int16)
>>> y = x[:, 0:2]
>>> y
array([[1, 2],
       [4, 5]], dtype=int16)
>>> y.view(dtype=[('width', np.int16), ('length', np.int16)])
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: new type not compatible with array.
>>> z = y.copy()
>>> z.view(dtype=[('width', np.int16), ('length', np.int16)])
array([[(1, 2)],
       [(4, 5)]], dtype=[('width', '<i2'), ('length', '<i2')])
```

class numpy.**record**
A data-type scalar that allows field access as attribute lookup.

Attributes

T	transpose
base	base object
data	pointer to start of data
dtype	dtype object
flags	integer value of flags
flat	a 1-d view of scalar
imag	imaginary part of scalar
itemsize	length of one element in bytes
nbytes	length of item in bytes
ndim	number of array dimensions
real	real part of scalar
shape	tuple of array dimensions
size	number of elements in the gentype
strides	tuple of bytes steps in each dimension

record.**T**
transpose

record.**base**
base object

record.**data**
pointer to start of data

record.**dtype**
dtype object

record.**flags**
integer value of flags

record.**flat**
a 1-d view of scalar

record.**imag**
imaginary part of scalar

record.**itemsize**
length of one element in bytes

record.**nbytes**
length of item in bytes

record.**ndim**
number of array dimensions

record.**real**
real part of scalar

record.**shape**
tuple of array dimensions

`record.`**`size`**
number of elements in the gentype

`record.`**`strides`**
tuple of bytes steps in each dimension

Methods

all	Not implemented (virtual attribute)
any	Not implemented (virtual attribute)
argmax	Not implemented (virtual attribute)
argmin	Not implemented (virtual attribute)
argsort	Not implemented (virtual attribute)
astype	Not implemented (virtual attribute)
byteswap	Not implemented (virtual attribute)
choose	Not implemented (virtual attribute)
clip	Not implemented (virtual attribute)
compress	Not implemented (virtual attribute)
conj	
conjugate	Not implemented (virtual attribute)
copy	Not implemented (virtual attribute)
cumprod	Not implemented (virtual attribute)
cumsum	Not implemented (virtual attribute)
diagonal	Not implemented (virtual attribute)
dump	Not implemented (virtual attribute)
dumps	Not implemented (virtual attribute)
fill	Not implemented (virtual attribute)
flatten	Not implemented (virtual attribute)
getfield	Not implemented (virtual attribute)
item	Not implemented (virtual attribute)
itemset	Not implemented (virtual attribute)
max	Not implemented (virtual attribute)
mean	Not implemented (virtual attribute)
min	Not implemented (virtual attribute)
newbyteorder([new_order])	Return a new *dtype* with a different byte order.
nonzero	Not implemented (virtual attribute)
pprint()	Pretty-print all fields.
prod	Not implemented (virtual attribute)
ptp	Not implemented (virtual attribute)
put	Not implemented (virtual attribute)
ravel	Not implemented (virtual attribute)
repeat	Not implemented (virtual attribute)
reshape	Not implemented (virtual attribute)
resize	Not implemented (virtual attribute)
round	Not implemented (virtual attribute)
searchsorted	Not implemented (virtual attribute)
setfield	Not implemented (virtual attribute)
setflags	Not implemented (virtual attribute)
sort	Not implemented (virtual attribute)
squeeze	Not implemented (virtual attribute)

Continued on next page

Table 51 – continued from previous page

std	Not implemented (virtual attribute)
sum	Not implemented (virtual attribute)
swapaxes	Not implemented (virtual attribute)
take	Not implemented (virtual attribute)
tobytes	
tofile	Not implemented (virtual attribute)
tolist	Not implemented (virtual attribute)
tostring	Not implemented (virtual attribute)
trace	Not implemented (virtual attribute)
transpose	Not implemented (virtual attribute)
var	Not implemented (virtual attribute)
view	Not implemented (virtual attribute)

record.**all**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**any**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**argmax**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**argmin**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**argsort**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**astype**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**byteswap**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**choose**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**clip**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**compress**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**conj**()

record.**conjugate**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**copy**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**cumprod**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**cumsum**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**diagonal**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**dump**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**dumps**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**fill**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**flatten**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**getfield**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**item**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**itemset**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**max**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**mean**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**min**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**newbyteorder**(*new_order='S'*)
Return a new *dtype* with a different byte order.

Changes are also made in all fields and sub-arrays of the data type.

The *new_order* code can be any from the following:

- 'S' - swap dtype from current to opposite endian
- {'<', 'L'} - little endian
- {'>', 'B'} - big endian
- {'=', 'N'} - native order
- {'|', 'I'} - ignore (no change to byte order)

Parameters **new_order** : str, optional

Byte order to force; a value from the byte order specifications above. The default value ('S') results in swapping the current byte order. The code does a case-insensitive check on the first letter of *new_order* for the alternatives above. For example, any of 'B' or 'b' or 'biggish' are valid to specify big-endian.

Returns **new_dtype** : dtype

New *dtype* object with the given change to the byte order.

record.**nonzero**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**pprint**()
Pretty-print all fields.

record.**prod**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**ptp**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**put**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**ravel**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**repeat**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**reshape**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**resize**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**round**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**searchsorted**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**setfield**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**setflags**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**sort**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**squeeze**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**std**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**sum**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**swapaxes**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**take**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**tobytes**()

record.**tofile**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**tolist**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**tostring**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**trace**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**transpose**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

The

record.**var**()
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

`The`

`record.`**`view`**`()`
Not implemented (virtual attribute)

Class generic exists solely to derive numpy scalars from, and possesses, albeit unimplemented, all the attributes of the ndarray class so as to provide a uniform API.

See also:

`The`

1.6.6 Masked arrays (`numpy.ma`)

See also:

Masked arrays

1.6.7 Standard container class

For backward compatibility and as a standard "container "class, the UserArray from Numeric has been brought over to NumPy and named *numpy.lib.user_array.container* The container class is a Python class whose self.array attribute is an ndarray. Multiple inheritance is probably easier with numpy.lib.user_array.container than with the ndarray itself and so it is included by default. It is not documented here beyond mentioning its existence because you are encouraged to use the ndarray class directly if you can.

numpy.lib.user_array.container(data[, ...])	Standard container-class for easy multiple-inheritance.

class numpy.lib.user_array.**container**(*data*, *dtype=None*, *copy=True*)
Standard container-class for easy multiple-inheritance.

Methods

copy	
tostring	
byteswap	
astype	

1.6.8 Array Iterators

Iterators are a powerful concept for array processing. Essentially, iterators implement a generalized for-loop. If *myiter* is an iterator object, then the Python code:

```
for val in myiter:
    ...
    some code involving val
    ...
```

calls `val = myiter.next()` repeatedly until `StopIteration` is raised by the iterator. There are several ways to iterate over an array that may be useful: default iteration, flat iteration, and N-dimensional enumeration.

Default iteration

The default iterator of an ndarray object is the default Python iterator of a sequence type. Thus, when the array object itself is used as an iterator. The default behavior is equivalent to:

```
for i in range(arr.shape[0]):
    val = arr[i]
```

This default iterator selects a sub-array of dimension $N-1$ from the array. This can be a useful construct for defining recursive algorithms. To loop over the entire array requires N for-loops.

```
>>> a = arange(24).reshape(3,2,4)+10
>>> for val in a:
...     print 'item:', val
item: [[10 11 12 13]
 [14 15 16 17]]
item: [[18 19 20 21]
 [22 23 24 25]]
item: [[26 27 28 29]
 [30 31 32 33]]
```

Flat iteration

ndarray.flat	A 1-D iterator over the array.

As mentioned previously, the flat attribute of ndarray objects returns an iterator that will cycle over the entire array in C-style contiguous order.

```
>>> for i, val in enumerate(a.flat):
...     if i%5 == 0: print i, val
0 10
5 15
10 20
15 25
20 30
```

Here, I've used the built-in enumerate iterator to return the iterator index as well as the value.

N-dimensional enumeration

ndenumerate(arr)	Multidimensional index iterator.

class numpy.**ndenumerate**(*arr*)

Multidimensional index iterator.

Return an iterator yielding pairs of array coordinates and values.

Parameters **arr** : ndarray

Input array.

See also:

ndindex, *flatiter*

Examples

```
>>> a = np.array([[1, 2], [3, 4]])
>>> for index, x in np.ndenumerate(a):
...     print(index, x)
(0, 0) 1
(0, 1) 2
(1, 0) 3
(1, 1) 4
```

Methods

next()	Standard iterator method, returns the index tuple and array value.

ndenumerate.**next**()
Standard iterator method, returns the index tuple and array value.

Returns **coords** : tuple of ints

The indices of the current iteration.

val : scalar

The array element of the current iteration.

Sometimes it may be useful to get the N-dimensional index while iterating. The ndenumerate iterator can achieve this.

```
>>> for i, val in ndenumerate(a):
...     if sum(i)%5 == 0: print i, val
(0, 0, 0) 10
(1, 1, 3) 25
(2, 0, 3) 29
(2, 1, 2) 32
```

Iterator for broadcasting

broadcast	Produce an object that mimics broadcasting.

class numpy.**broadcast**
Produce an object that mimics broadcasting.

Parameters **in1, in2, ...** : array_like

Input parameters.

Returns **b** : broadcast object

Broadcast the input parameters against one another, and return an object that encapsulates the result. Amongst others, it has `shape` and `nd` properties, and may be used as an iterator.

See also:

broadcast_arrays, *broadcast_to*

Examples

Manually adding two vectors, using broadcasting:

```
>>> x = np.array([[1], [2], [3]])
>>> y = np.array([4, 5, 6])
>>> b = np.broadcast(x, y)
```

```
>>> out = np.empty(b.shape)
>>> out.flat = [u+v for (u,v) in b]
>>> out
array([[ 5.,  6.,  7.],
       [ 6.,  7.,  8.],
       [ 7.,  8.,  9.]])
```

Compare against built-in broadcasting:

```
>>> x + y
array([[5, 6, 7],
       [6, 7, 8],
       [7, 8, 9]])
```

Attributes

index	current index in broadcasted result
iters	tuple of iterators along `self`'s "components."
shape	Shape of broadcasted result.
size	Total size of broadcasted result.

`broadcast.`**`index`**
current index in broadcasted result

Examples

```
>>> x = np.array([[1], [2], [3]])
>>> y = np.array([4, 5, 6])
>>> b = np.broadcast(x, y)
>>> b.index
0
>>> b.next(), b.next(), b.next()
((1, 4), (1, 5), (1, 6))
>>> b.index
3
```

`broadcast.`**`iters`**
tuple of iterators along `self`'s "components."

Returns a tuple of *numpy.flatiter* objects, one for each "component" of `self`.

See also:

numpy.flatiter

Examples

```
>>> x = np.array([1, 2, 3])
>>> y = np.array([[4], [5], [6]])
>>> b = np.broadcast(x, y)
>>> row, col = b.iters
>>> row.next(), col.next()
(1, 4)
```

broadcast.**shape**
Shape of broadcasted result.

Examples

```
>>> x = np.array([1, 2, 3])
>>> y = np.array([[4], [5], [6]])
>>> b = np.broadcast(x, y)
>>> b.shape
(3, 3)
```

broadcast.**size**
Total size of broadcasted result.

Examples

```
>>> x = np.array([1, 2, 3])
>>> y = np.array([[4], [5], [6]])
>>> b = np.broadcast(x, y)
>>> b.size
9
```

Methods

reset()	Reset the broadcasted result's iterator(s).

broadcast.**reset**()
Reset the broadcasted result's iterator(s).

Parameters None

Returns None

Examples

```
>>> x = np.array([1, 2, 3])
>>> y = np.array([[4], [5], [6]]
>>> b = np.broadcast(x, y)
>>> b.index
0
```

(continues on next page)

(continued from previous page)

```
>>> b.next(), b.next(), b.next()
((1, 4), (2, 4), (3, 4))
>>> b.index
3
>>> b.reset()
>>> b.index
0
```

The general concept of broadcasting is also available from Python using the *broadcast* iterator. This object takes N objects as inputs and returns an iterator that returns tuples providing each of the input sequence elements in the broadcasted result.

```
>>> for val in broadcast([[1,0],[2,3]],[0,1]):
...     print val
(1, 0)
(0, 1)
(2, 0)
(3, 1)
```

1.7 Masked arrays

Masked arrays are arrays that may have missing or invalid entries. The `numpy.ma` module provides a nearly work-alike replacement for numpy that supports data arrays with masks.

1.7.1 The `numpy.ma` module

Rationale

Masked arrays are arrays that may have missing or invalid entries. The `numpy.ma` module provides a nearly work-alike replacement for numpy that supports data arrays with masks.

What is a masked array?

In many circumstances, datasets can be incomplete or tainted by the presence of invalid data. For example, a sensor may have failed to record a data, or recorded an invalid value. The `numpy.ma` module provides a convenient way to address this issue, by introducing masked arrays.

A masked array is the combination of a standard *numpy.ndarray* and a mask. A mask is either *nomask*, indicating that no value of the associated array is invalid, or an array of booleans that determines for each element of the associated array whether the value is valid or not. When an element of the mask is `False`, the corresponding element of the associated array is valid and is said to be unmasked. When an element of the mask is `True`, the corresponding element of the associated array is said to be masked (invalid).

The package ensures that masked entries are not used in computations.

As an illustration, let's consider the following dataset:

```
>>> import numpy as np
>>> import numpy.ma as ma
>>> x = np.array([1, 2, 3, -1, 5])
```

We wish to mark the fourth entry as invalid. The easiest is to create a masked array:

```
>>> mx = ma.masked_array(x, mask=[0, 0, 0, 1, 0])
```

We can now compute the mean of the dataset, without taking the invalid data into account:

```
>>> mx.mean()
2.75
```

The `numpy.ma` module

The main feature of the `numpy.ma` module is the *`MaskedArray`* class, which is a subclass of *`numpy.ndarray`*. The class, its attributes and methods are described in more details in the *MaskedArray class* section.

The `numpy.ma` module can be used as an addition to *`numpy`*:

```
>>> import numpy as np
>>> import numpy.ma as ma
```

To create an array with the second element invalid, we would do:

```
>>> y = ma.array([1, 2, 3], mask = [0, 1, 0])
```

To create a masked array where all values close to 1.e20 are invalid, we would do:

```
>>> z = masked_values([1.0, 1.e20, 3.0, 4.0], 1.e20)
```

For a complete discussion of creation methods for masked arrays please see section *Constructing masked arrays*.

1.7.2 Using numpy.ma

Constructing masked arrays

There are several ways to construct a masked array.

- A first possibility is to directly invoke the *`MaskedArray`* class.
- A second possibility is to use the two masked array constructors, *`array`* and *`masked_array`*.

`array`(data[, dtype, copy, order, mask, ...])	An array class with possibly masked values.
`masked_array`	alias of `numpy.ma.core.MaskedArray`

numpy.ma.**array**(*data*, *dtype=None*, *copy=False*, *order=None*, *mask=False*, *fill_value=None*, *keep_mask=True*, *hard_mask=False*, *shrink=True*, *subok=True*, *ndmin=0*)

An array class with possibly masked values.

Masked values of True exclude the corresponding element from any computation.

Construction:

```
x = MaskedArray(data, mask=nomask, dtype=None, copy=False, subok=True,
                ndmin=0, fill_value=None, keep_mask=True, hard_mask=None,
                shrink=True, order=None)
```

Parameters **data** : array_like

Input data.

mask : sequence, optional

Mask. Must be convertible to an array of booleans with the same shape as *data*. True indicates a masked (i.e. invalid) data.

dtype : dtype, optional

Data type of the output. If *dtype* is None, the type of the data argument (`data.dtype`) is used. If *dtype* is not None and different from `data.dtype`, a copy is performed.

copy : bool, optional

Whether to copy the input data (True), or to use a reference instead. Default is False.

subok : bool, optional

Whether to return a subclass of *MaskedArray* if possible (True) or a plain *MaskedArray*. Default is True.

ndmin : int, optional

Minimum number of dimensions. Default is 0.

fill_value : scalar, optional

Value used to fill in the masked values when necessary. If None, a default based on the data-type is used.

keep_mask : bool, optional

Whether to combine *mask* with the mask of the input data, if any (True), or to use only *mask* for the output (False). Default is True.

hard_mask : bool, optional

Whether to use a hard mask or not. With a hard mask, masked values cannot be unmasked. Default is False.

shrink : bool, optional

Whether to force compression of an empty mask. Default is True.

order : {'C', 'F', 'A'}, optional

Specify the order of the array. If order is 'C', then the array will be in C-contiguous order (last-index varies the fastest). If order is 'F', then the returned array will be in Fortran-contiguous order (first-index varies the fastest). If order is 'A' (default), then the returned array may be in any order (either C-, Fortran-contiguous, or even discontiguous), unless a copy is required, in which case it will be C-contiguous.

`numpy.ma.`**`masked_array`**
alias of `numpy.ma.core.MaskedArray`

- A third option is to take the view of an existing array. In that case, the mask of the view is set to *nomask* if the array has no named fields, or an array of boolean with the same structure as the array otherwise.

```
>>> x = np.array([1, 2, 3])
>>> x.view(ma.MaskedArray)
masked_array(data = [1 2 3],
             mask = False,
       fill_value = 999999)
>>> x = np.array([(1, 1.), (2, 2.)], dtype=[('a',int), ('b', float)])
>>> x.view(ma.MaskedArray)
masked_array(data = [(1, 1.0) (2, 2.0)],
```

(continues on next page)

(continued from previous page)

```
             mask = [(False, False) (False, False)],
       fill_value = (999999, 1e+20),
            dtype = [('a', '<i4'), ('b', '<f8')])
```

- Yet another possibility is to use any of the following functions:

asarray(a[, dtype, order])	Convert the input to a masked array of the given data-type.
asanyarray(a[, dtype])	Convert the input to a masked array, conserving subclasses.
fix_invalid(a[, mask, copy, fill_value])	Return input with invalid data masked and replaced by a fill value.
masked_equal(x, value[, copy])	Mask an array where equal to a given value.
masked_greater(x, value[, copy])	Mask an array where greater than a given value.
masked_greater_equal(x, value[, copy])	Mask an array where greater than or equal to a given value.
masked_inside(x, v1, v2[, copy])	Mask an array inside a given interval.
masked_invalid(a[, copy])	Mask an array where invalid values occur (NaNs or infs).
masked_less(x, value[, copy])	Mask an array where less than a given value.
masked_less_equal(x, value[, copy])	Mask an array where less than or equal to a given value.
masked_not_equal(x, value[, copy])	Mask an array where *not* equal to a given value.
masked_object(x, value[, copy, shrink])	Mask the array *x* where the data are exactly equal to value.
masked_outside(x, v1, v2[, copy])	Mask an array outside a given interval.
masked_values(x, value[, rtol, atol, copy, ...])	Mask using floating point equality.
masked_where(condition, a[, copy])	Mask an array where a condition is met.

numpy.ma.**asarray**(*a*, *dtype=None*, *order=None*)

Convert the input to a masked array of the given data-type.

No copy is performed if the input is already an *ndarray*. If *a* is a subclass of *MaskedArray*, a base class *MaskedArray* is returned.

Parameters **a** : array_like

Input data, in any form that can be converted to a masked array. This includes lists, lists of tuples, tuples, tuples of tuples, tuples of lists, ndarrays and masked arrays.

dtype : dtype, optional

By default, the data-type is inferred from the input data.

order : {'C', 'F'}, optional

Whether to use row-major ('C') or column-major ('FORTRAN') memory representation. Default is 'C'.

Returns **out** : MaskedArray

Masked array interpretation of *a*.

See also:

asanyarray Similar to *asarray*, but conserves subclasses.

Examples

```
>>> x = np.arange(10.).reshape(2, 5)
>>> x
array([[ 0.,  1.,  2.,  3.,  4.],
       [ 5.,  6.,  7.,  8.,  9.]])
>>> np.ma.asarray(x)
masked_array(data =
 [[ 0.  1.  2.  3.  4.]
 [ 5.  6.  7.  8.  9.]],
             mask =
 False,
       fill_value = 1e+20)
>>> type(np.ma.asarray(x))
<class 'numpy.ma.core.MaskedArray'>
```

numpy.ma.**asanyarray**(*a*, *dtype=None*)

Convert the input to a masked array, conserving subclasses.

If *a* is a subclass of *MaskedArray*, its class is conserved. No copy is performed if the input is already an *ndarray*.

Parameters **a** : array_like

Input data, in any form that can be converted to an array.

dtype : dtype, optional

By default, the data-type is inferred from the input data.

order : {'C', 'F'}, optional

Whether to use row-major ('C') or column-major ('FORTRAN') memory representation. Default is 'C'.

Returns **out** : MaskedArray

MaskedArray interpretation of *a*.

See also:

asarray Similar to *asanyarray*, but does not conserve subclass.

Examples

```
>>> x = np.arange(10.).reshape(2, 5)
>>> x
array([[ 0.,  1.,  2.,  3.,  4.],
       [ 5.,  6.,  7.,  8.,  9.]])
>>> np.ma.asanyarray(x)
masked_array(data =
 [[ 0.  1.  2.  3.  4.]
 [ 5.  6.  7.  8.  9.]],
             mask =
 False,
       fill_value = 1e+20)
>>> type(np.ma.asanyarray(x))
<class 'numpy.ma.core.MaskedArray'>
```

numpy.ma.**fix_invalid**(*a*, *mask=False*, *copy=True*, *fill_value=None*)

Return input with invalid data masked and replaced by a fill value.

Invalid data means values of *nan*, *inf*, etc.

Parameters **a** : array_like

Input array, a (subclass of) ndarray.

mask : sequence, optional

Mask. Must be convertible to an array of booleans with the same shape as *data*. True indicates a masked (i.e. invalid) data.

copy : bool, optional

Whether to use a copy of *a* (True) or to fix *a* in place (False). Default is True.

fill_value : scalar, optional

Value used for fixing invalid data. Default is None, in which case the `a.fill_value` is used.

Returns **b** : MaskedArray

The input array with invalid entries fixed.

Notes

A copy is performed by default.

Examples

```
>>> x = np.ma.array([1., -1, np.nan, np.inf], mask=[1] + [0]*3)
>>> x
masked_array(data = [-- -1.0 nan inf],
             mask = [ True False False False],
       fill_value = 1e+20)
>>> np.ma.fix_invalid(x)
masked_array(data = [-- -1.0 -- --],
             mask = [ True False  True  True],
       fill_value = 1e+20)
```

```
>>> fixed = np.ma.fix_invalid(x)
>>> fixed.data
array([  1.00000000e+00,  -1.00000000e+00,   1.00000000e+20,
         1.00000000e+20])
>>> x.data
array([  1.,  -1.,  NaN,  Inf])
```

numpy.ma.**masked_equal**(*x*, *value*, *copy=True*)

Mask an array where equal to a given value.

This function is a shortcut to `masked_where`, with *condition* = (x == value). For floating point arrays, consider using `masked_values(x, value)`.

See also:

masked_where Mask where a condition is met.

masked_values Mask using floating point equality.

Examples

```
>>> import numpy.ma as ma
>>> a = np.arange(4)
>>> a
array([0, 1, 2, 3])
>>> ma.masked_equal(a, 2)
masked_array(data = [0 1 -- 3],
      mask = [False False  True False],
      fill_value=999999)
```

numpy.ma.**masked_greater**(*x*, *value*, *copy=True*)

Mask an array where greater than a given value.

This function is a shortcut to `masked_where`, with *condition* = (x > value).

See also:

masked_where Mask where a condition is met.

Examples

```
>>> import numpy.ma as ma
>>> a = np.arange(4)
>>> a
array([0, 1, 2, 3])
>>> ma.masked_greater(a, 2)
masked_array(data = [0 1 2 --],
      mask = [False False False  True],
      fill_value=999999)
```

numpy.ma.**masked_greater_equal**(*x*, *value*, *copy=True*)

Mask an array where greater than or equal to a given value.

This function is a shortcut to `masked_where`, with *condition* = (x >= value).

See also:

masked_where Mask where a condition is met.

Examples

```
>>> import numpy.ma as ma
>>> a = np.arange(4)
>>> a
array([0, 1, 2, 3])
>>> ma.masked_greater_equal(a, 2)
masked_array(data = [0 1 -- --],
      mask = [False False  True  True],
      fill_value=999999)
```

numpy.ma.**masked_inside**(*x*, *v1*, *v2*, *copy=True*)
Mask an array inside a given interval.

Shortcut to `masked_where`, where *condition* is True for *x* inside the interval [v1,v2] (v1 <= x <= v2). The boundaries *v1* and *v2* can be given in either order.

See also:

masked_where Mask where a condition is met.

Notes

The array *x* is prefilled with its filling value.

Examples

```
>>> import numpy.ma as ma
>>> x = [0.31, 1.2, 0.01, 0.2, -0.4, -1.1]
>>> ma.masked_inside(x, -0.3, 0.3)
masked_array(data = [0.31 1.2 -- -- -0.4 -1.1],
      mask = [False False  True  True False False],
      fill_value=1e+20)
```

The order of *v1* and *v2* doesn't matter.

```
>>> ma.masked_inside(x, 0.3, -0.3)
masked_array(data = [0.31 1.2 -- -- -0.4 -1.1],
      mask = [False False  True  True False False],
      fill_value=1e+20)
```

numpy.ma.**masked_invalid**(*a*, *copy=True*)
Mask an array where invalid values occur (NaNs or infs).

This function is a shortcut to `masked_where`, with *condition* = ~(np.isfinite(a)). Any pre-existing mask is conserved. Only applies to arrays with a dtype where NaNs or infs make sense (i.e. floating point types), but accepts any array_like object.

See also:

masked_where Mask where a condition is met.

Examples

```
>>> import numpy.ma as ma
>>> a = np.arange(5, dtype=float)
>>> a[2] = np.NaN
>>> a[3] = np.PINF
>>> a
array([  0.,   1.,  NaN,  Inf,   4.])
>>> ma.masked_invalid(a)
masked_array(data = [0.0 1.0 -- -- 4.0],
      mask = [False False  True  True False],
      fill_value=1e+20)
```

numpy.ma.**masked_less**(*x*, *value*, *copy=True*)

Mask an array where less than a given value.

This function is a shortcut to `masked_where`, with *condition* = (x < value).

See also:

masked_where Mask where a condition is met.

Examples

```
>>> import numpy.ma as ma
>>> a = np.arange(4)
>>> a
array([0, 1, 2, 3])
>>> ma.masked_less(a, 2)
masked_array(data = [-- -- 2 3],
      mask = [ True  True False False],
      fill_value=999999)
```

numpy.ma.**masked_less_equal**(*x*, *value*, *copy=True*)

Mask an array where less than or equal to a given value.

This function is a shortcut to `masked_where`, with *condition* = (x <= value).

See also:

masked_where Mask where a condition is met.

Examples

```
>>> import numpy.ma as ma
>>> a = np.arange(4)
>>> a
array([0, 1, 2, 3])
>>> ma.masked_less_equal(a, 2)
masked_array(data = [-- -- -- 3],
      mask = [ True  True  True False],
      fill_value=999999)
```

numpy.ma.**masked_not_equal**(*x*, *value*, *copy=True*)

Mask an array where *not* equal to a given value.

This function is a shortcut to `masked_where`, with *condition* = (x != value).

See also:

masked_where Mask where a condition is met.

Examples

```
>>> import numpy.ma as ma
>>> a = np.arange(4)
>>> a
array([0, 1, 2, 3])
>>> ma.masked_not_equal(a, 2)
masked_array(data = [-- -- 2 --],
      mask = [ True  True False  True],
      fill_value=999999)
```

numpy.ma.**masked_object**(*x*, *value*, *copy=True*, *shrink=True*)

Mask the array *x* where the data are exactly equal to value.

This function is similar to *masked_values*, but only suitable for object arrays: for floating point, use *masked_values* instead.

Parameters **x** : array_like

Array to mask

value : object

Comparison value

copy : {True, False}, optional

Whether to return a copy of *x*.

shrink : {True, False}, optional

Whether to collapse a mask full of False to nomask

Returns **result** : MaskedArray

The result of masking *x* where equal to *value*.

See also:

masked_where Mask where a condition is met.

masked_equal Mask where equal to a given value (integers).

masked_values Mask using floating point equality.

Examples

```
>>> import numpy.ma as ma
>>> food = np.array(['green_eggs', 'ham'], dtype=object)
>>> # don't eat spoiled food
>>> eat = ma.masked_object(food, 'green_eggs')
>>> print(eat)
[-- ham]
>>> # plain ol` ham is boring
>>> fresh_food = np.array(['cheese', 'ham', 'pineapple'], dtype=object)
>>> eat = ma.masked_object(fresh_food, 'green_eggs')
>>> print(eat)
[cheese ham pineapple]
```

Note that *mask* is set to `nomask` if possible.

```
>>> eat
masked_array(data = [cheese ham pineapple],
      mask = False,
      fill_value=?)
```

numpy.ma.**masked_outside**(*x*, *v1*, *v2*, *copy=True*)

Mask an array outside a given interval.

Shortcut to `masked_where`, where *condition* is True for *x* outside the interval [v1,v2] (x < v1)|(x > v2). The boundaries *v1* and *v2* can be given in either order.

See also:

masked_where Mask where a condition is met.

Notes

The array *x* is prefilled with its filling value.

Examples

```
>>> import numpy.ma as ma
>>> x = [0.31, 1.2, 0.01, 0.2, -0.4, -1.1]
>>> ma.masked_outside(x, -0.3, 0.3)
masked_array(data = [-- -- 0.01 0.2 -- --],
      mask = [ True  True False False  True  True],
      fill_value=1e+20)
```

The order of *v1* and *v2* doesn't matter.

```
>>> ma.masked_outside(x, 0.3, -0.3)
masked_array(data = [-- -- 0.01 0.2 -- --],
      mask = [ True  True False False  True  True],
      fill_value=1e+20)
```

numpy.ma.**masked_values**(*x*, *value*, *rtol=1e-05*, *atol=1e-08*, *copy=True*, *shrink=True*)

Mask using floating point equality.

Return a MaskedArray, masked where the data in array *x* are approximately equal to *value*, determined using *isclose*. The default tolerances for *masked_values* are the same as those for *isclose*.

For integer types, exact equality is used, in the same way as *masked_equal*.

The fill_value is set to *value* and the mask is set to `nomask` if possible.

Parameters **x** : array_like

Array to mask.

value : float

Masking value.

rtol, atol : float, optional

Tolerance parameters passed on to *isclose*

copy : bool, optional

Whether to return a copy of *x*.

shrink : bool, optional

Whether to collapse a mask full of False to `nomask`.

Returns **result** : MaskedArray

The result of masking *x* where approximately equal to *value*.

See also:

masked_where Mask where a condition is met.

masked_equal Mask where equal to a given value (integers).

Examples

```
>>> import numpy.ma as ma
>>> x = np.array([1, 1.1, 2, 1.1, 3])
>>> ma.masked_values(x, 1.1)
masked_array(data = [1.0 -- 2.0 -- 3.0],
      mask = [False  True False  True False],
      fill_value=1.1)
```

Note that *mask* is set to `nomask` if possible.

```
>>> ma.masked_values(x, 1.5)
masked_array(data = [ 1.   1.1  2.   1.1  3. ],
      mask = False,
      fill_value=1.5)
```

For integers, the fill value will be different in general to the result of `masked_equal`.

```
>>> x = np.arange(5)
>>> x
array([0, 1, 2, 3, 4])
>>> ma.masked_values(x, 2)
masked_array(data = [0 1 -- 3 4],
      mask = [False False  True False False],
      fill_value=2)
>>> ma.masked_equal(x, 2)
masked_array(data = [0 1 -- 3 4],
      mask = [False False  True False False],
      fill_value=999999)
```

`numpy.ma.`**`masked_where`**(*condition*, *a*, *copy=True*)

Mask an array where a condition is met.

Return *a* as an array masked where *condition* is True. Any masked values of *a* or *condition* are also masked in the output.

Parameters **condition** : array_like

Masking condition. When *condition* tests floating point values for equality, consider using `masked_values` instead.

a : array_like

Array to mask.

copy : bool

If True (default) make a copy of *a* in the result. If False modify *a* in place and return a view.

Returns **result** : MaskedArray

The result of masking *a* where *condition* is True.

See also:

masked_values Mask using floating point equality.

masked_equal Mask where equal to a given value.

masked_not_equal Mask where *not* equal to a given value.

masked_less_equal Mask where less than or equal to a given value.

masked_greater_equal Mask where greater than or equal to a given value.

masked_less Mask where less than a given value.

masked_greater Mask where greater than a given value.

masked_inside Mask inside a given interval.

masked_outside Mask outside a given interval.

masked_invalid Mask invalid values (NaNs or infs).

Examples

```
>>> import numpy.ma as ma
>>> a = np.arange(4)
>>> a
array([0, 1, 2, 3])
>>> ma.masked_where(a <= 2, a)
masked_array(data = [-- -- -- 3],
      mask = [ True  True  True False],
      fill_value=999999)
```

Mask array *b* conditional on *a*.

```
>>> b = ['a', 'b', 'c', 'd']
>>> ma.masked_where(a == 2, b)
masked_array(data = [a b -- d],
      mask = [False False  True False],
      fill_value=N/A)
```

Effect of the *copy* argument.

```
>>> c = ma.masked_where(a <= 2, a)
>>> c
masked_array(data = [-- -- -- 3],
      mask = [ True  True  True False],
      fill_value=999999)
>>> c[0] = 99
>>> c
masked_array(data = [99 -- -- 3],
```

(continues on next page)

(continued from previous page)

```
      mask = [False  True  True False],
      fill_value=999999)
>>> a
array([0, 1, 2, 3])
>>> c = ma.masked_where(a <= 2, a, copy=False)
>>> c[0] = 99
>>> c
masked_array(data = [99 -- -- 3],
      mask = [False  True  True False],
      fill_value=999999)
>>> a
array([99,  1,  2,  3])
```

When *condition* or *a* contain masked values.

```
>>> a = np.arange(4)
>>> a = ma.masked_where(a == 2, a)
>>> a
masked_array(data = [0 1 -- 3],
      mask = [False False  True False],
      fill_value=999999)
>>> b = np.arange(4)
>>> b = ma.masked_where(b == 0, b)
>>> b
masked_array(data = [-- 1 2 3],
      mask = [ True False False False],
      fill_value=999999)
>>> ma.masked_where(a == 3, b)
masked_array(data = [-- 1 -- --],
      mask = [ True False  True  True],
      fill_value=999999)
```

Accessing the data

The underlying data of a masked array can be accessed in several ways:

- through the *data* attribute. The output is a view of the array as a *numpy.ndarray* or one of its subclasses, depending on the type of the underlying data at the masked array creation.
- through the *__array__* method. The output is then a *numpy.ndarray*.
- by directly taking a view of the masked array as a *numpy.ndarray* or one of its subclass (which is actually what using the *data* attribute does).
- by using the *getdata* function.

None of these methods is completely satisfactory if some entries have been marked as invalid. As a general rule, where a representation of the array is required without any masked entries, it is recommended to fill the array with the *filled* method.

Accessing the mask

The mask of a masked array is accessible through its *mask* attribute. We must keep in mind that a `True` entry in the mask indicates an *invalid* data.

Another possibility is to use the *getmask* and *getmaskarray* functions. `getmask(x)` outputs the mask of `x` if `x` is a masked array, and the special value *nomask* otherwise. `getmaskarray(x)` outputs the mask of `x` if `x` is a masked array. If `x` has no invalid entry or is not a masked array, the function outputs a boolean array of `False` with as many elements as `x`.

Accessing only the valid entries

To retrieve only the valid entries, we can use the inverse of the mask as an index. The inverse of the mask can be calculated with the *numpy.logical_not* function or simply with the ~ operator:

```
>>> x = ma.array([[1, 2], [3, 4]], mask=[[0, 1], [1, 0]])
>>> x[~x.mask]
masked_array(data = [1 4],
             mask = [False False],
       fill_value = 999999)
```

Another way to retrieve the valid data is to use the *compressed* method, which returns a one-dimensional *ndarray* (or one of its subclasses, depending on the value of the *baseclass* attribute):

```
>>> x.compressed()
array([1, 4])
```

Note that the output of *compressed* is always 1D.

Modifying the mask

Masking an entry

The recommended way to mark one or several specific entries of a masked array as invalid is to assign the special value *masked* to them:

```
>>> x = ma.array([1, 2, 3])
>>> x[0] = ma.masked
>>> x
masked_array(data = [-- 2 3],
             mask = [ True False False],
       fill_value = 999999)
>>> y = ma.array([[1, 2, 3], [4, 5, 6], [7, 8, 9]])
>>> y[(0, 1, 2), (1, 2, 0)] = ma.masked
>>> y
masked_array(data =
 [[1 -- 3]
  [4 5 --]
  [-- 8 9]],
             mask =
 [[False  True False]
  [False False  True]
  [ True False False]],
       fill_value = 999999)
>>> z = ma.array([1, 2, 3, 4])
>>> z[:-2] = ma.masked
>>> z
masked_array(data = [-- -- 3 4],
             mask = [ True  True False False],
       fill_value = 999999)
```

A second possibility is to modify the *mask* directly, but this usage is discouraged.

Note: When creating a new masked array with a simple, non-structured datatype, the mask is initially set to the special value *nomask*, that corresponds roughly to the boolean `False`. Trying to set an element of *nomask* will fail with a `TypeError` exception, as a boolean does not support item assignment.

All the entries of an array can be masked at once by assigning `True` to the mask:

```
>>> x = ma.array([1, 2, 3], mask=[0, 0, 1])
>>> x.mask = True
>>> x
masked_array(data = [-- -- --],
             mask = [ True  True  True],
       fill_value = 999999)
```

Finally, specific entries can be masked and/or unmasked by assigning to the mask a sequence of booleans:

```
>>> x = ma.array([1, 2, 3])
>>> x.mask = [0, 1, 0]
>>> x
masked_array(data = [1 -- 3],
             mask = [False  True False],
       fill_value = 999999)
```

Unmasking an entry

To unmask one or several specific entries, we can just assign one or several new valid values to them:

```
>>> x = ma.array([1, 2, 3], mask=[0, 0, 1])
>>> x
masked_array(data = [1 2 --],
             mask = [False False  True],
       fill_value = 999999)
>>> x[-1] = 5
>>> x
masked_array(data = [1 2 5],
             mask = [False False False],
       fill_value = 999999)
```

Note: Unmasking an entry by direct assignment will silently fail if the masked array has a *hard* mask, as shown by the `hardmask` attribute. This feature was introduced to prevent overwriting the mask. To force the unmasking of an entry where the array has a hard mask, the mask must first to be softened using the *soften_mask* method before the allocation. It can be re-hardened with *harden_mask*:

```
>>> x = ma.array([1, 2, 3], mask=[0, 0, 1], hard_mask=True)
>>> x
masked_array(data = [1 2 --],
             mask = [False False  True],
       fill_value = 999999)
>>> x[-1] = 5
>>> x
masked_array(data = [1 2 --],
             mask = [False False  True],
```

(continues on next page)

(continued from previous page)

```
       fill_value = 999999)
>>> x.soften_mask()
>>> x[-1] = 5
>>> x
masked_array(data = [1 2 5],
             mask = [False False  False],
       fill_value = 999999)
>>> x.harden_mask()
```

To unmask all masked entries of a masked array (provided the mask isn't a hard mask), the simplest solution is to assign the constant *nomask* to the mask:

```
>>> x = ma.array([1, 2, 3], mask=[0, 0, 1])
>>> x
masked_array(data = [1 2 --],
             mask = [False False  True],
       fill_value = 999999)
>>> x.mask = ma.nomask
>>> x
masked_array(data = [1 2 3],
             mask = [False False False],
       fill_value = 999999)
```

Indexing and slicing

As a *MaskedArray* is a subclass of *numpy.ndarray*, it inherits its mechanisms for indexing and slicing.

When accessing a single entry of a masked array with no named fields, the output is either a scalar (if the corresponding entry of the mask is `False`) or the special value *masked* (if the corresponding entry of the mask is `True`):

```
>>> x = ma.array([1, 2, 3], mask=[0, 0, 1])
>>> x[0]
1
>>> x[-1]
masked_array(data = --,
             mask = True,
       fill_value = 1e+20)
>>> x[-1] is ma.masked
True
```

If the masked array has named fields, accessing a single entry returns a `numpy.void` object if none of the fields are masked, or a 0d masked array with the same dtype as the initial array if at least one of the fields is masked.

```
>>> y = ma.masked_array([(1,2), (3, 4)],
...                     mask=[(0, 0), (0, 1)],
...                    dtype=[('a', int), ('b', int)])
>>> y[0]
(1, 2)
>>> y[-1]
masked_array(data = (3, --),
             mask = (False, True),
       fill_value = (999999, 999999),
            dtype = [('a', '<i4'), ('b', '<i4')])
```

When accessing a slice, the output is a masked array whose *data* attribute is a view of the original data, and whose mask is either *nomask* (if there was no invalid entries in the original array) or a view of the corresponding slice of the original mask. The view is required to ensure propagation of any modification of the mask to the original.

```
>>> x = ma.array([1, 2, 3, 4, 5], mask=[0, 1, 0, 0, 1])
>>> mx = x[:3]
>>> mx
masked_array(data = [1 -- 3],
             mask = [False  True False],
       fill_value = 999999)
>>> mx[1] = -1
>>> mx
masked_array(data = [1 -1 3],
             mask = [False False False],
       fill_value = 999999)
>>> x.mask
array([False,  True, False, False,  True])
>>> x.data
array([ 1, -1,  3,  4,  5])
```

Accessing a field of a masked array with structured datatype returns a *MaskedArray*.

Operations on masked arrays

Arithmetic and comparison operations are supported by masked arrays. As much as possible, invalid entries of a masked array are not processed, meaning that the corresponding `data` entries *should* be the same before and after the operation.

Warning: We need to stress that this behavior may not be systematic, that masked data may be affected by the operation in some cases and therefore users should not rely on this data remaining unchanged.

The `numpy.ma` module comes with a specific implementation of most ufuncs. Unary and binary functions that have a validity domain (such as *log* or *divide*) return the *masked* constant whenever the input is masked or falls outside the validity domain:

```
>>> ma.log([-1, 0, 1, 2])
masked_array(data = [-- -- 0.0 0.69314718056],
             mask = [ True  True False False],
       fill_value = 1e+20)
```

Masked arrays also support standard numpy ufuncs. The output is then a masked array. The result of a unary ufunc is masked wherever the input is masked. The result of a binary ufunc is masked wherever any of the input is masked. If the ufunc also returns the optional context output (a 3-element tuple containing the name of the ufunc, its arguments and its domain), the context is processed and entries of the output masked array are masked wherever the corresponding input fall outside the validity domain:

```
>>> x = ma.array([-1, 1, 0, 2, 3], mask=[0, 0, 0, 0, 1])
>>> np.log(x)
masked_array(data = [-- -- 0.0 0.69314718056 --],
             mask = [ True  True False False  True],
       fill_value = 1e+20)
```

1.7.3 Examples

Data with a given value representing missing data

Let's consider a list of elements, `x`, where values of -9999. represent missing data. We wish to compute the average value of the data and the vector of anomalies (deviations from the average):

```
>>> import numpy.ma as ma
>>> x = [0.,1.,-9999.,3.,4.]
>>> mx = ma.masked_values (x, -9999.)
>>> print mx.mean()
2.0
>>> print mx - mx.mean()
[-2.0 -1.0 -- 1.0 2.0]
>>> print mx.anom()
[-2.0 -1.0 -- 1.0 2.0]
```

Filling in the missing data

Suppose now that we wish to print that same data, but with the missing values replaced by the average value.

```
>>> print mx.filled(mx.mean())
[ 0.  1.  2.  3.  4.]
```

Numerical operations

Numerical operations can be easily performed without worrying about missing values, dividing by zero, square roots of negative numbers, etc.:

```
>>> import numpy as np, numpy.ma as ma
>>> x = ma.array([1., -1., 3., 4., 5., 6.], mask=[0,0,0,0,1,0])
>>> y = ma.array([1., 2., 0., 4., 5., 6.], mask=[0,0,0,0,0,1])
>>> print np.sqrt(x/y)
[1.0 -- -- 1.0 -- --]
```

Four values of the output are invalid: the first one comes from taking the square root of a negative number, the second from the division by zero, and the last two where the inputs were masked.

Ignoring extreme values

Let's consider an array `d` of random floats between 0 and 1. We wish to compute the average of the values of `d` while ignoring any data outside the range `[0.1, 0.9]`:

```
>>> print ma.masked_outside(d, 0.1, 0.9).mean()
```

1.7.4 Constants of the `numpy.ma` module

In addition to the *MaskedArray* class, the `numpy.ma` module defines several constants.

`numpy.ma.`**`masked`**

The *masked* constant is a special case of *MaskedArray*, with a float datatype and a null shape. It is used to test whether a specific entry of a masked array is masked, or to mask one or several entries of a masked array:

```
>>> x = ma.array([1, 2, 3], mask=[0, 1, 0])
>>> x[1] is ma.masked
True
>>> x[-1] = ma.masked
>>> x
masked_array(data = [1 -- --],
             mask = [False  True  True],
       fill_value = 999999)
```

numpy.ma.**nomask**
Value indicating that a masked array has no invalid entry. *nomask* is used internally to speed up computations when the mask is not needed.

numpy.ma.**masked_print_options**
String used in lieu of missing data when a masked array is printed. By default, this string is `'--'`.

1.7.5 The MaskedArray class

class numpy.ma.**MaskedArray**

A subclass of *ndarray* designed to manipulate numerical arrays with missing data.

An instance of *MaskedArray* can be thought as the combination of several elements:

- The *data*, as a regular *numpy.ndarray* of any shape or datatype (the data).
- A boolean *mask* with the same shape as the data, where a `True` value indicates that the corresponding element of the data is invalid. The special value *nomask* is also acceptable for arrays without named fields, and indicates that no data is invalid.
- A *fill_value*, a value that may be used to replace the invalid entries in order to return a standard *numpy.ndarray*.

Attributes and properties of masked arrays

See also:

Array Attributes

MaskedArray.**data**
Returns the underlying data, as a view of the masked array. If the underlying data is a subclass of *numpy.ndarray*, it is returned as such.

```
>>> x = ma.array(np.matrix([[1, 2], [3, 4]]), mask=[[0, 1], [1, 0]])
>>> x.data
matrix([[1, 2],
        [3, 4]])
```

The type of the data can be accessed through the *baseclass* attribute.

MaskedArray.**mask**
Returns the underlying mask, as an array with the same shape and structure as the data, but where all fields are atomically booleans. A value of `True` indicates an invalid entry.

MaskedArray.**recordmask**
Returns the mask of the array if it has no named fields. For structured arrays, returns a ndarray of booleans where entries are `True` if **all** the fields are masked, `False` otherwise:

```
>>> x = ma.array([(1, 1), (2, 2), (3, 3), (4, 4), (5, 5)],
...              mask=[(0, 0), (1, 0), (1, 1), (0, 1), (0, 0)],
...             dtype=[('a', int), ('b', int)])
>>> x.recordmask
array([False, False,  True, False, False])
```

MaskedArray.**fill_value**
: Returns the value used to fill the invalid entries of a masked array. The value is either a scalar (if the masked array has no named fields), or a 0-D ndarray with the same *dtype* as the masked array if it has named fields.

  The default filling value depends on the datatype of the array:

datatype	default
bool	True
int	999999
float	1.e20
complex	1.e20+0j
object	'?'
string	'N/A'

MaskedArray.**baseclass**
: Returns the class of the underlying data.

```
>>> x =  ma.array(np.matrix([[1, 2], [3, 4]]), mask=[[0, 0], [1, 0]])
>>> x.baseclass
<class 'numpy.matrixlib.defmatrix.matrix'>
```

MaskedArray.**sharedmask**
: Returns whether the mask of the array is shared between several masked arrays. If this is the case, any modification to the mask of one array will be propagated to the others.

MaskedArray.**hardmask**
: Returns whether the mask is hard (`True`) or soft (`False`). When the mask is hard, masked entries cannot be unmasked.

As *MaskedArray* is a subclass of *ndarray*, a masked array also inherits all the attributes and properties of a *ndarray* instance.

MaskedArray.base	Base object if memory is from some other object.
MaskedArray.ctypes	An object to simplify the interaction of the array with the ctypes module.
MaskedArray.dtype	Data-type of the array's elements.
MaskedArray.flags	Information about the memory layout of the array.
MaskedArray.itemsize	Length of one array element in bytes.
MaskedArray.nbytes	Total bytes consumed by the elements of the array.
MaskedArray.ndim	Number of array dimensions.
MaskedArray.shape	Tuple of array dimensions.
MaskedArray.size	Number of elements in the array.
MaskedArray.strides	Tuple of bytes to step in each dimension when traversing an array.
MaskedArray.imag	Imaginary part.
MaskedArray.real	Real part
MaskedArray.flat	Flat version of the array.

Continued on next page

Table 61 – continued from previous page

MaskedArray.__array_priority__

MaskedArray.**base**

Base object if memory is from some other object.

Examples

The base of an array that owns its memory is None:

```
>>> x = np.array([1,2,3,4])
>>> x.base is None
True
```

Slicing creates a view, whose memory is shared with x:

```
>>> y = x[2:]
>>> y.base is x
True
```

MaskedArray.**ctypes**

An object to simplify the interaction of the array with the ctypes module.

This attribute creates an object that makes it easier to use arrays when calling shared libraries with the ctypes module. The returned object has, among others, data, shape, and strides attributes (see Notes below) which themselves return ctypes objects that can be used as arguments to a shared library.

Parameters None

Returns **c** : Python object

Possessing attributes data, shape, strides, etc.

See also:

numpy.ctypeslib

Notes

Below are the public attributes of this object which were documented in "Guide to NumPy" (we have omitted undocumented public attributes, as well as documented private attributes):

- data: A pointer to the memory area of the array as a Python integer. This memory area may contain data that is not aligned, or not in correct byte-order. The memory area may not even be writeable. The array flags and data-type of this array should be respected when passing this attribute to arbitrary C-code to avoid trouble that can include Python crashing. User Beware! The value of this attribute is exactly the same as self._array_interface_['data'][0].
- shape (c_intp*self.ndim): A ctypes array of length self.ndim where the basetype is the C-integer corresponding to dtype('p') on this platform. This base-type could be c_int, c_long, or c_longlong depending on the platform. The c_intp type is defined accordingly in numpy.ctypeslib. The ctypes array contains the shape of the underlying array.
- strides (c_intp*self.ndim): A ctypes array of length self.ndim where the basetype is the same as for the shape attribute. This ctypes array contains the strides information from the underlying array. This strides information is important for showing how many bytes must be jumped to get to the next element in the array.

- data_as(obj): Return the data pointer cast to a particular c-types object. For example, calling self._as_parameter_ is equivalent to self.data_as(ctypes.c_void_p). Perhaps you want to use the data as a pointer to a ctypes array of floating-point data: self.data_as(ctypes.POINTER(ctypes.c_double)).
- shape_as(obj): Return the shape tuple as an array of some other c-types type. For example: self.shape_as(ctypes.c_short).
- strides_as(obj): Return the strides tuple as an array of some other c-types type. For example: self.strides_as(ctypes.c_longlong).

Be careful using the ctypes attribute - especially on temporary arrays or arrays constructed on the fly. For example, calling `(a+b).ctypes.data_as(ctypes.c_void_p)` returns a pointer to memory that is invalid because the array created as (a+b) is deallocated before the next Python statement. You can avoid this problem using either `c=a+b` or `ct=(a+b).ctypes`. In the latter case, ct will hold a reference to the array until ct is deleted or re-assigned.

If the ctypes module is not available, then the ctypes attribute of array objects still returns something useful, but ctypes objects are not returned and errors may be raised instead. In particular, the object will still have the as parameter attribute which will return an integer equal to the data attribute.

Examples

```
>>> import ctypes
>>> x
array([[0, 1],
       [2, 3]])
>>> x.ctypes.data
30439712
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_long))
<ctypes.LP_c_long object at 0x01F01300>
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_long)).contents
c_long(0)
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_longlong)).contents
c_longlong(4294967296L)
>>> x.ctypes.shape
<numpy.core._internal.c_long_Array_2 object at 0x01FFD580>
>>> x.ctypes.shape_as(ctypes.c_long)
<numpy.core._internal.c_long_Array_2 object at 0x01FCE620>
>>> x.ctypes.strides
<numpy.core._internal.c_long_Array_2 object at 0x01FCE620>
>>> x.ctypes.strides_as(ctypes.c_longlong)
<numpy.core._internal.c_longlong_Array_2 object at 0x01F01300>
```

`MaskedArray.`**`dtype`**

Data-type of the array's elements.

Parameters None

Returns **d** : numpy dtype object

See also:

numpy.dtype

Examples

```
>>> x
array([[0, 1],
       [2, 3]])
>>> x.dtype
dtype('int32')
>>> type(x.dtype)
<type 'numpy.dtype'>
```

MaskedArray.**flags**

Information about the memory layout of the array.

Notes

The *flags* object can be accessed dictionary-like (as in `a.flags['WRITEABLE']`), or by using lowercased attribute names (as in `a.flags.writeable`). Short flag names are only supported in dictionary access.

Only the WRITEBACKIFCOPY, UPDATEIFCOPY, WRITEABLE, and ALIGNED flags can be changed by the user, via direct assignment to the attribute or dictionary entry, or by calling *ndarray.setflags*.

The array flags cannot be set arbitrarily:

- UPDATEIFCOPY can only be set `False`.
- WRITEBACKIFCOPY can only be set `False`.
- ALIGNED can only be set `True` if the data is truly aligned.
- WRITEABLE can only be set `True` if the array owns its own memory or the ultimate owner of the memory exposes a writeable buffer interface or is a string.

Arrays can be both C-style and Fortran-style contiguous simultaneously. This is clear for 1-dimensional arrays, but can also be true for higher dimensional arrays.

Even for contiguous arrays a stride for a given dimension `arr.strides[dim]` may be *arbitrary* if `arr.shape[dim] == 1` or the array has no elements. It does *not* generally hold that `self.strides[-1] == self.itemsize` for C-style contiguous arrays or `self.strides[0] == self.itemsize` for Fortran-style contiguous arrays is true.

Attributes

C_CONTIGUOUS (C)	The data is in a single, C-style contiguous segment.
F_CONTIGUOUS (F)	The data is in a single, Fortran-style contiguous segment.
OWNDATA (O)	The array owns the memory it uses or borrows it from another object.
WRITEABLE (W)	The data area can be written to. Setting this to False locks the data, making it read-only. A view (slice, etc.) inherits WRITEABLE from its base array at creation time, but a view of a writeable array may be subsequently locked while the base array remains writeable. (The opposite is not true, in that a view of a locked array may not be made writeable. However, currently, locking a base object does not lock any views that already reference it, so under that circumstance it is possible to alter the contents of a locked array via a previously created writeable view onto it.) Attempting to change a non-writeable array raises a RuntimeError exception.
ALIGNED (A)	The data and all elements are aligned appropriately for the hardware.
WRITEBACKIFCOPY (X)	This array is a copy of some other array. The C-API function PyArray_ResolveWritebackIfCopy must be called before deallocating to the base array will be updated with the contents of this array.
UPDATEIFCOPY (U)	(Deprecated, use WRITEBACKIFCOPY) This array is a copy of some other array. When this array is deallocated, the base array will be updated with the contents of this array.
FNC	F_CONTIGUOUS and not C_CONTIGUOUS.
FORC	F_CONTIGUOUS or C_CONTIGUOUS (one-segment test).
BEHAVED (B)	ALIGNED and WRITEABLE.
CARRAY (CA)	BEHAVED and C_CONTIGUOUS.
FARRAY (FA)	BEHAVED and F_CONTIGUOUS and not C_CONTIGUOUS.

MaskedArray.**itemsize**
Length of one array element in bytes.

Examples

```
>>> x = np.array([1,2,3], dtype=np.float64)
>>> x.itemsize
8
>>> x = np.array([1,2,3], dtype=np.complex128)
>>> x.itemsize
16
```

MaskedArray.**nbytes**
Total bytes consumed by the elements of the array.

Notes

Does not include memory consumed by non-element attributes of the array object.

Examples

```
>>> x = np.zeros((3,5,2), dtype=np.complex128)
>>> x.nbytes
480
>>> np.prod(x.shape) * x.itemsize
480
```

MaskedArray.**ndim**
Number of array dimensions.

Examples

```
>>> x = np.array([1, 2, 3])
>>> x.ndim
1
>>> y = np.zeros((2, 3, 4))
>>> y.ndim
3
```

MaskedArray.**shape**
Tuple of array dimensions.

The shape property is usually used to get the current shape of an array, but may also be used to reshape the array in-place by assigning a tuple of array dimensions to it. As with *numpy.reshape*, one of the new shape dimensions can be -1, in which case its value is inferred from the size of the array and the remaining dimensions. Reshaping an array in-place will fail if a copy is required.

See also:

numpy.reshape similar function

ndarray.reshape similar method

Examples

```
>>> x = np.array([1, 2, 3, 4])
>>> x.shape
(4,)
>>> y = np.zeros((2, 3, 4))
>>> y.shape
(2, 3, 4)
>>> y.shape = (3, 8)
>>> y
```

(continues on next page)

(continued from previous page)

```
array([[ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.],
       [ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.],
       [ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.]])
>>> y.shape = (3, 6)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: total size of new array must be unchanged
>>> np.zeros((4,2))[::2].shape = (-1,)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
AttributeError: incompatible shape for a non-contiguous array
```

MaskedArray.**size**

Number of elements in the array.

Equivalent to `np.prod(a.shape)`, i.e., the product of the array's dimensions.

Examples

```
>>> x = np.zeros((3, 5, 2), dtype=np.complex128)
>>> x.size
30
>>> np.prod(x.shape)
30
```

MaskedArray.**strides**

Tuple of bytes to step in each dimension when traversing an array.

The byte offset of element `(i[0], i[1], ..., i[n])` in an array *a* is:

```
offset = sum(np.array(i) * a.strides)
```

A more detailed explanation of strides can be found in the "ndarray.rst" file in the NumPy reference guide.

See also:

numpy.lib.stride_tricks.as_strided

Notes

Imagine an array of 32-bit integers (each 4 bytes):

```
x = np.array([[0, 1, 2, 3, 4],
              [5, 6, 7, 8, 9]], dtype=np.int32)
```

This array is stored in memory as 40 bytes, one after the other (known as a contiguous block of memory). The strides of an array tell us how many bytes we have to skip in memory to move to the next position along a certain axis. For example, we have to skip 4 bytes (1 value) to move to the next column, but 20 bytes (5 values) to get to the same position in the next row. As such, the strides for the array *x* will be `(20, 4)`.

Examples

```
>>> y = np.reshape(np.arange(2*3*4), (2,3,4))
>>> y
array([[[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]],
       [[12, 13, 14, 15],
        [16, 17, 18, 19],
        [20, 21, 22, 23]]])
>>> y.strides
(48, 16, 4)
>>> y[1,1,1]
17
>>> offset=sum(y.strides * np.array((1,1,1)))
>>> offset/y.itemsize
17
```

```
>>> x = np.reshape(np.arange(5*6*7*8), (5,6,7,8)).transpose(2,3,1,0)
>>> x.strides
(32, 4, 224, 1344)
>>> i = np.array([3,5,2,2])
>>> offset = sum(i * x.strides)
>>> x[3,5,2,2]
813
>>> offset / x.itemsize
813
```

MaskedArray.**imag**
Imaginary part.

MaskedArray.**real**
Real part

MaskedArray.**flat**
Flat version of the array.

MaskedArray.**__array_priority__ = 15**

1.7.6 MaskedArray methods

See also:

Array methods

Conversion

MaskedArray.__float__()	Convert to float.
MaskedArray.__hex__	
MaskedArray.__int__()	Convert to int.
MaskedArray.__long__()	Convert to long.
MaskedArray.__oct__	
MaskedArray.view([dtype, type])	New view of array with the same data.

Continued on next page

Table 62 – continued from previous page

MaskedArray.astype(newtype)	Returns a copy of the MaskedArray cast to given newtype.
MaskedArray.byteswap([inplace])	Swap the bytes of the array elements
MaskedArray.compressed()	Return all the non-masked data as a 1-D array.
MaskedArray.filled([fill_value])	Return a copy of self, with masked values filled with a given value.
MaskedArray.tofile(fid[, sep, format])	Save a masked array to a file in binary format.
MaskedArray.toflex()	Transforms a masked array into a flexible-type array.
MaskedArray.tolist([fill_value])	Return the data portion of the masked array as a hierarchical Python list.
MaskedArray.torecords()	Transforms a masked array into a flexible-type array.
MaskedArray.tostring([fill_value, order])	This function is a compatibility alias for tobytes.
MaskedArray.tobytes([fill_value, order])	Return the array data as a string containing the raw bytes in the array.

MaskedArray.**__float__**()
Convert to float.

MaskedArray.**__int__**()
Convert to int.

MaskedArray.**__long__**()
Convert to long.

MaskedArray.**view**(*dtype=None*, *type=None*)
New view of array with the same data.

Parameters **dtype** : data-type or ndarray sub-class, optional

Data-type descriptor of the returned view, e.g., float32 or int16. The default, None, results in the view having the same data-type as *a*. This argument can also be specified as an ndarray sub-class, which then specifies the type of the returned object (this is equivalent to setting the `type` parameter).

type : Python type, optional

Type of the returned view, e.g., ndarray or matrix. Again, the default None results in type preservation.

Notes

`a.view()` is used two different ways:

`a.view(some_dtype)` or `a.view(dtype=some_dtype)` constructs a view of the array's memory with a different data-type. This can cause a reinterpretation of the bytes of memory.

`a.view(ndarray_subclass)` or `a.view(type=ndarray_subclass)` just returns an instance of *ndarray_subclass* that looks at the same array (same shape, dtype, etc.) This does not cause a reinterpretation of the memory.

For `a.view(some_dtype)`, if `some_dtype` has a different number of bytes per entry than the previous dtype (for example, converting a regular array to a structured array), then the behavior of the view cannot be predicted just from the superficial appearance of `a` (shown by `print(a)`). It also depends on exactly how `a` is stored in memory. Therefore if `a` is C-ordered versus fortran-ordered, versus defined as a slice or transpose, etc., the view may give different results.

Examples

```
>>> x = np.array([(1, 2)], dtype=[('a', np.int8), ('b', np.int8)])
```

Viewing array data using a different type and dtype:

```
>>> y = x.view(dtype=np.int16, type=np.matrix)
>>> y
matrix([[513]], dtype=int16)
>>> print(type(y))
<class 'numpy.matrixlib.defmatrix.matrix'>
```

Creating a view on a structured array so it can be used in calculations

```
>>> x = np.array([(1, 2),(3,4)], dtype=[('a', np.int8), ('b', np.int8)])
>>> xv = x.view(dtype=np.int8).reshape(-1,2)
>>> xv
array([[1, 2],
       [3, 4]], dtype=int8)
>>> xv.mean(0)
array([ 2.,  3.])
```

Making changes to the view changes the underlying array

```
>>> xv[0,1] = 20
>>> print(x)
[(1, 20) (3, 4)]
```

Using a view to convert an array to a recarray:

```
>>> z = x.view(np.recarray)
>>> z.a
array([1], dtype=int8)
```

Views share data:

```
>>> x[0] = (9, 10)
>>> z[0]
(9, 10)
```

Views that change the dtype size (bytes per entry) should normally be avoided on arrays defined by slices, transposes, fortran-ordering, etc.:

```
>>> x = np.array([[1,2,3],[4,5,6]], dtype=np.int16)
>>> y = x[:, 0:2]
>>> y
array([[1, 2],
       [4, 5]], dtype=int16)
>>> y.view(dtype=[('width', np.int16), ('length', np.int16)])
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: new type not compatible with array.
>>> z = y.copy()
>>> z.view(dtype=[('width', np.int16), ('length', np.int16)])
array([[(1, 2)],
       [(4, 5)]], dtype=[('width', '<i2'), ('length', '<i2')])
```

MaskedArray.**astype**(*newtype*)

Returns a copy of the MaskedArray cast to given newtype.

Returns **output** : MaskedArray

A copy of self cast to input newtype. The returned record shape matches self.shape.

Examples

```
>>> x = np.ma.array([[1,2,3.1],[4,5,6],[7,8,9]], mask=[0] + [1,0]*4)
>>> print(x)
[[1.0 -- 3.1]
 [-- 5.0 --]
 [7.0 -- 9.0]]
>>> print(x.astype(int32))
[[1 -- 3]
 [-- 5 --]
 [7 -- 9]]
```

MaskedArray.**byteswap**(*inplace=False*)

Swap the bytes of the array elements

Toggle between low-endian and big-endian data representation by returning a byteswapped array, optionally swapped in-place.

Parameters **inplace** : bool, optional

If `True`, swap bytes in-place, default is `False`.

Returns **out** : ndarray

The byteswapped array. If *inplace* is `True`, this is a view to self.

Examples

```
>>> A = np.array([1, 256, 8755], dtype=np.int16)
>>> map(hex, A)
['0x1', '0x100', '0x2233']
>>> A.byteswap(inplace=True)
array([  256,     1, 13090], dtype=int16)
>>> map(hex, A)
['0x100', '0x1', '0x3322']
```

Arrays of strings are not swapped

```
>>> A = np.array(['ceg', 'fac'])
>>> A.byteswap()
array(['ceg', 'fac'],
      dtype='|S3')
```

MaskedArray.**compressed**()

Return all the non-masked data as a 1-D array.

Returns **data** : ndarray

A new *ndarray* holding the non-masked data is returned.

Notes

The result is **not** a MaskedArray!

Examples

```
>>> x = np.ma.array(np.arange(5), mask=[0]*2 + [1]*3)
>>> x.compressed()
array([0, 1])
>>> type(x.compressed())
<type 'numpy.ndarray'>
```

MaskedArray.**filled**(*fill_value=None*)

Return a copy of self, with masked values filled with a given value. **However**, if there are no masked values to fill, self will be returned instead as an ndarray.

Parameters **fill_value** : scalar, optional

The value to use for invalid entries (None by default). If None, the *fill_value* attribute of the array is used instead.

Returns **filled_array** : ndarray

A copy of `self` with invalid entries replaced by *fill_value* (be it the function argument or the attribute of `self`), or `self` itself as an ndarray if there are no invalid entries to be replaced.

Notes

The result is **not** a MaskedArray!

Examples

```
>>> x = np.ma.array([1,2,3,4,5], mask=[0,0,1,0,1], fill_value=-999)
>>> x.filled()
array([1, 2, -999, 4, -999])
>>> type(x.filled())
<type 'numpy.ndarray'>
```

Subclassing is preserved. This means that if the data part of the masked array is a matrix, *filled* returns a matrix:

```
>>> x = np.ma.array(np.matrix([[1, 2], [3, 4]]), mask=[[0, 1], [1, 0]])
>>> x.filled()
matrix([[     1, 999999],
        [999999,      4]])
```

MaskedArray.**tofile**(*fid*, *sep=''*, *format='%s'*)

Save a masked array to a file in binary format.

Warning: This function is not implemented yet.

Raises **NotImplementedError**

When *tofile* is called.

MaskedArray.**toflex**()

Transforms a masked array into a flexible-type array.

The flexible type array that is returned will have two fields:

- the _data field stores the _data part of the array.
- the _mask field stores the _mask part of the array.

Parameters **None**

Returns **record** : ndarray

A new flexible-type *ndarray* with two fields: the first element containing a value, the second element containing the corresponding mask boolean. The returned record shape matches self.shape.

Notes

A side-effect of transforming a masked array into a flexible *ndarray* is that meta information (fill_value, ...) will be lost.

Examples

```
>>> x = np.ma.array([[1,2,3],[4,5,6],[7,8,9]], mask=[0] + [1,0]*4)
>>> print(x)
[[1 -- 3]
 [-- 5 --]
 [7 -- 9]]
>>> print(x.toflex())
[[(1, False) (2, True) (3, False)]
 [(4, True) (5, False) (6, True)]
 [(7, False) (8, True) (9, False)]]
```

MaskedArray.**tolist**(*fill_value=None*)

Return the data portion of the masked array as a hierarchical Python list.

Data items are converted to the nearest compatible Python type. Masked values are converted to *fill_value*. If *fill_value* is None, the corresponding entries in the output list will be None.

Parameters **fill_value** : scalar, optional

The value to use for invalid entries. Default is None.

Returns **result** : list

The Python list representation of the masked array.

Examples

```
>>> x = np.ma.array([[1,2,3], [4,5,6], [7,8,9]], mask=[0] + [1,0]*4)
>>> x.tolist()
[[1, None, 3], [None, 5, None], [7, None, 9]]
>>> x.tolist(-999)
[[1, -999, 3], [-999, 5, -999], [7, -999, 9]]
```

MaskedArray.**torecords**()

Transforms a masked array into a flexible-type array.

The flexible type array that is returned will have two fields:

- the _data field stores the _data part of the array.
- the _mask field stores the _mask part of the array.

Parameters **None**

Returns **record** : ndarray

A new flexible-type *ndarray* with two fields: the first element containing a value, the second element containing the corresponding mask boolean. The returned record shape matches self.shape.

Notes

A side-effect of transforming a masked array into a flexible *ndarray* is that meta information (`fill_value`, ...) will be lost.

Examples

```
>>> x = np.ma.array([[1,2,3],[4,5,6],[7,8,9]], mask=[0] + [1,0]*4)
>>> print(x)
[[1 -- 3]
 [-- 5 --]
 [7 -- 9]]
>>> print(x.toflex())
[[(1, False) (2, True) (3, False)]
 [(4, True) (5, False) (6, True)]
 [(7, False) (8, True) (9, False)]]
```

MaskedArray.**tostring**(*fill_value=None*, *order='C'*)

This function is a compatibility alias for tobytes. Despite its name it returns bytes not strings.

MaskedArray.**tobytes**(*fill_value=None*, *order='C'*)

Return the array data as a string containing the raw bytes in the array.

The array is filled with a fill value before the string conversion.

New in version 1.9.0.

Parameters **fill_value** : scalar, optional

Value used to fill in the masked values. Default is None, in which case *MaskedArray.fill_value* is used.

order : {'C','F','A'}, optional

Order of the data item in the copy. Default is 'C'.

- 'C' – C order (row major).
- 'F' – Fortran order (column major).
- 'A' – Any, current order of array.
- None – Same as 'A'.

See also:

ndarray.tobytes, *tolist*, *tofile*

Notes

As for *ndarray.tobytes*, information about the shape, dtype, etc., but also about *fill_value*, will be lost.

Examples

```
>>> x = np.ma.array(np.array([[1, 2], [3, 4]]), mask=[[0, 1], [1, 0]])
>>> x.tobytes()
'\x01\x00\x00\x00?B\x0f\x00?B\x0f\x00\x04\x00\x00\x00'
```

Shape manipulation

For reshape, resize, and transpose, the single tuple argument may be replaced with n integers which will be interpreted as an n-tuple.

MaskedArray.flatten([order])	Return a copy of the array collapsed into one dimension.
MaskedArray.ravel([order])	Returns a 1D version of self, as a view.
MaskedArray.reshape(*s, **kwargs)	Give a new shape to the array without changing its data.
MaskedArray.resize(newshape[, refcheck, order])	
MaskedArray.squeeze([axis])	Remove single-dimensional entries from the shape of *a*.
MaskedArray.swapaxes(axis1, axis2)	Return a view of the array with *axis1* and *axis2* interchanged.
MaskedArray.transpose(*axes)	Returns a view of the array with axes transposed.
MaskedArray.T	

MaskedArray.**flatten**(*order='C'*)

Return a copy of the array collapsed into one dimension.

Parameters **order** : {'C', 'F', 'A', 'K'}, optional

'C' means to flatten in row-major (C-style) order. 'F' means to flatten in column-major (Fortran- style) order. 'A' means to flatten in column-major order if *a* is Fortran *contiguous* in memory, row-major order otherwise. 'K' means to flatten *a* in the order the elements occur in memory. The default is 'C'.

Returns **y** : ndarray

A copy of the input array, flattened to one dimension.

See also:

ravel Return a flattened array.

flat A 1-D flat iterator over the array.

Examples

```
>>> a = np.array([[1,2], [3,4]])
>>> a.flatten()
array([1, 2, 3, 4])
>>> a.flatten('F')
array([1, 3, 2, 4])
```

MaskedArray.**ravel**(*order='C'*)

Returns a 1D version of self, as a view.

Parameters **order** : {'C', 'F', 'A', 'K'}, optional

The elements of *a* are read using this index order. 'C' means to index the elements in C-like order, with the last axis index changing fastest, back to the first axis index changing slowest. 'F' means to index the elements in Fortran-like index order, with the first index changing fastest, and the last index changing slowest. Note that the 'C' and 'F' options take no account of the memory layout of the underlying array, and only refer to the order of axis indexing. 'A' means to read the elements in Fortran-like index order if *m* is Fortran *contiguous* in memory, C-like order otherwise. 'K' means to read the elements in the order they occur in memory, except for reversing the data when strides are negative. By default, 'C' index order is used.

Returns MaskedArray

Output view is of shape `(self.size,)` (or `(np.ma.product(self.shape),)`).

Examples

```
>>> x = np.ma.array([[1,2,3],[4,5,6],[7,8,9]], mask=[0] + [1,0]*4)
>>> print(x)
[[1 -- 3]
 [-- 5 --]
 [7 -- 9]]
>>> print(x.ravel())
[1 -- 3 -- 5 -- 7 -- 9]
```

MaskedArray.**reshape**(**s*, ***kwargs*)

Give a new shape to the array without changing its data.

Returns a masked array containing the same data, but with a new shape. The result is a view on the original array; if this is not possible, a ValueError is raised.

Parameters **shape** : int or tuple of ints

The new shape should be compatible with the original shape. If an integer is supplied, then the result will be a 1-D array of that length.

order : {'C', 'F'}, optional

Determines whether the array data should be viewed as in C (row-major) or FORTRAN (column-major) order.

Returns **reshaped_array** : array

A new view on the array.

See also:

reshape Equivalent function in the masked array module.

numpy.ndarray.reshape Equivalent method on ndarray object.

numpy.reshape Equivalent function in the NumPy module.

Notes

The reshaping operation cannot guarantee that a copy will not be made, to modify the shape in place, use `a.shape = s`

Examples

```
>>> x = np.ma.array([[1,2],[3,4]], mask=[1,0,0,1])
>>> print(x)
[[-- 2]
 [3 --]]
>>> x = x.reshape((4,1))
>>> print(x)
[[--]
 [2]
 [3]
 [--]]
```

MaskedArray.**resize**(*newshape*, *refcheck=True*, *order=False*)

> **Warning:** This method does nothing, except raise a ValueError exception. A masked array does not own its data and therefore cannot safely be resized in place. Use the *numpy.ma.resize* function instead.

This method is difficult to implement safely and may be deprecated in future releases of NumPy.

MaskedArray.**squeeze**(*axis=None*)

Remove single-dimensional entries from the shape of *a*.

Refer to *numpy.squeeze* for full documentation.

See also:

numpy.squeeze equivalent function

MaskedArray.**swapaxes**(*axis1*, *axis2*)

Return a view of the array with *axis1* and *axis2* interchanged.

Refer to *numpy.swapaxes* for full documentation.

See also:

numpy.swapaxes equivalent function

MaskedArray.**transpose**(**axes*)

Returns a view of the array with axes transposed.

For a 1-D array, this has no effect. (To change between column and row vectors, first cast the 1-D array into a matrix object.) For a 2-D array, this is the usual matrix transpose. For an n-D array, if axes are given, their order indicates how the axes are permuted (see Examples). If axes are not provided and `a.shape = (i[0], i[1], ... i[n-2], i[n-1])`, then `a.transpose().shape = (i[n-1], i[n-2], ... i[1], i[0])`.

Parameters **axes** : None, tuple of ints, or *n* ints

- None or no argument: reverses the order of the axes.
- tuple of ints: *i* in the *j*-th place in the tuple means *a*'s *i*-th axis becomes *a.transpose()*'s *j*-th axis.
- *n* ints: same as an n-tuple of the same ints (this form is intended simply as a "convenience" alternative to the tuple form)

Returns **out** : ndarray

View of *a*, with axes suitably permuted.

See also:

ndarray.T Array property returning the array transposed.

Examples

```
>>> a = np.array([[1, 2], [3, 4]])
>>> a
array([[1, 2],
       [3, 4]])
>>> a.transpose()
array([[1, 3],
       [2, 4]])
>>> a.transpose((1, 0))
array([[1, 3],
       [2, 4]])
>>> a.transpose(1, 0)
array([[1, 3],
       [2, 4]])
```

MaskedArray.**T**

Item selection and manipulation

For array methods that take an *axis* keyword, it defaults to *None*. If axis is *None*, then the array is treated as a 1-D array. Any other value for *axis* represents the dimension along which the operation should proceed.

MaskedArray.argmax([axis, fill_value, out])	Returns array of indices of the maximum values along the given axis.
MaskedArray.argmin([axis, fill_value, out])	Return array of indices to the minimum values along the given axis.
MaskedArray.argsort([axis, kind, order, ...])	Return an ndarray of indices that sort the array along the specified axis.

Continued on next page

Table 64 – continued from previous page

MaskedArray.choose(choices[, out, mode])	Use an index array to construct a new array from a set of choices.
MaskedArray.compress(condition[, axis, out])	Return *a* where condition is `True`.
MaskedArray.diagonal([offset, axis1, axis2])	Return specified diagonals.
MaskedArray.fill(value)	Fill the array with a scalar value.
MaskedArray.item(*args)	Copy an element of an array to a standard Python scalar and return it.
MaskedArray.nonzero()	Return the indices of unmasked elements that are not zero.
MaskedArray.put(indices, values[, mode])	Set storage-indexed locations to corresponding values.
MaskedArray.repeat(repeats[, axis])	Repeat elements of an array.
MaskedArray.searchsorted(v[, side, sorter])	Find indices where elements of v should be inserted in a to maintain order.
MaskedArray.sort([axis, kind, order, ...])	Sort the array, in-place
MaskedArray.take(indices[, axis, out, mode])	

MaskedArray.**argmax**(*axis=None*, *fill_value=None*, *out=None*)

Returns array of indices of the maximum values along the given axis. Masked values are treated as if they had the value fill_value.

Parameters **axis** : {None, integer}

If None, the index is into the flattened array, otherwise along the specified axis

fill_value : {var}, optional

Value used to fill in the masked values. If None, the output of maximum_fill_value(self._data) is used instead.

out : {None, array}, optional

Array into which the result can be placed. Its type is preserved and it must be of the right shape to hold the output.

Returns **index_array** : {integer_array}

Examples

```
>>> a = np.arange(6).reshape(2,3)
>>> a.argmax()
5
>>> a.argmax(0)
array([1, 1, 1])
>>> a.argmax(1)
array([2, 2])
```

MaskedArray.**argmin**(*axis=None*, *fill_value=None*, *out=None*)

Return array of indices to the minimum values along the given axis.

Parameters **axis** : {None, integer}

If None, the index is into the flattened array, otherwise along the specified axis

fill_value : {var}, optional

Value used to fill in the masked values. If None, the output of minimum_fill_value(self._data) is used instead.

out : {None, array}, optional

Array into which the result can be placed. Its type is preserved and it must be of the right shape to hold the output.

Returns ndarray or scalar

If multi-dimension input, returns a new ndarray of indices to the minimum values along the given axis. Otherwise, returns a scalar of index to the minimum values along the given axis.

Examples

```
>>> x = np.ma.array(arange(4), mask=[1,1,0,0])
>>> x.shape = (2,2)
>>> print(x)
[[-- --]
 [2 3]]
>>> print(x.argmin(axis=0, fill_value=-1))
[0 0]
>>> print(x.argmin(axis=0, fill_value=9))
[1 1]
```

MaskedArray.**argsort**(*axis=<class 'numpy._globals._NoValue'>*, *kind='quicksort'*, *order=None*, *endwith=True*, *fill_value=None*)

Return an ndarray of indices that sort the array along the specified axis. Masked values are filled beforehand to *fill_value*.

Parameters **axis** : int, optional

Axis along which to sort. If None, the default, the flattened array is used.

Changed in version 1.13.0: Previously, the default was documented to be -1, but that was in error. At some future date, the default will change to -1, as originally intended. Until then, the axis should be given explicitly when `arr.ndim > 1`, to avoid a FutureWarning.

kind : {'quicksort', 'mergesort', 'heapsort'}, optional

Sorting algorithm.

order : list, optional

When *a* is an array with fields defined, this argument specifies which fields to compare first, second, etc. Not all fields need be specified.

endwith : {True, False}, optional

Whether missing values (if any) should be treated as the largest values (True) or the smallest values (False) When the array contains unmasked values at the same extremes of the datatype, the ordering of these values and the masked values is undefined.

fill_value : {var}, optional

Value used internally for the masked values. If `fill_value` is not None, it supersedes `endwith`.

Returns **index_array** : ndarray, int

Array of indices that sort *a* along the specified axis. In other words, `a[index_array]` yields a sorted *a*.

See also:

MaskedArray.sort Describes sorting algorithms used.

lexsort Indirect stable sort with multiple keys.

ndarray.sort Inplace sort.

Notes

See *sort* for notes on the different sorting algorithms.

Examples

```
>>> a = np.ma.array([3,2,1], mask=[False, False, True])
>>> a
masked_array(data = [3 2 --],
             mask = [False False  True],
       fill_value = 999999)
>>> a.argsort()
array([1, 0, 2])
```

MaskedArray.**choose**(*choices*, *out=None*, *mode='raise'*)

Use an index array to construct a new array from a set of choices.

Refer to *numpy.choose* for full documentation.

See also:

numpy.choose equivalent function

MaskedArray.**compress**(*condition*, *axis=None*, *out=None*)

Return *a* where condition is `True`.

If condition is a *MaskedArray*, missing values are considered as `False`.

Parameters **condition** : var

Boolean 1-d array selecting which entries to return. If len(condition) is less than the size of a along the axis, then output is truncated to length of condition array.

axis : {None, int}, optional

Axis along which the operation must be performed.

out : {None, ndarray}, optional

Alternative output array in which to place the result. It must have the same shape as the expected output but the type will be cast if necessary.

Returns **result** : MaskedArray

A *MaskedArray* object.

Notes

Please note the difference with *compressed* ! The output of *compress* has a mask, the output of *compressed* does not.

Examples

```
>>> x = np.ma.array([[1,2,3],[4,5,6],[7,8,9]], mask=[0] + [1,0]*4)
>>> print(x)
[[1 -- 3]
 [-- 5 --]
 [7 -- 9]]
>>> x.compress([1, 0, 1])
masked_array(data = [1 3],
      mask = [False False],
      fill_value=999999)
```

```
>>> x.compress([1, 0, 1], axis=1)
masked_array(data =
 [[1 3]
 [-- --]
 [7 9]],
      mask =
 [[False False]
 [ True  True]
 [False False]],
      fill_value=999999)
```

MaskedArray.**diagonal**(*offset=0*, *axis1=0*, *axis2=1*)

Return specified diagonals. In NumPy 1.9 the returned array is a read-only view instead of a copy as in previous NumPy versions. In a future version the read-only restriction will be removed.

Refer to *numpy.diagonal* for full documentation.

See also:

numpy.diagonal equivalent function

MaskedArray.**fill**(*value*)

Fill the array with a scalar value.

Parameters **value** : scalar

All elements of *a* will be assigned this value.

Examples

```
>>> a = np.array([1, 2])
>>> a.fill(0)
>>> a
array([0, 0])
>>> a = np.empty(2)
>>> a.fill(1)
>>> a
array([ 1.,  1.])
```

MaskedArray.**item**(**args*)

Copy an element of an array to a standard Python scalar and return it.

Parameters ***args** : Arguments (variable number and type)

- none: in this case, the method only works for arrays with one element (*a.size == 1*), which element is copied into a standard Python scalar object and returned.
- int_type: this argument is interpreted as a flat index into the array, specifying which element to copy and return.
- tuple of int_types: functions as does a single int_type argument, except that the argument is interpreted as an nd-index into the array.

Returns **z** : Standard Python scalar object

A copy of the specified element of the array as a suitable Python scalar

Notes

When the data type of *a* is longdouble or clongdouble, item() returns a scalar array object because there is no available Python scalar that would not lose information. Void arrays return a buffer object for item(), unless fields are defined, in which case a tuple is returned.

item is very similar to a[args], except, instead of an array scalar, a standard Python scalar is returned. This can be useful for speeding up access to elements of the array and doing arithmetic on elements of the array using Python's optimized math.

Examples

```
>>> x = np.random.randint(9, size=(3, 3))
>>> x
array([[3, 1, 7],
       [2, 8, 3],
       [8, 5, 3]])
>>> x.item(3)
2
>>> x.item(7)
5
>>> x.item((0, 1))
1
>>> x.item((2, 2))
3
```

MaskedArray.**nonzero**()

Return the indices of unmasked elements that are not zero.

Returns a tuple of arrays, one for each dimension, containing the indices of the non-zero elements in that dimension. The corresponding non-zero values can be obtained with:

```
a[a.nonzero()]
```

To group the indices by element, rather than dimension, use instead:

```
np.transpose(a.nonzero())
```

The result of this is always a 2d array, with a row for each non-zero element.

Parameters **None**

Returns **tuple_of_arrays** : tuple

Indices of elements that are non-zero.

See also:

numpy.nonzero Function operating on ndarrays.

flatnonzero Return indices that are non-zero in the flattened version of the input array.

ndarray.nonzero Equivalent ndarray method.

count_nonzero Counts the number of non-zero elements in the input array.

Examples

```
>>> import numpy.ma as ma
>>> x = ma.array(np.eye(3))
>>> x
masked_array(data =
 [[ 1.  0.  0.]
 [ 0.  1.  0.]
 [ 0.  0.  1.]],
      mask =
 False,
      fill_value=1e+20)
>>> x.nonzero()
(array([0, 1, 2]), array([0, 1, 2]))
```

Masked elements are ignored.

```
>>> x[1, 1] = ma.masked
>>> x
masked_array(data =
 [[1.0 0.0 0.0]
 [0.0 -- 0.0]
 [0.0 0.0 1.0]],
      mask =
 [[False False False]
 [False  True False]
 [False False False]],
      fill_value=1e+20)
>>> x.nonzero()
(array([0, 2]), array([0, 2]))
```

Indices can also be grouped by element.

```
>>> np.transpose(x.nonzero())
array([[0, 0],
       [2, 2]])
```

A common use for `nonzero` is to find the indices of an array, where a condition is True. Given an array a, the condition $a > 3$ is a boolean array and since False is interpreted as 0, ma.nonzero(a > 3) yields the indices of the a where the condition is true.

```
>>> a = ma.array([[1,2,3],[4,5,6],[7,8,9]])
>>> a > 3
masked_array(data =
 [[False False False]
 [ True  True  True]
 [ True  True  True]],
```

(continues on next page)

(continued from previous page)

```
      mask =
 False,
      fill_value=999999)
>>> ma.nonzero(a > 3)
(array([1, 1, 1, 2, 2, 2]), array([0, 1, 2, 0, 1, 2]))
```

The `nonzero` method of the condition array can also be called.

```
>>> (a > 3).nonzero()
(array([1, 1, 1, 2, 2, 2]), array([0, 1, 2, 0, 1, 2]))
```

`MaskedArray.`**`put`**(*indices*, *values*, *mode='raise'*)

Set storage-indexed locations to corresponding values.

Sets self._data.flat[n] = values[n] for each n in indices. If *values* is shorter than *indices* then it will repeat. If *values* has some masked values, the initial mask is updated in consequence, else the corresponding values are unmasked.

Parameters **indices** : 1-D array_like

Target indices, interpreted as integers.

values : array_like

Values to place in self._data copy at target indices.

mode : {'raise', 'wrap', 'clip'}, optional

Specifies how out-of-bounds indices will behave. 'raise' : raise an error. 'wrap' : wrap around. 'clip' : clip to the range.

Notes

values can be a scalar or length 1 array.

Examples

```
>>> x = np.ma.array([[1,2,3],[4,5,6],[7,8,9]], mask=[0] + [1,0]*4)
>>> print(x)
[[1 -- 3]
 [-- 5 --]
 [7 -- 9]]
>>> x.put([0,4,8],[10,20,30])
>>> print(x)
[[10 -- 3]
 [-- 20 --]
 [7 -- 30]]
```

```
>>> x.put(4,999)
>>> print(x)
[[10 -- 3]
 [-- 999 --]
 [7 -- 30]]
```

`MaskedArray.`**`repeat`**(*repeats*, *axis=None*)

Repeat elements of an array.

Refer to *numpy.repeat* for full documentation.

See also:

numpy.repeat equivalent function

MaskedArray.**searchsorted**(*v*, *side='left'*, *sorter=None*)
Find indices where elements of v should be inserted in a to maintain order.

For full documentation, see *numpy.searchsorted*

See also:

numpy.searchsorted equivalent function

MaskedArray.**sort**(*axis=-1*, *kind='quicksort'*, *order=None*, *endwith=True*, *fill_value=None*)
Sort the array, in-place

Parameters **a** : array_like

Array to be sorted.

axis : int, optional

Axis along which to sort. If None, the array is flattened before sorting. The default is -1, which sorts along the last axis.

kind : {'quicksort', 'mergesort', 'heapsort'}, optional

Sorting algorithm. Default is 'quicksort'.

order : list, optional

When *a* is a structured array, this argument specifies which fields to compare first, second, and so on. This list does not need to include all of the fields.

endwith : {True, False}, optional

Whether missing values (if any) should be treated as the largest values (True) or the smallest values (False) When the array contains unmasked values at the same extremes of the datatype, the ordering of these values and the masked values is undefined.

fill_value : {var}, optional

Value used internally for the masked values. If `fill_value` is not None, it supersedes `endwith`.

Returns **sorted_array** : ndarray

Array of the same type and shape as *a*.

See also:

ndarray.sort Method to sort an array in-place.

argsort Indirect sort.

lexsort Indirect stable sort on multiple keys.

searchsorted Find elements in a sorted array.

Notes

See `sort` for notes on the different sorting algorithms.

Examples

```
>>> a = ma.array([1, 2, 5, 4, 3],mask=[0, 1, 0, 1, 0])
>>> # Default
>>> a.sort()
>>> print(a)
[1 3 5 -- --]
```

```
>>> a = ma.array([1, 2, 5, 4, 3],mask=[0, 1, 0, 1, 0])
>>> # Put missing values in the front
>>> a.sort(endwith=False)
>>> print(a)
[-- -- 1 3 5]
```

```
>>> a = ma.array([1, 2, 5, 4, 3],mask=[0, 1, 0, 1, 0])
>>> # fill_value takes over endwith
>>> a.sort(endwith=False, fill_value=3)
>>> print(a)
[1 -- -- 3 5]
```

MaskedArray.**take**(*indices*, *axis=None*, *out=None*, *mode='raise'*)

Pickling and copy

MaskedArray.copy([order])	Return a copy of the array.
MaskedArray.dump(file)	Dump a pickle of the array to the specified file.
MaskedArray.dumps()	Returns the pickle of the array as a string.

MaskedArray.**copy**(*order='C'*)

Return a copy of the array.

Parameters **order** : {'C', 'F', 'A', 'K'}, optional

Controls the memory layout of the copy. 'C' means C-order, 'F' means F-order, 'A' means 'F' if *a* is Fortran contiguous, 'C' otherwise. 'K' means match the layout of *a* as closely as possible. (Note that this function and *numpy.copy* are very similar, but have different default values for their order= arguments.)

See also:

numpy.copy, *numpy.copyto*

Examples

```
>>> x = np.array([[1,2,3],[4,5,6]], order='F')
```

```
>>> y = x.copy()
```

```
>>> x.fill(0)
```

```
>>> x
array([[0, 0, 0],
       [0, 0, 0]])
```

```
>>> y
array([[1, 2, 3],
       [4, 5, 6]])
```

```
>>> y.flags['C_CONTIGUOUS']
True
```

MaskedArray.**dump**(*file*)

Dump a pickle of the array to the specified file. The array can be read back with pickle.load or numpy.load.

Parameters **file** : str

A string naming the dump file.

MaskedArray.**dumps**()

Returns the pickle of the array as a string. pickle.loads or numpy.loads will convert the string back to an array.

Parameters **None**

Calculations

MaskedArray.all([axis, out, keepdims])	Returns True if all elements evaluate to True.
MaskedArray.anom([axis, dtype])	Compute the anomalies (deviations from the arithmetic mean) along the given axis.
MaskedArray.any([axis, out, keepdims])	Returns True if any of the elements of *a* evaluate to True.
MaskedArray.clip([min, max, out])	Return an array whose values are limited to `[min, max]`.
MaskedArray.conj()	Complex-conjugate all elements.
MaskedArray.conjugate()	Return the complex conjugate, element-wise.
MaskedArray.cumprod([axis, dtype, out])	Return the cumulative product of the array elements over the given axis.
MaskedArray.cumsum([axis, dtype, out])	Return the cumulative sum of the array elements over the given axis.
MaskedArray.max([axis, out, fill_value, ...])	Return the maximum along a given axis.
MaskedArray.mean([axis, dtype, out, keepdims])	Returns the average of the array elements along given axis.
MaskedArray.min([axis, out, fill_value, ...])	Return the minimum along a given axis.
MaskedArray.prod([axis, dtype, out, keepdims])	Return the product of the array elements over the given axis.
MaskedArray.product([axis, dtype, out, keepdims])	Return the product of the array elements over the given axis.
MaskedArray.ptp([axis, out, fill_value])	Return (maximum - minimum) along the given dimension (i.e.
MaskedArray.round([decimals, out])	Return each element rounded to the given number of decimals.
MaskedArray.std([axis, dtype, out, ddof, ...])	Returns the standard deviation of the array elements along given axis.
MaskedArray.sum([axis, dtype, out, keepdims])	Return the sum of the array elements over the given axis.

Continued on next page

Table 66 – continued from previous page

MaskedArray.trace([offset, axis1, axis2, ...])	Return the sum along diagonals of the array.
MaskedArray.var([axis, dtype, out, ddof, ...])	Compute the variance along the specified axis.

MaskedArray.**all**(*axis=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Returns True if all elements evaluate to True.

The output array is masked where all the values along the given axis are masked: if the output would have been a scalar and that all the values are masked, then the output is *masked*.

Refer to *numpy.all* for full documentation.

See also:

ndarray.all corresponding function for ndarrays

numpy.all equivalent function

Examples

```
>>> np.ma.array([1,2,3]).all()
True
>>> a = np.ma.array([1,2,3], mask=True)
>>> (a.all() is np.ma.masked)
True
```

MaskedArray.**anom**(*axis=None*, *dtype=None*)

Compute the anomalies (deviations from the arithmetic mean) along the given axis.

Returns an array of anomalies, with the same shape as the input and where the arithmetic mean is computed along the given axis.

Parameters **axis** : int, optional

Axis over which the anomalies are taken. The default is to use the mean of the flattened array as reference.

dtype : dtype, optional

Type to use in computing the variance. For arrays of integer type the default is float32; for arrays of float types it is the same as the array type.

See also:

mean Compute the mean of the array.

Examples

```
>>> a = np.ma.array([1,2,3])
>>> a.anom()
masked_array(data = [-1.  0.  1.],
             mask = False,
       fill_value = 1e+20)
```

MaskedArray.**any**(*axis=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Returns True if any of the elements of *a* evaluate to True.

Masked values are considered as False during computation.

Refer to *numpy.any* for full documentation.

See also:

ndarray.any corresponding function for ndarrays

numpy.any equivalent function

MaskedArray.**clip**(*min=None*, *max=None*, *out=None*)
Return an array whose values are limited to `[min, max]`. One of max or min must be given.

Refer to *numpy.clip* for full documentation.

See also:

numpy.clip equivalent function

MaskedArray.**conj**()
Complex-conjugate all elements.

Refer to `numpy.conjugate` for full documentation.

See also:

numpy.conjugate equivalent function

MaskedArray.**conjugate**()
Return the complex conjugate, element-wise.

Refer to `numpy.conjugate` for full documentation.

See also:

numpy.conjugate equivalent function

MaskedArray.**cumprod**(*axis=None*, *dtype=None*, *out=None*)
Return the cumulative product of the array elements over the given axis.

Masked values are set to 1 internally during the computation. However, their position is saved, and the result will be masked at the same locations.

Refer to *numpy.cumprod* for full documentation.

See also:

ndarray.cumprod corresponding function for ndarrays

numpy.cumprod equivalent function

Notes

The mask is lost if *out* is not a valid MaskedArray !

Arithmetic is modular when using integer types, and no error is raised on overflow.

MaskedArray.**cumsum**(*axis=None*, *dtype=None*, *out=None*)

Return the cumulative sum of the array elements over the given axis.

Masked values are set to 0 internally during the computation. However, their position is saved, and the result will be masked at the same locations.

Refer to *numpy.cumsum* for full documentation.

See also:

ndarray.cumsum corresponding function for ndarrays

numpy.cumsum equivalent function

Notes

The mask is lost if *out* is not a valid *MaskedArray* !

Arithmetic is modular when using integer types, and no error is raised on overflow.

Examples

```
>>> marr = np.ma.array(np.arange(10), mask=[0,0,0,1,1,1,0,0,0,0])
>>> print(marr.cumsum())
[0 1 3 -- -- -- 9 16 24 33]
```

MaskedArray.**max**(*axis=None*, *out=None*, *fill_value=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Return the maximum along a given axis.

Parameters **axis** : {None, int}, optional

Axis along which to operate. By default, `axis` is None and the flattened input is used.

out : array_like, optional

Alternative output array in which to place the result. Must be of the same shape and buffer length as the expected output.

fill_value : {var}, optional

Value used to fill in the masked values. If None, use the output of maximum_fill_value().

Returns **amax** : array_like

New array holding the result. If `out` was specified, `out` is returned.

See also:

maximum_fill_value Returns the maximum filling value for a given datatype.

MaskedArray.**mean**(*axis=None*, *dtype=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Returns the average of the array elements along given axis.

Masked entries are ignored, and result elements which are not finite will be masked.

Refer to *numpy.mean* for full documentation.

See also:

ndarray.mean corresponding function for ndarrays

numpy.mean Equivalent function

numpy.ma.average Weighted average.

Examples

```
>>> a = np.ma.array([1,2,3], mask=[False, False, True])
>>> a
masked_array(data = [1 2 --],
             mask = [False False  True],
       fill_value = 999999)
>>> a.mean()
1.5
```

MaskedArray.**min**(*axis=None*, *out=None*, *fill_value=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Return the minimum along a given axis.

Parameters **axis** : {None, int}, optional

Axis along which to operate. By default, `axis` is None and the flattened input is used.

out : array_like, optional

Alternative output array in which to place the result. Must be of the same shape and buffer length as the expected output.

fill_value : {var}, optional

Value used to fill in the masked values. If None, use the output of `minimum_fill_value`.

Returns **amin** : array_like

New array holding the result. If `out` was specified, `out` is returned.

See also:

minimum_fill_value Returns the minimum filling value for a given datatype.

MaskedArray.**prod**(*axis=None*, *dtype=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Return the product of the array elements over the given axis.

Masked elements are set to 1 internally for computation.

Refer to *numpy.prod* for full documentation.

See also:

ndarray.prod corresponding function for ndarrays

numpy.prod equivalent function

Notes

Arithmetic is modular when using integer types, and no error is raised on overflow.

MaskedArray.**product**(*axis=None*, *dtype=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Return the product of the array elements over the given axis.

Masked elements are set to 1 internally for computation.

Refer to *numpy.prod* for full documentation.

See also:

ndarray.prod corresponding function for ndarrays

numpy.prod equivalent function

Notes

Arithmetic is modular when using integer types, and no error is raised on overflow.

MaskedArray.**ptp**(*axis=None*, *out=None*, *fill_value=None*)

Return (maximum - minimum) along the given dimension (i.e. peak-to-peak value).

Parameters **axis** : {None, int}, optional

Axis along which to find the peaks. If None (default) the flattened array is used.

out : {None, array_like}, optional

Alternative output array in which to place the result. It must have the same shape and buffer length as the expected output but the type will be cast if necessary.

fill_value : {var}, optional

Value used to fill in the masked values.

Returns **ptp** : ndarray.

A new array holding the result, unless `out` was specified, in which case a reference to `out` is returned.

MaskedArray.**round**(*decimals=0*, *out=None*)

Return each element rounded to the given number of decimals.

Refer to *numpy.around* for full documentation.

See also:

ndarray.around corresponding function for ndarrays

numpy.around equivalent function

MaskedArray.**std**(*axis=None*, *dtype=None*, *out=None*, *ddof=0*, *keepdims=<class 'numpy._globals._NoValue'>*)

Returns the standard deviation of the array elements along given axis.

Masked entries are ignored.

Refer to *numpy.std* for full documentation.

See also:

ndarray.std corresponding function for ndarrays

numpy.std Equivalent function

MaskedArray.**sum**(*axis=None*, *dtype=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Return the sum of the array elements over the given axis.

Masked elements are set to 0 internally.

Refer to *numpy.sum* for full documentation.

See also:

ndarray.sum corresponding function for ndarrays

numpy.sum equivalent function

Examples

```
>>> x = np.ma.array([[1,2,3],[4,5,6],[7,8,9]], mask=[0] + [1,0]*4)
>>> print(x)
[[1 -- 3]
 [-- 5 --]
 [7 -- 9]]
>>> print(x.sum())
25
>>> print(x.sum(axis=1))
[4 5 16]
>>> print(x.sum(axis=0))
[8 5 12]
>>> print(type(x.sum(axis=0, dtype=np.int64)[0]))
<type 'numpy.int64'>
```

MaskedArray.**trace**(*offset=0*, *axis1=0*, *axis2=1*, *dtype=None*, *out=None*)

Return the sum along diagonals of the array.

Refer to *numpy.trace* for full documentation.

See also:

numpy.trace equivalent function

MaskedArray.**var**(*axis=None*, *dtype=None*, *out=None*, *ddof=0*, *keepdims=<class 'numpy._globals._NoValue'>*)

Compute the variance along the specified axis.

Returns the variance of the array elements, a measure of the spread of a distribution. The variance is computed for the flattened array by default, otherwise over the specified axis.

Parameters **a** : array_like

Array containing numbers whose variance is desired. If *a* is not an array, a conversion is attempted.

axis : None or int or tuple of ints, optional

Axis or axes along which the variance is computed. The default is to compute the variance of the flattened array.

New in version 1.7.0.

If this is a tuple of ints, a variance is performed over multiple axes, instead of a single axis or all the axes as before.

dtype : data-type, optional

Type to use in computing the variance. For arrays of integer type the default is *float32*; for arrays of float types it is the same as the array type.

out : ndarray, optional

Alternate output array in which to place the result. It must have the same shape as the expected output, but the type is cast if necessary.

ddof : int, optional

"Delta Degrees of Freedom": the divisor used in the calculation is `N - ddof`, where `N` represents the number of elements. By default *ddof* is zero.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the input array.

If the default value is passed, then *keepdims* will not be passed through to the *var* method of sub-classes of *ndarray*, however any non-default value will be. If the sub-classes *sum* method does not implement *keepdims* any exceptions will be raised.

Returns **variance** : ndarray, see dtype parameter above

If `out=None`, returns a new array containing the variance; otherwise, a reference to the output array is returned.

See also:

std, *mean*, `nanmean`, `nanstd`, `nanvar`

`numpy.doc.ufuncs` Section "Output arguments"

Notes

The variance is the average of the squared deviations from the mean, i.e., `var = mean(abs(x - x.mean())**2)`.

The mean is normally calculated as `x.sum() / N`, where `N = len(x)`. If, however, *ddof* is specified, the divisor `N - ddof` is used instead. In standard statistical practice, `ddof=1` provides an unbiased estimator of the variance of a hypothetical infinite population. `ddof=0` provides a maximum likelihood estimate of the variance for normally distributed variables.

Note that for complex numbers, the absolute value is taken before squaring, so that the result is always real and nonnegative.

For floating-point input, the variance is computed using the same precision the input has. Depending on the input data, this can cause the results to be inaccurate, especially for *float32* (see example below). Specifying a higher-accuracy accumulator using the `dtype` keyword can alleviate this issue.

Examples

```
>>> a = np.array([[1, 2], [3, 4]])
>>> np.var(a)
1.25
>>> np.var(a, axis=0)
array([ 1.,  1.])
>>> np.var(a, axis=1)
array([ 0.25,  0.25])
```

In single precision, var() can be inaccurate:

```
>>> a = np.zeros((2, 512*512), dtype=np.float32)
>>> a[0, :] = 1.0
>>> a[1, :] = 0.1
>>> np.var(a)
0.20250003
```

Computing the variance in float64 is more accurate:

```
>>> np.var(a, dtype=np.float64)
0.20249999932944759
>>> ((1-0.55)**2 + (0.1-0.55)**2)/2
0.2025
```

Arithmetic and comparison operations

Comparison operators:

MaskedArray.__lt__($self, value, /)	Return self<value.
MaskedArray.__le__($self, value, /)	Return self<=value.
MaskedArray.__gt__($self, value, /)	Return self>value.
MaskedArray.__ge__($self, value, /)	Return self>=value.
MaskedArray.__eq__(other)	Check whether other equals self elementwise.
MaskedArray.__ne__(other)	Check whether other does not equal self elementwise.

MaskedArray.**__lt__**(*$self*, *value*, */*)
Return self<value.

MaskedArray.**__le__**(*$self*, *value*, */*)
Return self<=value.

MaskedArray.**__gt__**(*$self*, *value*, */*)
Return self>value.

MaskedArray.**__ge__**(*$self*, *value*, */*)
Return self>=value.

MaskedArray.**__eq__**(*other*)
Check whether other equals self elementwise.

When either of the elements is masked, the result is masked as well, but the underlying boolean data are still set, with self and other considered equal if both are masked, and unequal otherwise.

For structured arrays, all fields are combined, with masked values ignored. The result is masked if all fields were masked, with self and other considered equal only if both were fully masked.

MaskedArray.**__ne__**(*other*)
Check whether other does not equal self elementwise.

When either of the elements is masked, the result is masked as well, but the underlying boolean data are still set, with self and other considered equal if both are masked, and unequal otherwise.

For structured arrays, all fields are combined, with masked values ignored. The result is masked if all fields were masked, with self and other considered equal only if both were fully masked.

Truth value of an array (`bool`):

MaskedArray.__nonzero__	

Arithmetic:

MaskedArray.__abs__(self)	
MaskedArray.__add__(other)	Add self to other, and return a new masked array.
MaskedArray.__radd__(other)	Add other to self, and return a new masked array.
MaskedArray.__sub__(other)	Subtract other from self, and return a new masked array.
MaskedArray.__rsub__(other)	Subtract self from other, and return a new masked array.
MaskedArray.__mul__(other)	Multiply self by other, and return a new masked array.
MaskedArray.__rmul__(other)	Multiply other by self, and return a new masked array.
MaskedArray.__div__(other)	Divide other into self, and return a new masked array.
MaskedArray.__rdiv__	
MaskedArray.__truediv__(other)	Divide other into self, and return a new masked array.
MaskedArray.__rtruediv__(other)	Divide self into other, and return a new masked array.
MaskedArray.__floordiv__(other)	Divide other into self, and return a new masked array.
MaskedArray.__rfloordiv__(other)	Divide self into other, and return a new masked array.
MaskedArray.__mod__($self, value, /)	Return self%value.
MaskedArray.__rmod__($self, value, /)	Return value%self.
MaskedArray.__divmod__($self, value, /)	Return divmod(self, value).
MaskedArray.__rdivmod__($self, value, /)	Return divmod(value, self).
MaskedArray.__pow__(other)	Raise self to the power other, masking the potential NaNs/Infs
MaskedArray.__rpow__(other)	Raise other to the power self, masking the potential NaNs/Infs
MaskedArray.__lshift__($self, value, /)	Return self<<value.
MaskedArray.__rlshift__($self, value, /)	Return value<<self.
MaskedArray.__rshift__($self, value, /)	Return self>>value.
MaskedArray.__rrshift__($self, value, /)	Return value>>self.
MaskedArray.__and__($self, value, /)	Return self&value.
MaskedArray.__rand__($self, value, /)	Return value&self.
MaskedArray.__or__($self, value, /)	Return self|value.
MaskedArray.__ror__($self, value, /)	Return value|self.
MaskedArray.__xor__($self, value, /)	Return self^value.
MaskedArray.__rxor__($self, value, /)	Return value^self.

MaskedArray.**__abs__**(*self*)

MaskedArray.**__add__**(*other*)
Add self to other, and return a new masked array.

MaskedArray.**__radd__**(*other*)
Add other to self, and return a new masked array.

MaskedArray.**__sub__**(*other*)
Subtract other from self, and return a new masked array.

MaskedArray.**__rsub__**(*other*)
Subtract self from other, and return a new masked array.

MaskedArray.**__mul__**(*other*)
Multiply self by other, and return a new masked array.

MaskedArray.**__rmul__**(*other*)
Multiply other by self, and return a new masked array.

MaskedArray.**__div__**(*other*)
Divide other into self, and return a new masked array.

MaskedArray.**__truediv__**(*other*)
Divide other into self, and return a new masked array.

MaskedArray.**__rtruediv__**(*other*)
Divide self into other, and return a new masked array.

MaskedArray.**__floordiv__**(*other*)
Divide other into self, and return a new masked array.

MaskedArray.**__rfloordiv__**(*other*)
Divide self into other, and return a new masked array.

MaskedArray.**__mod__**(*$self*, *value*, */*)
Return self%value.

MaskedArray.**__rmod__**(*$self*, *value*, */*)
Return value%self.

MaskedArray.**__divmod__**(*$self*, *value*, */*)
Return divmod(self, value).

MaskedArray.**__rdivmod__**(*$self*, *value*, */*)
Return divmod(value, self).

MaskedArray.**__pow__**(*other*)
Raise self to the power other, masking the potential NaNs/Infs

MaskedArray.**__rpow__**(*other*)
Raise other to the power self, masking the potential NaNs/Infs

MaskedArray.**__lshift__**(*$self*, *value*, */*)
Return self<<value.

MaskedArray.**__rlshift__**(*$self*, *value*, */*)
Return value<<self.

MaskedArray.**__rshift__**(*$self*, *value*, */*)
Return self>>value.

MaskedArray.**__rrshift__**(*$self*, *value*, */*)
Return value>>self.

MaskedArray.**__and__**(*$self*, *value*, */*)
Return self&value.

MaskedArray.**__rand__**(*$self*, *value*, */*)
Return value&self.

MaskedArray.**__or__**(*$self*, *value*, */*)
Return self|value.

MaskedArray.**__ror__**(*$self*, *value*, */*)
Return value|self.

MaskedArray.__**xor**__(*$self*, *value*, */*)
Return self^value.

MaskedArray.__**rxor**__(*$self*, *value*, */*)
Return value^self.

Arithmetic, in-place:

MaskedArray.__iadd__(other)	Add other to self in-place.
MaskedArray.__isub__(other)	Subtract other from self in-place.
MaskedArray.__imul__(other)	Multiply self by other in-place.
MaskedArray.__idiv__(other)	Divide self by other in-place.
MaskedArray.__itruediv__(other)	True divide self by other in-place.
MaskedArray.__ifloordiv__(other)	Floor divide self by other in-place.
MaskedArray.__imod__($self, value, /)	Return self%=value.
MaskedArray.__ipow__(other)	Raise self to the power other, in place.
MaskedArray.__ilshift__($self, value, /)	Return self<<=value.
MaskedArray.__irshift__($self, value, /)	Return self>>=value.
MaskedArray.__iand__($self, value, /)	Return self&=value.
MaskedArray.__ior__($self, value, /)	Return self|=value.
MaskedArray.__ixor__($self, value, /)	Return self^=value.

MaskedArray.__**iadd**__(*other*)
Add other to self in-place.

MaskedArray.__**isub**__(*other*)
Subtract other from self in-place.

MaskedArray.__**imul**__(*other*)
Multiply self by other in-place.

MaskedArray.__**idiv**__(*other*)
Divide self by other in-place.

MaskedArray.__**itruediv**__(*other*)
True divide self by other in-place.

MaskedArray.__**ifloordiv**__(*other*)
Floor divide self by other in-place.

MaskedArray.__**imod**__(*$self*, *value*, */*)
Return self%=value.

MaskedArray.__**ipow**__(*other*)
Raise self to the power other, in place.

MaskedArray.__**ilshift**__(*$self*, *value*, */*)
Return self<<=value.

MaskedArray.__**irshift**__(*$self*, *value*, */*)
Return self>>=value.

MaskedArray.__**iand**__(*$self*, *value*, */*)
Return self&=value.

MaskedArray.__**ior**__(*$self*, *value*, */*)
Return self|=value.

MaskedArray.__**ixor**__(*$self*, *value*, */*)
Return self^=value.

Representation

MaskedArray.__repr__()	Literal string representation.
MaskedArray.__str__()	Return str(self).
MaskedArray.ids()	Return the addresses of the data and mask areas.
MaskedArray.iscontiguous()	Return a boolean indicating whether the data is contiguous.

MaskedArray.__**repr**__()
Literal string representation.

MaskedArray.__**str**__()
Return str(self).

MaskedArray.**ids**()
Return the addresses of the data and mask areas.

Parameters **None**

Examples

```
>>> x = np.ma.array([1, 2, 3], mask=[0, 1, 1])
>>> x.ids()
(166670640, 166659832)
```

If the array has no mask, the address of *nomask* is returned. This address is typically not close to the data in memory:

```
>>> x = np.ma.array([1, 2, 3])
>>> x.ids()
(166691080, 3083169284L)
```

MaskedArray.**iscontiguous**()
Return a boolean indicating whether the data is contiguous.

Parameters **None**

Examples

```
>>> x = np.ma.array([1, 2, 3])
>>> x.iscontiguous()
True
```

iscontiguous returns one of the flags of the masked array:

```
>>> x.flags
  C_CONTIGUOUS : True
  F_CONTIGUOUS : True
  OWNDATA : False
  WRITEABLE : True
```

(continues on next page)

(continued from previous page)

```
  ALIGNED : True
  WRITEBACKIFCOPY : False
  UPDATEIFCOPY : False
```

Special methods

For standard library functions:

MaskedArray.__copy__()	Used if copy.copy is called on an array.
MaskedArray.__deepcopy__(memo, /)	Used if copy.deepcopy is called on an array.
MaskedArray.__getstate__()	Return the internal state of the masked array, for pickling purposes.
MaskedArray.__reduce__()	Return a 3-tuple for pickling a MaskedArray.
MaskedArray.__setstate__(state)	Restore the internal state of the masked array, for pickling purposes.

MaskedArray.**__copy__**()
: Used if copy.copy is called on an array. Returns a copy of the array.

  Equivalent to a.copy(order='K').

MaskedArray.**__deepcopy__**(*memo*, */*) → Deep copy of array.
: Used if copy.deepcopy is called on an array.

MaskedArray.**__getstate__**()
: Return the internal state of the masked array, for pickling purposes.

MaskedArray.**__reduce__**()
: Return a 3-tuple for pickling a MaskedArray.

MaskedArray.**__setstate__**(*state*)
: Restore the internal state of the masked array, for pickling purposes. state is typically the output of the __getstate__ output, and is a 5-tuple:

  - class name
  - a tuple giving the shape of the data
  - a typecode for the data
  - a binary string for the data
  - a binary string for the mask.

Basic customization:

MaskedArray.__new__([data, mask, dtype, . . .])	Create a new masked array from scratch.
MaskedArray.__array__(ldtype)	Returns either a new reference to self if dtype is not given or a new array of provided data type if dtype is different from the current dtype of the array.
MaskedArray.__array_wrap__(obj[, context])	Special hook for ufuncs.

static MaskedArray.**__new__**(*data=None*, *mask=False*, *dtype=None*, *copy=False*, *subok=True*, *ndmin=0*, *fill_value=None*, *keep_mask=True*, *hard_mask=None*, *shrink=True*, *order=None*, ***options*)
: Create a new masked array from scratch.

Notes

A masked array can also be created by taking a .view(MaskedArray).

MaskedArray.**__array__**(|*dtype*) → reference if type unchanged, copy otherwise.
Returns either a new reference to self if dtype is not given or a new array of provided data type if dtype is different from the current dtype of the array.

MaskedArray.**__array_wrap__**(*obj*, *context=None*)
Special hook for ufuncs.

Wraps the numpy array and sets the mask according to context.

Container customization: (see *Indexing*)

MaskedArray.__len__($self, /)	Return len(self).
MaskedArray.__getitem__(indx)	x.__getitem__(y) <==> x[y]
MaskedArray.__setitem__(indx, value)	x.__setitem__(i, y) <==> x[i]=y
MaskedArray.__delitem__($self, key, /)	Delete self[key].
MaskedArray.__contains__($self, key, /)	Return key in self.

MaskedArray.**__len__**(*$self*, */*)
Return len(self).

MaskedArray.**__getitem__**(*indx*)
x.__getitem__(y) <==> x[y]

Return the item described by i, as a masked array.

MaskedArray.**__setitem__**(*indx*, *value*)
x.__setitem__(i, y) <==> x[i]=y

Set item described by index. If value is masked, masks those locations.

MaskedArray.**__delitem__**(*$self*, *key*, */*)
Delete self[key].

MaskedArray.**__contains__**(*$self*, *key*, */*)
Return key in self.

Specific methods

Handling the mask

The following methods can be used to access information about the mask or to manipulate the mask.

MaskedArray.__setmask__(mask[, copy])	Set the mask.
MaskedArray.harden_mask()	Force the mask to hard.
MaskedArray.soften_mask()	Force the mask to soft.
MaskedArray.unshare_mask()	Copy the mask and set the sharedmask flag to False.
MaskedArray.shrink_mask()	Reduce a mask to nomask when possible.

MaskedArray.**__setmask__**(*mask*, *copy=False*)
Set the mask.

MaskedArray.**harden_mask**()
Force the mask to hard.

Whether the mask of a masked array is hard or soft is determined by its *hardmask* property. *harden_mask* sets *hardmask* to True.

See also:

hardmask

MaskedArray.**soften_mask**()
Force the mask to soft.

Whether the mask of a masked array is hard or soft is determined by its *hardmask* property. *soften_mask* sets *hardmask* to False.

See also:

hardmask

MaskedArray.**unshare_mask**()
Copy the mask and set the sharedmask flag to False.

Whether the mask is shared between masked arrays can be seen from the *sharedmask* property. *unshare_mask* ensures the mask is not shared. A copy of the mask is only made if it was shared.

See also:

sharedmask

MaskedArray.**shrink_mask**()
Reduce a mask to nomask when possible.

Parameters **None**

Returns None

Examples

```
>>> x = np.ma.array([[1,2 ], [3, 4]], mask=[0]*4)
>>> x.mask
array([[False, False],
       [False, False]])
>>> x.shrink_mask()
>>> x.mask
False
```

Handling the *fill_value*

MaskedArray.get_fill_value()	Return the filling value of the masked array.
MaskedArray.set_fill_value([value])	Set the filling value of the masked array.

MaskedArray.**get_fill_value**()
Return the filling value of the masked array.

Returns **fill_value** : scalar

The filling value.

Examples

```
>>> for dt in [np.int32, np.int64, np.float64, np.complex128]:
...     np.ma.array([0, 1], dtype=dt).get_fill_value()
...
999999
999999
1e+20
(1e+20+0j)
```

```
>>> x = np.ma.array([0, 1.], fill_value=-np.inf)
>>> x.get_fill_value()
-inf
```

MaskedArray.**set_fill_value**(*value=None*)

Set the filling value of the masked array.

Parameters **value** : scalar, optional

The new filling value. Default is None, in which case a default based on the data type is used.

See also:

ma.set_fill_value Equivalent function.

Examples

```
>>> x = np.ma.array([0, 1.], fill_value=-np.inf)
>>> x.fill_value
-inf
>>> x.set_fill_value(np.pi)
>>> x.fill_value
3.1415926535897931
```

Reset to default:

```
>>> x.set_fill_value()
>>> x.fill_value
1e+20
```

Counting the missing elements

MaskedArray.count([axis, keepdims])	Count the non-masked elements of the array along the given axis.

MaskedArray.**count**(*axis=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Count the non-masked elements of the array along the given axis.

Parameters **axis** : None or int or tuple of ints, optional

Axis or axes along which the count is performed. The default (*axis* = *None*) performs the count over all the dimensions of the input array. *axis* may be negative, in which case

it counts from the last to the first axis.

New in version 1.10.0.

If this is a tuple of ints, the count is performed on multiple axes, instead of a single axis or all the axes as before.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the array.

Returns **result** : ndarray or scalar

An array with the same shape as the input array, with the specified axis removed. If the array is a 0-d array, or if *axis* is None, a scalar is returned.

See also:

count_masked Count masked elements in array or along a given axis.

Examples

```
>>> import numpy.ma as ma
>>> a = ma.arange(6).reshape((2, 3))
>>> a[1, :] = ma.masked
>>> a
masked_array(data =
 [[0 1 2]
 [-- -- --]],
             mask =
 [[False False False]
 [ True  True  True]],
       fill_value = 999999)
>>> a.count()
3
```

When the *axis* keyword is specified an array of appropriate size is returned.

```
>>> a.count(axis=0)
array([1, 1, 1])
>>> a.count(axis=1)
array([3, 0])
```

1.7.7 Masked array operations

Constants

ma.MaskType	alias of numpy.bool_

numpy.ma.**MaskType**
alias of numpy.bool_

Creation

From existing data

ma.masked_array	alias of numpy.ma.core.MaskedArray
ma.array(data[, dtype, copy, order, mask, ...])	An array class with possibly masked values.
ma.copy(self, *args, **params) a.copy(order=)	Return a copy of the array.
ma.frombuffer(buffer[, dtype, count, offset])	Interpret a buffer as a 1-dimensional array.
ma.fromfunction(function, shape, **kwargs)	Construct an array by executing a function over each coordinate.
ma.MaskedArray.copy([order])	Return a copy of the array.

numpy.ma.**copy**(*self*, **args*, ***params*) *a.copy(order='C')* **= <numpy.ma.core._frommethod object>**

Return a copy of the array.

Parameters **order** : {'C', 'F', 'A', 'K'}, optional

Controls the memory layout of the copy. 'C' means C-order, 'F' means F-order, 'A' means 'F' if *a* is Fortran contiguous, 'C' otherwise. 'K' means match the layout of *a* as closely as possible. (Note that this function and *numpy.copy* are very similar, but have different default values for their order= arguments.)

Examples

```
>>> x = np.array([[1,2,3],[4,5,6]], order='F')
```

```
>>> y = x.copy()
```

```
>>> x.fill(0)
```

```
>>> x
array([[0, 0, 0],
       [0, 0, 0]])
```

```
>>> y
array([[1, 2, 3],
       [4, 5, 6]])
```

```
>>> y.flags['C_CONTIGUOUS']
True
```

numpy.ma.**frombuffer**(*buffer*, *dtype=float*, *count=-1*, *offset=0*) **= <numpy.ma.core._convert2ma object>**

Interpret a buffer as a 1-dimensional array.

Parameters **buffer** : buffer_like

An object that exposes the buffer interface.

dtype : data-type, optional

Data-type of the returned array; default: float.

count : int, optional

Number of items to read. `-1` means all data in the buffer.

offset : int, optional

Start reading the buffer from this offset (in bytes); default: 0.

Notes

If the buffer has data that is not in machine byte-order, this should be specified as part of the data-type, e.g.:

```
>>> dt = np.dtype(int)
>>> dt = dt.newbyteorder('>')
>>> np.frombuffer(buf, dtype=dt)
```

The data of the resulting array will not be byteswapped, but will be interpreted correctly.

Examples

```
>>> s = 'hello world'
>>> np.frombuffer(s, dtype='S1', count=5, offset=6)
array(['w', 'o', 'r', 'l', 'd'],
      dtype='|S1')
```

```
>>> np.frombuffer(b'\x01\x02', dtype=np.uint8)
array([1, 2], dtype=uint8)
>>> np.frombuffer(b'\x01\x02\x03\x04\x05', dtype=np.uint8, count=3)
array([1, 2, 3], dtype=uint8)
```

numpy.ma.**fromfunction**(*function*, *shape*, ***kwargs*) **= <numpy.ma.core._convert2ma object>**

Construct an array by executing a function over each coordinate.

The resulting array therefore has a value `fn(x, y, z)` at coordinate `(x, y, z)`.

Parameters **function** : callable

The function is called with N parameters, where N is the rank of *shape*. Each parameter represents the coordinates of the array varying along a specific axis. For example, if *shape* were `(2, 2)`, then the parameters would be `array([[0, 0], [1, 1]])` and `array([[0, 1], [0, 1]])`

shape : (N,) tuple of ints

Shape of the output array, which also determines the shape of the coordinate arrays passed to *function*.

dtype : data-type, optional

Data-type of the coordinate arrays passed to *function*. By default, *dtype* is float.

Returns **fromfunction** : any

The result of the call to *function* is passed back directly. Therefore the shape of *fromfunction* is completely determined by *function*. If *function* returns a scalar value, the shape of *fromfunction* would match the *shape* parameter.

See also:

indices, meshgrid

Notes

Keywords other than *dtype* are passed to *function*.

Examples

```
>>> np.fromfunction(lambda i, j: i == j, (3, 3), dtype=int)
array([[ True, False, False],
       [False,  True, False],
       [False, False,  True]])
```

```
>>> np.fromfunction(lambda i, j: i + j, (3, 3), dtype=int)
array([[0, 1, 2],
       [1, 2, 3],
       [2, 3, 4]])
```

Ones and zeros

ma.empty(shape[, dtype, order])	Return a new array of given shape and type, without initializing entries.
ma.empty_like(a[, dtype, order, subok])	Return a new array with the same shape and type as a given array.
ma.masked_all(shape[, dtype])	Empty masked array with all elements masked.
ma.masked_all_like(arr)	Empty masked array with the properties of an existing array.
ma.ones(shape[, dtype, order])	Return a new array of given shape and type, filled with ones.
ma.zeros(shape[, dtype, order])	Return a new array of given shape and type, filled with zeros.

numpy.ma.**empty**(*shape*, *dtype=float*, *order='C'*) **= <numpy.ma.core._convert2ma object>**

Return a new array of given shape and type, without initializing entries.

Parameters **shape** : int or tuple of int

Shape of the empty array

dtype : data-type, optional

Desired output data-type.

order : {'C', 'F'}, optional

Whether to store multi-dimensional data in row-major (C-style) or column-major (Fortran-style) order in memory.

Returns **out** : ndarray

Array of uninitialized (arbitrary) data of the given shape, dtype, and order. Object arrays will be initialized to None.

See also:

empty_like, *zeros*, *ones*

Notes

empty, unlike *zeros*, does not set the array values to zero, and may therefore be marginally faster. On the other hand, it requires the user to manually set all the values in the array, and should be used with caution.

Examples

```
>>> np.empty([2, 2])
array([[ -9.74499359e+001,   6.69583040e-309],
       [  2.13182611e-314,   3.06959433e-309]])         #random
```

```
>>> np.empty([2, 2], dtype=int)
array([[-1073741821, -1067949133],
       [  496041986,    19249760]])                     #random
```

numpy.ma.**empty_like**(*a*, *dtype=None*, *order='K'*, *subok=True*) **= <numpy.ma.core._convert2ma object>**

Return a new array with the same shape and type as a given array.

Parameters **a** : array_like

The shape and data-type of *a* define these same attributes of the returned array.

dtype : data-type, optional

Overrides the data type of the result.

New in version 1.6.0.

order : {'C', 'F', 'A', or 'K'}, optional

Overrides the memory layout of the result. 'C' means C-order, 'F' means F-order, 'A' means 'F' if `a` is Fortran contiguous, 'C' otherwise. 'K' means match the layout of `a` as closely as possible.

New in version 1.6.0.

subok : bool, optional.

If True, then the newly created array will use the sub-class type of 'a', otherwise it will be a base-class array. Defaults to True.

Returns **out** : ndarray

Array of uninitialized (arbitrary) data with the same shape and type as *a*.

See also:

ones_like Return an array of ones with shape and type of input.

zeros_like Return an array of zeros with shape and type of input.

empty Return a new uninitialized array.

ones Return a new array setting values to one.

zeros Return a new array setting values to zero.

Notes

This function does *not* initialize the returned array; to do that use *zeros_like* or *ones_like* instead. It may be marginally faster than the functions that do set the array values.

Examples

```
>>> a = ([1,2,3], [4,5,6])                         # a is array-like
>>> np.empty_like(a)
array([[-1073741821, -1073741821,           3],    #random
       [          0,           0, -1073741821]])
>>> a = np.array([[1., 2., 3.],[4.,5.,6.]])
>>> np.empty_like(a)
array([[ -2.00000715e+000,   1.48219694e-323,  -2.00000572e+000],#random
       [  4.38791518e-305,  -2.00000715e+000,   4.17269252e-309]])
```

numpy.ma.**masked_all**(*shape*, *dtype=<class 'float'>*)

Empty masked array with all elements masked.

Return an empty masked array of the given shape and dtype, where all the data are masked.

Parameters **shape** : tuple

Shape of the required MaskedArray.

dtype : dtype, optional

Data type of the output.

Returns **a** : MaskedArray

A masked array with all data masked.

See also:

masked_all_like Empty masked array modelled on an existing array.

Examples

```
>>> import numpy.ma as ma
>>> ma.masked_all((3, 3))
masked_array(data =
 [[-- -- --]
 [-- -- --]
 [-- -- --]],
      mask =
 [[ True  True  True]
 [ True  True  True]
 [ True  True  True]],
      fill_value=1e+20)
```

The *dtype* parameter defines the underlying data type.

```
>>> a = ma.masked_all((3, 3))
>>> a.dtype
dtype('float64')
```

(continues on next page)

(continued from previous page)

```
>>> a = ma.masked_all((3, 3), dtype=np.int32)
>>> a.dtype
dtype('int32')
```

numpy.ma.**masked_all_like**(*arr*)

Empty masked array with the properties of an existing array.

Return an empty masked array of the same shape and dtype as the array *arr*, where all the data are masked.

Parameters **arr** : ndarray

An array describing the shape and dtype of the required MaskedArray.

Returns **a** : MaskedArray

A masked array with all data masked.

Raises **AttributeError**

If *arr* doesn't have a shape attribute (i.e. not an ndarray)

See also:

masked_all Empty masked array with all elements masked.

Examples

```
>>> import numpy.ma as ma
>>> arr = np.zeros((2, 3), dtype=np.float32)
>>> arr
array([[ 0.,  0.,  0.],
       [ 0.,  0.,  0.]], dtype=float32)
>>> ma.masked_all_like(arr)
masked_array(data =
 [[-- -- --]
 [-- -- --]],
      mask =
 [[ True  True  True]
 [ True  True  True]],
      fill_value=1e+20)
```

The dtype of the masked array matches the dtype of *arr*.

```
>>> arr.dtype
dtype('float32')
>>> ma.masked_all_like(arr).dtype
dtype('float32')
```

numpy.ma.**ones**(*shape*, *dtype=None*, *order='C'*) **= <numpy.ma.core._convert2ma object>**

Return a new array of given shape and type, filled with ones.

Parameters **shape** : int or sequence of ints

Shape of the new array, e.g., `(2, 3)` or `2`.

dtype : data-type, optional

The desired data-type for the array, e.g., `numpy.int8`. Default is `numpy.float64`.

order : {'C', 'F'}, optional

Whether to store multidimensional data in C- or Fortran-contiguous (row- or column-wise) order in memory.

Returns **out** : ndarray

Array of ones with the given shape, dtype, and order.

See also:

zeros, ones_like

Examples

```
>>> np.ones(5)
array([ 1.,  1.,  1.,  1.,  1.])
```

```
>>> np.ones((5,), dtype=int)
array([1, 1, 1, 1, 1])
```

```
>>> np.ones((2, 1))
array([[ 1.],
       [ 1.]])
```

```
>>> s = (2,2)
>>> np.ones(s)
array([[ 1.,  1.],
       [ 1.,  1.]])
```

numpy.ma.**zeros**(*shape*, *dtype=float*, *order='C'*) **= <numpy.ma.core._convert2ma object>**

Return a new array of given shape and type, filled with zeros.

Parameters **shape** : int or sequence of ints

Shape of the new array, e.g., (2, 3) or 2.

dtype : data-type, optional

The desired data-type for the array, e.g., numpy.int8. Default is numpy.float64.

order : {'C', 'F'}, optional

Whether to store multidimensional data in C- or Fortran-contiguous (row- or column-wise) order in memory.

Returns **out** : ndarray

Array of zeros with the given shape, dtype, and order.

See also:

zeros_like Return an array of zeros with shape and type of input.

ones_like Return an array of ones with shape and type of input.

empty_like Return an empty array with shape and type of input.

ones Return a new array setting values to one.

empty Return a new uninitialized array.

Examples

```
>>> np.zeros(5)
array([ 0.,  0.,  0.,  0.,  0.])
```

```
>>> np.zeros((5,), dtype=int)
array([0, 0, 0, 0, 0])
```

```
>>> np.zeros((2, 1))
array([[ 0.],
       [ 0.]])
```

```
>>> s = (2,2)
>>> np.zeros(s)
array([[ 0.,  0.],
       [ 0.,  0.]])
```

```
>>> np.zeros((2,), dtype=[('x', 'i4'), ('y', 'i4')]) # custom dtype
array([(0, 0), (0, 0)],
      dtype=[('x', '<i4'), ('y', '<i4')])
```

Inspecting the array

ma.all(self[, axis, out, keepdims])	Returns True if all elements evaluate to True.
ma.any(self[, axis, out, keepdims])	Returns True if any of the elements of *a* evaluate to True.
ma.count(self[, axis, keepdims])	Count the non-masked elements of the array along the given axis.
ma.count_masked(arr[, axis])	Count the number of masked elements along the given axis.
ma.getmask(a)	Return the mask of a masked array, or nomask.
ma.getmaskarray(arr)	Return the mask of a masked array, or full boolean array of False.
ma.getdata(a[, subok])	Return the data of a masked array as an ndarray.
ma.nonzero(self)	Return the indices of unmasked elements that are not zero.
ma.shape(obj)	Return the shape of an array.
ma.size(obj[, axis])	Return the number of elements along a given axis.
ma.is_masked(x)	Determine whether input has masked values.
ma.is_mask(m)	Return True if m is a valid, standard mask.
ma.MaskedArray.data	Return the current data, as a view of the original underlying data.
ma.MaskedArray.mask	Mask
ma.MaskedArray.recordmask	Return the mask of the records.
ma.MaskedArray.all([axis, out, keepdims])	Returns True if all elements evaluate to True.
ma.MaskedArray.any([axis, out, keepdims])	Returns True if any of the elements of *a* evaluate to True.
ma.MaskedArray.count([axis, keepdims])	Count the non-masked elements of the array along the given axis.
ma.MaskedArray.nonzero()	Return the indices of unmasked elements that are not zero.
ma.shape(obj)	Return the shape of an array.
ma.size(obj[, axis])	Return the number of elements along a given axis.

numpy.ma.**all**(*self*, *axis=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*) = **<numpy.ma.core._frommethod object>**

Returns True if all elements evaluate to True.

The output array is masked where all the values along the given axis are masked: if the output would have been a scalar and that all the values are masked, then the output is *masked*.

Refer to *numpy.all* for full documentation.

See also:

ndarray.all corresponding function for ndarrays

numpy.all equivalent function

Examples

```
>>> np.ma.array([1,2,3]).all()
True
>>> a = np.ma.array([1,2,3], mask=True)
>>> (a.all() is np.ma.masked)
True
```

numpy.ma.**any**(*self*, *axis=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*) = **<numpy.ma.core._frommethod object>**

Returns True if any of the elements of *a* evaluate to True.

Masked values are considered as False during computation.

Refer to *numpy.any* for full documentation.

See also:

ndarray.any corresponding function for ndarrays

numpy.any equivalent function

numpy.ma.**count**(*self*, *axis=None*, *keepdims=<class 'numpy._globals._NoValue'>*) = **<numpy.ma.core._frommethod object>**

Count the non-masked elements of the array along the given axis.

Parameters **axis** : None or int or tuple of ints, optional

Axis or axes along which the count is performed. The default (*axis* = *None*) performs the count over all the dimensions of the input array. *axis* may be negative, in which case it counts from the last to the first axis.

New in version 1.10.0.

If this is a tuple of ints, the count is performed on multiple axes, instead of a single axis or all the axes as before.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the array.

Returns **result** : ndarray or scalar

An array with the same shape as the input array, with the specified axis removed. If the array is a 0-d array, or if *axis* is None, a scalar is returned.

See also:

count_masked Count masked elements in array or along a given axis.

Examples

```
>>> import numpy.ma as ma
>>> a = ma.arange(6).reshape((2, 3))
>>> a[1, :] = ma.masked
>>> a
masked_array(data =
 [[0 1 2]
 [-- -- --]],
             mask =
 [[False False False]
 [ True  True  True]],
       fill_value = 999999)
>>> a.count()
3
```

When the *axis* keyword is specified an array of appropriate size is returned.

```
>>> a.count(axis=0)
array([1, 1, 1])
>>> a.count(axis=1)
array([3, 0])
```

numpy.ma.**count_masked**(*arr*, *axis=None*)

Count the number of masked elements along the given axis.

Parameters **arr** : array_like

An array with (possibly) masked elements.

axis : int, optional

Axis along which to count. If None (default), a flattened version of the array is used.

Returns **count** : int, ndarray

The total number of masked elements (axis=None) or the number of masked elements along each slice of the given axis.

See also:

MaskedArray.count Count non-masked elements.

Examples

```
>>> import numpy.ma as ma
>>> a = np.arange(9).reshape((3,3))
>>> a = ma.array(a)
>>> a[1, 0] = ma.masked
>>> a[1, 2] = ma.masked
>>> a[2, 1] = ma.masked
>>> a
```

(continues on next page)

(continued from previous page)

```
masked_array(data =
 [[0 1 2]
 [-- 4 --]
 [6 -- 8]],
      mask =
 [[False False False]
 [ True False  True]
 [False  True False]],
      fill_value=999999)
>>> ma.count_masked(a)
3
```

When the *axis* keyword is used an array is returned.

```
>>> ma.count_masked(a, axis=0)
array([1, 1, 1])
>>> ma.count_masked(a, axis=1)
array([0, 2, 1])
```

numpy.ma.**getmask**(*a*)

Return the mask of a masked array, or nomask.

Return the mask of *a* as an ndarray if *a* is a *MaskedArray* and the mask is not *nomask*, else return *nomask*. To guarantee a full array of booleans of the same shape as a, use *getmaskarray*.

Parameters **a** : array_like

Input *MaskedArray* for which the mask is required.

See also:

getdata Return the data of a masked array as an ndarray.

getmaskarray Return the mask of a masked array, or full array of False.

Examples

```
>>> import numpy.ma as ma
>>> a = ma.masked_equal([[1,2],[3,4]], 2)
>>> a
masked_array(data =
 [[1 --]
 [3 4]],
      mask =
 [[False  True]
 [False False]],
      fill_value=999999)
>>> ma.getmask(a)
array([[False,  True],
       [False, False]])
```

Equivalently use the *MaskedArray* *mask* attribute.

```
>>> a.mask
array([[False,  True],
       [False, False]])
```

Result when mask == *nomask*

```
>>> b = ma.masked_array([[1,2],[3,4]])
>>> b
masked_array(data =
 [[1 2]
 [3 4]],
      mask =
 False,
      fill_value=999999)
>>> ma.nomask
False
>>> ma.getmask(b) == ma.nomask
True
>>> b.mask == ma.nomask
True
```

numpy.ma.**getmaskarray**(*arr*)

Return the mask of a masked array, or full boolean array of False.

Return the mask of *arr* as an ndarray if *arr* is a *MaskedArray* and the mask is not *nomask*, else return a full boolean array of False of the same shape as *arr*.

Parameters **arr** : array_like

Input *MaskedArray* for which the mask is required.

See also:

getmask Return the mask of a masked array, or nomask.

getdata Return the data of a masked array as an ndarray.

Examples

```
>>> import numpy.ma as ma
>>> a = ma.masked_equal([[1,2],[3,4]], 2)
>>> a
masked_array(data =
 [[1 --]
 [3 4]],
      mask =
 [[False  True]
 [False False]],
      fill_value=999999)
>>> ma.getmaskarray(a)
array([[False,  True],
       [False, False]])
```

Result when mask == nomask

```
>>> b = ma.masked_array([[1,2],[3,4]])
>>> b
masked_array(data =
 [[1 2]
 [3 4]],
      mask =
 False,
```

(continues on next page)

(continued from previous page)

```
      fill_value=999999)
>>> >ma.getmaskarray(b)
array([[False, False],
       [False, False]])
```

numpy.ma.**getdata**(*a*, *subok=True*)

Return the data of a masked array as an ndarray.

Return the data of *a* (if any) as an ndarray if *a* is a `MaskedArray`, else return *a* as a ndarray or subclass (depending on *subok*) if not.

Parameters **a** : array_like

Input `MaskedArray`, alternatively a ndarray or a subclass thereof.

subok : bool

Whether to force the output to be a *pure* ndarray (False) or to return a subclass of ndarray if appropriate (True, default).

See also:

getmask Return the mask of a masked array, or nomask.

getmaskarray Return the mask of a masked array, or full array of False.

Examples

```
>>> import numpy.ma as ma
>>> a = ma.masked_equal([[1,2],[3,4]], 2)
>>> a
masked_array(data =
 [[1 --]
 [3 4]],
      mask =
 [[False  True]
 [False False]],
      fill_value=999999)
>>> ma.getdata(a)
array([[1, 2],
       [3, 4]])
```

Equivalently use the `MaskedArray` *data* attribute.

```
>>> a.data
array([[1, 2],
       [3, 4]])
```

numpy.ma.**nonzero**(*self*) **= <numpy.ma.core._frommethod object>**

Return the indices of unmasked elements that are not zero.

Returns a tuple of arrays, one for each dimension, containing the indices of the non-zero elements in that dimension. The corresponding non-zero values can be obtained with:

```
a[a.nonzero()]
```

To group the indices by element, rather than dimension, use instead:

```
np.transpose(a.nonzero())
```

The result of this is always a 2d array, with a row for each non-zero element.

Parameters **None**

Returns **tuple_of_arrays** : tuple

Indices of elements that are non-zero.

See also:

numpy.nonzero Function operating on ndarrays.

flatnonzero Return indices that are non-zero in the flattened version of the input array.

ndarray.nonzero Equivalent ndarray method.

count_nonzero Counts the number of non-zero elements in the input array.

Examples

```
>>> import numpy.ma as ma
>>> x = ma.array(np.eye(3))
>>> x
masked_array(data =
 [[ 1.  0.  0.]
 [ 0.  1.  0.]
 [ 0.  0.  1.]],
      mask =
 False,
      fill_value=1e+20)
>>> x.nonzero()
(array([0, 1, 2]), array([0, 1, 2]))
```

Masked elements are ignored.

```
>>> x[1, 1] = ma.masked
>>> x
masked_array(data =
 [[1.0 0.0 0.0]
 [0.0 -- 0.0]
 [0.0 0.0 1.0]],
      mask =
 [[False False False]
 [False  True False]
 [False False False]],
      fill_value=1e+20)
>>> x.nonzero()
(array([0, 2]), array([0, 2]))
```

Indices can also be grouped by element.

```
>>> np.transpose(x.nonzero())
array([[0, 0],
       [2, 2]])
```

A common use for `nonzero` is to find the indices of an array, where a condition is True. Given an array *a*, the condition *a* > 3 is a boolean array and since False is interpreted as 0, ma.nonzero(a > 3) yields the indices of the *a* where the condition is true.

```
>>> a = ma.array([[1,2,3],[4,5,6],[7,8,9]])
>>> a > 3
masked_array(data =
 [[False False False]
 [ True  True  True]
 [ True  True  True]],
      mask =
 False,
      fill_value=999999)
>>> ma.nonzero(a > 3)
(array([1, 1, 1, 2, 2, 2]), array([0, 1, 2, 0, 1, 2]))
```

The `nonzero` method of the condition array can also be called.

```
>>> (a > 3).nonzero()
(array([1, 1, 1, 2, 2, 2]), array([0, 1, 2, 0, 1, 2]))
```

numpy.ma.**shape**(*obj*)

Return the shape of an array.

Parameters **a** : array_like

Input array.

Returns **shape** : tuple of ints

The elements of the shape tuple give the lengths of the corresponding array dimensions.

See also:

`alen`

`ndarray.shape` Equivalent array method.

Examples

```
>>> np.shape(np.eye(3))
(3, 3)
>>> np.shape([[1, 2]])
(1, 2)
>>> np.shape([0])
(1,)
>>> np.shape(0)
()
```

```
>>> a = np.array([(1, 2), (3, 4)], dtype=[('x', 'i4'), ('y', 'i4')])
>>> np.shape(a)
(2,)
>>> a.shape
(2,)
```

numpy.ma.**size**(*obj*, *axis=None*)

Return the number of elements along a given axis.

Parameters **a** : array_like

Input data.

axis : int, optional

Axis along which the elements are counted. By default, give the total number of elements.

Returns **element_count** : int

Number of elements along the specified axis.

See also:

shape dimensions of array

ndarray.shape dimensions of array

ndarray.size number of elements in array

Examples

```
>>> a = np.array([[1,2,3],[4,5,6]])
>>> np.size(a)
6
>>> np.size(a,1)
3
>>> np.size(a,0)
2
```

numpy.ma.**is_masked**(*x*)

Determine whether input has masked values.

Accepts any object as input, but always returns False unless the input is a MaskedArray containing masked values.

Parameters **x** : array_like

Array to check for masked values.

Returns **result** : bool

True if *x* is a MaskedArray with masked values, False otherwise.

Examples

```
>>> import numpy.ma as ma
>>> x = ma.masked_equal([0, 1, 0, 2, 3], 0)
>>> x
masked_array(data = [-- 1 -- 2 3],
      mask = [ True False  True False False],
      fill_value=999999)
>>> ma.is_masked(x)
True
>>> x = ma.masked_equal([0, 1, 0, 2, 3], 42)
>>> x
masked_array(data = [0 1 0 2 3],
      mask = False,
      fill_value=999999)
```

(continues on next page)

(continued from previous page)

```
>>> ma.is_masked(x)
False
```

Always returns False if *x* isn't a MaskedArray.

```
>>> x = [False, True, False]
>>> ma.is_masked(x)
False
>>> x = 'a string'
>>> ma.is_masked(x)
False
```

numpy.ma.**is_mask**(*m*)

Return True if m is a valid, standard mask.

This function does not check the contents of the input, only that the type is MaskType. In particular, this function returns False if the mask has a flexible dtype.

Parameters **m** : array_like

Array to test.

Returns **result** : bool

True if *m.dtype.type* is MaskType, False otherwise.

See also:

isMaskedArray Test whether input is an instance of MaskedArray.

Examples

```
>>> import numpy.ma as ma
>>> m = ma.masked_equal([0, 1, 0, 2, 3], 0)
>>> m
masked_array(data = [-- 1 -- 2 3],
      mask = [ True False  True False False],
      fill_value=999999)
>>> ma.is_mask(m)
False
>>> ma.is_mask(m.mask)
True
```

Input must be an ndarray (or have similar attributes) for it to be considered a valid mask.

```
>>> m = [False, True, False]
>>> ma.is_mask(m)
False
>>> m = np.array([False, True, False])
>>> m
array([False,  True, False])
>>> ma.is_mask(m)
True
```

Arrays with complex dtypes don't return True.

```
>>> dtype = np.dtype({'names':['monty', 'pithon'],
                      'formats':[bool, bool]})
>>> dtype
dtype([('monty', '|b1'), ('pithon', '|b1')])
>>> m = np.array([(True, False), (False, True), (True, False)],
                 dtype=dtype)
>>> m
array([(True, False), (False, True), (True, False)],
      dtype=[('monty', '|b1'), ('pithon', '|b1')])
>>> ma.is_mask(m)
False
```

MaskedArray.**data**
Return the current data, as a view of the original underlying data.

MaskedArray.**mask**
Mask

MaskedArray.**recordmask**
Return the mask of the records.

A record is masked when all the fields are masked.

Manipulating a MaskedArray

Changing the shape

ma.ravel(self[, order])	Returns a 1D version of self, as a view.
ma.reshape(a, new_shape[, order])	Returns an array containing the same data with a new shape.
ma.resize(x, new_shape)	Return a new masked array with the specified size and shape.
ma.MaskedArray.flatten([order])	Return a copy of the array collapsed into one dimension.
ma.MaskedArray.ravel([order])	Returns a 1D version of self, as a view.
ma.MaskedArray.reshape(*s, **kwargs)	Give a new shape to the array without changing its data.
ma.MaskedArray.resize(newshape[, refcheck, ...])	

numpy.ma.**ravel**(*self*, *order='C'*) **= <numpy.ma.core._frommethod object>**
Returns a 1D version of self, as a view.

Parameters **order** : {'C', 'F', 'A', 'K'}, optional

The elements of *a* are read using this index order. 'C' means to index the elements in C-like order, with the last axis index changing fastest, back to the first axis index changing slowest. 'F' means to index the elements in Fortran-like index order, with the first index changing fastest, and the last index changing slowest. Note that the 'C' and 'F' options take no account of the memory layout of the underlying array, and only refer to the order of axis indexing. 'A' means to read the elements in Fortran-like index order if *m* is Fortran *contiguous* in memory, C-like order otherwise. 'K' means to read the elements in the order they occur in memory, except for reversing the data when strides are negative. By default, 'C' index order is used.

Returns MaskedArray

Output view is of shape `(self.size,)` (or `(np.ma.product(self.shape),)`).

Examples

```
>>> x = np.ma.array([[1,2,3],[4,5,6],[7,8,9]], mask=[0] + [1,0]*4)
>>> print(x)
[[1 -- 3]
 [-- 5 --]
 [7 -- 9]]
>>> print(x.ravel())
[1 -- 3 -- 5 -- 7 -- 9]
```

numpy.ma.**reshape**(*a*, *new_shape*, *order='C'*)

Returns an array containing the same data with a new shape.

Refer to *MaskedArray.reshape* for full documentation.

See also:

MaskedArray.reshape equivalent function

numpy.ma.**resize**(*x*, *new_shape*)

Return a new masked array with the specified size and shape.

This is the masked equivalent of the *numpy.resize* function. The new array is filled with repeated copies of *x* (in the order that the data are stored in memory). If *x* is masked, the new array will be masked, and the new mask will be a repetition of the old one.

See also:

numpy.resize Equivalent function in the top level NumPy module.

Examples

```
>>> import numpy.ma as ma
>>> a = ma.array([[1, 2] ,[3, 4]])
>>> a[0, 1] = ma.masked
>>> a
masked_array(data =
 [[1 --]
 [3 4]],
             mask =
 [[False  True]
 [False False]],
       fill_value = 999999)
>>> np.resize(a, (3, 3))
array([[1, 2, 3],
       [4, 1, 2],
       [3, 4, 1]])
>>> ma.resize(a, (3, 3))
masked_array(data =
 [[1 -- 3]
 [4 1 --]
 [3 4 1]],
```

(continues on next page)

(continued from previous page)

```
             mask =
 [[False  True False]
 [False False  True]
 [False False False]],
       fill_value = 999999)
```

A MaskedArray is always returned, regardless of the input type.

```
>>> a = np.array([[1, 2] ,[3, 4]])
>>> ma.resize(a, (3, 3))
masked_array(data =
 [[1 2 3]
 [4 1 2]
 [3 4 1]],
             mask =
 False,
       fill_value = 999999)
```

Modifying axes

ma.swapaxes(self, *args, ...)	Return a view of the array with *axis1* and *axis2* interchanged.
ma.transpose(a[, axes])	Permute the dimensions of an array.
ma.MaskedArray.swapaxes(axis1, axis2)	Return a view of the array with *axis1* and *axis2* interchanged.
ma.MaskedArray.transpose(*axes)	Returns a view of the array with axes transposed.

numpy.ma.**swapaxes**(*self*, **args*, ***params*) *a.swapaxes(axis1, axis2)* **= <numpy.ma.core._frommethod object>**

Return a view of the array with *axis1* and *axis2* interchanged.

Refer to *numpy.swapaxes* for full documentation.

See also:

numpy.swapaxes equivalent function

numpy.ma.**transpose**(*a*, *axes=None*)

Permute the dimensions of an array.

This function is exactly equivalent to *numpy.transpose*.

See also:

numpy.transpose Equivalent function in top-level NumPy module.

Examples

```
>>> import numpy.ma as ma
>>> x = ma.arange(4).reshape((2,2))
>>> x[1, 1] = ma.masked
```

(continues on next page)

(continued from previous page)

```
>>>> x
masked_array(data =
 [[0 1]
 [2 --]],
             mask =
 [[False False]
 [False  True]],
       fill_value = 999999)
>>> ma.transpose(x)
masked_array(data =
 [[0 2]
 [1 --]],
             mask =
 [[False False]
 [False  True]],
       fill_value = 999999)
```

Changing the number of dimensions

ma.atleast_1d(*arys)	Convert inputs to arrays with at least one dimension.
ma.atleast_2d(*arys)	View inputs as arrays with at least two dimensions.
ma.atleast_3d(*arys)	View inputs as arrays with at least three dimensions.
ma.expand_dims(x, axis)	Expand the shape of an array.
ma.squeeze(a[, axis])	Remove single-dimensional entries from the shape of an array.
ma.MaskedArray.squeeze([axis])	Remove single-dimensional entries from the shape of *a*.
ma.column_stack(tup)	Stack 1-D arrays as columns into a 2-D array.
ma.concatenate(arrays[, axis])	Concatenate a sequence of arrays along the given axis.
ma.dstack(tup)	Stack arrays in sequence depth wise (along third axis).
ma.hstack(tup)	Stack arrays in sequence horizontally (column wise).
ma.hsplit(ary, indices_or_sections)	Split an array into multiple sub-arrays horizontally (column-wise).
*ma.mr_*	Translate slice objects to concatenation along the first axis.
ma.row_stack(tup)	Stack arrays in sequence vertically (row wise).
ma.vstack(tup)	Stack arrays in sequence vertically (row wise).

numpy.ma.**atleast_1d**(**arys*) **= <numpy.ma.extras._fromnxfunction_allargs object>**

Convert inputs to arrays with at least one dimension.

Scalar inputs are converted to 1-dimensional arrays, whilst higher-dimensional inputs are preserved.

Parameters **arys1, arys2, ...** : array_like

One or more input arrays.

Returns **ret** : ndarray

An array, or list of arrays, each with `a.ndim >= 1`. Copies are made only if necessary.

Notes

The function is applied to both the _data and the _mask, if any.

Examples

```
>>> np.atleast_1d(1.0)
array([ 1.])
```

```
>>> x = np.arange(9.0).reshape(3,3)
>>> np.atleast_1d(x)
array([[ 0.,  1.,  2.],
       [ 3.,  4.,  5.],
       [ 6.,  7.,  8.]])
>>> np.atleast_1d(x) is x
True
```

```
>>> np.atleast_1d(1, [3, 4])
[array([1]), array([3, 4])]
```

numpy.ma.**atleast_2d**(**arys*) **= <numpy.ma.extras._fromnxfunction_allargs object>**

View inputs as arrays with at least two dimensions.

Parameters **arys1, arys2, ...** : array_like

One or more array-like sequences. Non-array inputs are converted to arrays. Arrays that already have two or more dimensions are preserved.

Returns **res, res2, ...** : ndarray

An array, or list of arrays, each with `a.ndim >= 2`. Copies are avoided where possible, and views with two or more dimensions are returned.

Notes

The function is applied to both the _data and the _mask, if any.

Examples

```
>>> np.atleast_2d(3.0)
array([[ 3.]])
```

```
>>> x = np.arange(3.0)
>>> np.atleast_2d(x)
array([[ 0.,  1.,  2.]])
>>> np.atleast_2d(x).base is x
True
```

```
>>> np.atleast_2d(1, [1, 2], [[1, 2]])
[array([[1]]), array([[1, 2]]), array([[1, 2]])]
```

numpy.ma.**atleast_3d**(**arys*) **= <numpy.ma.extras._fromnxfunction_allargs object>**

View inputs as arrays with at least three dimensions.

Parameters **arys1, arys2, ...** : array_like

One or more array-like sequences. Non-array inputs are converted to arrays. Arrays that already have three or more dimensions are preserved.

Returns **res1, res2, ...** : ndarray

An array, or list of arrays, each with `a.ndim >= 3`. Copies are avoided where possible, and views with three or more dimensions are returned. For example, a 1-D array of shape `(N,)` becomes a view of shape `(1, N, 1)`, and a 2-D array of shape `(M, N)` becomes a view of shape `(M, N, 1)`.

Notes

The function is applied to both the _data and the _mask, if any.

Examples

```
>>> np.atleast_3d(3.0)
array([[[ 3.]]])
```

```
>>> x = np.arange(3.0)
>>> np.atleast_3d(x).shape
(1, 3, 1)
```

```
>>> x = np.arange(12.0).reshape(4,3)
>>> np.atleast_3d(x).shape
(4, 3, 1)
>>> np.atleast_3d(x).base is x.base  # x is a reshape, so not base itself
True
```

```
>>> for arr in np.atleast_3d([1, 2], [[1, 2]], [[[1, 2]]]):
...     print(arr, arr.shape)
...
[[[1]
  [2]]] (1, 2, 1)
[[[1]
  [2]]] (1, 2, 1)
[[[1 2]]] (1, 1, 2)
```

numpy.ma.**expand_dims**(*x*, *axis*)

Expand the shape of an array.

Expands the shape of the array by including a new axis before the one specified by the *axis* parameter. This function behaves the same as *numpy.expand_dims* but preserves masked elements.

See also:

numpy.expand_dims Equivalent function in top-level NumPy module.

Examples

```
>>> import numpy.ma as ma
>>> x = ma.array([1, 2, 4])
>>> x[1] = ma.masked
>>> x
masked_array(data = [1 -- 4],
             mask = [False  True False],
       fill_value = 999999)
>>> np.expand_dims(x, axis=0)
array([[1, 2, 4]])
>>> ma.expand_dims(x, axis=0)
masked_array(data =
 [[1 -- 4]],
             mask =
 [[False  True False]],
       fill_value = 999999)
```

The same result can be achieved using slicing syntax with *np.newaxis*.

```
>>> x[np.newaxis, :]
masked_array(data =
 [[1 -- 4]],
             mask =
 [[False  True False]],
       fill_value = 999999)
```

numpy.ma.**squeeze**(*a*, *axis=None*)

Remove single-dimensional entries from the shape of an array.

Parameters **a** : array_like

Input data.

axis : None or int or tuple of ints, optional

New in version 1.7.0.

Selects a subset of the single-dimensional entries in the shape. If an axis is selected with shape entry greater than one, an error is raised.

Returns **squeezed** : ndarray

The input array, but with all or a subset of the dimensions of length 1 removed. This is always *a* itself or a view into *a*.

Raises **ValueError**

If *axis* is not *None*, and an axis being squeezed is not of length 1

See also:

expand_dims The inverse operation, adding singleton dimensions

reshape Insert, remove, and combine dimensions, and resize existing ones

Examples

```
>>> x = np.array([[[0], [1], [2]]])
>>> x.shape
(1, 3, 1)
>>> np.squeeze(x).shape
(3,)
>>> np.squeeze(x, axis=0).shape
(3, 1)
>>> np.squeeze(x, axis=1).shape
Traceback (most recent call last):
...
ValueError: cannot select an axis to squeeze out which has size not equal to one
>>> np.squeeze(x, axis=2).shape
(1, 3)
```

numpy.ma.**column_stack**(*tup*) **= <numpy.ma.extras._fromnxfunction_seq object>**

Stack 1-D arrays as columns into a 2-D array.

Take a sequence of 1-D arrays and stack them as columns to make a single 2-D array. 2-D arrays are stacked as-is, just like with *hstack*. 1-D arrays are turned into 2-D columns first.

Parameters **tup** : sequence of 1-D or 2-D arrays.

Arrays to stack. All of them must have the same first dimension.

Returns **stacked** : 2-D array

The array formed by stacking the given arrays.

Notes

The function is applied to both the _data and the _mask, if any.

Examples

```
>>> a = np.array((1,2,3))
>>> b = np.array((2,3,4))
>>> np.column_stack((a,b))
array([[1, 2],
       [2, 3],
       [3, 4]])
```

numpy.ma.**concatenate**(*arrays*, *axis=0*)

Concatenate a sequence of arrays along the given axis.

Parameters **arrays** : sequence of array_like

The arrays must have the same shape, except in the dimension corresponding to *axis* (the first, by default).

axis : int, optional

The axis along which the arrays will be joined. Default is 0.

Returns **result** : MaskedArray

The concatenated array with any masked entries preserved.

See also:

numpy.concatenate Equivalent function in the top-level NumPy module.

Examples

```
>>> import numpy.ma as ma
>>> a = ma.arange(3)
>>> a[1] = ma.masked
>>> b = ma.arange(2, 5)
>>> a
masked_array(data = [0 -- 2],
             mask = [False  True False],
       fill_value = 999999)
>>> b
masked_array(data = [2 3 4],
             mask = False,
       fill_value = 999999)
>>> ma.concatenate([a, b])
masked_array(data = [0 -- 2 2 3 4],
             mask = [False  True False False False False],
       fill_value = 999999)
```

numpy.ma.**dstack**(*tup*) **= <numpy.ma.extras._fromnxfunction_seq object>**

Stack arrays in sequence depth wise (along third axis).

This is equivalent to concatenation along the third axis after 2-D arrays of shape *(M,N)* have been reshaped to *(M,N,1)* and 1-D arrays of shape *(N,)* have been reshaped to *(1,N,1)*. Rebuilds arrays divided by *dsplit*.

This function makes most sense for arrays with up to 3 dimensions. For instance, for pixel-data with a height (first axis), width (second axis), and r/g/b channels (third axis). The functions *concatenate*, *stack* and *block* provide more general stacking and concatenation operations.

Parameters **tup** : sequence of arrays

The arrays must have the same shape along all but the third axis. 1-D or 2-D arrays must have the same shape.

Returns **stacked** : ndarray

The array formed by stacking the given arrays, will be at least 3-D.

See also:

stack Join a sequence of arrays along a new axis.

vstack Stack along first axis.

hstack Stack along second axis.

concatenate Join a sequence of arrays along an existing axis.

dsplit Split array along third axis.

Notes

The function is applied to both the _data and the _mask, if any.

Examples

```
>>> a = np.array((1,2,3))
>>> b = np.array((2,3,4))
>>> np.dstack((a,b))
array([[[1, 2],
        [2, 3],
        [3, 4]]])
```

```
>>> a = np.array([[1],[2],[3]])
>>> b = np.array([[2],[3],[4]])
>>> np.dstack((a,b))
array([[[1, 2]],
       [[2, 3]],
       [[3, 4]]])
```

numpy.ma.**hstack**(*tup*) **= <numpy.ma.extras._fromnxfunction_seq object>**

Stack arrays in sequence horizontally (column wise).

This is equivalent to concatenation along the second axis, except for 1-D arrays where it concatenates along the first axis. Rebuilds arrays divided by *hsplit*.

This function makes most sense for arrays with up to 3 dimensions. For instance, for pixel-data with a height (first axis), width (second axis), and r/g/b channels (third axis). The functions *concatenate*, *stack* and *block* provide more general stacking and concatenation operations.

Parameters **tup** : sequence of ndarrays

The arrays must have the same shape along all but the second axis, except 1-D arrays which can be any length.

Returns **stacked** : ndarray

The array formed by stacking the given arrays.

See also:

stack Join a sequence of arrays along a new axis.

vstack Stack arrays in sequence vertically (row wise).

dstack Stack arrays in sequence depth wise (along third axis).

concatenate Join a sequence of arrays along an existing axis.

hsplit Split array along second axis.

block Assemble arrays from blocks.

Notes

The function is applied to both the _data and the _mask, if any.

Examples

```
>>> a = np.array((1,2,3))
>>> b = np.array((2,3,4))
>>> np.hstack((a,b))
array([1, 2, 3, 2, 3, 4])
>>> a = np.array([[1],[2],[3]])
>>> b = np.array([[2],[3],[4]])
>>> np.hstack((a,b))
array([[1, 2],
       [2, 3],
       [3, 4]])
```

numpy.ma.**hsplit**(*ary*, *indices_or_sections*) **= <numpy.ma.extras._fromnxfunction_single object>**

Split an array into multiple sub-arrays horizontally (column-wise).

Please refer to the *split* documentation. *hsplit* is equivalent to *split* with `axis=1`, the array is always split along the second axis regardless of the array dimension.

See also:

split Split an array into multiple sub-arrays of equal size.

Notes

The function is applied to both the _data and the _mask, if any.

Examples

```
>>> x = np.arange(16.0).reshape(4, 4)
>>> x
array([[  0.,   1.,   2.,   3.],
       [  4.,   5.,   6.,   7.],
       [  8.,   9.,  10.,  11.],
       [ 12.,  13.,  14.,  15.]])
>>> np.hsplit(x, 2)
[array([[  0.,   1.],
       [  4.,   5.],
       [  8.,   9.],
       [ 12.,  13.]]),
 array([[  2.,   3.],
       [  6.,   7.],
       [ 10.,  11.],
       [ 14.,  15.]])]
>>> np.hsplit(x, np.array([3, 6]))
[array([[  0.,   1.,   2.],
       [  4.,   5.,   6.],
       [  8.,   9.,  10.],
       [ 12.,  13.,  14.]]),
 array([[  3.],
       [  7.],
       [ 11.],
```

(continues on next page)

(continued from previous page)

```
       [ 15.]]),
 array([], dtype=float64)]
```

With a higher dimensional array the split is still along the second axis.

```
>>> x = np.arange(8.0).reshape(2, 2, 2)
>>> x
array([[[ 0.,  1.],
        [ 2.,  3.]],
       [[ 4.,  5.],
        [ 6.,  7.]]])
>>> np.hsplit(x, 2)
[array([[[ 0.,  1.]],
       [[ 4.,  5.]]]),
 array([[[ 2.,  3.]],
       [[ 6.,  7.]]])]
```

numpy.ma.**mr_ = <numpy.ma.extras.mr_class object>**

Translate slice objects to concatenation along the first axis.

This is the masked array version of *lib.index_tricks.RClass*.

See also:

`lib.index_tricks.RClass`

Examples

```
>>> np.ma.mr_[np.ma.array([1,2,3]), 0, 0, np.ma.array([4,5,6])]
array([1, 2, 3, 0, 0, 4, 5, 6])
```

numpy.ma.**row_stack**(*tup*) **= <numpy.ma.extras._fromnxfunction_seq object>**

Stack arrays in sequence vertically (row wise).

This is equivalent to concatenation along the first axis after 1-D arrays of shape *(N,)* have been reshaped to *(1,N)*. Rebuilds arrays divided by *vsplit*.

This function makes most sense for arrays with up to 3 dimensions. For instance, for pixel-data with a height (first axis), width (second axis), and r/g/b channels (third axis). The functions *concatenate*, *stack* and *block* provide more general stacking and concatenation operations.

Parameters **tup** : sequence of ndarrays

The arrays must have the same shape along all but the first axis. 1-D arrays must have the same length.

Returns **stacked** : ndarray

The array formed by stacking the given arrays, will be at least 2-D.

See also:

stack Join a sequence of arrays along a new axis.

hstack Stack arrays in sequence horizontally (column wise).

dstack Stack arrays in sequence depth wise (along third dimension).

concatenate Join a sequence of arrays along an existing axis.

vsplit Split array into a list of multiple sub-arrays vertically.

block Assemble arrays from blocks.

Notes

The function is applied to both the _data and the _mask, if any.

Examples

```
>>> a = np.array([1, 2, 3])
>>> b = np.array([2, 3, 4])
>>> np.vstack((a,b))
array([[1, 2, 3],
       [2, 3, 4]])
```

```
>>> a = np.array([[1], [2], [3]])
>>> b = np.array([[2], [3], [4]])
>>> np.vstack((a,b))
array([[1],
       [2],
       [3],
       [2],
       [3],
       [4]])
```

numpy.ma.**vstack**(*tup*) **= <numpy.ma.extras._fromnxfunction_seq object>**

Stack arrays in sequence vertically (row wise).

This is equivalent to concatenation along the first axis after 1-D arrays of shape *(N,)* have been reshaped to *(1,N)*. Rebuilds arrays divided by *vsplit*.

This function makes most sense for arrays with up to 3 dimensions. For instance, for pixel-data with a height (first axis), width (second axis), and r/g/b channels (third axis). The functions *concatenate*, *stack* and *block* provide more general stacking and concatenation operations.

Parameters **tup** : sequence of ndarrays

The arrays must have the same shape along all but the first axis. 1-D arrays must have the same length.

Returns **stacked** : ndarray

The array formed by stacking the given arrays, will be at least 2-D.

See also:

stack Join a sequence of arrays along a new axis.

hstack Stack arrays in sequence horizontally (column wise).

dstack Stack arrays in sequence depth wise (along third dimension).

concatenate Join a sequence of arrays along an existing axis.

vsplit Split array into a list of multiple sub-arrays vertically.

block Assemble arrays from blocks.

Notes

The function is applied to both the _data and the _mask, if any.

Examples

```
>>> a = np.array([1, 2, 3])
>>> b = np.array([2, 3, 4])
>>> np.vstack((a,b))
array([[1, 2, 3],
       [2, 3, 4]])
```

```
>>> a = np.array([[1], [2], [3]])
>>> b = np.array([[2], [3], [4]])
>>> np.vstack((a,b))
array([[1],
       [2],
       [3],
       [2],
       [3],
       [4]])
```

Joining arrays

ma.column_stack(tup)	Stack 1-D arrays as columns into a 2-D array.
ma.concatenate(arrays[, axis])	Concatenate a sequence of arrays along the given axis.
ma.append(a, b[, axis])	Append values to the end of an array.
ma.dstack(tup)	Stack arrays in sequence depth wise (along third axis).
ma.hstack(tup)	Stack arrays in sequence horizontally (column wise).
ma.vstack(tup)	Stack arrays in sequence vertically (row wise).

numpy.ma.**append**(*a*, *b*, *axis=None*)

Append values to the end of an array.

New in version 1.9.0.

Parameters **a** : array_like

Values are appended to a copy of this array.

b : array_like

These values are appended to a copy of *a*. It must be of the correct shape (the same shape as *a*, excluding *axis*). If *axis* is not specified, *b* can be any shape and will be flattened before use.

axis : int, optional

The axis along which *v* are appended. If *axis* is not given, both *a* and *b* are flattened before use.

Returns **append** : MaskedArray

A copy of *a* with *b* appended to *axis*. Note that *append* does not occur in-place: a new array is allocated and filled. If *axis* is None, the result is a flattened array.

See also:

numpy.append Equivalent function in the top-level NumPy module.

Examples

```
>>> import numpy.ma as ma
>>> a = ma.masked_values([1, 2, 3], 2)
>>> b = ma.masked_values([[4, 5, 6], [7, 8, 9]], 7)
>>> print(ma.append(a, b))
[1 -- 3 4 5 6 -- 8 9]
```

Operations on masks

Creating a mask

ma.make_mask(m[, copy, shrink, dtype])	Create a boolean mask from an array.
ma.make_mask_none(newshape[, dtype])	Return a boolean mask of the given shape, filled with False.
ma.mask_or(m1, m2[, copy, shrink])	Combine two masks with the `logical_or` operator.
ma.make_mask_descr(ndtype)	Construct a dtype description list from a given dtype.

numpy.ma.**make_mask**(*m*, *copy=False*, *shrink=True*, *dtype=<class 'numpy.bool_'>*)

Create a boolean mask from an array.

Return *m* as a boolean mask, creating a copy if necessary or requested. The function can accept any sequence that is convertible to integers, or `nomask`. Does not require that contents must be 0s and 1s, values of 0 are interepreted as False, everything else as True.

Parameters **m** : array_like

Potential mask.

copy : bool, optional

Whether to return a copy of *m* (True) or *m* itself (False).

shrink : bool, optional

Whether to shrink *m* to `nomask` if all its values are False.

dtype : dtype, optional

Data-type of the output mask. By default, the output mask has a dtype of MaskType (bool). If the dtype is flexible, each field has a boolean dtype. This is ignored when *m* is `nomask`, in which case `nomask` is always returned.

Returns **result** : ndarray

A boolean mask derived from *m*.

Examples

```
>>> import numpy.ma as ma
>>> m = [True, False, True, True]
>>> ma.make_mask(m)
array([ True, False,  True,  True])
>>> m = [1, 0, 1, 1]
>>> ma.make_mask(m)
array([ True, False,  True,  True])
>>> m = [1, 0, 2, -3]
>>> ma.make_mask(m)
array([ True, False,  True,  True])
```

Effect of the *shrink* parameter.

```
>>> m = np.zeros(4)
>>> m
array([ 0.,  0.,  0.,  0.])
>>> ma.make_mask(m)
False
>>> ma.make_mask(m, shrink=False)
array([False, False, False, False])
```

Using a flexible *dtype*.

```
>>> m = [1, 0, 1, 1]
>>> n = [0, 1, 0, 0]
>>> arr = []
>>> for man, mouse in zip(m, n):
...     arr.append((man, mouse))
>>> arr
[(1, 0), (0, 1), (1, 0), (1, 0)]
>>> dtype = np.dtype({'names':['man', 'mouse'],
                      'formats':[int, int]})
>>> arr = np.array(arr, dtype=dtype)
>>> arr
array([(1, 0), (0, 1), (1, 0), (1, 0)],
      dtype=[('man', '<i4'), ('mouse', '<i4')])
>>> ma.make_mask(arr, dtype=dtype)
array([(True, False), (False, True), (True, False), (True, False)],
      dtype=[('man', '|b1'), ('mouse', '|b1')])
```

numpy.ma.**make_mask_none**(*newshape*, *dtype=None*)

Return a boolean mask of the given shape, filled with False.

This function returns a boolean ndarray with all entries False, that can be used in common mask manipulations. If a complex dtype is specified, the type of each field is converted to a boolean type.

Parameters **newshape** : tuple

A tuple indicating the shape of the mask.

dtype : {None, dtype}, optional

If None, use a MaskType instance. Otherwise, use a new datatype with the same fields as *dtype*, converted to boolean types.

Returns **result** : ndarray

An ndarray of appropriate shape and dtype, filled with False.

See also:

make_mask Create a boolean mask from an array.

make_mask_descr Construct a dtype description list from a given dtype.

Examples

```
>>> import numpy.ma as ma
>>> ma.make_mask_none((3,))
array([False, False, False])
```

Defining a more complex dtype.

```
>>> dtype = np.dtype({'names':['foo', 'bar'],
                      'formats':[np.float32, int]})
>>> dtype
dtype([('foo', '<f4'), ('bar', '<i4')])
>>> ma.make_mask_none((3,), dtype=dtype)
array([(False, False), (False, False), (False, False)],
      dtype=[('foo', '|b1'), ('bar', '|b1')])
```

numpy.ma.**mask_or**(*m1*, *m2*, *copy=False*, *shrink=True*)

Combine two masks with the `logical_or` operator.

The result may be a view on *m1* or *m2* if the other is *nomask* (i.e. False).

Parameters **m1, m2** : array_like

Input masks.

copy : bool, optional

If copy is False and one of the inputs is *nomask*, return a view of the other input mask. Defaults to False.

shrink : bool, optional

Whether to shrink the output to *nomask* if all its values are False. Defaults to True.

Returns **mask** : output mask

The result masks values that are masked in either *m1* or *m2*.

Raises **ValueError**

If *m1* and *m2* have different flexible dtypes.

Examples

```
>>> m1 = np.ma.make_mask([0, 1, 1, 0])
>>> m2 = np.ma.make_mask([1, 0, 0, 0])
>>> np.ma.mask_or(m1, m2)
array([ True,  True,  True, False])
```

numpy.ma.**make_mask_descr**(*ndtype*)

Construct a dtype description list from a given dtype.

Returns a new dtype object, with the type of all fields in *ndtype* to a boolean type. Field names are not altered.

Parameters **ndtype** : dtype

The dtype to convert.

Returns **result** : dtype

A dtype that looks like *ndtype*, the type of all fields is boolean.

Examples

```
>>> import numpy.ma as ma
>>> dtype = np.dtype({'names':['foo', 'bar'],
                      'formats':[np.float32, int]})
>>> dtype
dtype([('foo', '<f4'), ('bar', '<i4')])
>>> ma.make_mask_descr(dtype)
dtype([('foo', '|b1'), ('bar', '|b1')])
>>> ma.make_mask_descr(np.float32)
dtype('bool')
```

Accessing a mask

ma.getmask(a)	Return the mask of a masked array, or nomask.
ma.getmaskarray(arr)	Return the mask of a masked array, or full boolean array of False.
ma.masked_array.mask	Mask

masked_array.**mask**
Mask

Finding masked data

ma.flatnotmasked_contiguous(a)	Find contiguous unmasked data in a masked array along the given axis.
ma.flatnotmasked_edges(a)	Find the indices of the first and last unmasked values.
ma.notmasked_contiguous(a[, axis])	Find contiguous unmasked data in a masked array along the given axis.
ma.notmasked_edges(a[, axis])	Find the indices of the first and last unmasked values along an axis.
ma.clump_masked(a)	Returns a list of slices corresponding to the masked clumps of a 1-D array.
ma.clump_unmasked(a)	Return list of slices corresponding to the unmasked clumps of a 1-D array.

numpy.ma.**flatnotmasked_contiguous**(*a*)
Find contiguous unmasked data in a masked array along the given axis.

Parameters **a** : narray

The input array.

Returns **slice_list** : list

A sorted sequence of slices (start index, end index).

See also:

flatnotmasked_edges, *notmasked_contiguous*, *notmasked_edges*, *clump_masked*, *clump_unmasked*

Notes

Only accepts 2-D arrays at most.

Examples

```
>>> a = np.ma.arange(10)
>>> np.ma.flatnotmasked_contiguous(a)
slice(0, 10, None)
```

```
>>> mask = (a < 3) | (a > 8) | (a == 5)
>>> a[mask] = np.ma.masked
>>> np.array(a[~a.mask])
array([3, 4, 6, 7, 8])
```

```
>>> np.ma.flatnotmasked_contiguous(a)
[slice(3, 5, None), slice(6, 9, None)]
>>> a[:] = np.ma.masked
>>> print(np.ma.flatnotmasked_edges(a))
None
```

numpy.ma.**flatnotmasked_edges**(*a*)

Find the indices of the first and last unmasked values.

Expects a 1-D *MaskedArray*, returns None if all values are masked.

Parameters **a** : array_like

Input 1-D *MaskedArray*

Returns **edges** : ndarray or None

The indices of first and last non-masked value in the array. Returns None if all values are masked.

See also:

flatnotmasked_contiguous, *notmasked_contiguous*, *notmasked_edges*, *clump_masked*, *clump_unmasked*

Notes

Only accepts 1-D arrays.

Examples

```
>>> a = np.ma.arange(10)
>>> flatnotmasked_edges(a)
[0,-1]
```

```
>>> mask = (a < 3) | (a > 8) | (a == 5)
>>> a[mask] = np.ma.masked
>>> np.array(a[~a.mask])
array([3, 4, 6, 7, 8])
```

```
>>> flatnotmasked_edges(a)
array([3, 8])
```

```
>>> a[:] = np.ma.masked
>>> print(flatnotmasked_edges(ma))
None
```

numpy.ma.**notmasked_contiguous**(*a*, *axis=None*)

Find contiguous unmasked data in a masked array along the given axis.

Parameters **a** : array_like

The input array.

axis : int, optional

Axis along which to perform the operation. If None (default), applies to a flattened version of the array.

Returns **endpoints** : list

A list of slices (start and end indexes) of unmasked indexes in the array.

See also:

flatnotmasked_edges, *flatnotmasked_contiguous*, *notmasked_edges*, *clump_masked*, *clump_unmasked*

Notes

Only accepts 2-D arrays at most.

Examples

```
>>> a = np.arange(9).reshape((3, 3))
>>> mask = np.zeros_like(a)
>>> mask[1:, 1:] = 1
```

```
>>> ma = np.ma.array(a, mask=mask)
>>> np.array(ma[~ma.mask])
array([0, 1, 2, 3, 6])
```

```
>>> np.ma.notmasked_contiguous(ma)
[slice(0, 4, None), slice(6, 7, None)]
```

numpy.ma.**notmasked_edges**(*a*, *axis=None*)

Find the indices of the first and last unmasked values along an axis.

If all values are masked, return None. Otherwise, return a list of two tuples, corresponding to the indices of the first and last unmasked values respectively.

Parameters **a** : array_like

The input array.

axis : int, optional

Axis along which to perform the operation. If None (default), applies to a flattened version of the array.

Returns **edges** : ndarray or list

An array of start and end indexes if there are any masked data in the array. If there are no masked data in the array, *edges* is a list of the first and last index.

See also:

flatnotmasked_contiguous, *flatnotmasked_edges*, *notmasked_contiguous*, *clump_masked*, *clump_unmasked*

Examples

```
>>> a = np.arange(9).reshape((3, 3))
>>> m = np.zeros_like(a)
>>> m[1:, 1:] = 1
```

```
>>> am = np.ma.array(a, mask=m)
>>> np.array(am[~am.mask])
array([0, 1, 2, 3, 6])
```

```
>>> np.ma.notmasked_edges(ma)
array([0, 6])
```

numpy.ma.**clump_masked**(*a*)

Returns a list of slices corresponding to the masked clumps of a 1-D array. (A "clump" is defined as a contiguous region of the array).

Parameters **a** : ndarray

A one-dimensional masked array.

Returns **slices** : list of slice

The list of slices, one for each continuous region of masked elements in *a*.

See also:

flatnotmasked_edges, *flatnotmasked_contiguous*, *notmasked_edges*, *notmasked_contiguous*, *clump_unmasked*

Notes

New in version 1.4.0.

Examples

```
>>> a = np.ma.masked_array(np.arange(10))
>>> a[[0, 1, 2, 6, 8, 9]] = np.ma.masked
>>> np.ma.clump_masked(a)
[slice(0, 3, None), slice(6, 7, None), slice(8, 10, None)]
```

numpy.ma.**clump_unmasked**(*a*)

Return list of slices corresponding to the unmasked clumps of a 1-D array. (A "clump" is defined as a contiguous region of the array).

Parameters **a** : ndarray

A one-dimensional masked array.

Returns **slices** : list of slice

The list of slices, one for each continuous region of unmasked elements in *a*.

See also:

flatnotmasked_edges, *flatnotmasked_contiguous*, *notmasked_edges*, *notmasked_contiguous*, *clump_masked*

Notes

New in version 1.4.0.

Examples

```
>>> a = np.ma.masked_array(np.arange(10))
>>> a[[0, 1, 2, 6, 8, 9]] = np.ma.masked
>>> np.ma.clump_unmasked(a)
[slice(3, 6, None), slice(7, 8, None)]
```

Modifying a mask

ma.mask_cols(a[, axis])	Mask columns of a 2D array that contain masked values.
ma.mask_or(m1, m2[, copy, shrink])	Combine two masks with the `logical_or` operator.
ma.mask_rowcols(a[, axis])	Mask rows and/or columns of a 2D array that contain masked values.
ma.mask_rows(a[, axis])	Mask rows of a 2D array that contain masked values.
ma.harden_mask(self)	Force the mask to hard.
ma.soften_mask(self)	Force the mask to soft.
ma.MaskedArray.harden_mask()	Force the mask to hard.
ma.MaskedArray.soften_mask()	Force the mask to soft.
ma.MaskedArray.shrink_mask()	Reduce a mask to nomask when possible.
ma.MaskedArray.unshare_mask()	Copy the mask and set the sharedmask flag to False.

numpy.ma.**mask_cols**(*a*, *axis=None*)

Mask columns of a 2D array that contain masked values.

This function is a shortcut to `mask_rowcols` with *axis* equal to 1.

See also:

mask_rowcols Mask rows and/or columns of a 2D array.

masked_where Mask where a condition is met.

Examples

```
>>> import numpy.ma as ma
>>> a = np.zeros((3, 3), dtype=int)
>>> a[1, 1] = 1
>>> a
array([[0, 0, 0],
       [0, 1, 0],
       [0, 0, 0]])
>>> a = ma.masked_equal(a, 1)
>>> a
masked_array(data =
 [[0 0 0]
 [0 -- 0]
 [0 0 0]],
      mask =
 [[False False False]
 [False  True False]
 [False False False]],
      fill_value=999999)
>>> ma.mask_cols(a)
masked_array(data =
 [[0 -- 0]
 [0 -- 0]
 [0 -- 0]],
      mask =
 [[False  True False]
 [False  True False]
 [False  True False]],
      fill_value=999999)
```

numpy.ma.**mask_rowcols**(*a*, *axis=None*)

Mask rows and/or columns of a 2D array that contain masked values.

Mask whole rows and/or columns of a 2D array that contain masked values. The masking behavior is selected using the *axis* parameter.

- If *axis* is None, rows *and* columns are masked.
- If *axis* is 0, only rows are masked.
- If *axis* is 1 or -1, only columns are masked.

Parameters **a** : array_like, MaskedArray

The array to mask. If not a MaskedArray instance (or if no array elements are masked). The result is a MaskedArray with *mask* set to *nomask* (False). Must be a 2D array.

axis : int, optional

Axis along which to perform the operation. If None, applies to a flattened version of the array.

Returns **a** : MaskedArray

A modified version of the input array, masked depending on the value of the *axis* parameter.

Raises **NotImplementedError**

If input array *a* is not 2D.

See also:

mask_rows Mask rows of a 2D array that contain masked values.

mask_cols Mask cols of a 2D array that contain masked values.

masked_where Mask where a condition is met.

Notes

The input array's mask is modified by this function.

Examples

```
>>> import numpy.ma as ma
>>> a = np.zeros((3, 3), dtype=int)
>>> a[1, 1] = 1
>>> a
array([[0, 0, 0],
       [0, 1, 0],
       [0, 0, 0]])
>>> a = ma.masked_equal(a, 1)
>>> a
masked_array(data =
 [[0 0 0]
 [0 -- 0]
 [0 0 0]],
      mask =
 [[False False False]
 [False  True False]
 [False False False]],
      fill_value=999999)
>>> ma.mask_rowcols(a)
masked_array(data =
 [[0 -- 0]
 [-- -- --]
 [0 -- 0]],
      mask =
 [[False  True False]
 [ True  True  True]
 [False  True False]],
      fill_value=999999)
```

numpy.ma.**mask_rows**(*a*, *axis=None*)

Mask rows of a 2D array that contain masked values.

This function is a shortcut to `mask_rowcols` with *axis* equal to 0.

See also:

mask_rowcols Mask rows and/or columns of a 2D array.

masked_where Mask where a condition is met.

Examples

```
>>> import numpy.ma as ma
>>> a = np.zeros((3, 3), dtype=int)
>>> a[1, 1] = 1
>>> a
array([[0, 0, 0],
       [0, 1, 0],
       [0, 0, 0]])
>>> a = ma.masked_equal(a, 1)
>>> a
masked_array(data =
 [[0 0 0]
 [0 -- 0]
 [0 0 0]],
      mask =
 [[False False False]
 [False  True False]
 [False False False]],
      fill_value=999999)
>>> ma.mask_rows(a)
masked_array(data =
 [[0 0 0]
 [-- -- --]
 [0 0 0]],
      mask =
 [[False False False]
 [ True  True  True]
 [False False False]],
      fill_value=999999)
```

numpy.ma.**harden_mask**(*self*) **= <numpy.ma.core._frommethod object>**

Force the mask to hard.

Whether the mask of a masked array is hard or soft is determined by its *hardmask* property. *harden_mask* sets *hardmask* to True.

See also:

hardmask

numpy.ma.**soften_mask**(*self*) **= <numpy.ma.core._frommethod object>**

Force the mask to soft.

Whether the mask of a masked array is hard or soft is determined by its *hardmask* property. *soften_mask* sets *hardmask* to False.

See also:

hardmask

Conversion operations

> to a masked array

ma.asarray(a[, dtype, order])	Convert the input to a masked array of the given data-type.
ma.asanyarray(a[, dtype])	Convert the input to a masked array, conserving subclasses.
ma.fix_invalid(a[, mask, copy, fill_value])	Return input with invalid data masked and replaced by a fill value.
ma.masked_equal(x, value[, copy])	Mask an array where equal to a given value.
ma.masked_greater(x, value[, copy])	Mask an array where greater than a given value.
ma.masked_greater_equal(x, value[, copy])	Mask an array where greater than or equal to a given value.
ma.masked_inside(x, v1, v2[, copy])	Mask an array inside a given interval.
ma.masked_invalid(a[, copy])	Mask an array where invalid values occur (NaNs or infs).
ma.masked_less(x, value[, copy])	Mask an array where less than a given value.
ma.masked_less_equal(x, value[, copy])	Mask an array where less than or equal to a given value.
ma.masked_not_equal(x, value[, copy])	Mask an array where *not* equal to a given value.
ma.masked_object(x, value[, copy, shrink])	Mask the array *x* where the data are exactly equal to value.
ma.masked_outside(x, v1, v2[, copy])	Mask an array outside a given interval.
ma.masked_values(x, value[, rtol, atol, ...])	Mask using floating point equality.
ma.masked_where(condition, a[, copy])	Mask an array where a condition is met.

> to a ndarray

ma.compress_cols(a)	Suppress whole columns of a 2-D array that contain masked values.
ma.compress_rowcols(x[, axis])	Suppress the rows and/or columns of a 2-D array that contain masked values.
ma.compress_rows(a)	Suppress whole rows of a 2-D array that contain masked values.
ma.compressed(x)	Return all the non-masked data as a 1-D array.
ma.filled(a[, fill_value])	Return input as an array with masked data replaced by a fill value.
ma.MaskedArray.compressed()	Return all the non-masked data as a 1-D array.
ma.MaskedArray.filled([fill_value])	Return a copy of self, with masked values filled with a given value.

numpy.ma.**compress_cols**(*a*)

Suppress whole columns of a 2-D array that contain masked values.

This is equivalent to `np.ma.compress_rowcols(a, 1)`, see `extras.compress_rowcols` for details.

See also:

`extras.compress_rowcols`

numpy.ma.**compress_rowcols**(*x*, *axis=None*)

Suppress the rows and/or columns of a 2-D array that contain masked values.

The suppression behavior is selected with the *axis* parameter.

- If axis is None, both rows and columns are suppressed.
- If axis is 0, only rows are suppressed.

- If axis is 1 or -1, only columns are suppressed.

Parameters **x** : array_like, MaskedArray

The array to operate on. If not a MaskedArray instance (or if no array elements are masked), *x* is interpreted as a MaskedArray with *mask* set to *nomask*. Must be a 2D array.

axis : int, optional

Axis along which to perform the operation. Default is None.

Returns **compressed_array** : ndarray

The compressed array.

Examples

```
>>> x = np.ma.array(np.arange(9).reshape(3, 3), mask=[[1, 0, 0],
...                                                   [1, 0, 0],
...                                                   [0, 0, 0]])
>>> x
masked_array(data =
 [[-- 1 2]
 [-- 4 5]
 [6 7 8]],
             mask =
 [[ True False False]
 [ True False False]
 [False False False]],
       fill_value = 999999)
```

```
>>> np.ma.compress_rowcols(x)
array([[7, 8]])
>>> np.ma.compress_rowcols(x, 0)
array([[6, 7, 8]])
>>> np.ma.compress_rowcols(x, 1)
array([[1, 2],
       [4, 5],
       [7, 8]])
```

numpy.ma.**compress_rows**(*a*)

Suppress whole rows of a 2-D array that contain masked values.

This is equivalent to `np.ma.compress_rowcols(a, 0)`, see `extras.compress_rowcols` for details.

See also:

`extras.compress_rowcols`

numpy.ma.**compressed**(*x*)

Return all the non-masked data as a 1-D array.

This function is equivalent to calling the "compressed" method of a *MaskedArray*, see *MaskedArray.compressed* for details.

See also:

MaskedArray.compressed Equivalent method.

numpy.ma.**filled**(*a*, *fill_value=None*)

Return input as an array with masked data replaced by a fill value.

If *a* is not a *MaskedArray*, *a* itself is returned. If *a* is a *MaskedArray* and *fill_value* is None, *fill_value* is set to `a.fill_value`.

Parameters **a** : MaskedArray or array_like

An input object.

fill_value : scalar, optional

Filling value. Default is None.

Returns **a** : ndarray

The filled array.

See also:

compressed

Examples

```
>>> x = np.ma.array(np.arange(9).reshape(3, 3), mask=[[1, 0, 0],
...                                                   [1, 0, 0],
...                                                   [0, 0, 0]])
>>> x.filled()
array([[999999,      1,      2],
       [999999,      4,      5],
       [     6,      7,      8]])
```

> to another object

ma.MaskedArray.tofile(fid[, sep, format])	Save a masked array to a file in binary format.
ma.MaskedArray.tolist([fill_value])	Return the data portion of the masked array as a hierarchical Python list.
ma.MaskedArray.torecords()	Transforms a masked array into a flexible-type array.
ma.MaskedArray.tobytes([fill_value, order])	Return the array data as a string containing the raw bytes in the array.

Pickling and unpickling

ma.dump(a, F)	Pickle a masked array to a file.
ma.dumps(a)	Return a string corresponding to the pickling of a masked array.
ma.load(F)	Wrapper around `cPickle.load` which accepts either a file-like object or a filename.
ma.loads(strg)	Load a pickle from the current string.

numpy.ma.**dump**(*a*, *F*)

Pickle a masked array to a file.

This is a wrapper around `cPickle.dump`.

Parameters **a** : MaskedArray

The array to be pickled.

F : str or file-like object

The file to pickle *a* to. If a string, the full path to the file.

numpy.ma.**dumps**(*a*)

Return a string corresponding to the pickling of a masked array.

This is a wrapper around `cPickle.dumps`.

Parameters **a** : MaskedArray

The array for which the string representation of the pickle is returned.

numpy.ma.**load**(*F*)

Wrapper around `cPickle.load` which accepts either a file-like object or a filename.

Parameters **F** : str or file

The file or file name to load.

See also:

dump Pickle an array

Notes

This is different from *numpy.load*, which does not use cPickle but loads the NumPy binary .npy format.

numpy.ma.**loads**(*strg*)

Load a pickle from the current string.

The result of `cPickle.loads(strg)` is returned.

Parameters **strg** : str

The string to load.

See also:

dumps Return a string corresponding to the pickling of a masked array.

Filling a masked array

ma.common_fill_value(a, b)	Return the common filling value of two masked arrays, if any.
ma.default_fill_value(obj)	Return the default fill value for the argument object.
ma.maximum_fill_value(obj)	Return the minimum value that can be represented by the dtype of an object.
ma.maximum_fill_value(obj)	Return the minimum value that can be represented by the dtype of an object.
ma.set_fill_value(a, fill_value)	Set the filling value of a, if a is a masked array.
ma.MaskedArray.get_fill_value()	Return the filling value of the masked array.
ma.MaskedArray.set_fill_value([value])	Set the filling value of the masked array.
ma.MaskedArray.fill_value	Filling value.

numpy.ma.**common_fill_value**(*a*, *b*)

Return the common filling value of two masked arrays, if any.

If `a.fill_value == b.fill_value`, return the fill value, otherwise return None.

Parameters **a, b** : MaskedArray

The masked arrays for which to compare fill values.

Returns **fill_value** : scalar or None

The common fill value, or None.

Examples

```
>>> x = np.ma.array([0, 1.], fill_value=3)
>>> y = np.ma.array([0, 1.], fill_value=3)
>>> np.ma.common_fill_value(x, y)
3.0
```

numpy.ma.**default_fill_value**(*obj*)

Return the default fill value for the argument object.

The default filling value depends on the datatype of the input array or the type of the input scalar:

datatype	default
bool	True
int	999999
float	1.e20
complex	1.e20+0j
object	'?'
string	'N/A'

For structured types, a structured scalar is returned, with each field the default fill value for its type.

For subarray types, the fill value is an array of the same size containing the default scalar fill value.

Parameters **obj** : ndarray, dtype or scalar

The array data-type or scalar for which the default fill value is returned.

Returns **fill_value** : scalar

The default fill value.

Examples

```
>>> np.ma.default_fill_value(1)
999999
>>> np.ma.default_fill_value(np.array([1.1, 2., np.pi]))
1e+20
>>> np.ma.default_fill_value(np.dtype(complex))
(1e+20+0j)
```

numpy.ma.**maximum_fill_value**(*obj*)

Return the minimum value that can be represented by the dtype of an object.

This function is useful for calculating a fill value suitable for taking the maximum of an array with a given dtype.

Parameters **obj** : ndarray, dtype or scalar

An object that can be queried for it's numeric type.

Returns **val** : scalar

The minimum representable value.

Raises **TypeError**

If *obj* isn't a suitable numeric type.

See also:

minimum_fill_value The inverse function.

set_fill_value Set the filling value of a masked array.

MaskedArray.fill_value Return current fill value.

Examples

```
>>> import numpy.ma as ma
>>> a = np.int8()
>>> ma.maximum_fill_value(a)
-128
>>> a = np.int32()
>>> ma.maximum_fill_value(a)
-2147483648
```

An array of numeric data can also be passed.

```
>>> a = np.array([1, 2, 3], dtype=np.int8)
>>> ma.maximum_fill_value(a)
-128
>>> a = np.array([1, 2, 3], dtype=np.float32)
>>> ma.maximum_fill_value(a)
-inf
```

numpy.ma.**set_fill_value**(*a*, *fill_value*)

Set the filling value of a, if a is a masked array.

This function changes the fill value of the masked array *a* in place. If *a* is not a masked array, the function returns silently, without doing anything.

Parameters **a** : array_like

Input array.

fill_value : dtype

Filling value. A consistency test is performed to make sure the value is compatible with the dtype of *a*.

Returns None

Nothing returned by this function.

See also:

maximum_fill_value Return the default fill value for a dtype.

MaskedArray.fill_value Return current fill value.

MaskedArray.set_fill_value Equivalent method.

Examples

```
>>> import numpy.ma as ma
>>> a = np.arange(5)
>>> a
array([0, 1, 2, 3, 4])
>>> a = ma.masked_where(a < 3, a)
>>> a
masked_array(data = [-- -- -- 3 4],
      mask = [ True  True  True False False],
      fill_value=999999)
>>> ma.set_fill_value(a, -999)
>>> a
masked_array(data = [-- -- -- 3 4],
      mask = [ True  True  True False False],
      fill_value=-999)
```

Nothing happens if *a* is not a masked array.

```
>>> a = range(5)
>>> a
[0, 1, 2, 3, 4]
>>> ma.set_fill_value(a, 100)
>>> a
[0, 1, 2, 3, 4]
>>> a = np.arange(5)
>>> a
array([0, 1, 2, 3, 4])
>>> ma.set_fill_value(a, 100)
>>> a
array([0, 1, 2, 3, 4])
```

MaskedArray.**fill_value**
Filling value.

Masked arrays arithmetics

Arithmetics

ma.anom(self[, axis, dtype])	Compute the anomalies (deviations from the arithmetic mean) along the given axis.
ma.anomalies(self[, axis, dtype])	Compute the anomalies (deviations from the arithmetic mean) along the given axis.
ma.average(a[, axis, weights, returned])	Return the weighted average of array over the given axis.
ma.conjugate(x, /[, out, where, casting, ...])	Return the complex conjugate, element-wise.
ma.corrcoef(x[, y, rowvar, bias, ...])	Return Pearson product-moment correlation coefficients.
ma.cov(x[, y, rowvar, bias, allow_masked, ddof])	Estimate the covariance matrix.

Continued on next page

Table 95 – continued from previous page

ma.cumsum(self[, axis, dtype, out])	Return the cumulative sum of the array elements over the given axis.
ma.cumprod(self[, axis, dtype, out])	Return the cumulative product of the array elements over the given axis.
ma.mean(self[, axis, dtype, out, keepdims])	Returns the average of the array elements along given axis.
ma.median(a[, axis, out, overwrite_input, ...])	Compute the median along the specified axis.
ma.power(a, b[, third])	Returns element-wise base array raised to power from second array.
ma.prod(self[, axis, dtype, out, keepdims])	Return the product of the array elements over the given axis.
ma.std(self[, axis, dtype, out, ddof, keepdims])	Returns the standard deviation of the array elements along given axis.
ma.sum(self[, axis, dtype, out, keepdims])	Return the sum of the array elements over the given axis.
ma.var(self[, axis, dtype, out, ddof, keepdims])	Compute the variance along the specified axis.
ma.MaskedArray.anom([axis, dtype])	Compute the anomalies (deviations from the arithmetic mean) along the given axis.
ma.MaskedArray.cumprod([axis, dtype, out])	Return the cumulative product of the array elements over the given axis.
ma.MaskedArray.cumsum([axis, dtype, out])	Return the cumulative sum of the array elements over the given axis.
ma.MaskedArray.mean([axis, dtype, out, keepdims])	Returns the average of the array elements along given axis.
ma.MaskedArray.prod([axis, dtype, out, keepdims])	Return the product of the array elements over the given axis.
ma.MaskedArray.std([axis, dtype, out, ddof, ...])	Returns the standard deviation of the array elements along given axis.
ma.MaskedArray.sum([axis, dtype, out, keepdims])	Return the sum of the array elements over the given axis.
ma.MaskedArray.var([axis, dtype, out, ddof, ...])	Compute the variance along the specified axis.

numpy.ma.**anom**(*self*, *axis=None*, *dtype=None*) **= <numpy.ma.core._frommethod object>**

Compute the anomalies (deviations from the arithmetic mean) along the given axis.

Returns an array of anomalies, with the same shape as the input and where the arithmetic mean is computed along the given axis.

Parameters **axis** : int, optional

Axis over which the anomalies are taken. The default is to use the mean of the flattened array as reference.

dtype : dtype, optional

Type to use in computing the variance. For arrays of integer type the default is float32; for arrays of float types it is the same as the array type.

See also:

mean Compute the mean of the array.

Examples

```
>>> a = np.ma.array([1,2,3])
>>> a.anom()
masked_array(data = [-1.  0.  1.],
```

(continues on next page)

(continued from previous page)

```
             mask = False,
       fill_value = 1e+20)
```

numpy.ma.**anomalies**(*self*, *axis=None*, *dtype=None*) **= <numpy.ma.core._frommethod object>**

Compute the anomalies (deviations from the arithmetic mean) along the given axis.

Returns an array of anomalies, with the same shape as the input and where the arithmetic mean is computed along the given axis.

Parameters **axis** : int, optional

Axis over which the anomalies are taken. The default is to use the mean of the flattened array as reference.

dtype : dtype, optional

Type to use in computing the variance. For arrays of integer type the default is float32; for arrays of float types it is the same as the array type.

See also:

mean Compute the mean of the array.

Examples

```
>>> a = np.ma.array([1,2,3])
>>> a.anom()
masked_array(data = [-1.  0.  1.],
             mask = False,
       fill_value = 1e+20)
```

numpy.ma.**average**(*a*, *axis=None*, *weights=None*, *returned=False*)

Return the weighted average of array over the given axis.

Parameters **a** : array_like

Data to be averaged. Masked entries are not taken into account in the computation.

axis : int, optional

Axis along which to average *a*. If *None*, averaging is done over the flattened array.

weights : array_like, optional

The importance that each element has in the computation of the average. The weights array can either be 1-D (in which case its length must be the size of *a* along the given axis) or of the same shape as *a*. If `weights=None`, then all data in *a* are assumed to have a weight equal to one. If *weights* is complex, the imaginary parts are ignored.

returned : bool, optional

Flag indicating whether a tuple `(result, sum of weights)` should be returned as output (True), or just the result (False). Default is False.

Returns **average, [sum_of_weights]** : (tuple of) scalar or MaskedArray

The average along the specified axis. When returned is *True*, return a tuple with the average as the first element and the sum of the weights as the second element. The

return type is *np.float64* if *a* is of integer type and floats smaller than *float64*, or the input data-type, otherwise. If returned, *sum_of_weights* is always *float64*.

Examples

```
>>> a = np.ma.array([1., 2., 3., 4.], mask=[False, False, True, True])
>>> np.ma.average(a, weights=[3, 1, 0, 0])
1.25
```

```
>>> x = np.ma.arange(6.).reshape(3, 2)
>>> print(x)
[[ 0.  1.]
 [ 2.  3.]
 [ 4.  5.]]
>>> avg, sumweights = np.ma.average(x, axis=0, weights=[1, 2, 3],
...                                 returned=True)
>>> print(avg)
[2.66666666667 3.66666666667]
```

numpy.ma.**conjugate**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <numpy.ma.core._MaskedUnaryOperation object>**

Return the complex conjugate, element-wise.

The complex conjugate of a complex number is obtained by changing the sign of its imaginary part.

Parameters **x** : array_like

Input value.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The complex conjugate of *x*, with same dtype as *y*.

Examples

```
>>> np.conjugate(1+2j)
(1-2j)
```

```
>>> x = np.eye(2) + 1j * np.eye(2)
>>> np.conjugate(x)
array([[ 1.-1.j,  0.-0.j],
       [ 0.-0.j,  1.-1.j]])
```

numpy.ma.**corrcoef**(*x*, *y=None*, *rowvar=True*, *bias=<class 'numpy._globals._NoValue'>*, *allow_masked=True*, *ddof=<class 'numpy._globals._NoValue'>*)

Return Pearson product-moment correlation coefficients.

Except for the handling of missing data this function does the same as *numpy.corrcoef*. For more details and examples, see *numpy.corrcoef*.

Parameters **x** : array_like

A 1-D or 2-D array containing multiple variables and observations. Each row of *x* represents a variable, and each column a single observation of all those variables. Also see *rowvar* below.

y : array_like, optional

An additional set of variables and observations. *y* has the same shape as *x*.

rowvar : bool, optional

If *rowvar* is True (default), then each row represents a variable, with observations in the columns. Otherwise, the relationship is transposed: each column represents a variable, while the rows contain observations.

bias : _NoValue, optional

Has no effect, do not use.

Deprecated since version 1.10.0.

allow_masked : bool, optional

If True, masked values are propagated pair-wise: if a value is masked in *x*, the corresponding value is masked in *y*. If False, raises an exception. Because *bias* is deprecated, this argument needs to be treated as keyword only to avoid a warning.

ddof : _NoValue, optional

Has no effect, do not use.

Deprecated since version 1.10.0.

See also:

numpy.corrcoef Equivalent function in top-level NumPy module.

cov Estimate the covariance matrix.

Notes

This function accepts but discards arguments *bias* and *ddof*. This is for backwards compatibility with previous versions of this function. These arguments had no effect on the return values of the function and can be safely ignored in this and previous versions of numpy.

numpy.ma.**cov**(*x*, *y=None*, *rowvar=True*, *bias=False*, *allow_masked=True*, *ddof=None*)

Estimate the covariance matrix.

Except for the handling of missing data this function does the same as *numpy.cov*. For more details and examples, see *numpy.cov*.

By default, masked values are recognized as such. If *x* and *y* have the same shape, a common mask is allocated: if `x[i,j]` is masked, then `y[i,j]` will also be masked. Setting *allow_masked* to False will raise an exception if values are missing in either of the input arrays.

Parameters **x** : array_like

A 1-D or 2-D array containing multiple variables and observations. Each row of *x* represents a variable, and each column a single observation of all those variables. Also see *rowvar* below.

y : array_like, optional

An additional set of variables and observations. *y* has the same form as *x*.

rowvar : bool, optional

If *rowvar* is True (default), then each row represents a variable, with observations in the columns. Otherwise, the relationship is transposed: each column represents a variable, while the rows contain observations.

bias : bool, optional

Default normalization (False) is by `(N-1)`, where `N` is the number of observations given (unbiased estimate). If *bias* is True, then normalization is by `N`. This keyword can be overridden by the keyword `ddof` in numpy versions >= 1.5.

allow_masked : bool, optional

If True, masked values are propagated pair-wise: if a value is masked in *x*, the corresponding value is masked in *y*. If False, raises a *ValueError* exception when some values are missing.

ddof : {None, int}, optional

If not `None` normalization is by `(N - ddof)`, where `N` is the number of observations; this overrides the value implied by `bias`. The default value is `None`.

New in version 1.5.

Raises **ValueError**

Raised if some values are missing and *allow_masked* is False.

See also:

numpy.cov

numpy.ma.**cumsum**(*self*, *axis=None*, *dtype=None*, *out=None*) **= <numpy.ma.core._frommethod object>**

Return the cumulative sum of the array elements over the given axis.

Masked values are set to 0 internally during the computation. However, their position is saved, and the result will be masked at the same locations.

Refer to *numpy.cumsum* for full documentation.

See also:

ndarray.cumsum corresponding function for ndarrays

numpy.cumsum equivalent function

Notes

The mask is lost if *out* is not a valid *MaskedArray* !

Arithmetic is modular when using integer types, and no error is raised on overflow.

Examples

```
>>> marr = np.ma.array(np.arange(10), mask=[0,0,0,1,1,1,0,0,0,0])
>>> print(marr.cumsum())
[0 1 3 -- -- -- 9 16 24 33]
```

numpy.ma.**cumprod**(*self*, *axis=None*, *dtype=None*, *out=None*) **= <numpy.ma.core._frommethod object>**

Return the cumulative product of the array elements over the given axis.

Masked values are set to 1 internally during the computation. However, their position is saved, and the result will be masked at the same locations.

Refer to *numpy.cumprod* for full documentation.

See also:

ndarray.cumprod corresponding function for ndarrays

numpy.cumprod equivalent function

Notes

The mask is lost if *out* is not a valid MaskedArray !

Arithmetic is modular when using integer types, and no error is raised on overflow.

numpy.ma.**mean**(*self*, *axis=None*, *dtype=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*) **= <numpy.ma.core._frommethod object>**

Returns the average of the array elements along given axis.

Masked entries are ignored, and result elements which are not finite will be masked.

Refer to *numpy.mean* for full documentation.

See also:

ndarray.mean corresponding function for ndarrays

numpy.mean Equivalent function

numpy.ma.average Weighted average.

Examples

```
>>> a = np.ma.array([1,2,3], mask=[False, False, True])
>>> a
masked_array(data = [1 2 --],
             mask = [False False  True],
       fill_value = 999999)
```

(continues on next page)

(continued from previous page)

```
>>> a.mean()
1.5
```

numpy.ma.**median**(*a*, *axis=None*, *out=None*, *overwrite_input=False*, *keepdims=False*)

Compute the median along the specified axis.

Returns the median of the array elements.

Parameters **a** : array_like

Input array or object that can be converted to an array.

axis : int, optional

Axis along which the medians are computed. The default (None) is to compute the median along a flattened version of the array.

out : ndarray, optional

Alternative output array in which to place the result. It must have the same shape and buffer length as the expected output but the type will be cast if necessary.

overwrite_input : bool, optional

If True, then allow use of memory of input array (a) for calculations. The input array will be modified by the call to median. This will save memory when you do not need to preserve the contents of the input array. Treat the input as undefined, but it will probably be fully or partially sorted. Default is False. Note that, if *overwrite_input* is True, and the input is not already an *ndarray*, an error will be raised.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the input array.

New in version 1.10.0.

Returns **median** : ndarray

A new array holding the result is returned unless out is specified, in which case a reference to out is returned. Return data-type is *float64* for integers and floats smaller than *float64*, or the input data-type, otherwise.

See also:

mean

Notes

Given a vector `V` with `N` non masked values, the median of `V` is the middle value of a sorted copy of `V` (`Vs`) - i.e. `Vs[(N-1)/2]`, when `N` is odd, or `{Vs[N/2 - 1] + Vs[N/2]}/2` when `N` is even.

Examples

```
>>> x = np.ma.array(np.arange(8), mask=[0]*4 + [1]*4)
>>> np.ma.median(x)
1.5
```

```
>>> x = np.ma.array(np.arange(10).reshape(2, 5), mask=[0]*6 + [1]*4)
>>> np.ma.median(x)
2.5
>>> np.ma.median(x, axis=-1, overwrite_input=True)
masked_array(data = [ 2.  5.],
             mask = False,
       fill_value = 1e+20)
```

numpy.ma.**power**(*a*, *b*, *third=None*)

Returns element-wise base array raised to power from second array.

This is the masked array version of *numpy.power*. For details see *numpy.power*.

See also:

numpy.power

Notes

The *out* argument to *numpy.power* is not supported, *third* has to be None.

numpy.ma.**prod**(*self*, *axis=None*, *dtype=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*) **= <numpy.ma.core._frommethod object>**

Return the product of the array elements over the given axis.

Masked elements are set to 1 internally for computation.

Refer to *numpy.prod* for full documentation.

See also:

ndarray.prod corresponding function for ndarrays

numpy.prod equivalent function

Notes

Arithmetic is modular when using integer types, and no error is raised on overflow.

numpy.ma.**std**(*self*, *axis=None*, *dtype=None*, *out=None*, *ddof=0*, *keepdims=<class 'numpy._globals._NoValue'>*) **= <numpy.ma.core._frommethod object>**

Returns the standard deviation of the array elements along given axis.

Masked entries are ignored.

Refer to *numpy.std* for full documentation.

See also:

ndarray.std corresponding function for ndarrays

numpy.std Equivalent function

numpy.ma.**sum**(*self*, *axis=None*, *dtype=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*) **= <numpy.ma.core._frommethod object>**

Return the sum of the array elements over the given axis.

Masked elements are set to 0 internally.

Refer to *numpy.sum* for full documentation.

See also:

ndarray.sum corresponding function for ndarrays

numpy.sum equivalent function

Examples

```
>>> x = np.ma.array([[1,2,3],[4,5,6],[7,8,9]], mask=[0] + [1,0]*4)
>>> print(x)
[[1 -- 3]
 [-- 5 --]
 [7 -- 9]]
>>> print(x.sum())
25
>>> print(x.sum(axis=1))
[4 5 16]
>>> print(x.sum(axis=0))
[8 5 12]
>>> print(type(x.sum(axis=0, dtype=np.int64)[0]))
<type 'numpy.int64'>
```

numpy.ma.**var**(*self*, *axis=None*, *dtype=None*, *out=None*, *ddof=0*, *keepdims=<class 'numpy._globals._NoValue'>*) **= <numpy.ma.core._frommethod object>**

Compute the variance along the specified axis.

Returns the variance of the array elements, a measure of the spread of a distribution. The variance is computed for the flattened array by default, otherwise over the specified axis.

Parameters **a** : array_like

Array containing numbers whose variance is desired. If *a* is not an array, a conversion is attempted.

axis : None or int or tuple of ints, optional

Axis or axes along which the variance is computed. The default is to compute the variance of the flattened array.

New in version 1.7.0.

If this is a tuple of ints, a variance is performed over multiple axes, instead of a single axis or all the axes as before.

dtype : data-type, optional

Type to use in computing the variance. For arrays of integer type the default is *float32*; for arrays of float types it is the same as the array type.

out : ndarray, optional

Alternate output array in which to place the result. It must have the same shape as the expected output, but the type is cast if necessary.

ddof : int, optional

"Delta Degrees of Freedom": the divisor used in the calculation is `N - ddof`, where `N` represents the number of elements. By default *ddof* is zero.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the input array.

If the default value is passed, then *keepdims* will not be passed through to the *var* method of sub-classes of *ndarray*, however any non-default value will be. If the sub-classes *sum* method does not implement *keepdims* any exceptions will be raised.

Returns **variance** : ndarray, see dtype parameter above

If `out=None`, returns a new array containing the variance; otherwise, a reference to the output array is returned.

See also:

std, *mean*, `nanmean`, `nanstd`, `nanvar`

`numpy.doc.ufuncs` Section "Output arguments"

Notes

The variance is the average of the squared deviations from the mean, i.e., `var = mean(abs(x - x.mean())**2)`.

The mean is normally calculated as `x.sum() / N`, where `N = len(x)`. If, however, *ddof* is specified, the divisor `N - ddof` is used instead. In standard statistical practice, `ddof=1` provides an unbiased estimator of the variance of a hypothetical infinite population. `ddof=0` provides a maximum likelihood estimate of the variance for normally distributed variables.

Note that for complex numbers, the absolute value is taken before squaring, so that the result is always real and nonnegative.

For floating-point input, the variance is computed using the same precision the input has. Depending on the input data, this can cause the results to be inaccurate, especially for *float32* (see example below). Specifying a higher-accuracy accumulator using the `dtype` keyword can alleviate this issue.

Examples

```
>>> a = np.array([[1, 2], [3, 4]])
>>> np.var(a)
1.25
>>> np.var(a, axis=0)
array([ 1.,  1.])
>>> np.var(a, axis=1)
array([ 0.25,  0.25])
```

In single precision, var() can be inaccurate:

```
>>> a = np.zeros((2, 512*512), dtype=np.float32)
>>> a[0, :] = 1.0
>>> a[1, :] = 0.1
>>> np.var(a)
0.20250003
```

Computing the variance in float64 is more accurate:

```
>>> np.var(a, dtype=np.float64)
0.20249999932944759
>>> ((1-0.55)**2 + (0.1-0.55)**2)/2
0.2025
```

Minimum/maximum

ma.argmax(self[, axis, fill_value, out])	Returns array of indices of the maximum values along the given axis.
ma.argmin(self[, axis, fill_value, out])	Return array of indices to the minimum values along the given axis.
ma.max(obj[, axis, out, fill_value, keepdims])	Return the maximum along a given axis.
ma.min(obj[, axis, out, fill_value, keepdims])	Return the minimum along a given axis.
ma.ptp(obj[, axis, out, fill_value])	Return (maximum - minimum) along the given dimension (i.e.
ma.MaskedArray.argmax([axis, fill_value, out])	Returns array of indices of the maximum values along the given axis.
ma.MaskedArray.argmin([axis, fill_value, out])	Return array of indices to the minimum values along the given axis.
ma.MaskedArray.max([axis, out, fill_value, ...])	Return the maximum along a given axis.
ma.MaskedArray.min([axis, out, fill_value, ...])	Return the minimum along a given axis.
ma.MaskedArray.ptp([axis, out, fill_value])	Return (maximum - minimum) along the given dimension (i.e.

numpy.ma.**argmax**(*self*, *axis=None*, *fill_value=None*, *out=None*) **= <numpy.ma.core._frommethod object>**

Returns array of indices of the maximum values along the given axis. Masked values are treated as if they had the value fill_value.

Parameters **axis** : {None, integer}

If None, the index is into the flattened array, otherwise along the specified axis

fill_value : {var}, optional

Value used to fill in the masked values. If None, the output of maximum_fill_value(self._data) is used instead.

out : {None, array}, optional

Array into which the result can be placed. Its type is preserved and it must be of the right shape to hold the output.

Returns **index_array** : {integer_array}

Examples

```
>>> a = np.arange(6).reshape(2,3)
>>> a.argmax()
5
>>> a.argmax(0)
array([1, 1, 1])
>>> a.argmax(1)
array([2, 2])
```

numpy.ma.**argmin**(*self*, *axis=None*, *fill_value=None*, *out=None*) **= <numpy.ma.core._frommethod object>**

Return array of indices to the minimum values along the given axis.

Parameters **axis** : {None, integer}

If None, the index is into the flattened array, otherwise along the specified axis

fill_value : {var}, optional

Value used to fill in the masked values. If None, the output of minimum_fill_value(self._data) is used instead.

out : {None, array}, optional

Array into which the result can be placed. Its type is preserved and it must be of the right shape to hold the output.

Returns ndarray or scalar

If multi-dimension input, returns a new ndarray of indices to the minimum values along the given axis. Otherwise, returns a scalar of index to the minimum values along the given axis.

Examples

```
>>> x = np.ma.array(arange(4), mask=[1,1,0,0])
>>> x.shape = (2,2)
>>> print(x)
[[-- --]
 [2 3]]
>>> print(x.argmin(axis=0, fill_value=-1))
[0 0]
>>> print(x.argmin(axis=0, fill_value=9))
[1 1]
```

numpy.ma.**max**(*obj*, *axis=None*, *out=None*, *fill_value=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Return the maximum along a given axis.

Parameters **axis** : {None, int}, optional

Axis along which to operate. By default, `axis` is None and the flattened input is used.

out : array_like, optional

Alternative output array in which to place the result. Must be of the same shape and buffer length as the expected output.

fill_value : {var}, optional

Value used to fill in the masked values. If None, use the output of maximum_fill_value().

Returns **amax** : array_like

New array holding the result. If `out` was specified, `out` is returned.

See also:

maximum_fill_value Returns the maximum filling value for a given datatype.

numpy.ma.**min**(*obj*, *axis=None*, *out=None*, *fill_value=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Return the minimum along a given axis.

Parameters **axis** : {None, int}, optional

Axis along which to operate. By default, `axis` is None and the flattened input is used.

out : array_like, optional

Alternative output array in which to place the result. Must be of the same shape and buffer length as the expected output.

fill_value : {var}, optional

Value used to fill in the masked values. If None, use the output of `minimum_fill_value`.

Returns **amin** : array_like

New array holding the result. If `out` was specified, `out` is returned.

See also:

`minimum_fill_value` Returns the minimum filling value for a given datatype.

numpy.ma.**ptp**(*obj*, *axis=None*, *out=None*, *fill_value=None*)

Return (maximum - minimum) along the given dimension (i.e. peak-to-peak value).

Parameters **axis** : {None, int}, optional

Axis along which to find the peaks. If None (default) the flattened array is used.

out : {None, array_like}, optional

Alternative output array in which to place the result. It must have the same shape and buffer length as the expected output but the type will be cast if necessary.

fill_value : {var}, optional

Value used to fill in the masked values.

Returns **ptp** : ndarray.

A new array holding the result, unless `out` was specified, in which case a reference to `out` is returned.

Sorting

ma.argsort(a[, axis, kind, order, endwith, ...])	Return an ndarray of indices that sort the array along the specified axis.
ma.sort(a[, axis, kind, order, endwith, ...])	Sort the array, in-place
ma.MaskedArray.argsort([axis, kind, order, ...])	Return an ndarray of indices that sort the array along the specified axis.
ma.MaskedArray.sort([axis, kind, order, ...])	Sort the array, in-place

numpy.ma.**argsort**(*a*, *axis=<class 'numpy._globals._NoValue'>*, *kind='quicksort'*, *order=None*, *endwith=True*, *fill_value=None*)

Return an ndarray of indices that sort the array along the specified axis. Masked values are filled beforehand to *fill_value*.

Parameters **axis** : int, optional

Axis along which to sort. If None, the default, the flattened array is used.

Changed in version 1.13.0: Previously, the default was documented to be -1, but that was in error. At some future date, the default will change to -1, as originally intended. Until then, the axis should be given explicitly when `arr.ndim > 1`, to avoid a FutureWarning.

kind : {'quicksort', 'mergesort', 'heapsort'}, optional

Sorting algorithm.

order : list, optional

When *a* is an array with fields defined, this argument specifies which fields to compare first, second, etc. Not all fields need be specified.

endwith : {True, False}, optional

Whether missing values (if any) should be treated as the largest values (True) or the smallest values (False) When the array contains unmasked values at the same extremes of the datatype, the ordering of these values and the masked values is undefined.

fill_value : {var}, optional

Value used internally for the masked values. If `fill_value` is not None, it supersedes `endwith`.

Returns **index_array** : ndarray, int

Array of indices that sort *a* along the specified axis. In other words, `a[index_array]` yields a sorted *a*.

See also:

MaskedArray.sort Describes sorting algorithms used.

lexsort Indirect stable sort with multiple keys.

ndarray.sort Inplace sort.

Notes

See *sort* for notes on the different sorting algorithms.

Examples

```
>>> a = np.ma.array([3,2,1], mask=[False, False, True])
>>> a
masked_array(data = [3 2 --],
             mask = [False False  True],
       fill_value = 999999)
>>> a.argsort()
array([1, 0, 2])
```

numpy.ma.**sort**(*a*, *axis=-1*, *kind='quicksort'*, *order=None*, *endwith=True*, *fill_value=None*)

Sort the array, in-place

Parameters **a** : array_like

Array to be sorted.

axis : int, optional

Axis along which to sort. If None, the array is flattened before sorting. The default is -1, which sorts along the last axis.

kind : {'quicksort', 'mergesort', 'heapsort'}, optional

Sorting algorithm. Default is 'quicksort'.

order : list, optional

When *a* is a structured array, this argument specifies which fields to compare first, second, and so on. This list does not need to include all of the fields.

endwith : {True, False}, optional

Whether missing values (if any) should be treated as the largest values (True) or the smallest values (False) When the array contains unmasked values at the same extremes of the datatype, the ordering of these values and the masked values is undefined.

fill_value : {var}, optional

Value used internally for the masked values. If `fill_value` is not None, it supersedes `endwith`.

Returns **sorted_array** : ndarray

Array of the same type and shape as *a*.

See also:

`ndarray.sort` Method to sort an array in-place.

`argsort` Indirect sort.

`lexsort` Indirect stable sort on multiple keys.

`searchsorted` Find elements in a sorted array.

Notes

See `sort` for notes on the different sorting algorithms.

Examples

```
>>> a = ma.array([1, 2, 5, 4, 3],mask=[0, 1, 0, 1, 0])
>>> # Default
>>> a.sort()
>>> print(a)
[1 3 5 -- --]
```

```
>>> a = ma.array([1, 2, 5, 4, 3],mask=[0, 1, 0, 1, 0])
>>> # Put missing values in the front
>>> a.sort(endwith=False)
>>> print(a)
[-- -- 1 3 5]
```

```
>>> a = ma.array([1, 2, 5, 4, 3],mask=[0, 1, 0, 1, 0])
>>> # fill_value takes over endwith
>>> a.sort(endwith=False, fill_value=3)
>>> print(a)
[1 -- -- 3 5]
```

Algebra

ma.diag(v[, k])	Extract a diagonal or construct a diagonal array.
ma.dot(a, b[, strict, out])	Return the dot product of two arrays.
ma.identity(n[, dtype])	Return the identity array.
ma.inner(a, b)	Inner product of two arrays.
ma.innerproduct(a, b)	Inner product of two arrays.
ma.outer(a, b)	Compute the outer product of two vectors.
ma.outerproduct(a, b)	Compute the outer product of two vectors.
ma.trace(self[, offset, axis1, axis2, ...])	Return the sum along diagonals of the array.
ma.transpose(a[, axes])	Permute the dimensions of an array.
ma.MaskedArray.trace([offset, axis1, axis2, ...])	Return the sum along diagonals of the array.
ma.MaskedArray.transpose(*axes)	Returns a view of the array with axes transposed.

numpy.ma.**diag**(*v*, *k=0*)

Extract a diagonal or construct a diagonal array.

This function is the equivalent of *numpy.diag* that takes masked values into account, see *numpy.diag* for details.

See also:

numpy.diag Equivalent function for ndarrays.

numpy.ma.**dot**(*a*, *b*, *strict=False*, *out=None*)

Return the dot product of two arrays.

This function is the equivalent of *numpy.dot* that takes masked values into account. Note that *strict* and *out* are in different position than in the method version. In order to maintain compatibility with the corresponding method, it is recommended that the optional arguments be treated as keyword only. At some point that may be mandatory.

Note: Works only with 2-D arrays at the moment.

Parameters **a, b** : masked_array_like

Inputs arrays.

strict : bool, optional

Whether masked data are propagated (True) or set to 0 (False) for the computation. Default is False. Propagating the mask means that if a masked value appears in a row or column, the whole row or column is considered masked.

out : masked_array, optional

Output argument. This must have the exact kind that would be returned if it was not used. In particular, it must have the right type, must be C-contiguous, and its dtype must be the dtype that would be returned for *dot(a,b)*. This is a performance feature. Therefore, if these conditions are not met, an exception is raised, instead of attempting to be flexible.

New in version 1.10.2.

See also:

numpy.dot Equivalent function for ndarrays.

Examples

```
>>> a = ma.array([[1, 2, 3], [4, 5, 6]], mask=[[1, 0, 0], [0, 0, 0]])
>>> b = ma.array([[1, 2], [3, 4], [5, 6]], mask=[[1, 0], [0, 0], [0, 0]])
>>> np.ma.dot(a, b)
masked_array(data =
 [[21 26]
 [45 64]],
             mask =
 [[False False]
 [False False]],
       fill_value = 999999)
>>> np.ma.dot(a, b, strict=True)
masked_array(data =
 [[-- --]
 [-- 64]],
             mask =
 [[ True  True]
 [ True False]],
       fill_value = 999999)
```

numpy.ma.**identity**(*n*, *dtype=None*) **= <numpy.ma.core._convert2ma object>**

Return the identity array.

The identity array is a square array with ones on the main diagonal.

Parameters **n** : int

Number of rows (and columns) in *n* x *n* output.

dtype : data-type, optional

Data-type of the output. Defaults to `float`.

Returns **out** : ndarray

n x *n* array with its main diagonal set to one, and all other elements 0.

Examples

```
>>> np.identity(3)
array([[ 1.,  0.,  0.],
       [ 0.,  1.,  0.],
       [ 0.,  0.,  1.]])
```

numpy.ma.**inner**(*a*, *b*)

Inner product of two arrays.

Ordinary inner product of vectors for 1-D arrays (without complex conjugation), in higher dimensions a sum product over the last axes.

Parameters **a, b** : array_like

If *a* and *b* are nonscalar, their last dimensions must match.

Returns **out** : ndarray

out.shape = a.shape[:-1] + b.shape[:-1]

Raises **ValueError**

If the last dimension of *a* and *b* has different size.

See also:

tensordot Sum products over arbitrary axes.

dot Generalised matrix product, using second last dimension of *b*.

einsum Einstein summation convention.

Notes

For vectors (1-D arrays) it computes the ordinary inner-product:

```
np.inner(a, b) = sum(a[:]*b[:])
```

More generally, if *ndim(a) = r > 0* and *ndim(b) = s > 0*:

```
np.inner(a, b) = np.tensordot(a, b, axes=(-1,-1))
```

or explicitly:

```
np.inner(a, b)[i0,...,ir-1,j0,...,js-1]
     = sum(a[i0,...,ir-1,:]*b[j0,...,js-1,:])
```

In addition *a* or *b* may be scalars, in which case:

```
np.inner(a,b) = a*b
```

Examples

Ordinary inner product for vectors:

```
>>> a = np.array([1,2,3])
>>> b = np.array([0,1,0])
>>> np.inner(a, b)
2
```

A multidimensional example:

```
>>> a = np.arange(24).reshape((2,3,4))
>>> b = np.arange(4)
>>> np.inner(a, b)
array([[ 14,  38,  62],
       [ 86, 110, 134]])
```

An example where *b* is a scalar:

```
>>> np.inner(np.eye(2), 7)
array([[ 7.,  0.],
       [ 0.,  7.]])
```

numpy.ma.**innerproduct**(*a*, *b*)

Inner product of two arrays.

Ordinary inner product of vectors for 1-D arrays (without complex conjugation), in higher dimensions a sum product over the last axes.

Parameters **a, b** : array_like

If *a* and *b* are nonscalar, their last dimensions must match.

Returns **out** : ndarray

out.shape = a.shape[:-1] + b.shape[:-1]

Raises **ValueError**

If the last dimension of *a* and *b* has different size.

See also:

tensordot Sum products over arbitrary axes.

dot Generalised matrix product, using second last dimension of *b*.

einsum Einstein summation convention.

Notes

For vectors (1-D arrays) it computes the ordinary inner-product:

```
np.inner(a, b) = sum(a[:]*b[:])
```

More generally, if *ndim(a) = r > 0* and *ndim(b) = s > 0*:

```
np.inner(a, b) = np.tensordot(a, b, axes=(-1,-1))
```

or explicitly:

```
np.inner(a, b)[i0,...,ir-1,j0,...,js-1]
     = sum(a[i0,...,ir-1,:]*b[j0,...,js-1,:])
```

In addition *a* or *b* may be scalars, in which case:

```
np.inner(a,b) = a*b
```

Examples

Ordinary inner product for vectors:

```
>>> a = np.array([1,2,3])
>>> b = np.array([0,1,0])
>>> np.inner(a, b)
2
```

A multidimensional example:

```
>>> a = np.arange(24).reshape((2,3,4))
>>> b = np.arange(4)
>>> np.inner(a, b)
array([[ 14,  38,  62],
       [ 86, 110, 134]])
```

An example where *b* is a scalar:

```
>>> np.inner(np.eye(2), 7)
array([[ 7.,  0.],
       [ 0.,  7.]])
```

numpy.ma.**outer**(*a*, *b*)

Compute the outer product of two vectors.

Given two vectors, `a = [a0, a1, ..., aM]` and `b = [b0, b1, ..., bN]`, the outer product *[R57]* is:

```
[[a0*b0  a0*b1 ... a0*bN ]
 [a1*b0    .
 [ ...          .
 [aM*b0            aM*bN ]]
```

Parameters **a** : (M,) array_like

First input vector. Input is flattened if not already 1-dimensional.

b : (N,) array_like

Second input vector. Input is flattened if not already 1-dimensional.

out : (M, N) ndarray, optional

A location where the result is stored

New in version 1.9.0.

Returns **out** : (M, N) ndarray

`out[i, j] = a[i] * b[j]`

See also:

inner

einsum `einsum('i,j->ij', a.ravel(), b.ravel())` is the equivalent.

ufunc.outer A generalization to N dimensions and other operations. `np.multiply.outer(a.ravel(), b.ravel())` is the equivalent.

References

[R57]

Examples

Make a (*very* coarse) grid for computing a Mandelbrot set:

```
>>> rl = np.outer(np.ones((5,)), np.linspace(-2, 2, 5))
>>> rl
array([[-2., -1.,  0.,  1.,  2.],
       [-2., -1.,  0.,  1.,  2.],
       [-2., -1.,  0.,  1.,  2.],
       [-2., -1.,  0.,  1.,  2.],
       [-2., -1.,  0.,  1.,  2.]])
>>> im = np.outer(1j*np.linspace(2, -2, 5), np.ones((5,)))
>>> im
array([[ 0.+2.j,  0.+2.j,  0.+2.j,  0.+2.j,  0.+2.j],
       [ 0.+1.j,  0.+1.j,  0.+1.j,  0.+1.j,  0.+1.j],
       [ 0.+0.j,  0.+0.j,  0.+0.j,  0.+0.j,  0.+0.j],
       [ 0.-1.j,  0.-1.j,  0.-1.j,  0.-1.j,  0.-1.j],
       [ 0.-2.j,  0.-2.j,  0.-2.j,  0.-2.j,  0.-2.j]])
>>> grid = rl + im
>>> grid
array([[-2.+2.j, -1.+2.j,  0.+2.j,  1.+2.j,  2.+2.j],
       [-2.+1.j, -1.+1.j,  0.+1.j,  1.+1.j,  2.+1.j],
       [-2.+0.j, -1.+0.j,  0.+0.j,  1.+0.j,  2.+0.j],
       [-2.-1.j, -1.-1.j,  0.-1.j,  1.-1.j,  2.-1.j],
       [-2.-2.j, -1.-2.j,  0.-2.j,  1.-2.j,  2.-2.j]])
```

An example using a "vector" of letters:

```
>>> x = np.array(['a', 'b', 'c'], dtype=object)
>>> np.outer(x, [1, 2, 3])
array([[a, aa, aaa],
       [b, bb, bbb],
       [c, cc, ccc]], dtype=object)
```

numpy.ma.**outerproduct**(*a*, *b*)

Compute the outer product of two vectors.

Given two vectors, `a = [a0, a1, ..., aM]` and `b = [b0, b1, ..., bN]`, the outer product *[R58]* is:

```
[[a0*b0  a0*b1 ... a0*bN ]
 [a1*b0    .
 [ ...          .
 [aM*b0            aM*bN ]]
```

Parameters **a** : (M,) array_like

First input vector. Input is flattened if not already 1-dimensional.

b : (N,) array_like

Second input vector. Input is flattened if not already 1-dimensional.

out : (M, N) ndarray, optional

A location where the result is stored

New in version 1.9.0.

Returns **out** : (M, N) ndarray

`out[i, j] = a[i] * b[j]`

See also:

inner

einsum `einsum('i,j->ij', a.ravel(), b.ravel())` is the equivalent.

ufunc.outer A generalization to N dimensions and other operations. `np.multiply.outer(a.ravel(), b.ravel())` is the equivalent.

References

[R58]

Examples

Make a (*very* coarse) grid for computing a Mandelbrot set:

```
>>> rl = np.outer(np.ones((5,)), np.linspace(-2, 2, 5))
>>> rl
array([[-2., -1.,  0.,  1.,  2.],
       [-2., -1.,  0.,  1.,  2.],
       [-2., -1.,  0.,  1.,  2.],
       [-2., -1.,  0.,  1.,  2.],
       [-2., -1.,  0.,  1.,  2.]])
>>> im = np.outer(1j*np.linspace(2, -2, 5), np.ones((5,)))
>>> im
array([[ 0.+2.j,  0.+2.j,  0.+2.j,  0.+2.j,  0.+2.j],
       [ 0.+1.j,  0.+1.j,  0.+1.j,  0.+1.j,  0.+1.j],
       [ 0.+0.j,  0.+0.j,  0.+0.j,  0.+0.j,  0.+0.j],
       [ 0.-1.j,  0.-1.j,  0.-1.j,  0.-1.j,  0.-1.j],
       [ 0.-2.j,  0.-2.j,  0.-2.j,  0.-2.j,  0.-2.j]])
>>> grid = rl + im
>>> grid
array([[-2.+2.j, -1.+2.j,  0.+2.j,  1.+2.j,  2.+2.j],
       [-2.+1.j, -1.+1.j,  0.+1.j,  1.+1.j,  2.+1.j],
       [-2.+0.j, -1.+0.j,  0.+0.j,  1.+0.j,  2.+0.j],
       [-2.-1.j, -1.-1.j,  0.-1.j,  1.-1.j,  2.-1.j],
       [-2.-2.j, -1.-2.j,  0.-2.j,  1.-2.j,  2.-2.j]])
```

An example using a “vector” of letters:

```
>>> x = np.array(['a', 'b', 'c'], dtype=object)
>>> np.outer(x, [1, 2, 3])
array([[a, aa, aaa],
       [b, bb, bbb],
       [c, cc, ccc]], dtype=object)
```

numpy.ma.**trace**(*self*, *offset=0*, *axis1=0*, *axis2=1*, *dtype=None*, *out=None*) *a.trace(offset=0, axis1=0, axis2=1, dtype=None, out=None)* **= <numpy.ma.core._frommethod object>**

Return the sum along diagonals of the array.

Refer to *numpy.trace* for full documentation.

See also:

numpy.trace equivalent function

Polynomial fit

ma.vander(x[, n])	Generate a Vandermonde matrix.
ma.polyfit(x, y, deg[, rcond, full, w, cov])	Least squares polynomial fit.

numpy.ma.**vander**(*x*, *n=None*)

Generate a Vandermonde matrix.

The columns of the output matrix are powers of the input vector. The order of the powers is determined by the *increasing* boolean argument. Specifically, when *increasing* is False, the *i*-th output column is the input vector raised element-wise to the power of `N - i - 1`. Such a matrix with a geometric progression in each row is named for Alexandre- Theophile Vandermonde.

Parameters **x** : array_like

1-D input array.

N : int, optional

Number of columns in the output. If *N* is not specified, a square array is returned (`N = len(x)`).

increasing : bool, optional

Order of the powers of the columns. If True, the powers increase from left to right, if False (the default) they are reversed.

New in version 1.9.0.

Returns **out** : ndarray

Vandermonde matrix. If *increasing* is False, the first column is `x^(N-1)`, the second `x^(N-2)` and so forth. If *increasing* is True, the columns are `x^0, x^1, ..., x^(N-1)`.

See also:

`polynomial.polynomial.polyvander`

Examples

```
>>> x = np.array([1, 2, 3, 5])
>>> N = 3
>>> np.vander(x, N)
array([[ 1,  1,  1],
       [ 4,  2,  1],
       [ 9,  3,  1],
       [25,  5,  1]])
```

```
>>> np.column_stack([x**(N-1-i) for i in range(N)])
array([[ 1,  1,  1],
       [ 4,  2,  1],
       [ 9,  3,  1],
       [25,  5,  1]])
```

```
>>> x = np.array([1, 2, 3, 5])
>>> np.vander(x)
array([[  1,   1,   1,   1],
       [  8,   4,   2,   1],
       [ 27,   9,   3,   1],
       [125,  25,   5,   1]])
>>> np.vander(x, increasing=True)
array([[  1,   1,   1,   1],
       [  1,   2,   4,   8],
       [  1,   3,   9,  27],
       [  1,   5,  25, 125]])
```

The determinant of a square Vandermonde matrix is the product of the differences between the values of the input vector:

```
>>> np.linalg.det(np.vander(x))
48.000000000000043
>>> (5-3)*(5-2)*(5-1)*(3-2)*(3-1)*(2-1)
48
```

numpy.ma.**polyfit**(*x*, *y*, *deg*, *rcond=None*, *full=False*, *w=None*, *cov=False*)

Least squares polynomial fit.

Fit a polynomial `p(x) = p[0] * x**deg + ... + p[deg]` of degree *deg* to points *(x, y)*. Returns a vector of coefficients *p* that minimises the squared error.

Parameters **x** : array_like, shape (M,)

x-coordinates of the M sample points `(x[i], y[i])`.

y : array_like, shape (M,) or (M, K)

y-coordinates of the sample points. Several data sets of sample points sharing the same x-coordinates can be fitted at once by passing in a 2D-array that contains one dataset per column.

deg : int

Degree of the fitting polynomial

rcond : float, optional

Relative condition number of the fit. Singular values smaller than this relative to the largest singular value will be ignored. The default value is len(x)*eps, where eps is the relative precision of the float type, about 2e-16 in most cases.

full : bool, optional

Switch determining nature of return value. When it is False (the default) just the coefficients are returned, when True diagnostic information from the singular value decomposition is also returned.

w : array_like, shape (M,), optional

Weights to apply to the y-coordinates of the sample points. For gaussian uncertainties, use 1/sigma (not 1/sigma**2).

cov : bool, optional

Return the estimate and the covariance matrix of the estimate If full is True, then cov is not returned.

Returns **p** : ndarray, shape (deg + 1,) or (deg + 1, K)

Polynomial coefficients, highest power first. If *y* was 2-D, the coefficients for *k*-th data set are in `p[:,k]`.

residuals, rank, singular_values, rcond

Present only if *full* = True. Residuals of the least-squares fit, the effective rank of the scaled Vandermonde coefficient matrix, its singular values, and the specified value of *rcond*. For more details, see *linalg.lstsq*.

V : ndarray, shape (M,M) or (M,M,K)

Present only if *full* = False and *cov'*=True. *The covariance matrix of the polynomial coefficient estimates. The diagonal of this matrix are the variance estimates for each coefficient. If y is a 2-D array, then the covariance matrix for the 'k*-th data set are in `V[:,:,k]`

Warns **RankWarning**

The rank of the coefficient matrix in the least-squares fit is deficient. The warning is only raised if *full* = False.

The warnings can be turned off by

```
>>> import warnings
>>> warnings.simplefilter('ignore', np.RankWarning)
```

See also:

`polyval` Compute polynomial values.

`linalg.lstsq` Computes a least-squares fit.

`scipy.interpolate.UnivariateSpline` Computes spline fits.

Notes

The solution minimizes the squared error

$$E = \sum_{j=0}^{k} |p(x_j) - y_j|^2$$

in the equations:

```
x[0]**n * p[0] + ... + x[0] * p[n-1] + p[n] = y[0]
x[1]**n * p[0] + ... + x[1] * p[n-1] + p[n] = y[1]
...
x[k]**n * p[0] + ... + x[k] * p[n-1] + p[n] = y[k]
```

The coefficient matrix of the coefficients *p* is a Vandermonde matrix.

`polyfit` issues a *RankWarning* when the least-squares fit is badly conditioned. This implies that the best fit is not well-defined due to numerical error. The results may be improved by lowering the polynomial degree or by replacing *x* by *x* - *x*.mean(). The *rcond* parameter can also be set to a value smaller than its default, but the resulting fit may be spurious: including contributions from the small singular values can add numerical noise to the result.

Note that fitting polynomial coefficients is inherently badly conditioned when the degree of the polynomial is large or the interval of sample points is badly centered. The quality of the fit should always be checked in these cases. When polynomial fits are not satisfactory, splines may be a good alternative.

References

[R59], *[R60]*

Examples

```
>>> x = np.array([0.0, 1.0, 2.0, 3.0,  4.0,  5.0])
>>> y = np.array([0.0, 0.8, 0.9, 0.1, -0.8, -1.0])
>>> z = np.polyfit(x, y, 3)
>>> z
array([ 0.08703704, -0.81349206,  1.69312169, -0.03968254])
```

It is convenient to use *poly1d* objects for dealing with polynomials:

```
>>> p = np.poly1d(z)
>>> p(0.5)
0.6143849206349179
>>> p(3.5)
-0.34732142857143039
>>> p(10)
22.579365079365115
```

High-order polynomials may oscillate wildly:

```
>>> p30 = np.poly1d(np.polyfit(x, y, 30))
/... RankWarning: Polyfit may be poorly conditioned...
>>> p30(4)
-0.80000000000000204
>>> p30(5)
-0.99999999999999445
>>> p30(4.5)
-0.10547061179440398
```

Illustration:

```
>>> import matplotlib.pyplot as plt
>>> xp = np.linspace(-2, 6, 100)
>>> _ = plt.plot(x, y, '.', xp, p(xp), '-', xp, p30(xp), '--')
>>> plt.ylim(-2,2)
(-2, 2)
>>> plt.show()
```

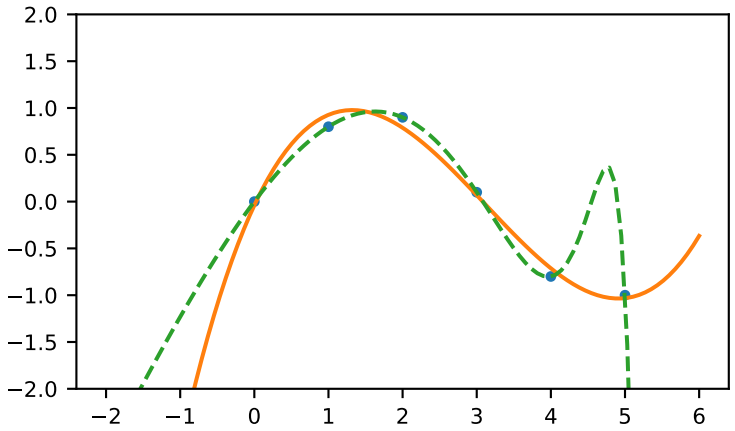

Clipping and rounding

ma.around	Round an array to the given number of decimals.
ma.clip(a, a_min, a_max[, out])	Clip (limit) the values in an array.
ma.round(a[, decimals, out])	Return a copy of a, rounded to 'decimals' places.
ma.MaskedArray.clip([min, max, out])	Return an array whose values are limited to `[min, max]`.
ma.MaskedArray.round([decimals, out])	Return each element rounded to the given number of decimals.

numpy.ma.**around = <numpy.ma.core._MaskedUnaryOperation object>**

Round an array to the given number of decimals.

Refer to *around* for full documentation.

See also:

around equivalent function

numpy.ma.**clip**(*a*, *a_min*, *a_max*, *out=None*)

Clip (limit) the values in an array.

Given an interval, values outside the interval are clipped to the interval edges. For example, if an interval of `[0, 1]` is specified, values smaller than 0 become 0, and values larger than 1 become 1.

Parameters **a** : array_like

Array containing elements to clip.

a_min : scalar or array_like or *None*

Minimum value. If *None*, clipping is not performed on lower interval edge. Not more than one of *a_min* and *a_max* may be *None*.

a_max : scalar or array_like or *None*

Maximum value. If *None*, clipping is not performed on upper interval edge. Not more than one of *a_min* and *a_max* may be *None*. If *a_min* or *a_max* are array_like, then the three arrays will be broadcasted to match their shapes.

out : ndarray, optional

The results will be placed in this array. It may be the input array for in-place clipping. *out* must be of the right shape to hold the output. Its type is preserved.

Returns **clipped_array** : ndarray

```
>>> a = np.arange(10)
>>> np.clip(a, 1, 8)
array([1, 1, 2, 3, 4, 5, 6, 7, 8, 8])
>>> a
array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
>>> np.clip(a, 3, 6, out=a)
array([3, 3, 3, 3, 4, 5, 6, 6, 6, 6])
>>> a = np.arange(10)
>>> a
array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
>>> np.clip(a, [3, 4, 1, 1, 1, 4, 4, 4, 4, 4], 8)
array([3, 4, 2, 3, 4, 5, 6, 7, 8, 8])
```

numpy.ma.**round**(*a*, *decimals=0*, *out=None*)

Return a copy of a, rounded to 'decimals' places.

When 'decimals' is negative, it specifies the number of positions to the left of the decimal point. The real and imaginary parts of complex numbers are rounded separately. Nothing is done if the array is not of float type and 'decimals' is greater than or equal to 0.

Parameters **decimals** : int

Number of decimals to round to. May be negative.

out : array_like

Existing array to use for output. If not given, returns a default copy of a.

Notes

If out is given and does not have a mask attribute, the mask of a is lost!

Miscellanea

ma.allequal(a, b[, fill_value])	Return True if all entries of a and b are equal, using fill_value as a truth value where either or both are masked.
ma.allclose(a, b[, masked_equal, rtol, atol])	Returns True if two arrays are element-wise equal within a tolerance.
ma.apply_along_axis(func1d, axis, arr, ...)	Apply a function to 1-D slices along the given axis.
ma.arange([start,] stop[, step,][, dtype])	Return evenly spaced values within a given interval.
ma.choose(indices, choices[, out, mode])	Use an index array to construct a new array from a set of choices.
ma.ediff1d(arr[, to_end, to_begin])	Compute the differences between consecutive elements of an array.
ma.indices(dimensions[, dtype])	Return an array representing the indices of a grid.
ma.where(condition[, x, y])	Return a masked array with elements from x or y, depending on condition.

numpy.ma.**allequal**(*a*, *b*, *fill_value=True*)

Return True if all entries of a and b are equal, using fill_value as a truth value where either or both are masked.

Parameters **a, b** : array_like

Input arrays to compare.

fill_value : bool, optional

Whether masked values in a or b are considered equal (True) or not (False).

Returns **y** : bool

Returns True if the two arrays are equal within the given tolerance, False otherwise. If either array contains NaN, then False is returned.

See also:

all, *any*, *numpy.ma.allclose*

Examples

```
>>> a = ma.array([1e10, 1e-7, 42.0], mask=[0, 0, 1])
>>> a
masked_array(data = [10000000000.0 1e-07 --],
      mask = [False False  True],
      fill_value=1e+20)
```

```
>>> b = array([1e10, 1e-7, -42.0])
>>> b
array([  1.00000000e+10,   1.00000000e-07,  -4.20000000e+01])
>>> ma.allequal(a, b, fill_value=False)
False
>>> ma.allequal(a, b)
True
```

numpy.ma.**allclose**(*a*, *b*, *masked_equal=True*, *rtol=1e-05*, *atol=1e-08*)

Returns True if two arrays are element-wise equal within a tolerance.

This function is equivalent to *allclose* except that masked values are treated as equal (default) or unequal, depending on the *masked_equal* argument.

Parameters **a, b** : array_like

Input arrays to compare.

masked_equal : bool, optional

Whether masked values in *a* and *b* are considered equal (True) or not (False). They are considered equal by default.

rtol : float, optional

Relative tolerance. The relative difference is equal to `rtol * b`. Default is 1e-5.

atol : float, optional

Absolute tolerance. The absolute difference is equal to *atol*. Default is 1e-8.

Returns **y** : bool

Returns True if the two arrays are equal within the given tolerance, False otherwise. If either array contains NaN, then False is returned.

See also:

all, *any*

numpy.allclose the non-masked *allclose*.

Notes

If the following equation is element-wise True, then *allclose* returns True:

```
absolute(`a` - `b`) <= (`atol` + `rtol` * absolute(`b`))
```

Return True if all elements of *a* and *b* are equal subject to given tolerances.

Examples

```
>>> a = ma.array([1e10, 1e-7, 42.0], mask=[0, 0, 1])
>>> a
masked_array(data = [10000000000.0 1e-07 --],
             mask = [False False  True],
       fill_value = 1e+20)
>>> b = ma.array([1e10, 1e-8, -42.0], mask=[0, 0, 1])
>>> ma.allclose(a, b)
False
```

```
>>> a = ma.array([1e10, 1e-8, 42.0], mask=[0, 0, 1])
>>> b = ma.array([1.00001e10, 1e-9, -42.0], mask=[0, 0, 1])
>>> ma.allclose(a, b)
True
>>> ma.allclose(a, b, masked_equal=False)
False
```

Masked values are not compared directly.

```
>>> a = ma.array([1e10, 1e-8, 42.0], mask=[0, 0, 1])
>>> b = ma.array([1.00001e10, 1e-9, 42.0], mask=[0, 0, 1])
>>> ma.allclose(a, b)
True
>>> ma.allclose(a, b, masked_equal=False)
False
```

numpy.ma.**apply_along_axis**(*func1d*, *axis*, *arr*, **args*, ***kwargs*)

Apply a function to 1-D slices along the given axis.

Execute *func1d(a, *args)* where *func1d* operates on 1-D arrays and *a* is a 1-D slice of *arr* along *axis*.

This is equivalent to (but faster than) the following use of *ndindex* and *s_*, which sets each of `ii`, `jj`, and `kk` to a tuple of indices:

```
Ni, Nk = a.shape[:axis], a.shape[axis+1:]
for ii in ndindex(Ni):
    for kk in ndindex(Nk):
        f = func1d(arr[ii + s_[:,] + kk])
        Nj = f.shape
        for jj in ndindex(Nj):
            out[ii + jj + kk] = f[jj]
```

Equivalently, eliminating the inner loop, this can be expressed as:

```
Ni, Nk = a.shape[:axis], a.shape[axis+1:]
for ii in ndindex(Ni):
```

(continues on next page)

(continued from previous page)

```
    for kk in ndindex(Nk):
        out[ii + s_[...,] + kk] = func1d(arr[ii + s_[:,] + kk])
```

Parameters **func1d** : function (M,) -> (Nj...)

This function should accept 1-D arrays. It is applied to 1-D slices of *arr* along the specified axis.

axis : integer

Axis along which *arr* is sliced.

arr : ndarray (Ni..., M, Nk...)

Input array.

args : any

Additional arguments to *func1d*.

kwargs : any

Additional named arguments to *func1d*.

New in version 1.9.0.

Returns **out** : ndarray (Ni..., Nj..., Nk...)

The output array. The shape of *out* is identical to the shape of *arr*, except along the *axis* dimension. This axis is removed, and replaced with new dimensions equal to the shape of the return value of *func1d*. So if *func1d* returns a scalar *out* will have one fewer dimensions than *arr*.

See also:

`apply_over_axes` Apply a function repeatedly over multiple axes.

Examples

```
>>> def my_func(a):
...     """Average first and last element of a 1-D array"""
...     return (a[0] + a[-1]) * 0.5
>>> b = np.array([[1,2,3], [4,5,6], [7,8,9]])
>>> np.apply_along_axis(my_func, 0, b)
array([ 4.,  5.,  6.])
>>> np.apply_along_axis(my_func, 1, b)
array([ 2.,  5.,  8.])
```

For a function that returns a 1D array, the number of dimensions in *outarr* is the same as *arr*.

```
>>> b = np.array([[8,1,7], [4,3,9], [5,2,6]])
>>> np.apply_along_axis(sorted, 1, b)
array([[1, 7, 8],
       [3, 4, 9],
       [2, 5, 6]])
```

For a function that returns a higher dimensional array, those dimensions are inserted in place of the *axis* dimension.

```
>>> b = np.array([[1,2,3], [4,5,6], [7,8,9]])
>>> np.apply_along_axis(np.diag, -1, b)
array([[[1, 0, 0],
        [0, 2, 0],
        [0, 0, 3]],
       [[4, 0, 0],
        [0, 5, 0],
        [0, 0, 6]],
       [[7, 0, 0],
        [0, 8, 0],
        [0, 0, 9]]])
```

numpy.ma.**arange**([*start*], *stop*[, *step*], *dtype=None*) **= <numpy.ma.core._convert2ma object>**

Return evenly spaced values within a given interval.

Values are generated within the half-open interval `[start, stop)` (in other words, the interval including *start* but excluding *stop*). For integer arguments the function is equivalent to the Python built-in range function, but returns an ndarray rather than a list.

When using a non-integer step, such as 0.1, the results will often not be consistent. It is better to use `linspace` for these cases.

Parameters **start** : number, optional

Start of interval. The interval includes this value. The default start value is 0.

stop : number

End of interval. The interval does not include this value, except in some cases where *step* is not an integer and floating point round-off affects the length of *out*.

step : number, optional

Spacing between values. For any output *out*, this is the distance between two adjacent values, `out[i+1] - out[i]`. The default step size is 1. If *step* is specified as a position argument, *start* must also be given.

dtype : dtype

The type of the output array. If *dtype* is not given, infer the data type from the other input arguments.

Returns **arange** : ndarray

Array of evenly spaced values.

For floating point arguments, the length of the result is `ceil((stop - start)/ step)`. Because of floating point overflow, this rule may result in the last element of *out* being greater than *stop*.

See also:

linspace Evenly spaced numbers with careful handling of endpoints.

ogrid Arrays of evenly spaced numbers in N-dimensions.

mgrid Grid-shaped arrays of evenly spaced numbers in N-dimensions.

Examples

```
>>> np.arange(3)
array([0, 1, 2])
>>> np.arange(3.0)
array([ 0.,  1.,  2.])
>>> np.arange(3,7)
array([3, 4, 5, 6])
>>> np.arange(3,7,2)
array([3, 5])
```

numpy.ma.**choose**(*indices*, *choices*, *out=None*, *mode='raise'*)

Use an index array to construct a new array from a set of choices.

Given an array of integers and a set of n choice arrays, this method will create a new array that merges each of the choice arrays. Where a value in *a* is i, the new array will have the value that choices[i] contains in the same place.

Parameters **a** : ndarray of ints

This array must contain integers in `[0, n-1]`, where n is the number of choices.

choices : sequence of arrays

Choice arrays. The index array and all of the choices should be broadcastable to the same shape.

out : array, optional

If provided, the result will be inserted into this array. It should be of the appropriate shape and *dtype*.

mode : {'raise', 'wrap', 'clip'}, optional

Specifies how out-of-bounds indices will behave.

- 'raise' : raise an error
- 'wrap' : wrap around
- 'clip' : clip to the range

Returns **merged_array** : array

See also:

choose equivalent function

Examples

```
>>> choice = np.array([[1,1,1], [2,2,2], [3,3,3]])
>>> a = np.array([2, 1, 0])
>>> np.ma.choose(a, choice)
masked_array(data = [3 2 1],
      mask = False,
      fill_value=999999)
```

numpy.ma.**ediff1d**(*arr*, *to_end=None*, *to_begin=None*)

Compute the differences between consecutive elements of an array.

This function is the equivalent of *numpy.ediff1d* that takes masked values into account, see *numpy.ediff1d* for details.

See also:

numpy.ediff1d Equivalent function for ndarrays.

numpy.ma.**indices**(*dimensions*, *dtype=<class 'int'>*)

Return an array representing the indices of a grid.

Compute an array where the subarrays contain index values 0,1,... varying only along the corresponding axis.

Parameters **dimensions** : sequence of ints

The shape of the grid.

dtype : dtype, optional

Data type of the result.

Returns **grid** : ndarray

The array of grid indices, `grid.shape = (len(dimensions),) + tuple(dimensions)`.

See also:

`mgrid`, `meshgrid`

Notes

The output shape is obtained by prepending the number of dimensions in front of the tuple of dimensions, i.e. if *dimensions* is a tuple `(r0, ..., rN-1)` of length `N`, the output shape is `(N,r0,...,rN-1)`.

The subarrays `grid[k]` contains the N-D array of indices along the `k-th` axis. Explicitly:

```
grid[k,i0,i1,...,iN-1] = ik
```

Examples

```
>>> grid = np.indices((2, 3))
>>> grid.shape
(2, 2, 3)
>>> grid[0]        # row indices
array([[0, 0, 0],
       [1, 1, 1]])
>>> grid[1]        # column indices
array([[0, 1, 2],
       [0, 1, 2]])
```

The indices can be used as an index into an array.

```
>>> x = np.arange(20).reshape(5, 4)
>>> row, col = np.indices((2, 3))
>>> x[row, col]
array([[0, 1, 2],
       [4, 5, 6]])
```

Note that it would be more straightforward in the above example to extract the required elements directly with `x[:2, :3]`.

numpy.ma.**where**(*condition*, *x=<class 'numpy._globals._NoValue'>*, *y=<class 'numpy._globals._NoValue'>*)

Return a masked array with elements from x or y, depending on condition.

Returns a masked array, shaped like condition, where the elements are from *x* when *condition* is True, and from *y* otherwise. If neither *x* nor *y* are given, the function returns a tuple of indices where *condition* is True (the result of `condition.nonzero()`).

Parameters **condition** : array_like, bool

The condition to meet. For each True element, yield the corresponding element from *x*, otherwise from *y*.

x, y : array_like, optional

Values from which to choose. *x*, *y* and *condition* need to be broadcastable to some shape.

Returns **out** : MaskedArray or tuple of ndarrays

The resulting masked array if *x* and *y* were given, otherwise the result of `condition.nonzero()`.

See also:

numpy.where Equivalent function in the top-level NumPy module.

Examples

```
>>> x = np.ma.array(np.arange(9.).reshape(3, 3), mask=[[0, 1, 0],
...                                                    [1, 0, 1],
...                                                    [0, 1, 0]])
>>> print(x)
[[0.0 -- 2.0]
 [-- 4.0 --]
 [6.0 -- 8.0]]
>>> np.ma.where(x > 5)    # return the indices where x > 5
(array([2, 2]), array([0, 2]))
```

```
>>> print(np.ma.where(x > 5, x, -3.1416))
[[-3.1416 -- -3.1416]
 [-- -3.1416 --]
 [6.0 -- 8.0]]
```

1.8 The Array Interface

Note: This page describes the numpy-specific API for accessing the contents of a numpy array from other C extensions. **PEP 3118** – `The Revised Buffer Protocol` introduces similar, standardized API to Python 2.6 and 3.0 for any extension module to use. Cython's buffer array support uses the **PEP 3118** API; see the Cython numpy tutorial. Cython provides a way to write code that supports the buffer protocol with Python versions older than 2.6 because it has a backward-compatible implementation utilizing the array interface described here.

version 3

The array interface (sometimes called array protocol) was created in 2005 as a means for array-like Python objects to re-use each other's data buffers intelligently whenever possible. The homogeneous N-dimensional array interface is a default mechanism for objects to share N-dimensional array memory and information. The interface consists of a Python-side and a C-side using two attributes. Objects wishing to be considered an N-dimensional array in application code should support at least one of these attributes. Objects wishing to support an N-dimensional array in application code should look for at least one of these attributes and use the information provided appropriately.

This interface describes homogeneous arrays in the sense that each item of the array has the same "type". This type can be very simple or it can be a quite arbitrary and complicated C-like structure.

There are two ways to use the interface: A Python side and a C-side. Both are separate attributes.

1.8.1 Python side

This approach to the interface consists of the object having an *__array_interface__* attribute.

__array_interface__

A dictionary of items (3 required and 5 optional). The optional keys in the dictionary have implied defaults if they are not provided.

The keys are:

shape (required)

Tuple whose elements are the array size in each dimension. Each entry is an integer (a Python int or long). Note that these integers could be larger than the platform "int" or "long" could hold (a Python int is a C long). It is up to the code using this attribute to handle this appropriately; either by raising an error when overflow is possible, or by using `Py_LONG_LONG` as the C type for the shapes.

typestr (required)

A string providing the basic type of the homogenous array The basic string format consists of 3 parts: a character describing the byteorder of the data (<: little-endian, >: big-endian, |: not-relevant), a character code giving the basic type of the array, and an integer providing the number of bytes the type uses.

The basic type character codes are:

`t`	Bit field (following integer gives the number of bits in the bit field).
`b`	Boolean (integer type where all values are only True or False)
`i`	Integer
`u`	Unsigned integer
`f`	Floating point
`c`	Complex floating point
`m`	Timedelta
`M`	Datetime
`O`	Object (i.e. the memory contains a pointer to `PyObject`)
`S`	String (fixed-length sequence of char)
`U`	Unicode (fixed-length sequence of `Py_UNICODE`)
`V`	Other (void * – each item is a fixed-size chunk of memory)

descr (optional)

A list of tuples providing a more detailed description of the memory layout for each item in the homogeneous array. Each tuple in the list has two or three elements. Normally, this attribute would be used when *typestr* is `V[0-9]+`, but this is not a requirement. The only requirement is that the

number of bytes represented in the *typestr* key is the same as the total number of bytes represented here. The idea is to support descriptions of C-like structs that make up array elements. The elements of each tuple in the list are

1. A string providing a name associated with this portion of the datatype. This could also be a tuple of `('full name', 'basic_name')` where basic name would be a valid Python variable name representing the full name of the field.
2. Either a basic-type description string as in *typestr* or another list (for nested structured types)
3. An optional shape tuple providing how many times this part of the structure should be repeated. No repeats are assumed if this is not given. Very complicated structures can be described using this generic interface. Notice, however, that each element of the array is still of the same data-type. Some examples of using this interface are given below.

Default: `[('', typestr)]`

data (optional)

A 2-tuple whose first argument is an integer (a long integer if necessary) that points to the data-area storing the array contents. This pointer must point to the first element of data (in other words any offset is always ignored in this case). The second entry in the tuple is a read-only flag (true means the data area is read-only).

This attribute can also be an object exposing the `buffer interface` which will be used to share the data. If this key is not present (or returns `None`), then memory sharing will be done through the buffer interface of the object itself. In this case, the offset key can be used to indicate the start of the buffer. A reference to the object exposing the array interface must be stored by the new object if the memory area is to be secured.

Default: `None`

strides (optional)

Either `None` to indicate a C-style contiguous array or a Tuple of strides which provides the number of bytes needed to jump to the next array element in the corresponding dimension. Each entry must be an integer (a Python `int` or `long`). As with shape, the values may be larger than can be represented by a C "int" or "long"; the calling code should handle this appropriately, either by raising an error, or by using `Py_LONG_LONG` in C. The default is `None` which implies a C-style contiguous memory buffer. In this model, the last dimension of the array varies the fastest. For example, the default strides tuple for an object whose array entries are 8 bytes long and whose shape is (10,20,30) would be (4800, 240, 8)

Default: `None` (C-style contiguous)

mask (optional)

`None` or an object exposing the array interface. All elements of the mask array should be interpreted only as true or not true indicating which elements of this array are valid. The shape of this object should be *"broadcastable"* to the shape of the original array.

Default: `None` (All array values are valid)

offset (optional)

An integer offset into the array data region. This can only be used when data is `None` or returns a `buffer` object.

Default: 0.

version (required)

An integer showing the version of the interface (i.e. 3 for this version). Be careful not to use this to invalidate objects exposing future versions of the interface.

1.8.2 C-struct access

This approach to the array interface allows for faster access to an array using only one attribute lookup and a well-defined C-structure.

__array_struct__
A :c:type: *PyCObject* whose `voidptr` member contains a pointer to a filled *PyArrayInterface* structure. Memory for the structure is dynamically created and the `PyCObject` is also created with an appropriate destructor so the retriever of this attribute simply has to apply `Py_DECREF` to the object returned by this attribute when it is finished. Also, either the data needs to be copied out, or a reference to the object exposing this attribute must be held to ensure the data is not freed. Objects exposing the `__array_struct__` interface must also not reallocate their memory if other objects are referencing them.

The PyArrayInterface structure is defined in `numpy/ndarrayobject.h` as:

```
typedef struct {
  int two;              /* contains the integer 2 -- simple sanity check */
  int nd;               /* number of dimensions */
  char typekind;        /* kind in array --- character code of typestr */
  int itemsize;         /* size of each element */
  int flags;            /* flags indicating how the data should be interpreted */
                        /*   must set ARR_HAS_DESCR bit to validate descr */
  Py_intptr_t *shape;   /* A length-nd array of shape information */
  Py_intptr_t *strides; /* A length-nd array of stride information */
  void *data;           /* A pointer to the first element of the array */
  PyObject *descr;      /* NULL or data-description (same as descr key
                           of __array_interface__) -- must set ARR_HAS_DESCR
                           flag or this will be ignored. */
} PyArrayInterface;
```

The flags member may consist of 5 bits showing how the data should be interpreted and one bit showing how the Interface should be interpreted. The data-bits are `CONTIGUOUS` (0x1), `FORTRAN` (0x2), `ALIGNED` (0x100), `NOTSWAPPED` (0x200), and `WRITEABLE` (0x400). A final flag `ARR_HAS_DESCR` (0x800) indicates whether or not this structure has the arrdescr field. The field should not be accessed unless this flag is present.

New since June 16, 2006:

In the past most implementations used the "desc" member of the `PyCObject` itself (do not confuse this with the "descr" member of the *PyArrayInterface* structure above — they are two separate things) to hold the pointer to the object exposing the interface. This is now an explicit part of the interface. Be sure to own a reference to the object when the `PyCObject` is created using `PyCObject_FromVoidPtrAndDesc`.

1.8.3 Type description examples

For clarity it is useful to provide some examples of the type description and corresponding *__array_interface__* 'descr' entries. Thanks to Scott Gilbert for these examples:

In every case, the 'descr' key is optional, but of course provides more information which may be important for various applications:

```
* Float data
    typestr == '>f4'
    descr == [('','>f4')]

* Complex double
    typestr == '>c8'
    descr == [('real','>f4'), ('imag','>f4')]

* RGB Pixel data
    typestr == '|V3'
    descr == [('r','|u1'), ('g','|u1'), ('b','|u1')]

* Mixed endian (weird but could happen).
    typestr == '|V8' (or '>u8')
    descr == [('big','>i4'), ('little','<i4')]

* Nested structure
    struct {
        int ival;
        struct {
            unsigned short sval;
            unsigned char bval;
            unsigned char cval;
        } sub;
    }
    typestr == '|V8' (or '<u8' if you want)
    descr == [('ival','<i4'), ('sub', [('sval','<u2'), ('bval','|u1'), ('cval','|u1')␣
↪]) ]

* Nested array
    struct {
        int ival;
        double data[16*4];
    }
    typestr == '|V516'
    descr == [('ival','>i4'), ('data','>f8',(16,4))]

* Padded structure
    struct {
        int ival;
        double dval;
    }
    typestr == '|V16'
    descr == [('ival','>i4'),('','|V4'),('dval','>f8')]
```

It should be clear that any structured type could be described using this interface.

1.8.4 Differences with Array interface (Version 2)

The version 2 interface was very similar. The differences were largely aesthetic. In particular:

1. The PyArrayInterface structure had no descr member at the end (and therefore no flag ARR_HAS_DESCR)
2. The desc member of the PyCObject returned from __array_struct__ was not specified. Usually, it was the object exposing the array (so that a reference to it could be kept and destroyed when the C-object was destroyed). Now it must be a tuple whose first element is a string with "PyArrayInterface Version #" and whose second element is the object exposing the array.

3. The tuple returned from __array_interface__['data'] used to be a hex-string (now it is an integer or a long integer).
4. There was no __array_interface__ attribute instead all of the keys (except for version) in the __array_interface__ dictionary were their own attribute: Thus to obtain the Python-side information you had to access separately the attributes:
   - __array_data__
   - __array_shape__
   - __array_strides__
   - __array_typestr__
   - __array_descr__
   - __array_offset__
   - __array_mask__

1.9 Datetimes and Timedeltas

New in version 1.7.0.

Starting in NumPy 1.7, there are core array data types which natively support datetime functionality. The data type is called "datetime64", so named because "datetime" is already taken by the datetime library included in Python.

Note: The datetime API is *experimental* in 1.7.0, and may undergo changes in future versions of NumPy.

1.9.1 Basic Datetimes

The most basic way to create datetimes is from strings in ISO 8601 date or datetime format. The unit for internal storage is automatically selected from the form of the string, and can be either a *date unit* or a *time unit*. The date units are years ('Y'), months ('M'), weeks ('W'), and days ('D'), while the time units are hours ('h'), minutes ('m'), seconds ('s'), milliseconds ('ms'), and some additional SI-prefix seconds-based units.

Example

A simple ISO date:

```
>>> np.datetime64('2005-02-25')
numpy.datetime64('2005-02-25')
```

Using months for the unit:

```
>>> np.datetime64('2005-02')
numpy.datetime64('2005-02')
```

Specifying just the month, but forcing a 'days' unit:

```
>>> np.datetime64('2005-02', 'D')
numpy.datetime64('2005-02-01')
```

From a date and time:

```
>>> np.datetime64('2005-02-25T03:30')
numpy.datetime64('2005-02-25T03:30')
```

When creating an array of datetimes from a string, it is still possible to automatically select the unit from the inputs, by using the datetime type with generic units.

Example

```
>>> np.array(['2007-07-13', '2006-01-13', '2010-08-13'], dtype='datetime64')
array(['2007-07-13', '2006-01-13', '2010-08-13'], dtype='datetime64[D]')
```

```
>>> np.array(['2001-01-01T12:00', '2002-02-03T13:56:03.172'], dtype='datetime64')
array(['2001-01-01T12:00:00.000-0600', '2002-02-03T13:56:03.172-0600'], dtype=
↪'datetime64[ms]')
```

The datetime type works with many common NumPy functions, for example *arange* can be used to generate ranges of dates.

Example

All the dates for one month:

```
>>> np.arange('2005-02', '2005-03', dtype='datetime64[D]')
array(['2005-02-01', '2005-02-02', '2005-02-03', '2005-02-04',
       '2005-02-05', '2005-02-06', '2005-02-07', '2005-02-08',
       '2005-02-09', '2005-02-10', '2005-02-11', '2005-02-12',
       '2005-02-13', '2005-02-14', '2005-02-15', '2005-02-16',
       '2005-02-17', '2005-02-18', '2005-02-19', '2005-02-20',
       '2005-02-21', '2005-02-22', '2005-02-23', '2005-02-24',
       '2005-02-25', '2005-02-26', '2005-02-27', '2005-02-28'],
      dtype='datetime64[D]')
```

The datetime object represents a single moment in time. If two datetimes have different units, they may still be representing the same moment of time, and converting from a bigger unit like months to a smaller unit like days is considered a 'safe' cast because the moment of time is still being represented exactly.

Example

```
>>> np.datetime64('2005') == np.datetime64('2005-01-01')
True
```

```
>>> np.datetime64('2010-03-14T15Z') == np.datetime64('2010-03-14T15:00:00.00Z')
True
```

1.9.2 Datetime and Timedelta Arithmetic

NumPy allows the subtraction of two Datetime values, an operation which produces a number with a time unit. Because NumPy doesn't have a physical quantities system in its core, the timedelta64 data type was created to complement datetime64.

Datetimes and Timedeltas work together to provide ways for simple datetime calculations.

Example

```
>>> np.datetime64('2009-01-01') - np.datetime64('2008-01-01')
numpy.timedelta64(366,'D')
```

```
>>> np.datetime64('2009') + np.timedelta64(20, 'D')
numpy.datetime64('2009-01-21')
```

```
>>> np.datetime64('2011-06-15T00:00') + np.timedelta64(12, 'h')
numpy.datetime64('2011-06-15T12:00-0500')
```

```
>>> np.timedelta64(1,'W') / np.timedelta64(1,'D')
7.0
```

There are two Timedelta units ('Y', years and 'M', months) which are treated specially, because how much time they represent changes depending on when they are used. While a timedelta day unit is equivalent to 24 hours, there is no way to convert a month unit into days, because different months have different numbers of days.

Example

```
>>> a = np.timedelta64(1, 'Y')
```

```
>>> np.timedelta64(a, 'M')
numpy.timedelta64(12,'M')
```

```
>>> np.timedelta64(a, 'D')
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
TypeError: Cannot cast NumPy timedelta64 scalar from metadata [Y] to [D] according to␣
↪the rule 'same_kind'
```

1.9.3 Datetime Units

The Datetime and Timedelta data types support a large number of time units, as well as generic units which can be coerced into any of the other units based on input data.

Datetimes are always stored based on POSIX time (though having a TAI mode which allows for accounting of leap-seconds is proposed), with an epoch of 1970-01-01T00:00Z. This means the supported dates are always a symmetric interval around the epoch, called "time span" in the table below.

The length of the span is the range of a 64-bit integer times the length of the date or unit. For example, the time span for 'W' (week) is exactly 7 times longer than the time span for 'D' (day), and the time span for 'D' (day) is exactly 24 times longer than the time span for 'h' (hour).

Here are the date units:

Code	Meaning	Time span (relative)	Time span (absolute)
Y	year	+/- 9.2e18 years	[9.2e18 BC, 9.2e18 AD]
M	month	+/- 7.6e17 years	[7.6e17 BC, 7.6e17 AD]
W	week	+/- 1.7e17 years	[1.7e17 BC, 1.7e17 AD]
D	day	+/- 2.5e16 years	[2.5e16 BC, 2.5e16 AD]

And here are the time units:

Code	Meaning	Time span (relative)	Time span (absolute)
h	hour	+/- 1.0e15 years	[1.0e15 BC, 1.0e15 AD]
m	minute	+/- 1.7e13 years	[1.7e13 BC, 1.7e13 AD]
s	second	+/- 2.9e11 years	[2.9e11 BC, 2.9e11 AD]
ms	millisecond	+/- 2.9e8 years	[2.9e8 BC, 2.9e8 AD]
us	microsecond	+/- 2.9e5 years	[290301 BC, 294241 AD]
ns	nanosecond	+/- 292 years	[1678 AD, 2262 AD]
ps	picosecond	+/- 106 days	[1969 AD, 1970 AD]
fs	femtosecond	+/- 2.6 hours	[1969 AD, 1970 AD]
as	attosecond	+/- 9.2 seconds	[1969 AD, 1970 AD]

1.9.4 Business Day Functionality

To allow the datetime to be used in contexts where only certain days of the week are valid, NumPy includes a set of "busday" (business day) functions.

The default for busday functions is that the only valid days are Monday through Friday (the usual business days). The implementation is based on a "weekmask" containing 7 Boolean flags to indicate valid days; custom weekmasks are possible that specify other sets of valid days.

The "busday" functions can additionally check a list of "holiday" dates, specific dates that are not valid days.

The function *busday_offset* allows you to apply offsets specified in business days to datetimes with a unit of 'D' (day).

Example

```
>>> np.busday_offset('2011-06-23', 1)
numpy.datetime64('2011-06-24')
```

```
>>> np.busday_offset('2011-06-23', 2)
numpy.datetime64('2011-06-27')
```

When an input date falls on the weekend or a holiday, *busday_offset* first applies a rule to roll the date to a valid business day, then applies the offset. The default rule is 'raise', which simply raises an exception. The rules most typically used are 'forward' and 'backward'.

Example

```
>>> np.busday_offset('2011-06-25', 2)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: Non-business day date in busday_offset
```

```
>>> np.busday_offset('2011-06-25', 0, roll='forward')
numpy.datetime64('2011-06-27')
```

```
>>> np.busday_offset('2011-06-25', 2, roll='forward')
numpy.datetime64('2011-06-29')
```

```
>>> np.busday_offset('2011-06-25', 0, roll='backward')
numpy.datetime64('2011-06-24')
```

```
>>> np.busday_offset('2011-06-25', 2, roll='backward')
numpy.datetime64('2011-06-28')
```

In some cases, an appropriate use of the roll and the offset is necessary to get a desired answer.

Example

The first business day on or after a date:

```
>>> np.busday_offset('2011-03-20', 0, roll='forward')
numpy.datetime64('2011-03-21','D')
>>> np.busday_offset('2011-03-22', 0, roll='forward')
numpy.datetime64('2011-03-22','D')
```

The first business day strictly after a date:

```
>>> np.busday_offset('2011-03-20', 1, roll='backward')
numpy.datetime64('2011-03-21','D')
>>> np.busday_offset('2011-03-22', 1, roll='backward')
numpy.datetime64('2011-03-23','D')
```

The function is also useful for computing some kinds of days like holidays. In Canada and the U.S., Mother's day is on the second Sunday in May, which can be computed with a custom weekmask.

Example

```
>>> np.busday_offset('2012-05', 1, roll='forward', weekmask='Sun')
numpy.datetime64('2012-05-13','D')
```

When performance is important for manipulating many business dates with one particular choice of weekmask and holidays, there is an object *busdaycalendar* which stores the data necessary in an optimized form.

np.is_busday():

To test a datetime64 value to see if it is a valid day, use *is_busday*.

Example

```
>>> np.is_busday(np.datetime64('2011-07-15'))  # a Friday
True
```

(continues on next page)

(continued from previous page)

```
>>> np.is_busday(np.datetime64('2011-07-16')) # a Saturday
False
>>> np.is_busday(np.datetime64('2011-07-16'), weekmask="Sat Sun")
True
>>> a = np.arange(np.datetime64('2011-07-11'), np.datetime64('2011-07-18'))
>>> np.is_busday(a)
array([ True,  True,  True,  True,  True, False, False], dtype='bool')
```

np.busday_count():

To find how many valid days there are in a specified range of datetime64 dates, use *busday_count*:

Example

```
>>> np.busday_count(np.datetime64('2011-07-11'), np.datetime64('2011-07-18'))
5
>>> np.busday_count(np.datetime64('2011-07-18'), np.datetime64('2011-07-11'))
-5
```

If you have an array of datetime64 day values, and you want a count of how many of them are valid dates, you can do this:

Example

```
>>> a = np.arange(np.datetime64('2011-07-11'), np.datetime64('2011-07-18'))
>>> np.count_nonzero(np.is_busday(a))
5
```

Custom Weekmasks

Here are several examples of custom weekmask values. These examples specify the "busday" default of Monday through Friday being valid days.

Some examples:

```
# Positional sequences; positions are Monday through Sunday.
# Length of the sequence must be exactly 7.
weekmask = [1, 1, 1, 1, 1, 0, 0]
# list or other sequence; 0 == invalid day, 1 == valid day
weekmask = "1111100"
# string '0' == invalid day, '1' == valid day

# string abbreviations from this list: Mon Tue Wed Thu Fri Sat Sun
weekmask = "Mon Tue Wed Thu Fri"
# any amount of whitespace is allowed; abbreviations are case-sensitive.
weekmask = "MonTue Wed  Thu\tFri"
```

1.9.5 Changes with NumPy 1.11

In prior versions of NumPy, the datetime64 type always stored times in UTC. By default, creating a datetime64 object from a string or printing it would convert from or to local time:

```
# old behavior
>>>> np.datetime64('2000-01-01T00:00:00')
numpy.datetime64('2000-01-01T00:00:00-0800')  # note the timezone offset -08:00
```

A consensus of datetime64 users agreed that this behavior is undesirable and at odds with how datetime64 is usually used (e.g., by pandas). For most use cases, a timezone naive datetime type is preferred, similar to the `datetime.datetime` type in the Python standard library. Accordingly, datetime64 no longer assumes that input is in local time, nor does it print local times:

```
>>>> np.datetime64('2000-01-01T00:00:00')
numpy.datetime64('2000-01-01T00:00:00')
```

For backwards compatibility, datetime64 still parses timezone offsets, which it handles by converting to UTC. However, the resulting datetime is timezone naive:

```
>>> np.datetime64('2000-01-01T00:00:00-08')
DeprecationWarning: parsing timezone aware datetimes is deprecated; this will raise␣
↪an error in the future
numpy.datetime64('2000-01-01T08:00:00')
```

As a corollary to this change, we no longer prohibit casting between datetimes with date units and datetimes with timeunits. With timezone naive datetimes, the rule for casting from dates to times is no longer ambiguous.

1.9.6 Differences Between 1.6 and 1.7 Datetimes

The NumPy 1.6 release includes a more primitive datetime data type than 1.7. This section documents many of the changes that have taken place.

String Parsing

The datetime string parser in NumPy 1.6 is very liberal in what it accepts, and silently allows invalid input without raising errors. The parser in NumPy 1.7 is quite strict about only accepting ISO 8601 dates, with a few convenience extensions. 1.6 always creates microsecond (us) units by default, whereas 1.7 detects a unit based on the format of the string. Here is a comparison.:

```
# NumPy 1.6.1
>>> np.datetime64('1979-03-22')
1979-03-22 00:00:00
# NumPy 1.7.0
>>> np.datetime64('1979-03-22')
numpy.datetime64('1979-03-22')

# NumPy 1.6.1, unit default microseconds
>>> np.datetime64('1979-03-22').dtype
dtype('datetime64[us]')
# NumPy 1.7.0, unit of days detected from string
>>> np.datetime64('1979-03-22').dtype
dtype('<M8[D]')
```

(continues on next page)

(continued from previous page)

```
# NumPy 1.6.1, ignores invalid part of string
>>> np.datetime64('1979-03-2corruptedstring')
1979-03-02 00:00:00
# NumPy 1.7.0, raises error for invalid input
>>> np.datetime64('1979-03-2corruptedstring')
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: Error parsing datetime string "1979-03-2corruptedstring" at position 8

# NumPy 1.6.1, 'nat' produces today's date
>>> np.datetime64('nat')
2012-04-30 00:00:00
# NumPy 1.7.0, 'nat' produces not-a-time
>>> np.datetime64('nat')
numpy.datetime64('NaT')

# NumPy 1.6.1, 'garbage' produces today's date
>>> np.datetime64('garbage')
2012-04-30 00:00:00
# NumPy 1.7.0, 'garbage' raises an exception
>>> np.datetime64('garbage')
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: Error parsing datetime string "garbage" at position 0

# NumPy 1.6.1, can't specify unit in scalar constructor
>>> np.datetime64('1979-03-22T19:00', 'h')
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
TypeError: function takes at most 1 argument (2 given)
# NumPy 1.7.0, unit in scalar constructor
>>> np.datetime64('1979-03-22T19:00', 'h')
numpy.datetime64('1979-03-22T19:00-0500','h')

# NumPy 1.6.1, reads ISO 8601 strings w/o TZ as UTC
>>> np.array(['1979-03-22T19:00'], dtype='M8[h]')
array([1979-03-22 19:00:00], dtype=datetime64[h])
# NumPy 1.7.0, reads ISO 8601 strings w/o TZ as local (ISO specifies this)
>>> np.array(['1979-03-22T19:00'], dtype='M8[h]')
array(['1979-03-22T19-0500'], dtype='datetime64[h]')

# NumPy 1.6.1, doesn't parse all ISO 8601 strings correctly
>>> np.array(['1979-03-22T12'], dtype='M8[h]')
array([1979-03-22 00:00:00], dtype=datetime64[h])
>>> np.array(['1979-03-22T12:00'], dtype='M8[h]')
array([1979-03-22 12:00:00], dtype=datetime64[h])
# NumPy 1.7.0, handles this case correctly
>>> np.array(['1979-03-22T12'], dtype='M8[h]')
array(['1979-03-22T12-0500'], dtype='datetime64[h]')
>>> np.array(['1979-03-22T12:00'], dtype='M8[h]')
array(['1979-03-22T12-0500'], dtype='datetime64[h]')
```

Unit Conversion

The 1.6 implementation of datetime does not convert between units correctly.:

```
# NumPy 1.6.1, the representation value is untouched
>>> np.array(['1979-03-22'], dtype='M8[D]')
array([1979-03-22 00:00:00], dtype=datetime64[D])
>>> np.array(['1979-03-22'], dtype='M8[D]').astype('M8[M]')
array([2250-08-01 00:00:00], dtype=datetime64[M])
# NumPy 1.7.0, the representation is scaled accordingly
>>> np.array(['1979-03-22'], dtype='M8[D]')
array(['1979-03-22'], dtype='datetime64[D]')
>>> np.array(['1979-03-22'], dtype='M8[D]').astype('M8[M]')
array(['1979-03'], dtype='datetime64[M]')
```

Datetime Arithmetic

The 1.6 implementation of datetime only works correctly for a small subset of arithmetic operations. Here we show some simple cases.:

```
# NumPy 1.6.1, produces invalid results if units are incompatible
>>> a = np.array(['1979-03-22T12'], dtype='M8[h]')
>>> b = np.array([3*60], dtype='m8[m]')
>>> a + b
array([1970-01-01 00:00:00.080988], dtype=datetime64[us])
# NumPy 1.7.0, promotes to higher-resolution unit
>>> a = np.array(['1979-03-22T12'], dtype='M8[h]')
>>> b = np.array([3*60], dtype='m8[m]')
>>> a + b
array(['1979-03-22T15:00-0500'], dtype='datetime64[m]')

# NumPy 1.6.1, arithmetic works if everything is microseconds
>>> a = np.array(['1979-03-22T12:00'], dtype='M8[us]')
>>> b = np.array([3*60*60*1000000], dtype='m8[us]')
>>> a + b
array([1979-03-22 15:00:00], dtype=datetime64[us])
# NumPy 1.7.0
>>> a = np.array(['1979-03-22T12:00'], dtype='M8[us]')
>>> b = np.array([3*60*60*1000000], dtype='m8[us]')
>>> a + b
array(['1979-03-22T15:00:00.000000-0500'], dtype='datetime64[us]')
```

CHAPTER

TWO

UNIVERSAL FUNCTIONS (UFUNC)

A universal function (or ufunc for short) is a function that operates on *ndarrays* in an element-by-element fashion, supporting *array broadcasting*, *type casting*, and several other standard features. That is, a ufunc is a "vectorized" wrapper for a function that takes a fixed number of specific inputs and produces a fixed number of specific outputs.

In NumPy, universal functions are instances of the `numpy.ufunc` class. Many of the built-in functions are implemented in compiled C code. The basic ufuncs operate on scalars, but there is also a generalized kind for which the basic elements are sub-arrays (vectors, matrices, etc.), and broadcasting is done over other dimensions. One can also produce custom `ufunc` instances using the *frompyfunc* factory function.

2.1 Broadcasting

Each universal function takes array inputs and produces array outputs by performing the core function element-wise on the inputs (where an element is generally a scalar, but can be a vector or higher-order sub-array for generalized ufuncs). Standard broadcasting rules are applied so that inputs not sharing exactly the same shapes can still be usefully operated on. Broadcasting can be understood by four rules:

1. All input arrays with *ndim* smaller than the input array of largest *ndim*, have 1's prepended to their shapes.
2. The size in each dimension of the output shape is the maximum of all the input sizes in that dimension.
3. An input can be used in the calculation if its size in a particular dimension either matches the output size in that dimension, or has value exactly 1.
4. If an input has a dimension size of 1 in its shape, the first data entry in that dimension will be used for all calculations along that dimension. In other words, the stepping machinery of the ufunc will simply not step along that dimension (the stride will be 0 for that dimension).

Broadcasting is used throughout NumPy to decide how to handle disparately shaped arrays; for example, all arithmetic operations ($+$, $-$, $*$, ...) between *ndarrays* broadcast the arrays before operation.

A set of arrays is called "broadcastable" to the same shape if the above rules produce a valid result, *i.e.*, one of the following is true:

1. The arrays all have exactly the same shape.
2. The arrays all have the same number of dimensions and the length of each dimensions is either a common length or 1.
3. The arrays that have too few dimensions can have their shapes prepended with a dimension of length 1 to satisfy property 2.

Example

If `a.shape` is (5,1), `b.shape` is (1,6), `c.shape` is (6,) and `d.shape` is () so that *d* is a scalar, then *a*, *b*, *c*, and *d* are all broadcastable to dimension (5,6); and

- *a* acts like a (5,6) array where `a[:,0]` is broadcast to the other columns,
- *b* acts like a (5,6) array where `b[0,:]` is broadcast to the other rows,
- *c* acts like a (1,6) array and therefore like a (5,6) array where `c[:]` is broadcast to every row, and finally,
- *d* acts like a (5,6) array where the single value is repeated.

2.2 Output type determination

The output of the ufunc (and its methods) is not necessarily an *ndarray*, if all input arguments are not *ndarrays*. Indeed, if any input defines an *__array_ufunc__* method, control will be passed completely to that function, i.e., the ufunc is overridden.

If none of the inputs overrides the ufunc, then all output arrays will be passed to the *__array_prepare__* and *__array_wrap__* methods of the input (besides *ndarrays*, and scalars) that defines it **and** has the highest *__array_priority__* of any other input to the universal function. The default *__array_priority__* of the ndarray is 0.0, and the default *__array_priority__* of a subtype is 1.0. Matrices have *__array_priority__* equal to 10.0.

All ufuncs can also take output arguments. If necessary, output will be cast to the data-type(s) of the provided output array(s). If a class with an *__array__* method is used for the output, results will be written to the object returned by *__array__*. Then, if the class also has an *__array_prepare__* method, it is called so metadata may be determined based on the context of the ufunc (the context consisting of the ufunc itself, the arguments passed to the ufunc, and the ufunc domain.) The array object returned by *__array_prepare__* is passed to the ufunc for computation. Finally, if the class also has an *__array_wrap__* method, the returned *ndarray* result will be passed to that method just before passing control back to the caller.

2.3 Use of internal buffers

Internally, buffers are used for misaligned data, swapped data, and data that has to be converted from one data type to another. The size of internal buffers is settable on a per-thread basis. There can be up to $2(n_{\text{inputs}} + n_{\text{outputs}})$ buffers of the specified size created to handle the data from all the inputs and outputs of a ufunc. The default size of a buffer is 10,000 elements. Whenever buffer-based calculation would be needed, but all input arrays are smaller than the buffer size, those misbehaved or incorrectly-typed arrays will be copied before the calculation proceeds. Adjusting the size of the buffer may therefore alter the speed at which ufunc calculations of various sorts are completed. A simple interface for setting this variable is accessible using the function

setbufsize(size)	Set the size of the buffer used in ufuncs.

numpy.**setbufsize**(*size*)

Set the size of the buffer used in ufuncs.

Parameters **size** : int

Size of buffer.

2.4 Error handling

Universal functions can trip special floating-point status registers in your hardware (such as divide-by-zero). If available on your platform, these registers will be regularly checked during calculation. Error handling is controlled on a per-thread basis, and can be configured using the functions

seterr([all, divide, over, under, invalid])	Set how floating-point errors are handled.
seterrcall(func)	Set the floating-point error callback function or log object.

numpy.**seterr**(*all=None*, *divide=None*, *over=None*, *under=None*, *invalid=None*)

Set how floating-point errors are handled.

Note that operations on integer scalar types (such as `int16`) are handled like floating point, and are affected by these settings.

Parameters **all** : {'ignore', 'warn', 'raise', 'call', 'print', 'log'}, optional

Set treatment for all types of floating-point errors at once:

- ignore: Take no action when the exception occurs.
- warn: Print a *RuntimeWarning* (via the Python `warnings` module).
- raise: Raise a *FloatingPointError*.
- call: Call a function specified using the *seterrcall* function.
- print: Print a warning directly to `stdout`.
- log: Record error in a Log object specified by *seterrcall*.

The default is not to change the current behavior.

divide : {'ignore', 'warn', 'raise', 'call', 'print', 'log'}, optional

Treatment for division by zero.

over : {'ignore', 'warn', 'raise', 'call', 'print', 'log'}, optional

Treatment for floating-point overflow.

under : {'ignore', 'warn', 'raise', 'call', 'print', 'log'}, optional

Treatment for floating-point underflow.

invalid : {'ignore', 'warn', 'raise', 'call', 'print', 'log'}, optional

Treatment for invalid floating-point operation.

Returns **old_settings** : dict

Dictionary containing the old settings.

See also:

seterrcall Set a callback function for the 'call' mode.

geterr, *geterrcall*, *errstate*

Notes

The floating-point exceptions are defined in the IEEE 754 standard [1]:

- Division by zero: infinite result obtained from finite numbers.
- Overflow: result too large to be expressed.
- Underflow: result so close to zero that some precision was lost.
- Invalid operation: result is not an expressible number, typically indicates that a NaN was produced.

Examples

```
>>> old_settings = np.seterr(all='ignore')  #seterr to known value
>>> np.seterr(over='raise')
{'over': 'ignore', 'divide': 'ignore', 'invalid': 'ignore',
 'under': 'ignore'}
>>> np.seterr(**old_settings)  # reset to default
{'over': 'raise', 'divide': 'ignore', 'invalid': 'ignore', 'under': 'ignore'}
```

```
>>> np.int16(32000) * np.int16(3)
30464
>>> old_settings = np.seterr(all='warn', over='raise')
>>> np.int16(32000) * np.int16(3)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
FloatingPointError: overflow encountered in short_scalars
```

```
>>> old_settings = np.seterr(all='print')
>>> np.geterr()
{'over': 'print', 'divide': 'print', 'invalid': 'print', 'under': 'print'}
>>> np.int16(32000) * np.int16(3)
Warning: overflow encountered in short_scalars
30464
```

numpy.**seterrcall**(*func*)

Set the floating-point error callback function or log object.

There are two ways to capture floating-point error messages. The first is to set the error-handler to 'call', using *seterr*. Then, set the function to call using this function.

The second is to set the error-handler to 'log', using *seterr*. Floating-point errors then trigger a call to the 'write' method of the provided object.

Parameters **func** : callable f(err, flag) or object with write method

Function to call upon floating-point errors ('call'-mode) or object whose 'write' method is used to log such message ('log'-mode).

The call function takes two arguments. The first is a string describing the type of error (such as "divide by zero", "overflow", "underflow", or "invalid value"), and the second is the status flag. The flag is a byte, whose four least-significant bits indicate the type of error, one of "divide", "over", "under", "invalid":

```
[0 0 0 0 divide over under invalid]
```

In other words, `flags = divide + 2*over + 4*under + 8*invalid`.

If an object is provided, its write method should take one argument, a string.

Returns **h** : callable, log instance or None

The old error handler.

See also:

seterr, *geterr*, *geterrcall*

Examples

Callback upon error:

```
>>> def err_handler(type, flag):
...     print("Floating point error (%s), with flag %s" % (type, flag))
...
```

```
>>> saved_handler = np.seterrcall(err_handler)
>>> save_err = np.seterr(all='call')
```

```
>>> np.array([1, 2, 3]) / 0.0
Floating point error (divide by zero), with flag 1
array([ Inf,  Inf,  Inf])
```

```
>>> np.seterrcall(saved_handler)
<function err_handler at 0x...>
>>> np.seterr(**save_err)
{'over': 'call', 'divide': 'call', 'invalid': 'call', 'under': 'call'}
```

Log error message:

```
>>> class Log(object):
...     def write(self, msg):
...         print("LOG: %s" % msg)
...
```

```
>>> log = Log()
>>> saved_handler = np.seterrcall(log)
>>> save_err = np.seterr(all='log')
```

```
>>> np.array([1, 2, 3]) / 0.0
LOG: Warning: divide by zero encountered in divide

array([ Inf,  Inf,  Inf])
```

```
>>> np.seterrcall(saved_handler)
<__main__.Log object at 0x...>
>>> np.seterr(**save_err)
{'over': 'log', 'divide': 'log', 'invalid': 'log', 'under': 'log'}
```

2.5 Casting Rules

Note: In NumPy 1.6.0, a type promotion API was created to encapsulate the mechanism for determining output types. See the functions *result_type*, *promote_types*, and *min_scalar_type* for more details.

At the core of every ufunc is a one-dimensional strided loop that implements the actual function for a specific type combination. When a ufunc is created, it is given a static list of inner loops and a corresponding list of type signatures over which the ufunc operates. The ufunc machinery uses this list to determine which inner loop to use for a particular case. You can inspect the *.types* attribute for a particular ufunc to see which type combinations have a defined inner loop and which output type they produce (*character codes* are used in said output for brevity).

Casting must be done on one or more of the inputs whenever the ufunc does not have a core loop implementation for the input types provided. If an implementation for the input types cannot be found, then the algorithm searches for an implementation with a type signature to which all of the inputs can be cast "safely." The first one it finds in its internal list of loops is selected and performed, after all necessary type casting. Recall that internal copies during ufuncs (even for casting) are limited to the size of an internal buffer (which is user settable).

Note: Universal functions in NumPy are flexible enough to have mixed type signatures. Thus, for example, a universal function could be defined that works with floating-point and integer values. See *ldexp* for an example.

By the above description, the casting rules are essentially implemented by the question of when a data type can be cast "safely" to another data type. The answer to this question can be determined in Python with a function call: *can_cast(fromtype, totype)*. The Figure below shows the results of this call for the 24 internally supported types on the author's 64-bit system. You can generate this table for your system with the code given in the Figure.

Figure

Code segment showing the "can cast safely" table for a 32-bit system.

```
>>> def print_table(ntypes):
...     print 'X',
...     for char in ntypes: print char,
...     print
...     for row in ntypes:
...         print row,
...         for col in ntypes:
...             print int(np.can_cast(row, col)),
...         print
>>> print_table(np.typecodes['All'])
X ? b h i l q p B H I L Q P e f d g F D G S U V O M m
? 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
b 0 1 1 1 1 1 1 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 0 0
h 0 0 1 1 1 1 1 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 0 0
i 0 0 0 1 1 1 1 0 0 0 0 0 0 0 0 1 1 0 1 1 1 1 1 1 0 0
l 0 0 0 0 1 1 1 0 0 0 0 0 0 0 0 1 1 0 1 1 1 1 1 1 0 0
q 0 0 0 0 1 1 1 0 0 0 0 0 0 0 0 1 1 0 1 1 1 1 1 1 0 0
p 0 0 0 0 1 1 1 0 0 0 0 0 0 0 0 1 1 0 1 1 1 1 1 1 0 0
B 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 0 0
H 0 0 0 1 1 1 1 0 1 1 1 1 1 0 1 1 1 1 1 1 1 1 1 0 0
I 0 0 0 0 1 1 1 0 0 1 1 1 1 0 0 1 1 0 1 1 1 1 1 1 0 0
L 0 0 0 0 0 0 0 0 0 0 1 1 1 0 0 1 1 0 1 1 1 1 1 1 0 0
Q 0 0 0 0 0 0 0 0 0 0 1 1 1 0 0 1 1 0 1 1 1 1 1 1 0 0
P 0 0 0 0 0 0 0 0 0 0 1 1 1 0 0 1 1 0 1 1 1 1 1 1 0 0
e 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 0 0
f 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 0 0
d 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 0 1 1 1 1 1 1 0 0
```

(continues on next page)

(continued from previous page)

```
g 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0 0 1 1 1 1 1 0 0
F 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 0 0
D 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 0 0
G 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 0 0
S 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 0 0
U 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 0 0
V 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 0 0
O 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 0 0
M 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0
m 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1
```

You should note that, while included in the table for completeness, the 'S', 'U', and 'V' types cannot be operated on by ufuncs. Also, note that on a 32-bit system the integer types may have different sizes, resulting in a slightly altered table.

Mixed scalar-array operations use a different set of casting rules that ensure that a scalar cannot "upcast" an array unless the scalar is of a fundamentally different kind of data (*i.e.*, under a different hierarchy in the data-type hierarchy) than the array. This rule enables you to use scalar constants in your code (which, as Python types, are interpreted accordingly in ufuncs) without worrying about whether the precision of the scalar constant will cause upcasting on your large (small precision) array.

2.6 Overriding Ufunc behavior

Classes (including ndarray subclasses) can override how ufuncs act on them by defining certain special methods. For details, see *Standard array subclasses*.

2.7 `ufunc`

2.7.1 Optional keyword arguments

All ufuncs take optional keyword arguments. Most of these represent advanced usage and will not typically be used.

out

New in version 1.6.

The first output can be provided as either a positional or a keyword parameter. Keyword 'out' arguments are incompatible with positional ones.

New in version 1.10.

The 'out' keyword argument is expected to be a tuple with one entry per output (which can be *None* for arrays to be allocated by the ufunc). For ufuncs with a single output, passing a single array (instead of a tuple holding a single array) is also valid.

Passing a single array in the 'out' keyword argument to a ufunc with multiple outputs is deprecated, and will raise a warning in numpy 1.10, and an error in a future release.

where

New in version 1.7.

Accepts a boolean array which is broadcast together with the operands. Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone. This argument cannot be used for generalized ufuncs as those take non-scalar input.

casting

New in version 1.6.

May be 'no', 'equiv', 'safe', 'same_kind', or 'unsafe'. See `can_cast` for explanations of the parameter values.

Provides a policy for what kind of casting is permitted. For compatibility with previous versions of NumPy, this defaults to 'unsafe' for numpy < 1.7. In numpy 1.7 a transition to 'same_kind' was begun where ufuncs produce a DeprecationWarning for calls which are allowed under the 'unsafe' rules, but not under the 'same_kind' rules. From numpy 1.10 and onwards, the default is 'same_kind'.

order

New in version 1.6.

Specifies the calculation iteration order/memory layout of the output array. Defaults to 'K'. 'C' means the output should be C-contiguous, 'F' means F-contiguous, 'A' means F-contiguous if the inputs are F-contiguous and not also not C-contiguous, C-contiguous otherwise, and 'K' means to match the element ordering of the inputs as closely as possible.

dtype

New in version 1.6.

Overrides the dtype of the calculation and output arrays. Similar to *signature*.

subok

New in version 1.6.

Defaults to true. If set to false, the output will always be a strict array, not a subtype.

signature

Either a data-type, a tuple of data-types, or a special signature string indicating the input and output types of a ufunc. This argument allows you to provide a specific signature for the 1-d loop to use in the underlying calculation. If the loop specified does not exist for the ufunc, then a TypeError is raised. Normally, a suitable loop is found automatically by comparing the input types with what is available and searching for a loop with data-types to which all inputs can be cast safely. This keyword argument lets you bypass that search and choose a particular loop. A list of available signatures is provided by the **types** attribute of the ufunc object. For backwards compatibility this argument can also be provided as *sig*, although the long form is preferred. Note that this should not be confused with the generalized ufunc signature that is stored in the **signature** attribute of the of the ufunc object.

extobj

a list of length 1, 2, or 3 specifying the ufunc buffer-size, the error mode integer, and the error call-back function. Normally, these values are looked up in a thread-specific dictionary. Passing them here circumvents that look up and uses the low-level specification provided for the error mode. This may be useful, for example, as an optimization for calculations requiring many ufunc calls on small arrays in a loop.

2.7.2 Attributes

There are some informational attributes that universal functions possess. None of the attributes can be set.

__doc__	A docstring for each ufunc. The first part of the docstring is dynamically generated from the number of outputs, the name, and the number of inputs. The second part of the docstring is provided at creation time and stored with the ufunc.
__name__	The name of the ufunc.

ufunc.nin	The number of inputs.
ufunc.nout	The number of outputs.
ufunc.nargs	The number of arguments.
ufunc.ntypes	The number of types.
ufunc.types	Returns a list with types grouped input->output.
ufunc.identity	The identity value.
ufunc.signature	Definition of the core elements a generalized ufunc operates on.

ufunc.**nin**

The number of inputs.

Data attribute containing the number of arguments the ufunc treats as input.

Examples

```
>>> np.add.nin
2
>>> np.multiply.nin
2
>>> np.power.nin
2
>>> np.exp.nin
1
```

ufunc.**nout**

The number of outputs.

Data attribute containing the number of arguments the ufunc treats as output.

Notes

Since all ufuncs can take output arguments, this will always be (at least) 1.

Examples

```
>>> np.add.nout
1
>>> np.multiply.nout
1
>>> np.power.nout
1
>>> np.exp.nout
1
```

ufunc.**nargs**
The number of arguments.

Data attribute containing the number of arguments the ufunc takes, including optional ones.

Notes

Typically this value will be one more than what you might expect because all ufuncs take the optional "out" argument.

Examples

```
>>> np.add.nargs
3
>>> np.multiply.nargs
3
>>> np.power.nargs
3
>>> np.exp.nargs
2
```

ufunc.**ntypes**
The number of types.

The number of numerical NumPy types - of which there are 18 total - on which the ufunc can operate.

See also:

numpy.ufunc.types

Examples

```
>>> np.add.ntypes
18
>>> np.multiply.ntypes
18
>>> np.power.ntypes
17
>>> np.exp.ntypes
7
>>> np.remainder.ntypes
14
```

ufunc.**types**
Returns a list with types grouped input->output.

Data attribute listing the data-type "Domain-Range" groupings the ufunc can deliver. The data-types are given using the character codes.

See also:

numpy.ufunc.ntypes

Examples

```
>>> np.add.types
['??->?', 'bb->b', 'BB->B', 'hh->h', 'HH->H', 'ii->i', 'II->I', 'll->l',
'LL->L', 'qq->q', 'QQ->Q', 'ff->f', 'dd->d', 'gg->g', 'FF->F', 'DD->D',
'GG->G', 'OO->O']
```

```
>>> np.multiply.types
['??->?', 'bb->b', 'BB->B', 'hh->h', 'HH->H', 'ii->i', 'II->I', 'll->l',
'LL->L', 'qq->q', 'QQ->Q', 'ff->f', 'dd->d', 'gg->g', 'FF->F', 'DD->D',
'GG->G', 'OO->O']
```

```
>>> np.power.types
['bb->b', 'BB->B', 'hh->h', 'HH->H', 'ii->i', 'II->I', 'll->l', 'LL->L',
'qq->q', 'QQ->Q', 'ff->f', 'dd->d', 'gg->g', 'FF->F', 'DD->D', 'GG->G',
'OO->O']
```

```
>>> np.exp.types
['f->f', 'd->d', 'g->g', 'F->F', 'D->D', 'G->G', 'O->O']
```

```
>>> np.remainder.types
['bb->b', 'BB->B', 'hh->h', 'HH->H', 'ii->i', 'II->I', 'll->l', 'LL->L',
'qq->q', 'QQ->Q', 'ff->f', 'dd->d', 'gg->g', 'OO->O']
```

ufunc.**identity**

The identity value.

Data attribute containing the identity element for the ufunc, if it has one. If it does not, the attribute value is None.

Examples

```
>>> np.add.identity
0
>>> np.multiply.identity
1
>>> np.power.identity
1
>>> print(np.exp.identity)
None
```

ufunc.**signature**

Definition of the core elements a generalized ufunc operates on.

The signature determines how the dimensions of each input/output array are split into core and loop dimensions:

1. Each dimension in the signature is matched to a dimension of the corresponding passed-in array, starting from the end of the shape tuple.
2. Core dimensions assigned to the same label in the signature must have exactly matching sizes, no broadcasting is performed.
3. The core dimensions are removed from all inputs and the remaining dimensions are broadcast together, defining the loop dimensions.

Notes

Generalized ufuncs are used internally in many linalg functions, and in the testing suite; the examples below are taken from these. For ufuncs that operate on scalars, the signature is *None*, which is equivalent to '()' for every argument.

Examples

```
>>> np.core.umath_tests.matrix_multiply.signature
'(m,n),(n,p)->(m,p)'
>>> np.linalg._umath_linalg.det.signature
'(m,m)->()'
>>> np.add.signature is None
True  # equivalent to '(),()->()'
```

2.7.3 Methods

All ufuncs have four methods. However, these methods only make sense on scalar ufuncs that take two input arguments and return one output argument. Attempting to call these methods on other ufuncs will cause a `ValueError`. The reduce-like methods all take an *axis* keyword, a *dtype* keyword, and an *out* keyword, and the arrays must all have dimension >= 1. The *axis* keyword specifies the axis of the array over which the reduction will take place (with negative values counting backwards). Generally, it is an integer, though for *ufunc.reduce*, it can also be a tuple of `int` to reduce over several axes at once, or *None*, to reduce over all axes. The *dtype* keyword allows you to manage a very common problem that arises when naively using *ufunc.reduce*. Sometimes you may have an array of a certain data type and wish to add up all of its elements, but the result does not fit into the data type of the array. This commonly happens if you have an array of single-byte integers. The *dtype* keyword allows you to alter the data type over which the reduction takes place (and therefore the type of the output). Thus, you can ensure that the output is a data type with precision large enough to handle your output. The responsibility of altering the reduce type is mostly up to you. There is one exception: if no *dtype* is given for a reduction on the "add" or "multiply" operations, then if the input type is an integer (or Boolean) data-type and smaller than the size of the `int_` data type, it will be internally upcast to the `int_` (or `uint`) data-type. Finally, the *out* keyword allows you to provide an output array (for single-output ufuncs, which are currently the only ones supported; for future extension, however, a tuple with a single argument can be passed in). If *out* is given, the *dtype* argument is ignored.

Ufuncs also have a fifth method that allows in place operations to be performed using fancy indexing. No buffering is used on the dimensions where fancy indexing is used, so the fancy index can list an item more than once and the operation will be performed on the result of the previous operation for that item.

ufunc.reduce(a[, axis, dtype, out, keepdims])	Reduces *a*'s dimension by one, by applying ufunc along one axis.
ufunc.accumulate(array[, axis, dtype, out])	Accumulate the result of applying the operator to all elements.
ufunc.reduceat(a, indices[, axis, dtype, out])	Performs a (local) reduce with specified slices over a single axis.
ufunc.outer(A, B, **kwargs)	Apply the ufunc *op* to all pairs (a, b) with a in *A* and b in *B*.
ufunc.at(a, indices[, b])	Performs unbuffered in place operation on operand 'a' for elements specified by 'indices'.

ufunc.**reduce**(*a*, *axis=0*, *dtype=None*, *out=None*, *keepdims=False*)

Reduces *a*'s dimension by one, by applying ufunc along one axis.

Let $a.shape = (N_0, ..., N_i, ..., N_{M-1})$. Then $ufunc.reduce(a, axis = i)[k_0, .., k_{i-1}, k_{i+1}, .., k_{M-1}]$ = the

result of iterating *j* over $range(N_i)$, cumulatively applying ufunc to each $a[k_0, .., k_{i-1}, j, k_{i+1}, .., k_{M-1}]$. For a one-dimensional array, reduce produces results equivalent to:

```
r = op.identity # op = ufunc
for i in range(len(A)):
  r = op(r, A[i])
return r
```

For example, add.reduce() is equivalent to sum().

Parameters **a** : array_like

The array to act on.

axis : None or int or tuple of ints, optional

Axis or axes along which a reduction is performed. The default (*axis* = 0) is perform a reduction over the first dimension of the input array. *axis* may be negative, in which case it counts from the last to the first axis.

New in version 1.7.0.

If this is *None*, a reduction is performed over all the axes. If this is a tuple of ints, a reduction is performed on multiple axes, instead of a single axis or all the axes as before.

For operations which are either not commutative or not associative, doing a reduction over multiple axes is not well-defined. The ufuncs do not currently raise an exception in this case, but will likely do so in the future.

dtype : data-type code, optional

The type used to represent the intermediate results. Defaults to the data-type of the output array if this is provided, or the data-type of the input array if no output array is provided.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If not provided or *None*, a freshly-allocated array is returned. For consistency with ufunc.__call__, if given as a keyword, this may be wrapped in a 1-element tuple.

Changed in version 1.13.0: Tuples are allowed for keyword argument.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the original *arr*.

New in version 1.7.0.

Returns **r** : ndarray

The reduced array. If *out* was supplied, *r* is a reference to it.

Examples

```
>>> np.multiply.reduce([2,3,5])
30
```

A multi-dimensional array example:

```
>>> X = np.arange(8).reshape((2,2,2))
>>> X
array([[[0, 1],
        [2, 3]],
       [[4, 5],
        [6, 7]]])
>>> np.add.reduce(X, 0)
array([[ 4,  6],
       [ 8, 10]])
>>> np.add.reduce(X) # confirm: default axis value is 0
array([[ 4,  6],
       [ 8, 10]])
>>> np.add.reduce(X, 1)
array([[ 2,  4],
       [10, 12]])
>>> np.add.reduce(X, 2)
array([[ 1,  5],
       [ 9, 13]])
```

ufunc.**accumulate**(*array*, *axis=0*, *dtype=None*, *out=None*)

Accumulate the result of applying the operator to all elements.

For a one-dimensional array, accumulate produces results equivalent to:

```
r = np.empty(len(A))
t = op.identity        # op = the ufunc being applied to A's  elements
for i in range(len(A)):
    t = op(t, A[i])
    r[i] = t
return r
```

For example, add.accumulate() is equivalent to np.cumsum().

For a multi-dimensional array, accumulate is applied along only one axis (axis zero by default; see Examples below) so repeated use is necessary if one wants to accumulate over multiple axes.

Parameters **array** : array_like

The array to act on.

axis : int, optional

The axis along which to apply the accumulation; default is zero.

dtype : data-type code, optional

The data-type used to represent the intermediate results. Defaults to the data-type of the output array if such is provided, or the the data-type of the input array if no output array is provided.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If not provided or *None*, a freshly-allocated array is returned. For consistency with ufunc.__call__, if given as a keyword, this may be wrapped in a 1-element tuple.

Changed in version 1.13.0: Tuples are allowed for keyword argument.

Returns **r** : ndarray

The accumulated values. If *out* was supplied, *r* is a reference to *out*.

Examples

1-D array examples:

```
>>> np.add.accumulate([2, 3, 5])
array([ 2,  5, 10])
>>> np.multiply.accumulate([2, 3, 5])
array([ 2,  6, 30])
```

2-D array examples:

```
>>> I = np.eye(2)
>>> I
array([[ 1.,  0.],
       [ 0.,  1.]])
```

Accumulate along axis 0 (rows), down columns:

```
>>> np.add.accumulate(I, 0)
array([[ 1.,  0.],
       [ 1.,  1.]])
>>> np.add.accumulate(I) # no axis specified = axis zero
array([[ 1.,  0.],
       [ 1.,  1.]])
```

Accumulate along axis 1 (columns), through rows:

```
>>> np.add.accumulate(I, 1)
array([[ 1.,  1.],
       [ 0.,  1.]])
```

`ufunc.`**`reduceat`**(*a*, *indices*, *axis=0*, *dtype=None*, *out=None*)

Performs a (local) reduce with specified slices over a single axis.

For i in `range(len(indices))`, *`reduceat`* computes `ufunc.reduce(a[indices[i]:indices[i+1]])`, which becomes the i-th generalized "row" parallel to *axis* in the final result (i.e., in a 2-D array, for example, if *axis = 0*, it becomes the i-th row, but if *axis = 1*, it becomes the i-th column). There are three exceptions to this:

- when `i = len(indices) - 1` (so for the last index), `indices[i+1] = a.shape[axis]`.
- if `indices[i] >= indices[i + 1]`, the i-th generalized "row" is simply `a[indices[i]]`.
- if `indices[i] >= len(a)` or `indices[i] < 0`, an error is raised.

The shape of the output depends on the size of *`indices`*, and may be larger than *a* (this happens if `len(indices) > a.shape[axis]`).

Parameters **a** : array_like

The array to act on.

indices : array_like

Paired indices, comma separated (not colon), specifying slices to reduce.

axis : int, optional

The axis along which to apply the reduceat.

dtype : data-type code, optional

The type used to represent the intermediate results. Defaults to the data type of the output array if this is provided, or the data type of the input array if no output array is provided.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If not provided or *None*, a freshly-allocated array is returned. For consistency with ufunc.__call__, if given as a keyword, this may be wrapped in a 1-element tuple.

Changed in version 1.13.0: Tuples are allowed for keyword argument.

Returns **r** : ndarray

The reduced values. If *out* was supplied, *r* is a reference to *out*.

Notes

A descriptive example:

If *a* is 1-D, the function *ufunc.accumulate(a)* is the same as `ufunc.reduceat(a, indices)[::2]` where *indices* is `range(len(array) - 1)` with a zero placed in every other element: `indices = zeros(2 * len(a) - 1), indices[1::2] = range(1, len(a))`.

Don't be fooled by this attribute's name: *reduceat(a)* is not necessarily smaller than *a*.

Examples

To take the running sum of four successive values:

```
>>> np.add.reduceat(np.arange(8),[0,4, 1,5, 2,6, 3,7])[::2]
array([ 6, 10, 14, 18])
```

A 2-D example:

```
>>> x = np.linspace(0, 15, 16).reshape(4,4)
>>> x
array([[  0.,   1.,   2.,   3.],
       [  4.,   5.,   6.,   7.],
       [  8.,   9.,  10.,  11.],
       [ 12.,  13.,  14.,  15.]])
```

```
# reduce such that the result has the following five rows:
# [row1 + row2 + row3]
# [row4]
# [row2]
# [row3]
# [row1 + row2 + row3 + row4]
```

```
>>> np.add.reduceat(x, [0, 3, 1, 2, 0])
array([[ 12.,  15.,  18.,  21.],
       [ 12.,  13.,  14.,  15.],
       [  4.,   5.,   6.,   7.],
       [  8.,   9.,  10.,  11.],
       [ 24.,  28.,  32.,  36.]])
```

```
# reduce such that result has the following two columns:
# [col1 * col2 * col3, col4]
```

```
>>> np.multiply.reduceat(x, [0, 3], 1)
array([[    0.,     3.],
       [  120.,     7.],
       [  720.,    11.],
       [ 2184.,    15.]])
```

`ufunc.outer`(*A*, *B*, ***kwargs*)

Apply the ufunc *op* to all pairs (a, b) with a in *A* and b in *B*.

Let `M = A.ndim`, `N = B.ndim`. Then the result, *C*, of `op.outer(A, B)` is an array of dimension M + N such that:

$$C[i_0, ..., i_{M-1}, j_0, ..., j_{N-1}] = op(A[i_0, ..., i_{M-1}], B[j_0, ..., j_{N-1}])$$

For *A* and *B* one-dimensional, this is equivalent to:

```
r = empty(len(A),len(B))
for i in range(len(A)):
    for j in range(len(B)):
        r[i,j] = op(A[i], B[j]) # op = ufunc in question
```

Parameters **A** : array_like

First array

B : array_like

Second array

kwargs : any

Arguments to pass on to the ufunc. Typically `dtype` or *out*.

Returns **r** : ndarray

Output array

See also:

numpy.outer

Examples

```
>>> np.multiply.outer([1, 2, 3], [4, 5, 6])
array([[ 4,  5,  6],
       [ 8, 10, 12],
       [12, 15, 18]])
```

A multi-dimensional example:

```
>>> A = np.array([[1, 2, 3], [4, 5, 6]])
>>> A.shape
(2, 3)
>>> B = np.array([[1, 2, 3, 4]])
```

(continues on next page)

(continued from previous page)

```
>>> B.shape
(1, 4)
>>> C = np.multiply.outer(A, B)
>>> C.shape; C
(2, 3, 1, 4)
array([[[[ 1,  2,  3,  4]],
        [[ 2,  4,  6,  8]],
        [[ 3,  6,  9, 12]]],
       [[[ 4,  8, 12, 16]],
        [[ 5, 10, 15, 20]],
        [[ 6, 12, 18, 24]]]])
```

ufunc.**at**(*a*, *indices*, *b=None*)

Performs unbuffered in place operation on operand 'a' for elements specified by 'indices'. For addition ufunc, this method is equivalent to *a[indices] += b*, except that results are accumulated for elements that are indexed more than once. For example, *a[[0,0]] += 1* will only increment the first element once because of buffering, whereas *add.at(a, [0,0], 1)* will increment the first element twice.

New in version 1.8.0.

Parameters **a** : array_like

The array to perform in place operation on.

indices : array_like or tuple

Array like index object or slice object for indexing into first operand. If first operand has multiple dimensions, indices can be a tuple of array like index objects or slice objects.

b : array_like

Second operand for ufuncs requiring two operands. Operand must be broadcastable over first operand after indexing or slicing.

Examples

Set items 0 and 1 to their negative values:

```
>>> a = np.array([1, 2, 3, 4])
>>> np.negative.at(a, [0, 1])
>>> print(a)
array([-1, -2, 3, 4])
```

Increment items 0 and 1, and increment item 2 twice:

```
>>> a = np.array([1, 2, 3, 4])
>>> np.add.at(a, [0, 1, 2, 2], 1)
>>> print(a)
array([2, 3, 5, 4])
```

Add items 0 and 1 in first array to second array, and store results in first array:

```
>>> a = np.array([1, 2, 3, 4])
>>> b = np.array([1, 2])
>>> np.add.at(a, [0, 1], b)
>>> print(a)
array([2, 4, 3, 4])
```

Warning: A reduce-like operation on an array with a data-type that has a range "too small" to handle the result will silently wrap. One should use `dtype` to increase the size of the data-type over which reduction takes place.

2.8 Available ufuncs

There are currently more than 60 universal functions defined in `numpy` on one or more types, covering a wide variety of operations. Some of these ufuncs are called automatically on arrays when the relevant infix notation is used (*e.g.*, `add(a, b)` is called internally when `a + b` is written and *a* or *b* is an `ndarray`). Nevertheless, you may still want to use the ufunc call in order to use the optional output argument(s) to place the output(s) in an object (or objects) of your choice.

Recall that each ufunc operates element-by-element. Therefore, each scalar ufunc will be described as if acting on a set of scalar inputs to return a set of scalar outputs.

Note: The ufunc still returns its output(s) even if you use the optional output argument(s).

2.8.1 Math operations

`add`(x1, x2, /[, out, where, casting, order, ...])	Add arguments element-wise.
`subtract`(x1, x2, /[, out, where, casting, ...])	Subtract arguments, element-wise.
`multiply`(x1, x2, /[, out, where, casting, ...])	Multiply arguments element-wise.
`divide`(x1, x2, /[, out, where, casting, ...])	Returns a true division of the inputs, element-wise.
`logaddexp`(x1, x2, /[, out, where, casting, ...])	Logarithm of the sum of exponentiations of the inputs.
`logaddexp2`(x1, x2, /[, out, where, casting, ...])	Logarithm of the sum of exponentiations of the inputs in base-2.
`true_divide`(x1, x2, /[, out, where, ...])	Returns a true division of the inputs, element-wise.
`floor_divide`(x1, x2, /[, out, where, ...])	Return the largest integer smaller or equal to the division of the inputs.
`negative`(x, /[, out, where, casting, order, ...])	Numerical negative, element-wise.
`positive`(x, /[, out, where, casting, order, ...])	Numerical positive, element-wise.
`power`(x1, x2, /[, out, where, casting, ...])	First array elements raised to powers from second array, element-wise.
`remainder`(x1, x2, /[, out, where, casting, ...])	Return element-wise remainder of division.
`mod`(x1, x2, /[, out, where, casting, order, ...])	Return element-wise remainder of division.
`fmod`(x1, x2, /[, out, where, casting, ...])	Return the element-wise remainder of division.
`divmod`(x1, x2[, out1, out2], / [[, out, ...])	Return element-wise quotient and remainder simultaneously.
`absolute`(x, /[, out, where, casting, order, ...])	Calculate the absolute value element-wise.
`fabs`(x, /[, out, where, casting, order, ...])	Compute the absolute values element-wise.
`rint`(x, /[, out, where, casting, order, ...])	Round elements of the array to the nearest integer.
`sign`(x, /[, out, where, casting, order, ...])	Returns an element-wise indication of the sign of a number.
`heaviside`(x1, x2, /[, out, where, casting, ...])	Compute the Heaviside step function.
`conj`(x, /[, out, where, casting, order, ...])	Return the complex conjugate, element-wise.
`exp`(x, /[, out, where, casting, order, ...])	Calculate the exponential of all elements in the input array.
`exp2`(x, /[, out, where, casting, order, ...])	Calculate *2**p* for all *p* in the input array.
`log`(x, /[, out, where, casting, order, ...])	Natural logarithm, element-wise.

Continued on next page

Table 5 – continued from previous page

log2(x, /[, out, where, casting, order, ...])	Base-2 logarithm of x.
log10(x, /[, out, where, casting, order, ...])	Return the base 10 logarithm of the input array, element-wise.
expm1(x, /[, out, where, casting, order, ...])	Calculate `exp(x) - 1` for all elements in the array.
log1p(x, /[, out, where, casting, order, ...])	Return the natural logarithm of one plus the input array, element-wise.
sqrt(x, /[, out, where, casting, order, ...])	Return the positive square-root of an array, element-wise.
square(x, /[, out, where, casting, order, ...])	Return the element-wise square of the input.
cbrt(x, /[, out, where, casting, order, ...])	Return the cube-root of an array, element-wise.
reciprocal(x, /[, out, where, casting, ...])	Return the reciprocal of the argument, element-wise.

Tip: The optional output arguments can be used to help you save memory for large calculations. If your arrays are large, complicated expressions can take longer than absolutely necessary due to the creation and (later) destruction of temporary calculation spaces. For example, the expression `G = a * b + c` is equivalent to `t1 = A * B; G = T1 + C; del t1`. It will be more quickly executed as `G = A * B; add(G, C, G)` which is the same as `G = A * B; G += C`.

2.8.2 Trigonometric functions

All trigonometric functions use radians when an angle is called for. The ratio of degrees to radians is $180^\circ/\pi$.

sin(x, /[, out, where, casting, order, ...])	Trigonometric sine, element-wise.
cos(x, /[, out, where, casting, order, ...])	Cosine element-wise.
tan(x, /[, out, where, casting, order, ...])	Compute tangent element-wise.
arcsin(x, /[, out, where, casting, order, ...])	Inverse sine, element-wise.
arccos(x, /[, out, where, casting, order, ...])	Trigonometric inverse cosine, element-wise.
arctan(x, /[, out, where, casting, order, ...])	Trigonometric inverse tangent, element-wise.
arctan2(x1, x2, /[, out, where, casting, ...])	Element-wise arc tangent of `x1/x2` choosing the quadrant correctly.
hypot(x1, x2, /[, out, where, casting, ...])	Given the "legs" of a right triangle, return its hypotenuse.
sinh(x, /[, out, where, casting, order, ...])	Hyperbolic sine, element-wise.
cosh(x, /[, out, where, casting, order, ...])	Hyperbolic cosine, element-wise.
tanh(x, /[, out, where, casting, order, ...])	Compute hyperbolic tangent element-wise.
arcsinh(x, /[, out, where, casting, order, ...])	Inverse hyperbolic sine element-wise.
arccosh(x, /[, out, where, casting, order, ...])	Inverse hyperbolic cosine, element-wise.
arctanh(x, /[, out, where, casting, order, ...])	Inverse hyperbolic tangent element-wise.
deg2rad(x, /[, out, where, casting, order, ...])	Convert angles from degrees to radians.
rad2deg(x, /[, out, where, casting, order, ...])	Convert angles from radians to degrees.

2.8.3 Bit-twiddling functions

These function all require integer arguments and they manipulate the bit-pattern of those arguments.

bitwise_and(x1, x2, /[, out, where, ...])	Compute the bit-wise AND of two arrays element-wise.
bitwise_or(x1, x2, /[, out, where, casting, ...])	Compute the bit-wise OR of two arrays element-wise.
bitwise_xor(x1, x2, /[, out, where, ...])	Compute the bit-wise XOR of two arrays element-wise.

Continued on next page

Table 7 – continued from previous page

invert(x, /[, out, where, casting, order, ...])	Compute bit-wise inversion, or bit-wise NOT, element-wise.
left_shift(x1, x2, /[, out, where, casting, ...])	Shift the bits of an integer to the left.
right_shift(x1, x2, /[, out, where, ...])	Shift the bits of an integer to the right.

2.8.4 Comparison functions

greater(x1, x2, /[, out, where, casting, ...])	Return the truth value of (x1 > x2) element-wise.
greater_equal(x1, x2, /[, out, where, ...])	Return the truth value of (x1 >= x2) element-wise.
less(x1, x2, /[, out, where, casting, ...])	Return the truth value of (x1 < x2) element-wise.
less_equal(x1, x2, /[, out, where, casting, ...])	Return the truth value of (x1 =< x2) element-wise.
not_equal(x1, x2, /[, out, where, casting, ...])	Return (x1 != x2) element-wise.
equal(x1, x2, /[, out, where, casting, ...])	Return (x1 == x2) element-wise.

Warning: Do not use the Python keywords `and` and `or` to combine logical array expressions. These keywords will test the truth value of the entire array (not element-by-element as you might expect). Use the bitwise operators & and | instead.

logical_and(x1, x2, /[, out, where, ...])	Compute the truth value of x1 AND x2 element-wise.
logical_or(x1, x2, /[, out, where, casting, ...])	Compute the truth value of x1 OR x2 element-wise.
logical_xor(x1, x2, /[, out, where, ...])	Compute the truth value of x1 XOR x2, element-wise.
logical_not(x, /[, out, where, casting, ...])	Compute the truth value of NOT x element-wise.

Warning: The bit-wise operators & and | are the proper way to perform element-by-element array comparisons. Be sure you understand the operator precedence: `(a > 2) & (a < 5)` is the proper syntax because `a > 2 & a < 5` will result in an error due to the fact that `2 & a` is evaluated first.

maximum(x1, x2, /[, out, where, casting, ...])	Element-wise maximum of array elements.

Tip: The Python function `max()` will find the maximum over a one-dimensional array, but it will do so using a slower sequence interface. The reduce method of the maximum ufunc is much faster. Also, the `max()` method will not give answers you might expect for arrays with greater than one dimension. The reduce method of minimum also allows you to compute a total minimum over an array.

minimum(x1, x2, /[, out, where, casting, ...])	Element-wise minimum of array elements.

Warning: the behavior of `maximum(a, b)` is different than that of `max(a, b)`. As a ufunc, `maximum(a, b)` performs an element-by-element comparison of *a* and *b* and chooses each element of the result according to which element in the two arrays is larger. In contrast, `max(a, b)` treats the objects *a* and *b* as a whole, looks at the (total) truth value of `a > b` and uses it to return either *a* or *b* (as a whole). A similar difference exists between `minimum(a, b)` and `min(a, b)`.

fmax(x1, x2, /[, out, where, casting, ...])	Element-wise maximum of array elements.
fmin(x1, x2, /[, out, where, casting, ...])	Element-wise minimum of array elements.

2.8.5 Floating functions

Recall that all of these functions work element-by-element over an array, returning an array output. The description details only a single operation.

isfinite(x, /[, out, where, casting, order, ...])	Test element-wise for finiteness (not infinity or not Not a Number).
isinf(x, /[, out, where, casting, order, ...])	Test element-wise for positive or negative infinity.
isnan(x, /[, out, where, casting, order, ...])	Test element-wise for NaN and return result as a boolean array.
isnat(x, /[, out, where, casting, order, ...])	Test element-wise for NaT (not a time) and return result as a boolean array.
fabs(x, /[, out, where, casting, order, ...])	Compute the absolute values element-wise.
signbit(x, /[, out, where, casting, order, ...])	Returns element-wise True where signbit is set (less than zero).
copysign(x1, x2, /[, out, where, casting, ...])	Change the sign of x1 to that of x2, element-wise.
nextafter(x1, x2, /[, out, where, casting, ...])	Return the next floating-point value after x1 towards x2, element-wise.
spacing(x, /[, out, where, casting, order, ...])	Return the distance between x and the nearest adjacent number.
modf(x[, out1, out2], / [[, out, where, ...])	Return the fractional and integral parts of an array, element-wise.
ldexp(x1, x2, /[, out, where, casting, ...])	Returns x1 * 2**x2, element-wise.
frexp(x[, out1, out2], / [[, out, where, ...])	Decompose the elements of x into mantissa and twos exponent.
fmod(x1, x2, /[, out, where, casting, ...])	Return the element-wise remainder of division.
floor(x, /[, out, where, casting, order, ...])	Return the floor of the input, element-wise.
ceil(x, /[, out, where, casting, order, ...])	Return the ceiling of the input, element-wise.
trunc(x, /[, out, where, casting, order, ...])	Return the truncated value of the input, element-wise.

CHAPTER

THREE

ROUTINES

In this chapter routine docstrings are presented, grouped by functionality. Many docstrings contain example code, which demonstrates basic usage of the routine. The examples assume that NumPy is imported with:

```
>>> import numpy as np
```

A convenient way to execute examples is the `%doctest_mode` mode of IPython, which allows for pasting of multi-line examples and preserves indentation.

3.1 Array creation routines

See also:

Array creation

3.1.1 Ones and zeros

empty(shape[, dtype, order])	Return a new array of given shape and type, without initializing entries.
empty_like(a[, dtype, order, subok])	Return a new array with the same shape and type as a given array.
eye(N[, M, k, dtype, order])	Return a 2-D array with ones on the diagonal and zeros elsewhere.
identity(n[, dtype])	Return the identity array.
ones(shape[, dtype, order])	Return a new array of given shape and type, filled with ones.
ones_like(a[, dtype, order, subok])	Return an array of ones with the same shape and type as a given array.
zeros(shape[, dtype, order])	Return a new array of given shape and type, filled with zeros.
zeros_like(a[, dtype, order, subok])	Return an array of zeros with the same shape and type as a given array.
full(shape, fill_value[, dtype, order])	Return a new array of given shape and type, filled with *fill_value*.
full_like(a, fill_value[, dtype, order, subok])	Return a full array with the same shape and type as a given array.

numpy.**empty**(*shape*, *dtype=float*, *order='C'*)

Return a new array of given shape and type, without initializing entries.

Parameters **shape** : int or tuple of int

Shape of the empty array

dtype : data-type, optional

Desired output data-type.

order : {'C', 'F'}, optional

Whether to store multi-dimensional data in row-major (C-style) or column-major (Fortran-style) order in memory.

Returns **out** : ndarray

Array of uninitialized (arbitrary) data of the given shape, dtype, and order. Object arrays will be initialized to None.

See also:

empty_like, *zeros*, *ones*

Notes

empty, unlike *zeros*, does not set the array values to zero, and may therefore be marginally faster. On the other hand, it requires the user to manually set all the values in the array, and should be used with caution.

Examples

```
>>> np.empty([2, 2])
array([[ -9.74499359e+001,   6.69583040e-309],
       [  2.13182611e-314,   3.06959433e-309]])         #random
```

```
>>> np.empty([2, 2], dtype=int)
array([[-1073741821, -1067949133],
       [  496041986,    19249760]])                     #random
```

numpy.**empty_like**(*a*, *dtype=None*, *order='K'*, *subok=True*)

Return a new array with the same shape and type as a given array.

Parameters **a** : array_like

The shape and data-type of *a* define these same attributes of the returned array.

dtype : data-type, optional

Overrides the data type of the result.

New in version 1.6.0.

order : {'C', 'F', 'A', or 'K'}, optional

Overrides the memory layout of the result. 'C' means C-order, 'F' means F-order, 'A' means 'F' if `a` is Fortran contiguous, 'C' otherwise. 'K' means match the layout of `a` as closely as possible.

New in version 1.6.0.

subok : bool, optional.

If True, then the newly created array will use the sub-class type of 'a', otherwise it will be a base-class array. Defaults to True.

Returns **out** : ndarray

Array of uninitialized (arbitrary) data with the same shape and type as *a*.

See also:

ones_like Return an array of ones with shape and type of input.

zeros_like Return an array of zeros with shape and type of input.

empty Return a new uninitialized array.

ones Return a new array setting values to one.

zeros Return a new array setting values to zero.

Notes

This function does *not* initialize the returned array; to do that use *zeros_like* or *ones_like* instead. It may be marginally faster than the functions that do set the array values.

Examples

```
>>> a = ([1,2,3], [4,5,6])                         # a is array-like
>>> np.empty_like(a)
array([[-1073741821, -1073741821,           3],    #random
       [          0,           0, -1073741821]])
>>> a = np.array([[1., 2., 3.],[4.,5.,6.]])
>>> np.empty_like(a)
array([[ -2.00000715e+000,   1.48219694e-323,  -2.00000572e+000],#random
       [  4.38791518e-305,  -2.00000715e+000,   4.17269252e-309]])
```

numpy.**eye**(*N*, *M=None*, *k=0*, *dtype=<class 'float'>*, *order='C'*)

Return a 2-D array with ones on the diagonal and zeros elsewhere.

Parameters **N** : int

Number of rows in the output.

M : int, optional

Number of columns in the output. If None, defaults to *N*.

k : int, optional

Index of the diagonal: 0 (the default) refers to the main diagonal, a positive value refers to an upper diagonal, and a negative value to a lower diagonal.

dtype : data-type, optional

Data-type of the returned array.

order : {'C', 'F'}, optional

Whether the output should be stored in row-major (C-style) or column-major (Fortran-style) order in memory.

New in version 1.14.0.

Returns **I** : ndarray of shape (N,M)

An array where all elements are equal to zero, except for the *k*-th diagonal, whose values are equal to one.

See also:

identity (almost) equivalent function

diag diagonal 2-D array from a 1-D array specified by the user.

Examples

```
>>> np.eye(2, dtype=int)
array([[1, 0],
       [0, 1]])
>>> np.eye(3, k=1)
array([[ 0.,  1.,  0.],
       [ 0.,  0.,  1.],
       [ 0.,  0.,  0.]])
```

numpy.**identity**(*n*, *dtype=None*)

Return the identity array.

The identity array is a square array with ones on the main diagonal.

Parameters **n** : int

Number of rows (and columns) in *n* x *n* output.

dtype : data-type, optional

Data-type of the output. Defaults to `float`.

Returns **out** : ndarray

n x *n* array with its main diagonal set to one, and all other elements 0.

Examples

```
>>> np.identity(3)
array([[ 1.,  0.,  0.],
       [ 0.,  1.,  0.],
       [ 0.,  0.,  1.]])
```

numpy.**ones**(*shape*, *dtype=None*, *order='C'*)

Return a new array of given shape and type, filled with ones.

Parameters **shape** : int or sequence of ints

Shape of the new array, e.g., `(2, 3)` or `2`.

dtype : data-type, optional

The desired data-type for the array, e.g., `numpy.int8`. Default is `numpy.float64`.

order : {'C', 'F'}, optional

Whether to store multidimensional data in C- or Fortran-contiguous (row- or column-wise) order in memory.

Returns **out** : ndarray

Array of ones with the given shape, dtype, and order.

See also:

zeros, *ones_like*

Examples

```
>>> np.ones(5)
array([ 1.,  1.,  1.,  1.,  1.])
```

```
>>> np.ones((5,), dtype=int)
array([1, 1, 1, 1, 1])
```

```
>>> np.ones((2, 1))
array([[ 1.],
       [ 1.]])
```

```
>>> s = (2,2)
>>> np.ones(s)
array([[ 1.,  1.],
       [ 1.,  1.]])
```

numpy.**ones_like**(*a*, *dtype=None*, *order='K'*, *subok=True*)

Return an array of ones with the same shape and type as a given array.

Parameters **a** : array_like

The shape and data-type of *a* define these same attributes of the returned array.

dtype : data-type, optional

Overrides the data type of the result.

New in version 1.6.0.

order : {'C', 'F', 'A', or 'K'}, optional

Overrides the memory layout of the result. 'C' means C-order, 'F' means F-order, 'A' means 'F' if *a* is Fortran contiguous, 'C' otherwise. 'K' means match the layout of *a* as closely as possible.

New in version 1.6.0.

subok : bool, optional.

If True, then the newly created array will use the sub-class type of 'a', otherwise it will be a base-class array. Defaults to True.

Returns **out** : ndarray

Array of ones with the same shape and type as *a*.

See also:

zeros_like Return an array of zeros with shape and type of input.

empty_like Return an empty array with shape and type of input.

zeros Return a new array setting values to zero.

ones Return a new array setting values to one.

empty Return a new uninitialized array.

Examples

```
>>> x = np.arange(6)
>>> x = x.reshape((2, 3))
>>> x
array([[0, 1, 2],
       [3, 4, 5]])
>>> np.ones_like(x)
array([[1, 1, 1],
       [1, 1, 1]])
```

```
>>> y = np.arange(3, dtype=float)
>>> y
array([ 0.,  1.,  2.])
>>> np.ones_like(y)
array([ 1.,  1.,  1.])
```

numpy.**zeros**(*shape*, *dtype=float*, *order='C'*)

Return a new array of given shape and type, filled with zeros.

Parameters **shape** : int or sequence of ints

Shape of the new array, e.g., `(2, 3)` or `2`.

dtype : data-type, optional

The desired data-type for the array, e.g., `numpy.int8`. Default is `numpy.float64`.

order : {'C', 'F'}, optional

Whether to store multidimensional data in C- or Fortran-contiguous (row- or column-wise) order in memory.

Returns **out** : ndarray

Array of zeros with the given shape, dtype, and order.

See also:

zeros_like Return an array of zeros with shape and type of input.

ones_like Return an array of ones with shape and type of input.

empty_like Return an empty array with shape and type of input.

ones Return a new array setting values to one.

empty Return a new uninitialized array.

Examples

```
>>> np.zeros(5)
array([ 0.,  0.,  0.,  0.,  0.])
```

```
>>> np.zeros((5,), dtype=int)
array([0, 0, 0, 0, 0])
```

```
>>> np.zeros((2, 1))
array([[ 0.],
       [ 0.]])
```

```
>>> s = (2,2)
>>> np.zeros(s)
array([[ 0.,  0.],
       [ 0.,  0.]])
```

```
>>> np.zeros((2,), dtype=[('x', 'i4'), ('y', 'i4')]) # custom dtype
array([(0, 0), (0, 0)],
      dtype=[('x', '<i4'), ('y', '<i4')])
```

numpy.**zeros_like**(*a*, *dtype=None*, *order='K'*, *subok=True*)

Return an array of zeros with the same shape and type as a given array.

Parameters **a** : array_like

The shape and data-type of *a* define these same attributes of the returned array.

dtype : data-type, optional

Overrides the data type of the result.

New in version 1.6.0.

order : {'C', 'F', 'A', or 'K'}, optional

Overrides the memory layout of the result. 'C' means C-order, 'F' means F-order, 'A' means 'F' if *a* is Fortran contiguous, 'C' otherwise. 'K' means match the layout of *a* as closely as possible.

New in version 1.6.0.

subok : bool, optional.

If True, then the newly created array will use the sub-class type of 'a', otherwise it will be a base-class array. Defaults to True.

Returns **out** : ndarray

Array of zeros with the same shape and type as *a*.

See also:

ones_like Return an array of ones with shape and type of input.

empty_like Return an empty array with shape and type of input.

zeros Return a new array setting values to zero.

ones Return a new array setting values to one.

empty Return a new uninitialized array.

Examples

```
>>> x = np.arange(6)
>>> x = x.reshape((2, 3))
>>> x
array([[0, 1, 2],
       [3, 4, 5]])
>>> np.zeros_like(x)
array([[0, 0, 0],
       [0, 0, 0]])
```

```
>>> y = np.arange(3, dtype=float)
>>> y
array([ 0.,  1.,  2.])
>>> np.zeros_like(y)
array([ 0.,  0.,  0.])
```

numpy.**full**(*shape*, *fill_value*, *dtype=None*, *order='C'*)

Return a new array of given shape and type, filled with *fill_value*.

Parameters **shape** : int or sequence of ints

Shape of the new array, e.g., `(2, 3)` or `2`.

fill_value : scalar

Fill value.

dtype : data-type, optional

The desired data-type for the array The default, *None*, means
np.array(fill_value).dtype.

order : {'C', 'F'}, optional

Whether to store multidimensional data in C- or Fortran-contiguous (row- or column-wise) order in memory.

Returns **out** : ndarray

Array of *fill_value* with the given shape, dtype, and order.

See also:

zeros_like Return an array of zeros with shape and type of input.

ones_like Return an array of ones with shape and type of input.

empty_like Return an empty array with shape and type of input.

full_like Fill an array with shape and type of input.

zeros Return a new array setting values to zero.

ones Return a new array setting values to one.

empty Return a new uninitialized array.

Examples

```
>>> np.full((2, 2), np.inf)
array([[ inf,  inf],
       [ inf,  inf]])
>>> np.full((2, 2), 10)
array([[10, 10],
       [10, 10]])
```

numpy.**full_like**(*a*, *fill_value*, *dtype=None*, *order='K'*, *subok=True*)

Return a full array with the same shape and type as a given array.

Parameters **a** : array_like

The shape and data-type of *a* define these same attributes of the returned array.

fill_value : scalar

Fill value.

dtype : data-type, optional

Overrides the data type of the result.

order : {'C', 'F', 'A', or 'K'}, optional

Overrides the memory layout of the result. 'C' means C-order, 'F' means F-order, 'A' means 'F' if *a* is Fortran contiguous, 'C' otherwise. 'K' means match the layout of *a* as closely as possible.

subok : bool, optional.

If True, then the newly created array will use the sub-class type of 'a', otherwise it will be a base-class array. Defaults to True.

Returns **out** : ndarray

Array of *fill_value* with the same shape and type as *a*.

See also:

zeros_like Return an array of zeros with shape and type of input.

ones_like Return an array of ones with shape and type of input.

empty_like Return an empty array with shape and type of input.

zeros Return a new array setting values to zero.

ones Return a new array setting values to one.

empty Return a new uninitialized array.

full Fill a new array.

Examples

```
>>> x = np.arange(6, dtype=int)
>>> np.full_like(x, 1)
array([1, 1, 1, 1, 1, 1])
>>> np.full_like(x, 0.1)
array([0, 0, 0, 0, 0, 0])
```

(continues on next page)

(continued from previous page)

```
>>> np.full_like(x, 0.1, dtype=np.double)
array([ 0.1,  0.1,  0.1,  0.1,  0.1,  0.1])
>>> np.full_like(x, np.nan, dtype=np.double)
array([ nan,  nan,  nan,  nan,  nan,  nan])
```

```
>>> y = np.arange(6, dtype=np.double)
>>> np.full_like(y, 0.1)
array([ 0.1,  0.1,  0.1,  0.1,  0.1,  0.1])
```

3.1.2 From existing data

array(object[, dtype, copy, order, subok, ndmin])	Create an array.
asarray(a[, dtype, order])	Convert the input to an array.
asanyarray(a[, dtype, order])	Convert the input to an ndarray, but pass ndarray subclasses through.
ascontiguousarray(a[, dtype])	Return a contiguous array in memory (C order).
asmatrix(data[, dtype])	Interpret the input as a matrix.
copy(a[, order])	Return an array copy of the given object.
frombuffer(buffer[, dtype, count, offset])	Interpret a buffer as a 1-dimensional array.
fromfile(file[, dtype, count, sep])	Construct an array from data in a text or binary file.
fromfunction(function, shape, **kwargs)	Construct an array by executing a function over each coordinate.
fromiter(iterable, dtype[, count])	Create a new 1-dimensional array from an iterable object.
fromstring(string[, dtype, count, sep])	A new 1-D array initialized from text data in a string.
loadtxt(fname[, dtype, comments, delimiter, ...])	Load data from a text file.

numpy.**array**(*object*, *dtype=None*, *copy=True*, *order='K'*, *subok=False*, *ndmin=0*)

Create an array.

Parameters **object** : array_like

An array, any object exposing the array interface, an object whose __array__ method returns an array, or any (nested) sequence.

dtype : data-type, optional

The desired data-type for the array. If not given, then the type will be determined as the minimum type required to hold the objects in the sequence. This argument can only be used to 'upcast' the array. For downcasting, use the .astype(t) method.

copy : bool, optional

If true (default), then the object is copied. Otherwise, a copy will only be made if __array__ returns a copy, if obj is a nested sequence, or if a copy is needed to satisfy any of the other requirements (*dtype*, *order*, etc.).

order : {'K', 'A', 'C', 'F'}, optional

Specify the memory layout of the array. If object is not an array, the newly created array will be in C order (row major) unless 'F' is specified, in which case it will be in Fortran order (column major). If object is an array the following holds.

order	no copy	copy=True
'K'	unchanged	F & C order preserved, otherwise most similar order
'A'	unchanged	F order if input is F and not C, otherwise C order
'C'	C order	C order
'F'	F order	F order

When `copy=False` and a copy is made for other reasons, the result is the same as if `copy=True`, with some exceptions for *A*, see the Notes section. The default order is 'K'.

subok : bool, optional

If True, then sub-classes will be passed-through, otherwise the returned array will be forced to be a base-class array (default).

ndmin : int, optional

Specifies the minimum number of dimensions that the resulting array should have. Ones will be pre-pended to the shape as needed to meet this requirement.

Returns **out** : ndarray

An array object satisfying the specified requirements.

See also:

empty, *empty_like*, *zeros*, *zeros_like*, *ones*, *ones_like*, *full*, *full_like*

Notes

When order is 'A' and `object` is an array in neither 'C' nor 'F' order, and a copy is forced by a change in dtype, then the order of the result is not necessarily 'C' as expected. This is likely a bug.

Examples

```
>>> np.array([1, 2, 3])
array([1, 2, 3])
```

Upcasting:

```
>>> np.array([1, 2, 3.0])
array([ 1.,  2.,  3.])
```

More than one dimension:

```
>>> np.array([[1, 2], [3, 4]])
array([[1, 2],
       [3, 4]])
```

Minimum dimensions 2:

```
>>> np.array([1, 2, 3], ndmin=2)
array([[1, 2, 3]])
```

Type provided:

```
>>> np.array([1, 2, 3], dtype=complex)
array([ 1.+0.j,  2.+0.j,  3.+0.j])
```

Data-type consisting of more than one element:

```
>>> x = np.array([(1,2),(3,4)],dtype=[('a','<i4'),('b','<i4')])
>>> x['a']
array([1, 3])
```

Creating an array from sub-classes:

```
>>> np.array(np.mat('1 2; 3 4'))
array([[1, 2],
       [3, 4]])
```

```
>>> np.array(np.mat('1 2; 3 4'), subok=True)
matrix([[1, 2],
        [3, 4]])
```

numpy.**asarray**(*a*, *dtype=None*, *order=None*)

Convert the input to an array.

Parameters **a** : array_like

Input data, in any form that can be converted to an array. This includes lists, lists of tuples, tuples, tuples of tuples, tuples of lists and ndarrays.

dtype : data-type, optional

By default, the data-type is inferred from the input data.

order : {'C', 'F'}, optional

Whether to use row-major (C-style) or column-major (Fortran-style) memory representation. Defaults to 'C'.

Returns **out** : ndarray

Array interpretation of *a*. No copy is performed if the input is already an ndarray with matching dtype and order. If *a* is a subclass of ndarray, a base class ndarray is returned.

See also:

asanyarray Similar function which passes through subclasses.

ascontiguousarray Convert input to a contiguous array.

asfarray Convert input to a floating point ndarray.

asfortranarray Convert input to an ndarray with column-major memory order.

asarray_chkfinite Similar function which checks input for NaNs and Infs.

fromiter Create an array from an iterator.

fromfunction Construct an array by executing a function on grid positions.

Examples

Convert a list into an array:

```
>>> a = [1, 2]
>>> np.asarray(a)
array([1, 2])
```

Existing arrays are not copied:

```
>>> a = np.array([1, 2])
>>> np.asarray(a) is a
True
```

If *dtype* is set, array is copied only if dtype does not match:

```
>>> a = np.array([1, 2], dtype=np.float32)
>>> np.asarray(a, dtype=np.float32) is a
True
>>> np.asarray(a, dtype=np.float64) is a
False
```

Contrary to *asanyarray*, ndarray subclasses are not passed through:

```
>>> issubclass(np.matrix, np.ndarray)
True
>>> a = np.matrix([[1, 2]])
>>> np.asarray(a) is a
False
>>> np.asanyarray(a) is a
True
```

numpy.**asanyarray**(*a*, *dtype=None*, *order=None*)

Convert the input to an ndarray, but pass ndarray subclasses through.

Parameters **a** : array_like

Input data, in any form that can be converted to an array. This includes scalars, lists, lists of tuples, tuples, tuples of tuples, tuples of lists, and ndarrays.

dtype : data-type, optional

By default, the data-type is inferred from the input data.

order : {'C', 'F'}, optional

Whether to use row-major (C-style) or column-major (Fortran-style) memory representation. Defaults to 'C'.

Returns **out** : ndarray or an ndarray subclass

Array interpretation of *a*. If *a* is an ndarray or a subclass of ndarray, it is returned as-is and no copy is performed.

See also:

asarray Similar function which always returns ndarrays.

ascontiguousarray Convert input to a contiguous array.

asfarray Convert input to a floating point ndarray.

asfortranarray Convert input to an ndarray with column-major memory order.

asarray_chkfinite Similar function which checks input for NaNs and Infs.

fromiter Create an array from an iterator.

fromfunction Construct an array by executing a function on grid positions.

Examples

Convert a list into an array:

```
>>> a = [1, 2]
>>> np.asanyarray(a)
array([1, 2])
```

Instances of *ndarray* subclasses are passed through as-is:

```
>>> a = np.matrix([1, 2])
>>> np.asanyarray(a) is a
True
```

numpy.**ascontiguousarray**(*a*, *dtype=None*)

Return a contiguous array in memory (C order).

Parameters **a** : array_like

Input array.

dtype : str or dtype object, optional

Data-type of returned array.

Returns **out** : ndarray

Contiguous array of same shape and content as *a*, with type *dtype* if specified.

See also:

asfortranarray Convert input to an ndarray with column-major memory order.

require Return an ndarray that satisfies requirements.

ndarray.flags Information about the memory layout of the array.

Examples

```
>>> x = np.arange(6).reshape(2,3)
>>> np.ascontiguousarray(x, dtype=np.float32)
array([[ 0.,  1.,  2.],
       [ 3.,  4.,  5.]], dtype=float32)
>>> x.flags['C_CONTIGUOUS']
True
```

numpy.**copy**(*a*, *order='K'*)

Return an array copy of the given object.

Parameters **a** : array_like

Input data.

order : {'C', 'F', 'A', 'K'}, optional

Controls the memory layout of the copy. 'C' means C-order, 'F' means F-order, 'A' means 'F' if *a* is Fortran contiguous, 'C' otherwise. 'K' means match the layout of *a* as closely as possible. (Note that this function and *ndarray.copy* are very similar, but have different default values for their order= arguments.)

Returns **arr** : ndarray

Array interpretation of *a*.

Notes

This is equivalent to:

```
>>> np.array(a, copy=True)
```

Examples

Create an array x, with a reference y and a copy z:

```
>>> x = np.array([1, 2, 3])
>>> y = x
>>> z = np.copy(x)
```

Note that, when we modify x, y changes, but not z:

```
>>> x[0] = 10
>>> x[0] == y[0]
True
>>> x[0] == z[0]
False
```

numpy.**frombuffer**(*buffer*, *dtype=float*, *count=-1*, *offset=0*)

Interpret a buffer as a 1-dimensional array.

Parameters **buffer** : buffer_like

An object that exposes the buffer interface.

dtype : data-type, optional

Data-type of the returned array; default: float.

count : int, optional

Number of items to read. `-1` means all data in the buffer.

offset : int, optional

Start reading the buffer from this offset (in bytes); default: 0.

Notes

If the buffer has data that is not in machine byte-order, this should be specified as part of the data-type, e.g.:

```
>>> dt = np.dtype(int)
>>> dt = dt.newbyteorder('>')
>>> np.frombuffer(buf, dtype=dt)
```

The data of the resulting array will not be byteswapped, but will be interpreted correctly.

Examples

```
>>> s = 'hello world'
>>> np.frombuffer(s, dtype='S1', count=5, offset=6)
array(['w', 'o', 'r', 'l', 'd'],
      dtype='|S1')
```

```
>>> np.frombuffer(b'\x01\x02', dtype=np.uint8)
array([1, 2], dtype=uint8)
>>> np.frombuffer(b'\x01\x02\x03\x04\x05', dtype=np.uint8, count=3)
array([1, 2, 3], dtype=uint8)
```

numpy.**fromfile**(*file*, *dtype=float*, *count=-1*, *sep=''*)

Construct an array from data in a text or binary file.

A highly efficient way of reading binary data with a known data-type, as well as parsing simply formatted text files. Data written using the *tofile* method can be read using this function.

Parameters **file** : file or str

Open file object or filename.

dtype : data-type

Data type of the returned array. For binary files, it is used to determine the size and byte-order of the items in the file.

count : int

Number of items to read. `-1` means all items (i.e., the complete file).

sep : str

Separator between items if file is a text file. Empty ("") separator means the file should be treated as binary. Spaces (" ") in the separator match zero or more whitespace characters. A separator consisting only of spaces must match at least one whitespace.

See also:

load, *save*, *ndarray.tofile*

loadtxt More flexible way of loading data from a text file.

Notes

Do not rely on the combination of *tofile* and *fromfile* for data storage, as the binary files generated are are not platform independent. In particular, no byte-order or data-type information is saved. Data can be stored in the platform independent `.npy` format using *save* and *load* instead.

Examples

Construct an ndarray:

```
>>> dt = np.dtype([('time', [('min', int), ('sec', int)]),
...                ('temp', float)])
>>> x = np.zeros((1,), dtype=dt)
>>> x['time']['min'] = 10; x['temp'] = 98.25
>>> x
array([((10, 0), 98.25)],
      dtype=[('time', [('min', '<i4'), ('sec', '<i4')]), ('temp', '<f8')])
```

Save the raw data to disk:

```
>>> import os
>>> fname = os.tmpnam()
>>> x.tofile(fname)
```

Read the raw data from disk:

```
>>> np.fromfile(fname, dtype=dt)
array([((10, 0), 98.25)],
      dtype=[('time', [('min', '<i4'), ('sec', '<i4')]), ('temp', '<f8')])
```

The recommended way to store and load data:

```
>>> np.save(fname, x)
>>> np.load(fname + '.npy')
array([((10, 0), 98.25)],
      dtype=[('time', [('min', '<i4'), ('sec', '<i4')]), ('temp', '<f8')])
```

numpy.**fromfunction**(*function*, *shape*, ***kwargs*)

Construct an array by executing a function over each coordinate.

The resulting array therefore has a value `fn(x, y, z)` at coordinate `(x, y, z)`.

Parameters **function** : callable

The function is called with N parameters, where N is the rank of `shape`. Each parameter represents the coordinates of the array varying along a specific axis. For example, if `shape` were `(2, 2)`, then the parameters would be `array([[0, 0], [1, 1]])` and `array([[0, 1], [0, 1]])`

shape : (N,) tuple of ints

Shape of the output array, which also determines the shape of the coordinate arrays passed to *function*.

dtype : data-type, optional

Data-type of the coordinate arrays passed to *function*. By default, *dtype* is float.

Returns **fromfunction** : any

The result of the call to *function* is passed back directly. Therefore the shape of *fromfunction* is completely determined by *function*. If *function* returns a scalar value, the shape of *fromfunction* would match the `shape` parameter.

See also:

indices, *meshgrid*

Notes

Keywords other than `dtype` are passed to *function*.

Examples

```
>>> np.fromfunction(lambda i, j: i == j, (3, 3), dtype=int)
array([[ True, False, False],
       [False,  True, False],
       [False, False,  True]])
```

```
>>> np.fromfunction(lambda i, j: i + j, (3, 3), dtype=int)
array([[0, 1, 2],
       [1, 2, 3],
       [2, 3, 4]])
```

numpy.**fromiter**(*iterable*, *dtype*, *count=-1*)

Create a new 1-dimensional array from an iterable object.

Parameters **iterable** : iterable object

An iterable object providing data for the array.

dtype : data-type

The data-type of the returned array.

count : int, optional

The number of items to read from *iterable*. The default is -1, which means all data is read.

Returns **out** : ndarray

The output array.

Notes

Specify *count* to improve performance. It allows `fromiter` to pre-allocate the output array, instead of resizing it on demand.

Examples

```
>>> iterable = (x*x for x in range(5))
>>> np.fromiter(iterable, float)
array([  0.,   1.,   4.,   9.,  16.])
```

numpy.**fromstring**(*string*, *dtype=float*, *count=-1*, *sep=''*)

A new 1-D array initialized from text data in a string.

Parameters **string** : str

A string containing the data.

dtype : data-type, optional

The data type of the array; default: float. For binary input data, the data must be in exactly this format.

count : int, optional

Read this number of *dtype* elements from the data. If this is negative (the default), the count will be determined from the length of the data.

sep : str, optional

The string separating numbers in the data; extra whitespace between elements is also ignored.

Deprecated since version 1.14: If this argument is not provided, *fromstring* falls back on the behaviour of *frombuffer* after encoding unicode string inputs as either utf-8 (python 3), or the default encoding (python 2).

Returns **arr** : ndarray

The constructed array.

Raises **ValueError**

If the string is not the correct size to satisfy the requested *dtype* and *count*.

See also:

frombuffer, *fromfile*, *fromiter*

Examples

```
>>> np.fromstring('1 2', dtype=int, sep=' ')
array([1, 2])
>>> np.fromstring('1, 2', dtype=int, sep=',')
array([1, 2])
```

numpy.**loadtxt**(*fname*, *dtype=<class 'float'>*, *comments='#'*, *delimiter=None*, *converters=None*, *skiprows=0*, *usecols=None*, *unpack=False*, *ndmin=0*, *encoding='bytes'*)

Load data from a text file.

Each row in the text file must have the same number of values.

Parameters **fname** : file, str, or pathlib.Path

File, filename, or generator to read. If the filename extension is `.gz` or `.bz2`, the file is first decompressed. Note that generators should return byte strings for Python 3k.

dtype : data-type, optional

Data-type of the resulting array; default: float. If this is a structured data-type, the resulting array will be 1-dimensional, and each row will be interpreted as an element of the array. In this case, the number of columns used must match the number of fields in the data-type.

comments : str or sequence of str, optional

The characters or list of characters used to indicate the start of a comment. For backwards compatibility, byte strings will be decoded as 'latin1'. The default is '#'.

delimiter : str, optional

The string used to separate values. For backwards compatibility, byte strings will be decoded as 'latin1'. The default is whitespace.

converters : dict, optional

A dictionary mapping column number to a function that will convert that column to a float. E.g., if column 0 is a date string: `converters = {0: datestr2num}`. Converters can also be used to provide a default value for missing data (but see also *genfromtxt*): `converters = {3: lambda s: float(s.strip() or 0)}`. Default: None.

skiprows : int, optional

Skip the first *skiprows* lines; default: 0.

usecols : int or sequence, optional

Which columns to read, with 0 being the first. For example, usecols = (1,4,5) will extract the 2nd, 5th and 6th columns. The default, None, results in all columns being read.

Changed in version 1.11.0: When a single column has to be read it is possible to use an integer instead of a tuple. E.g `usecols = 3` reads the fourth column the same way as *usecols = (3,)*‘ would.

unpack : bool, optional

If True, the returned array is transposed, so that arguments may be unpacked using `x, y, z = loadtxt(...)`. When used with a structured data-type, arrays are returned for each field. Default is False.

ndmin : int, optional

The returned array will have at least *ndmin* dimensions. Otherwise mono-dimensional axes will be squeezed. Legal values: 0 (default), 1 or 2.

New in version 1.6.0.

encoding : str, optional

Encoding used to decode the inputfile. Does not apply to input streams. The special value ‘bytes’ enables backward compatibility workarounds that ensures you receive byte arrays as results if possible and passes latin1 encoded strings to converters. Override this value to receive unicode arrays and pass strings as input to converters. If set to None the system default is used. The default value is ‘bytes’.

New in version 1.14.0.

Returns **out** : ndarray

Data read from the text file.

See also:

load, *fromstring*, *fromregex*

genfromtxt Load data with missing values handled as specified.

scipy.io.loadmat reads MATLAB data files

Notes

This function aims to be a fast reader for simply formatted files. The *genfromtxt* function provides more sophisticated handling of, e.g., lines with missing values.

New in version 1.10.0.

The strings produced by the Python float.hex method can be used as input for floats.

Examples

```
>>> from io import StringIO   # StringIO behaves like a file object
>>> c = StringIO("0 1\n2 3")
>>> np.loadtxt(c)
array([[ 0.,  1.],
       [ 2.,  3.]])
```

```
>>> d = StringIO("M 21 72\nF 35 58")
>>> np.loadtxt(d, dtype={'names': ('gender', 'age', 'weight'),
...                      'formats': ('S1', 'i4', 'f4')})
array([('M', 21, 72.0), ('F', 35, 58.0)],
      dtype=[('gender', '|S1'), ('age', '<i4'), ('weight', '<f4')])
```

```
>>> c = StringIO("1,0,2\n3,0,4")
>>> x, y = np.loadtxt(c, delimiter=',', usecols=(0, 2), unpack=True)
>>> x
array([ 1.,  3.])
>>> y
array([ 2.,  4.])
```

3.1.3 Creating record arrays (`numpy.rec`)

Note: `numpy.rec` is the preferred alias for `numpy.core.records`.

core.records.array(obj[, dtype, shape, ...])	Construct a record array from a wide-variety of objects.
core.records.fromarrays(arrayList[, dtype, ...])	create a record array from a (flat) list of arrays
core.records.fromrecords(recList[, dtype, ...])	create a recarray from a list of records in text form
core.records.fromstring(datastring[, dtype, ...])	create a (read-only) record array from binary data contained in a string
core.records.fromfile(fd[, dtype, shape, ...])	Create an array from binary file data

numpy.core.records.**array**(*obj*, *dtype=None*, *shape=None*, *offset=0*, *strides=None*, *formats=None*, *names=None*, *titles=None*, *aligned=False*, *byteorder=None*, *copy=True*)

Construct a record array from a wide-variety of objects.

numpy.core.records.**fromarrays**(*arrayList*, *dtype=None*, *shape=None*, *formats=None*, *names=None*, *titles=None*, *aligned=False*, *byteorder=None*)

create a record array from a (flat) list of arrays

```
>>> x1=np.array([1,2,3,4])
>>> x2=np.array(['a','dd','xyz','12'])
>>> x3=np.array([1.1,2,3,4])
>>> r = np.core.records.fromarrays([x1,x2,x3],names='a,b,c')
>>> print(r[1])
(2, 'dd', 2.0)
>>> x1[1]=34
>>> r.a
array([1, 2, 3, 4])
```

numpy.core.records.**fromrecords**(*recList*, *dtype=None*, *shape=None*, *formats=None*, *names=None*, *titles=None*, *aligned=False*, *byteorder=None*)

create a recarray from a list of records in text form

The data in the same field can be heterogeneous, they will be promoted to the highest data type. This method is intended for creating smaller record arrays. If used to create large array without formats defined

r=fromrecords([(2,3.,'abc')]*100000)

it can be slow.

If formats is None, then this will auto-detect formats. Use list of tuples rather than list of lists for faster processing.

```
>>> r=np.core.records.fromrecords([(456,'dbe',1.2),(2,'de',1.3)],
... names='col1,col2,col3')
>>> print(r[0])
(456, 'dbe', 1.2)
>>> r.col1
array([456,   2])
>>> r.col2
array(['dbe', 'de'],
      dtype='|S3')
>>> import pickle
>>> print(pickle.loads(pickle.dumps(r)))
[(456, 'dbe', 1.2) (2, 'de', 1.3)]
```

numpy.core.records.**fromstring**(*datastring*, *dtype=None*, *shape=None*, *offset=0*, *formats=None*, *names=None*, *titles=None*, *aligned=False*, *byteorder=None*)

create a (read-only) record array from binary data contained in a string

numpy.core.records.**fromfile**(*fd*, *dtype=None*, *shape=None*, *offset=0*, *formats=None*, *names=None*, *titles=None*, *aligned=False*, *byteorder=None*)

Create an array from binary file data

If file is a string then that file is opened, else it is assumed to be a file object. The file object must support random access (i.e. it must have tell and seek methods).

```
>>> from tempfile import TemporaryFile
>>> a = np.empty(10,dtype='f8,i4,a5')
>>> a[5] = (0.5,10,'abcde')
>>>
>>> fd=TemporaryFile()
>>> a = a.newbyteorder('<')
>>> a.tofile(fd)
>>>
>>> fd.seek(0)
>>> r=np.core.records.fromfile(fd, formats='f8,i4,a5', shape=10,
... byteorder='<')
>>> print(r[5])
(0.5, 10, 'abcde')
>>> r.shape
(10,)
```

3.1.4 Creating character arrays (`numpy.char`)

Note: `numpy.char` is the preferred alias for `numpy.core.defchararray`.

core.defchararray.array(obj[, itemsize, ...])	Create a *chararray*.
core.defchararray.asarray(obj[, itemsize, ...])	Convert the input to a *chararray*, copying the data only if necessary.

numpy.core.defchararray.**asarray**(*obj*, *itemsize=None*, *unicode=None*, *order=None*)

Convert the input to a *chararray*, copying the data only if necessary.

Versus a regular NumPy array of type *str* or *unicode*, this class adds the following functionality:

1. values automatically have whitespace removed from the end when indexed
2. comparison operators automatically remove whitespace from the end when comparing values
3. vectorized string operations are provided as methods (e.g. *str.endswith*) and infix operators (e.g. +, *, ‘‘%‘‘)

Parameters **obj** : array of str or unicode-like

itemsize : int, optional

itemsize is the number of characters per scalar in the resulting array. If *itemsize* is None, and *obj* is an object array or a Python list, the *itemsize* will be automatically determined. If *itemsize* is provided and *obj* is of type str or unicode, then the *obj* string will be chunked into *itemsize* pieces.

unicode : bool, optional

When true, the resulting *chararray* can contain Unicode characters, when false only 8-bit characters. If unicode is *None* and *obj* is one of the following:

- a *chararray*,
- an ndarray of type *str* or ‘unicode‘
- a Python str or unicode object,

then the unicode setting of the output array will be automatically determined.

order : {‘C’, ‘F’}, optional

Specify the order of the array. If order is ‘C’ (default), then the array will be in C-contiguous order (last-index varies the fastest). If order is ‘F’, then the returned array will be in Fortran-contiguous order (first-index varies the fastest).

3.1.5 Numerical ranges

arange([start,] stop[, step,][, dtype])	Return evenly spaced values within a given interval.
linspace(start, stop[, num, endpoint, ...])	Return evenly spaced numbers over a specified interval.
logspace(start, stop[, num, endpoint, base, ...])	Return numbers spaced evenly on a log scale.
geomspace(start, stop[, num, endpoint, dtype])	Return numbers spaced evenly on a log scale (a geometric progression).
meshgrid(*xi, **kwargs)	Return coordinate matrices from coordinate vectors.
mgrid	*nd_grid* instance which returns a dense multi-dimensional “meshgrid”.

Continued on next page

Table 5 – continued from previous page

ogrid	*nd_grid* instance which returns an open multi-dimensional "meshgrid".

numpy.**arange**([*start*], *stop*[, *step*], *dtype=None*)

Return evenly spaced values within a given interval.

Values are generated within the half-open interval `[start, stop)` (in other words, the interval including *start* but excluding *stop*). For integer arguments the function is equivalent to the Python built-in range function, but returns an ndarray rather than a list.

When using a non-integer step, such as 0.1, the results will often not be consistent. It is better to use `linspace` for these cases.

Parameters **start** : number, optional

Start of interval. The interval includes this value. The default start value is 0.

stop : number

End of interval. The interval does not include this value, except in some cases where *step* is not an integer and floating point round-off affects the length of *out*.

step : number, optional

Spacing between values. For any output *out*, this is the distance between two adjacent values, `out[i+1] - out[i]`. The default step size is 1. If *step* is specified as a position argument, *start* must also be given.

dtype : dtype

The type of the output array. If *dtype* is not given, infer the data type from the other input arguments.

Returns **arange** : ndarray

Array of evenly spaced values.

For floating point arguments, the length of the result is `ceil((stop - start)/ step)`. Because of floating point overflow, this rule may result in the last element of *out* being greater than *stop*.

See also:

linspace Evenly spaced numbers with careful handling of endpoints.

ogrid Arrays of evenly spaced numbers in N-dimensions.

mgrid Grid-shaped arrays of evenly spaced numbers in N-dimensions.

Examples

```
>>> np.arange(3)
array([0, 1, 2])
>>> np.arange(3.0)
array([ 0.,  1.,  2.])
>>> np.arange(3,7)
array([3, 4, 5, 6])
>>> np.arange(3,7,2)
array([3, 5])
```

numpy.**linspace**(*start*, *stop*, *num=50*, *endpoint=True*, *retstep=False*, *dtype=None*)

Return evenly spaced numbers over a specified interval.

Returns *num* evenly spaced samples, calculated over the interval [*start*, *stop*].

The endpoint of the interval can optionally be excluded.

Parameters **start** : scalar

The starting value of the sequence.

stop : scalar

The end value of the sequence, unless *endpoint* is set to False. In that case, the sequence consists of all but the last of `num + 1` evenly spaced samples, so that *stop* is excluded. Note that the step size changes when *endpoint* is False.

num : int, optional

Number of samples to generate. Default is 50. Must be non-negative.

endpoint : bool, optional

If True, *stop* is the last sample. Otherwise, it is not included. Default is True.

retstep : bool, optional

If True, return (*samples*, *step*), where *step* is the spacing between samples.

dtype : dtype, optional

The type of the output array. If *dtype* is not given, infer the data type from the other input arguments.

New in version 1.9.0.

Returns **samples** : ndarray

There are *num* equally spaced samples in the closed interval `[start, stop]` or the half-open interval `[start, stop)` (depending on whether *endpoint* is True or False).

step : float, optional

Only returned if *retstep* is True

Size of spacing between samples.

See also:

arange Similar to *linspace*, but uses a step size (instead of the number of samples).

logspace Samples uniformly distributed in log space.

Examples

```
>>> np.linspace(2.0, 3.0, num=5)
array([ 2.  ,  2.25,  2.5 ,  2.75,  3.  ])
>>> np.linspace(2.0, 3.0, num=5, endpoint=False)
array([ 2. ,  2.2,  2.4,  2.6,  2.8])
>>> np.linspace(2.0, 3.0, num=5, retstep=True)
(array([ 2.  ,  2.25,  2.5 ,  2.75,  3.  ]), 0.25)
```

Graphical illustration:

```
>>> import matplotlib.pyplot as plt
>>> N = 8
>>> y = np.zeros(N)
>>> x1 = np.linspace(0, 10, N, endpoint=True)
>>> x2 = np.linspace(0, 10, N, endpoint=False)
>>> plt.plot(x1, y, 'o')
[<matplotlib.lines.Line2D object at 0x...>]
>>> plt.plot(x2, y + 0.5, 'o')
[<matplotlib.lines.Line2D object at 0x...>]
>>> plt.ylim([-0.5, 1])
(-0.5, 1)
>>> plt.show()
```

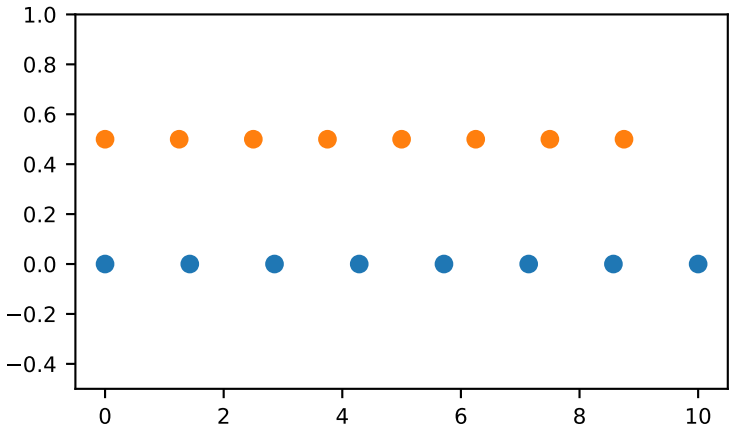

`numpy.`**`logspace`**(*start*, *stop*, *num=50*, *endpoint=True*, *base=10.0*, *dtype=None*)

Return numbers spaced evenly on a log scale.

In linear space, the sequence starts at `base ** start` (*base* to the power of *start*) and ends with `base ** stop` (see *endpoint* below).

Parameters **start** : float

`base ** start` is the starting value of the sequence.

stop : float

`base ** stop` is the final value of the sequence, unless *endpoint* is False. In that case, `num + 1` values are spaced over the interval in log-space, of which all but the last (a sequence of length *num*) are returned.

num : integer, optional

Number of samples to generate. Default is 50.

endpoint : boolean, optional

If true, *stop* is the last sample. Otherwise, it is not included. Default is True.

base : float, optional

The base of the log space. The step size between the elements in `ln(samples) / ln(base)` (or `log_base(samples)`) is uniform. Default is 10.0.

dtype : dtype

The type of the output array. If *dtype* is not given, infer the data type from the other input arguments.

Returns **samples** : ndarray

num samples, equally spaced on a log scale.

See also:

arange Similar to linspace, with the step size specified instead of the number of samples. Note that, when used with a float endpoint, the endpoint may or may not be included.

linspace Similar to logspace, but with the samples uniformly distributed in linear space, instead of log space.

geomspace Similar to logspace, but with endpoints specified directly.

Notes

Logspace is equivalent to the code

```
>>> y = np.linspace(start, stop, num=num, endpoint=endpoint)
...
>>> power(base, y).astype(dtype)
...
```

Examples

```
>>> np.logspace(2.0, 3.0, num=4)
array([  100.         ,   215.443469   ,   464.15888336,  1000.        ])
>>> np.logspace(2.0, 3.0, num=4, endpoint=False)
array([ 100.         ,  177.827941   ,  316.22776602,  562.34132519])
>>> np.logspace(2.0, 3.0, num=4, base=2.0)
array([ 4.         ,  5.0396842 ,  6.34960421,  8.        ])
```

Graphical illustration:

```
>>> import matplotlib.pyplot as plt
>>> N = 10
>>> x1 = np.logspace(0.1, 1, N, endpoint=True)
>>> x2 = np.logspace(0.1, 1, N, endpoint=False)
>>> y = np.zeros(N)
>>> plt.plot(x1, y, 'o')
[<matplotlib.lines.Line2D object at 0x...>]
>>> plt.plot(x2, y + 0.5, 'o')
[<matplotlib.lines.Line2D object at 0x...>]
>>> plt.ylim([-0.5, 1])
(-0.5, 1)
>>> plt.show()
```

numpy.**geomspace**(*start*, *stop*, *num=50*, *endpoint=True*, *dtype=None*)

Return numbers spaced evenly on a log scale (a geometric progression).

This is similar to *logspace*, but with endpoints specified directly. Each output sample is a constant multiple of the previous.

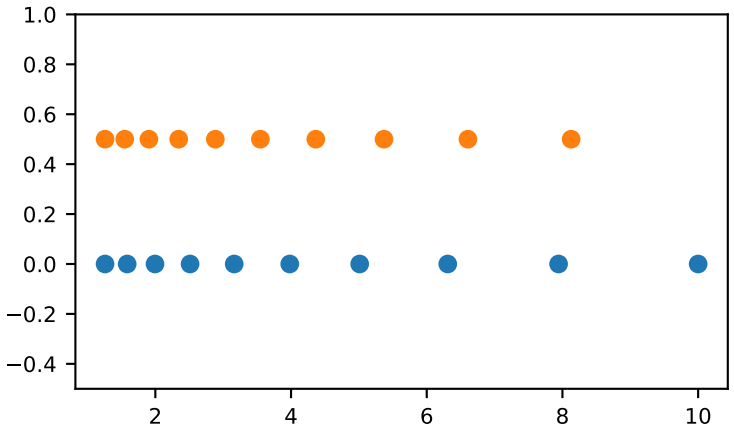

Parameters **start** : scalar

The starting value of the sequence.

stop : scalar

The final value of the sequence, unless *endpoint* is False. In that case, `num + 1` values are spaced over the interval in log-space, of which all but the last (a sequence of length *num*) are returned.

num : integer, optional

Number of samples to generate. Default is 50.

endpoint : boolean, optional

If true, *stop* is the last sample. Otherwise, it is not included. Default is True.

dtype : dtype

The type of the output array. If `dtype` is not given, infer the data type from the other input arguments.

Returns **samples** : ndarray

num samples, equally spaced on a log scale.

See also:

`logspace` Similar to geomspace, but with endpoints specified using log and base.

`linspace` Similar to geomspace, but with arithmetic instead of geometric progression.

`arange` Similar to linspace, with the step size specified instead of the number of samples.

Notes

If the inputs or dtype are complex, the output will follow a logarithmic spiral in the complex plane. (There are an infinite number of spirals passing through two points; the output will follow the shortest such path.)

Examples

```
>>> np.geomspace(1, 1000, num=4)
array([    1.,    10.,   100.,  1000.])
>>> np.geomspace(1, 1000, num=3, endpoint=False)
array([   1.,   10.,  100.])
>>> np.geomspace(1, 1000, num=4, endpoint=False)
array([   1.        ,    5.62341325,   31.6227766 ,  177.827941  ])
>>> np.geomspace(1, 256, num=9)
array([   1.,    2.,    4.,    8.,   16.,   32.,   64.,  128.,  256.])
```

Note that the above may not produce exact integers:

```
>>> np.geomspace(1, 256, num=9, dtype=int)
array([  1,   2,   4,   7,  16,  32,  63, 127, 256])
>>> np.around(np.geomspace(1, 256, num=9)).astype(int)
array([  1,   2,   4,   8,  16,  32,  64, 128, 256])
```

Negative, decreasing, and complex inputs are allowed:

```
>>> np.geomspace(1000, 1, num=4)
array([ 1000.,   100.,    10.,     1.])
>>> np.geomspace(-1000, -1, num=4)
array([-1000.,  -100.,   -10.,    -1.])
>>> np.geomspace(1j, 1000j, num=4)  # Straight line
array([ 0.   +1.j,  0.  +10.j,  0. +100.j,  0.+1000.j])
>>> np.geomspace(-1+0j, 1+0j, num=5)  # Circle
array([-1.00000000+0.j        , -0.70710678+0.70710678j,
        0.00000000+1.j        ,  0.70710678+0.70710678j,
        1.00000000+0.j        ])
```

Graphical illustration of `endpoint` parameter:

```
>>> import matplotlib.pyplot as plt
>>> N = 10
>>> y = np.zeros(N)
>>> plt.semilogx(np.geomspace(1, 1000, N, endpoint=True), y + 1, 'o')
>>> plt.semilogx(np.geomspace(1, 1000, N, endpoint=False), y + 2, 'o')
>>> plt.axis([0.5, 2000, 0, 3])
>>> plt.grid(True, color='0.7', linestyle='-', which='both', axis='both')
>>> plt.show()
```

numpy.**meshgrid**(**xi*, ***kwargs*)

Return coordinate matrices from coordinate vectors.

Make N-D coordinate arrays for vectorized evaluations of N-D scalar/vector fields over N-D grids, given one-dimensional coordinate arrays x1, x2,..., xn.

Changed in version 1.9: 1-D and 0-D cases are allowed.

Parameters **x1, x2,..., xn** : array_like

1-D arrays representing the coordinates of a grid.

indexing : {'xy', 'ij'}, optional

Cartesian ('xy', default) or matrix ('ij') indexing of output. See Notes for more details.

New in version 1.7.0.

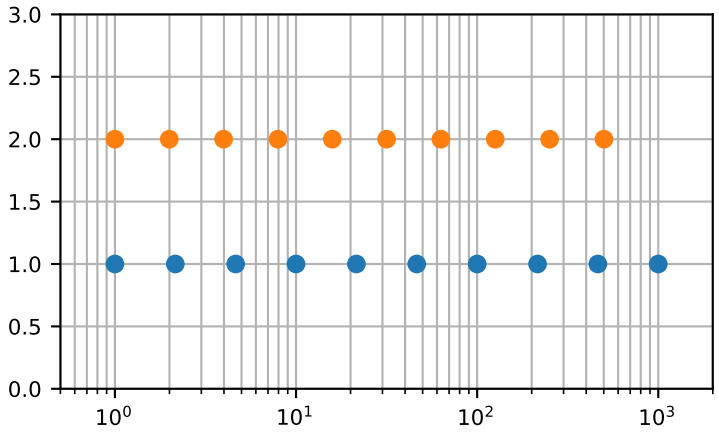

sparse : bool, optional

If True a sparse grid is returned in order to conserve memory. Default is False.

New in version 1.7.0.

copy : bool, optional

If False, a view into the original arrays are returned in order to conserve memory. Default is True. Please note that `sparse=False, copy=False` will likely return non-contiguous arrays. Furthermore, more than one element of a broadcast array may refer to a single memory location. If you need to write to the arrays, make copies first.

New in version 1.7.0.

Returns **X1, X2,..., XN** : ndarray

For vectors *x1*, *x2*,..., 'xn' with lengths `Ni=len(xi)` , return `(N1, N2, N3,...Nn)` shaped arrays if indexing='ij' or `(N2, N1, N3,...Nn)` shaped arrays if indexing='xy' with the elements of *xi* repeated to fill the matrix along the first dimension for *x1*, the second for *x2* and so on.

See also:

`index_tricks.mgrid` Construct a multi-dimensional "meshgrid" using indexing notation.

`index_tricks.ogrid` Construct an open multi-dimensional "meshgrid" using indexing notation.

Notes

This function supports both indexing conventions through the indexing keyword argument. Giving the string 'ij' returns a meshgrid with matrix indexing, while 'xy' returns a meshgrid with Cartesian indexing. In the 2-D case with inputs of length M and N, the outputs are of shape (N, M) for 'xy' indexing and (M, N) for 'ij' indexing. In the 3-D case with inputs of length M, N and P, outputs are of shape (N, M, P) for 'xy' indexing and (M, N, P) for 'ij' indexing. The difference is illustrated by the following code snippet:

```
xv, yv = np.meshgrid(x, y, sparse=False, indexing='ij')
for i in range(nx):
    for j in range(ny):
        # treat xv[i,j], yv[i,j]

xv, yv = np.meshgrid(x, y, sparse=False, indexing='xy')
for i in range(nx):
    for j in range(ny):
        # treat xv[j,i], yv[j,i]
```

In the 1-D and 0-D case, the indexing and sparse keywords have no effect.

Examples

```
>>> nx, ny = (3, 2)
>>> x = np.linspace(0, 1, nx)
>>> y = np.linspace(0, 1, ny)
>>> xv, yv = np.meshgrid(x, y)
>>> xv
array([[ 0. ,  0.5,  1. ],
       [ 0. ,  0.5,  1. ]])
>>> yv
array([[ 0.,  0.,  0.],
       [ 1.,  1.,  1.]])
>>> xv, yv = np.meshgrid(x, y, sparse=True)  # make sparse output arrays
>>> xv
array([[ 0. ,  0.5,  1. ]])
>>> yv
array([[ 0.],
       [ 1.]])
```

meshgrid is very useful to evaluate functions on a grid.

```
>>> x = np.arange(-5, 5, 0.1)
>>> y = np.arange(-5, 5, 0.1)
>>> xx, yy = np.meshgrid(x, y, sparse=True)
>>> z = np.sin(xx**2 + yy**2) / (xx**2 + yy**2)
>>> h = plt.contourf(x,y,z)
```

numpy.**mgrid = <numpy.lib.index_tricks.nd_grid object>**

nd_grid instance which returns a dense multi-dimensional "meshgrid".

An instance of `numpy.lib.index_tricks.nd_grid` which returns an dense (or fleshed out) mesh-grid when indexed, so that each returned argument has the same shape. The dimensions and number of the output arrays are equal to the number of indexing dimensions. If the step length is not a complex number, then the stop is not inclusive.

However, if the step length is a **complex number** (e.g. 5j), then the integer part of its magnitude is interpreted as specifying the number of points to create between the start and stop values, where the stop value **is inclusive**.

Returns mesh-grid *ndarrays* all of the same dimensions

See also:

numpy.lib.index_tricks.nd_grid class of *ogrid* and *mgrid* objects

ogrid like mgrid but returns open (not fleshed out) mesh grids

*r_* array concatenator

Examples

```
>>> np.mgrid[0:5,0:5]
array([[[0, 0, 0, 0, 0],
        [1, 1, 1, 1, 1],
        [2, 2, 2, 2, 2],
        [3, 3, 3, 3, 3],
        [4, 4, 4, 4, 4]],
       [[0, 1, 2, 3, 4],
        [0, 1, 2, 3, 4],
        [0, 1, 2, 3, 4],
        [0, 1, 2, 3, 4],
        [0, 1, 2, 3, 4]]])
>>> np.mgrid[-1:1:5j]
array([-1. , -0.5,  0. ,  0.5,  1. ])
```

numpy.**ogrid = <numpy.lib.index_tricks.nd_grid object>**

nd_grid instance which returns an open multi-dimensional "meshgrid".

An instance of `numpy.lib.index_tricks.nd_grid` which returns an open (i.e. not fleshed out) mesh-grid when indexed, so that only one dimension of each returned array is greater than 1. The dimension and number of the output arrays are equal to the number of indexing dimensions. If the step length is not a complex number, then the stop is not inclusive.

However, if the step length is a **complex number** (e.g. 5j), then the integer part of its magnitude is interpreted as specifying the number of points to create between the start and stop values, where the stop value **is inclusive**.

Returns mesh-grid *ndarrays* with only one dimension $\neq 1$

See also:

np.lib.index_tricks.nd_grid class of *ogrid* and *mgrid* objects

mgrid like *ogrid* but returns dense (or fleshed out) mesh grids

*r_* array concatenator

Examples

```
>>> from numpy import ogrid
>>> ogrid[-1:1:5j]
array([-1. , -0.5,  0. ,  0.5,  1. ])
>>> ogrid[0:5,0:5]
[array([[0],
        [1],
        [2],
        [3],
        [4]]), array([[0, 1, 2, 3, 4]])]
```

3.1.6 Building matrices

diag(v[, k])	Extract a diagonal or construct a diagonal array.
diagflat(v[, k])	Create a two-dimensional array with the flattened input as a diagonal.
tri(N[, M, k, dtype])	An array with ones at and below the given diagonal and zeros elsewhere.
tril(m[, k])	Lower triangle of an array.
triu(m[, k])	Upper triangle of an array.
vander(x[, N, increasing])	Generate a Vandermonde matrix.

numpy.**diag**(*v*, *k=0*)

Extract a diagonal or construct a diagonal array.

See the more detailed documentation for `numpy.diagonal` if you use this function to extract a diagonal and wish to write to the resulting array; whether it returns a copy or a view depends on what version of numpy you are using.

Parameters **v** : array_like

If *v* is a 2-D array, return a copy of its *k*-th diagonal. If *v* is a 1-D array, return a 2-D array with *v* on the *k*-th diagonal.

k : int, optional

Diagonal in question. The default is 0. Use *k>0* for diagonals above the main diagonal, and *k<0* for diagonals below the main diagonal.

Returns **out** : ndarray

The extracted diagonal or constructed diagonal array.

See also:

diagonal Return specified diagonals.

diagflat Create a 2-D array with the flattened input as a diagonal.

trace Sum along diagonals.

triu Upper triangle of an array.

tril Lower triangle of an array.

Examples

```
>>> x = np.arange(9).reshape((3,3))
>>> x
array([[0, 1, 2],
       [3, 4, 5],
       [6, 7, 8]])
```

```
>>> np.diag(x)
array([0, 4, 8])
>>> np.diag(x, k=1)
array([1, 5])
>>> np.diag(x, k=-1)
array([3, 7])
```

```
>>> np.diag(np.diag(x))
array([[0, 0, 0],
       [0, 4, 0],
       [0, 0, 8]])
```

numpy.**diagflat**(*v*, *k=0*)

Create a two-dimensional array with the flattened input as a diagonal.

Parameters **v** : array_like

Input data, which is flattened and set as the *k*-th diagonal of the output.

k : int, optional

Diagonal to set; 0, the default, corresponds to the "main" diagonal, a positive (negative) *k* giving the number of the diagonal above (below) the main.

Returns **out** : ndarray

The 2-D output array.

See also:

diag MATLAB work-alike for 1-D and 2-D arrays.

diagonal Return specified diagonals.

trace Sum along diagonals.

Examples

```
>>> np.diagflat([[1,2], [3,4]])
array([[1, 0, 0, 0],
       [0, 2, 0, 0],
       [0, 0, 3, 0],
       [0, 0, 0, 4]])
```

```
>>> np.diagflat([1,2], 1)
array([[0, 1, 0],
       [0, 0, 2],
       [0, 0, 0]])
```

numpy.**tri**(*N*, *M=None*, *k=0*, *dtype=<class 'float'>*)

An array with ones at and below the given diagonal and zeros elsewhere.

Parameters **N** : int

Number of rows in the array.

M : int, optional

Number of columns in the array. By default, *M* is taken equal to *N*.

k : int, optional

The sub-diagonal at and below which the array is filled. $k = 0$ is the main diagonal, while $k < 0$ is below it, and $k > 0$ is above. The default is 0.

dtype : dtype, optional

Data type of the returned array. The default is float.

Returns **tri** : ndarray of shape (N, M)

Array with its lower triangle filled with ones and zero elsewhere; in other words `T[i, j] == 1` for `i <= j + k`, 0 otherwise.

Examples

```
>>> np.tri(3, 5, 2, dtype=int)
array([[1, 1, 1, 0, 0],
       [1, 1, 1, 1, 0],
       [1, 1, 1, 1, 1]])
```

```
>>> np.tri(3, 5, -1)
array([[ 0.,  0.,  0.,  0.,  0.],
       [ 1.,  0.,  0.,  0.,  0.],
       [ 1.,  1.,  0.,  0.,  0.]])
```

numpy.**tril**(*m*, *k=0*)

Lower triangle of an array.

Return a copy of an array with elements above the *k*-th diagonal zeroed.

Parameters **m** : array_like, shape (M, N)

Input array.

k : int, optional

Diagonal above which to zero elements. *k = 0* (the default) is the main diagonal, *k < 0* is below it and *k > 0* is above.

Returns **tril** : ndarray, shape (M, N)

Lower triangle of *m*, of same shape and data-type as *m*.

See also:

triu same thing, only for the upper triangle

Examples

```
>>> np.tril([[1,2,3],[4,5,6],[7,8,9],[10,11,12]], -1)
array([[ 0,  0,  0],
       [ 4,  0,  0],
       [ 7,  8,  0],
       [10, 11, 12]])
```

numpy.**triu**(*m*, *k=0*)

Upper triangle of an array.

Return a copy of a matrix with the elements below the *k*-th diagonal zeroed.

Please refer to the documentation for *tril* for further details.

See also:

tril lower triangle of an array

Examples

```
>>> np.triu([[1,2,3],[4,5,6],[7,8,9],[10,11,12]], -1)
array([[ 1,  2,  3],
       [ 4,  5,  6],
       [ 0,  8,  9],
       [ 0,  0, 12]])
```

numpy.**vander**(*x*, *N=None*, *increasing=False*)

Generate a Vandermonde matrix.

The columns of the output matrix are powers of the input vector. The order of the powers is determined by the *increasing* boolean argument. Specifically, when *increasing* is False, the *i*-th output column is the input vector raised element-wise to the power of `N - i - 1`. Such a matrix with a geometric progression in each row is named for Alexandre- Theophile Vandermonde.

Parameters **x** : array_like

1-D input array.

N : int, optional

Number of columns in the output. If *N* is not specified, a square array is returned (`N = len(x)`).

increasing : bool, optional

Order of the powers of the columns. If True, the powers increase from left to right, if False (the default) they are reversed.

New in version 1.9.0.

Returns **out** : ndarray

Vandermonde matrix. If *increasing* is False, the first column is `x^(N-1)`, the second `x^(N-2)` and so forth. If *increasing* is True, the columns are `x^0, x^1, ..., x^(N-1)`.

See also:

polynomial.polynomial.polyvander

Examples

```
>>> x = np.array([1, 2, 3, 5])
>>> N = 3
>>> np.vander(x, N)
array([[ 1,  1,  1],
       [ 4,  2,  1],
       [ 9,  3,  1],
       [25,  5,  1]])
```

```
>>> np.column_stack([x**(N-1-i) for i in range(N)])
array([[ 1,  1,  1],
       [ 4,  2,  1],
       [ 9,  3,  1],
       [25,  5,  1]])
```

```
>>> x = np.array([1, 2, 3, 5])
>>> np.vander(x)
array([[  1,   1,   1,   1],
       [  8,   4,   2,   1],
       [ 27,   9,   3,   1],
       [125,  25,   5,   1]])
>>> np.vander(x, increasing=True)
array([[  1,   1,   1,   1],
       [  1,   2,   4,   8],
       [  1,   3,   9,  27],
       [  1,   5,  25, 125]])
```

The determinant of a square Vandermonde matrix is the product of the differences between the values of the input vector:

```
>>> np.linalg.det(np.vander(x))
48.000000000000043
>>> (5-3)*(5-2)*(5-1)*(3-2)*(3-1)*(2-1)
48
```

3.1.7 The Matrix class

mat(data[, dtype])	Interpret the input as a matrix.
bmat(obj[, ldict, gdict])	Build a matrix object from a string, nested sequence, or array.

numpy.**mat**(*data*, *dtype=None*)

Interpret the input as a matrix.

Unlike *matrix*, *asmatrix* does not make a copy if the input is already a matrix or an ndarray. Equivalent to `matrix(data, copy=False)`.

Parameters **data** : array_like

Input data.

dtype : data-type

Data-type of the output matrix.

Returns **mat** : matrix

data interpreted as a matrix.

Examples

```
>>> x = np.array([[1, 2], [3, 4]])
```

```
>>> m = np.asmatrix(x)
```

```
>>> x[0,0] = 5
```

```
>>> m
matrix([[5, 2],
        [3, 4]])
```

3.2 Array manipulation routines

3.2.1 Basic operations

copyto(dst, src[, casting, where])	Copies values from one array to another, broadcasting as necessary.

numpy.**copyto**(*dst*, *src*, *casting='same_kind'*, *where=True*)

Copies values from one array to another, broadcasting as necessary.

Raises a TypeError if the *casting* rule is violated, and if *where* is provided, it selects which elements to copy.

New in version 1.7.0.

Parameters **dst** : ndarray

The array into which values are copied.

src : array_like

The array from which values are copied.

casting : {'no', 'equiv', 'safe', 'same_kind', 'unsafe'}, optional

Controls what kind of data casting may occur when copying.

- 'no' means the data types should not be cast at all.
- 'equiv' means only byte-order changes are allowed.
- 'safe' means only casts which can preserve values are allowed.
- 'same_kind' means only safe casts or casts within a kind, like float64 to float32, are allowed.
- 'unsafe' means any data conversions may be done.

where : array_like of bool, optional

A boolean array which is broadcasted to match the dimensions of *dst*, and selects elements to copy from *src* to *dst* wherever it contains the value True.

3.2.2 Changing array shape

reshape(a, newshape[, order])	Gives a new shape to an array without changing its data.
ravel(a[, order])	Return a contiguous flattened array.
ndarray.flat	A 1-D iterator over the array.
ndarray.flatten([order])	Return a copy of the array collapsed into one dimension.

numpy.**reshape**(*a*, *newshape*, *order='C'*)

Gives a new shape to an array without changing its data.

Parameters **a** : array_like

Array to be reshaped.

newshape : int or tuple of ints

The new shape should be compatible with the original shape. If an integer, then the result will be a 1-D array of that length. One shape dimension can be -1. In this case, the value is inferred from the length of the array and remaining dimensions.

order : {'C', 'F', 'A'}, optional

Read the elements of *a* using this index order, and place the elements into the reshaped array using this index order. 'C' means to read / write the elements using C-like index order, with the last axis index changing fastest, back to the first axis index changing slowest. 'F' means to read / write the elements using Fortran-like index order, with the first index changing fastest, and the last index changing slowest. Note that the 'C' and 'F' options take no account of the memory layout of the underlying array, and only refer to the order of indexing. 'A' means to read / write the elements in Fortran-like index order if *a* is Fortran *contiguous* in memory, C-like order otherwise.

Returns **reshaped_array** : ndarray

This will be a new view object if possible; otherwise, it will be a copy. Note there is no guarantee of the *memory layout* (C- or Fortran- contiguous) of the returned array.

See also:

ndarray.reshape Equivalent method.

Notes

It is not always possible to change the shape of an array without copying the data. If you want an error to be raised when the data is copied, you should assign the new shape to the shape attribute of the array:

```
>>> a = np.zeros((10, 2))
# A transpose makes the array non-contiguous
>>> b = a.T
# Taking a view makes it possible to modify the shape without modifying
# the initial object.
>>> c = b.view()
>>> c.shape = (20)
AttributeError: incompatible shape for a non-contiguous array
```

The *order* keyword gives the index ordering both for *fetching* the values from *a*, and then *placing* the values into the output array. For example, let's say you have an array:

```
>>> a = np.arange(6).reshape((3, 2))
>>> a
array([[0, 1],
       [2, 3],
       [4, 5]])
```

You can think of reshaping as first raveling the array (using the given index order), then inserting the elements from the raveled array into the new array using the same kind of index ordering as was used for the raveling.

```
>>> np.reshape(a, (2, 3)) # C-like index ordering
array([[0, 1, 2],
       [3, 4, 5]])
>>> np.reshape(np.ravel(a), (2, 3)) # equivalent to C ravel then C reshape
array([[0, 1, 2],
       [3, 4, 5]])
>>> np.reshape(a, (2, 3), order='F') # Fortran-like index ordering
array([[0, 4, 3],
       [2, 1, 5]])
>>> np.reshape(np.ravel(a, order='F'), (2, 3), order='F')
array([[0, 4, 3],
       [2, 1, 5]])
```

Examples

```
>>> a = np.array([[1,2,3], [4,5,6]])
>>> np.reshape(a, 6)
array([1, 2, 3, 4, 5, 6])
>>> np.reshape(a, 6, order='F')
array([1, 4, 2, 5, 3, 6])
```

```
>>> np.reshape(a, (3,-1))       # the unspecified value is inferred to be 2
array([[1, 2],
       [3, 4],
       [5, 6]])
```

numpy.**ravel**(*a*, *order='C'*)

Return a contiguous flattened array.

A 1-D array, containing the elements of the input, is returned. A copy is made only if needed.

As of NumPy 1.10, the returned array will have the same type as the input array. (for example, a masked array will be returned for a masked array input)

Parameters **a** : array_like

Input array. The elements in *a* are read in the order specified by *order*, and packed as a 1-D array.

order : {'C','F', 'A', 'K'}, optional

The elements of *a* are read using this index order. 'C' means to index the elements in row-major, C-style order, with the last axis index changing fastest, back to the first axis index changing slowest. 'F' means to index the elements in column-major, Fortran-style order, with the first index changing fastest, and the last index changing slowest. Note that the 'C' and 'F' options take no account of the memory layout of the underlying array, and only refer to the order of axis indexing. 'A' means to read the elements in Fortran-like index order if *a* is Fortran *contiguous* in memory, C-like order otherwise. 'K' means to read the elements in the order they occur in memory, except for reversing the data when strides are negative. By default, 'C' index order is used.

Returns **y** : array_like

If *a* is a matrix, y is a 1-D ndarray, otherwise y is an array of the same subtype as *a*. The shape of the returned array is `(a.size,)`. Matrices are special cased for backward compatibility.

See also:

ndarray.flat 1-D iterator over an array.

ndarray.flatten 1-D array copy of the elements of an array in row-major order.

ndarray.reshape Change the shape of an array without changing its data.

Notes

In row-major, C-style order, in two dimensions, the row index varies the slowest, and the column index the quickest. This can be generalized to multiple dimensions, where row-major order implies that the index along the first axis varies slowest, and the index along the last quickest. The opposite holds for column-major, Fortran-style index ordering.

When a view is desired in as many cases as possible, `arr.reshape(-1)` may be preferable.

Examples

It is equivalent to `reshape(-1, order=order)`.

```
>>> x = np.array([[1, 2, 3], [4, 5, 6]])
>>> print(np.ravel(x))
[1 2 3 4 5 6]
```

```
>>> print(x.reshape(-1))
[1 2 3 4 5 6]
```

```
>>> print(np.ravel(x, order='F'))
[1 4 2 5 3 6]
```

When `order` is 'A', it will preserve the array's 'C' or 'F' ordering:

```
>>> print(np.ravel(x.T))
[1 4 2 5 3 6]
>>> print(np.ravel(x.T, order='A'))
[1 2 3 4 5 6]
```

When `order` is 'K', it will preserve orderings that are neither 'C' nor 'F', but won't reverse axes:

```
>>> a = np.arange(3)[::-1]; a
array([2, 1, 0])
>>> a.ravel(order='C')
array([2, 1, 0])
>>> a.ravel(order='K')
array([2, 1, 0])
```

```
>>> a = np.arange(12).reshape(2,3,2).swapaxes(1,2); a
array([[[ 0,  2,  4],
        [ 1,  3,  5]],
       [[ 6,  8, 10],
        [ 7,  9, 11]]])
>>> a.ravel(order='C')
array([ 0,  2,  4,  1,  3,  5,  6,  8, 10,  7,  9, 11])
>>> a.ravel(order='K')
array([ 0,  1,  2,  3,  4,  5,  6,  7,  8,  9, 10, 11])
```

3.2.3 Transpose-like operations

moveaxis(a, source, destination)	Move axes of an array to new positions.
rollaxis(a, axis[, start])	Roll the specified axis backwards, until it lies in a given position.
swapaxes(a, axis1, axis2)	Interchange two axes of an array.
ndarray.T	Same as self.transpose(), except that self is returned if self.ndim < 2.
transpose(a[, axes])	Permute the dimensions of an array.

numpy.**moveaxis**(*a*, *source*, *destination*)

Move axes of an array to new positions.

Other axes remain in their original order.

New in version 1.11.0.

Parameters **a** : np.ndarray

The array whose axes should be reordered.

source : int or sequence of int

Original positions of the axes to move. These must be unique.

destination : int or sequence of int

Destination positions for each of the original axes. These must also be unique.

Returns **result** : np.ndarray

Array with moved axes. This array is a view of the input array.

See also:

transpose Permute the dimensions of an array.

swapaxes Interchange two axes of an array.

Examples

```
>>> x = np.zeros((3, 4, 5))
>>> np.moveaxis(x, 0, -1).shape
(4, 5, 3)
>>> np.moveaxis(x, -1, 0).shape
(5, 3, 4)
```

These all achieve the same result:

```
>>> np.transpose(x).shape
(5, 4, 3)
>>> np.swapaxes(x, 0, -1).shape
(5, 4, 3)
>>> np.moveaxis(x, [0, 1], [-1, -2]).shape
(5, 4, 3)
>>> np.moveaxis(x, [0, 1, 2], [-1, -2, -3]).shape
(5, 4, 3)
```

numpy.**rollaxis**(*a*, *axis*, *start=0*)

Roll the specified axis backwards, until it lies in a given position.

This function continues to be supported for backward compatibility, but you should prefer *moveaxis*. The *moveaxis* function was added in NumPy 1.11.

Parameters **a** : ndarray

Input array.

axis : int

The axis to roll backwards. The positions of the other axes do not change relative to one another.

start : int, optional

The axis is rolled until it lies before this position. The default, 0, results in a "complete" roll.

Returns **res** : ndarray

For NumPy >= 1.10.0 a view of *a* is always returned. For earlier NumPy versions a view of *a* is returned only if the order of the axes is changed, otherwise the input array is returned.

See also:

moveaxis Move array axes to new positions.

roll Roll the elements of an array by a number of positions along a given axis.

Examples

```
>>> a = np.ones((3,4,5,6))
>>> np.rollaxis(a, 3, 1).shape
(3, 6, 4, 5)
>>> np.rollaxis(a, 2).shape
(5, 3, 4, 6)
>>> np.rollaxis(a, 1, 4).shape
(3, 5, 6, 4)
```

numpy.**swapaxes**(*a*, *axis1*, *axis2*)

Interchange two axes of an array.

Parameters **a** : array_like

Input array.

axis1 : int

First axis.

axis2 : int

Second axis.

Returns **a_swapped** : ndarray

For NumPy >= 1.10.0, if *a* is an ndarray, then a view of *a* is returned; otherwise a new array is created. For earlier NumPy versions a view of *a* is returned only if the order of the axes is changed, otherwise the input array is returned.

Examples

```
>>> x = np.array([[1,2,3]])
>>> np.swapaxes(x,0,1)
array([[1],
       [2],
       [3]])
```

```
>>> x = np.array([[[0,1],[2,3]],[[4,5],[6,7]]])
>>> x
array([[[0, 1],
        [2, 3]],
       [[4, 5],
        [6, 7]]])
```

```
>>> np.swapaxes(x,0,2)
array([[[0, 4],
        [2, 6]],
       [[1, 5],
        [3, 7]]])
```

numpy.**transpose**(*a*, *axes=None*)

Permute the dimensions of an array.

Parameters **a** : array_like

Input array.

axes : list of ints, optional

By default, reverse the dimensions, otherwise permute the axes according to the values given.

Returns **p** : ndarray

a with its axes permuted. A view is returned whenever possible.

See also:

moveaxis, *argsort*

Notes

Use *transpose(a, argsort(axes))* to invert the transposition of tensors when using the *axes* keyword argument.

Transposing a 1-D array returns an unchanged view of the original array.

Examples

```
>>> x = np.arange(4).reshape((2,2))
>>> x
array([[0, 1],
       [2, 3]])
```

```
>>> np.transpose(x)
array([[0, 2],
       [1, 3]])
```

```
>>> x = np.ones((1, 2, 3))
>>> np.transpose(x, (1, 0, 2)).shape
(2, 1, 3)
```

3.2.4 Changing number of dimensions

atleast_1d(*arys)	Convert inputs to arrays with at least one dimension.
atleast_2d(*arys)	View inputs as arrays with at least two dimensions.
atleast_3d(*arys)	View inputs as arrays with at least three dimensions.
broadcast	Produce an object that mimics broadcasting.
broadcast_to(array, shape[, subok])	Broadcast an array to a new shape.
broadcast_arrays(*args, **kwargs)	Broadcast any number of arrays against each other.
expand_dims(a, axis)	Expand the shape of an array.
squeeze(a[, axis])	Remove single-dimensional entries from the shape of an array.

numpy.**atleast_1d**(**arys*)

Convert inputs to arrays with at least one dimension.

Scalar inputs are converted to 1-dimensional arrays, whilst higher-dimensional inputs are preserved.

Parameters **arys1, arys2, ...** : array_like

One or more input arrays.

Returns **ret** : ndarray

An array, or list of arrays, each with `a.ndim >= 1`. Copies are made only if necessary.

See also:

atleast_2d, *atleast_3d*

Examples

```
>>> np.atleast_1d(1.0)
array([ 1.])
```

```
>>> x = np.arange(9.0).reshape(3,3)
>>> np.atleast_1d(x)
array([[ 0.,  1.,  2.],
       [ 3.,  4.,  5.],
       [ 6.,  7.,  8.]])
>>> np.atleast_1d(x) is x
True
```

```
>>> np.atleast_1d(1, [3, 4])
[array([1]), array([3, 4])]
```

numpy.**atleast_2d**(**arys*)

View inputs as arrays with at least two dimensions.

Parameters **arys1, arys2, ...** : array_like

One or more array-like sequences. Non-array inputs are converted to arrays. Arrays that already have two or more dimensions are preserved.

Returns **res, res2, ...** : ndarray

An array, or list of arrays, each with `a.ndim >= 2`. Copies are avoided where possible, and views with two or more dimensions are returned.

See also:

atleast_1d, *atleast_3d*

Examples

```
>>> np.atleast_2d(3.0)
array([[ 3.]])
```

```
>>> x = np.arange(3.0)
>>> np.atleast_2d(x)
array([[ 0.,  1.,  2.]])
>>> np.atleast_2d(x).base is x
True
```

```
>>> np.atleast_2d(1, [1, 2], [[1, 2]])
[array([[1]]), array([[1, 2]]), array([[1, 2]])]
```

numpy.**atleast_3d**(**arys*)

View inputs as arrays with at least three dimensions.

Parameters **arys1, arys2, ...** : array_like

One or more array-like sequences. Non-array inputs are converted to arrays. Arrays that already have three or more dimensions are preserved.

Returns **res1, res2, ...** : ndarray

An array, or list of arrays, each with `a.ndim >= 3`. Copies are avoided where possible, and views with three or more dimensions are returned. For example, a 1-D array of shape `(N,)` becomes a view of shape `(1, N, 1)`, and a 2-D array of shape `(M, N)` becomes a view of shape `(M, N, 1)`.

See also:

atleast_1d, *atleast_2d*

Examples

```
>>> np.atleast_3d(3.0)
array([[[ 3.]]])
```

```
>>> x = np.arange(3.0)
>>> np.atleast_3d(x).shape
(1, 3, 1)
```

```
>>> x = np.arange(12.0).reshape(4,3)
>>> np.atleast_3d(x).shape
(4, 3, 1)
>>> np.atleast_3d(x).base is x.base  # x is a reshape, so not base itself
True
```

```
>>> for arr in np.atleast_3d([1, 2], [[1, 2]], [[[1, 2]]]):
...     print(arr, arr.shape)
...
[[[1]
  [2]]] (1, 2, 1)
[[[1]
  [2]]] (1, 2, 1)
[[[1 2]]] (1, 1, 2)
```

numpy.**broadcast_to**(*array*, *shape*, *subok=False*)

Broadcast an array to a new shape.

Parameters **array** : array_like

The array to broadcast.

shape : tuple

The shape of the desired array.

subok : bool, optional

If True, then sub-classes will be passed-through, otherwise the returned array will be forced to be a base-class array (default).

Returns **broadcast** : array

A readonly view on the original array with the given shape. It is typically not contiguous. Furthermore, more than one element of a broadcasted array may refer to a single memory location.

Raises **ValueError**

If the array is not compatible with the new shape according to NumPy's broadcasting rules.

Notes

New in version 1.10.0.

Examples

```
>>> x = np.array([1, 2, 3])
>>> np.broadcast_to(x, (3, 3))
array([[1, 2, 3],
       [1, 2, 3],
       [1, 2, 3]])
```

numpy.**broadcast_arrays**(**args*, ***kwargs*)

Broadcast any number of arrays against each other.

Parameters **'*args'** : array_likes

The arrays to broadcast.

subok : bool, optional

If True, then sub-classes will be passed-through, otherwise the returned arrays will be forced to be a base-class array (default).

Returns **broadcasted** : list of arrays

These arrays are views on the original arrays. They are typically not contiguous. Furthermore, more than one element of a broadcasted array may refer to a single memory location. If you need to write to the arrays, make copies first.

Examples

```
>>> x = np.array([[1,2,3]])
>>> y = np.array([[1],[2],[3]])
>>> np.broadcast_arrays(x, y)
[array([[1, 2, 3],
       [1, 2, 3],
       [1, 2, 3]]), array([[1, 1, 1],
       [2, 2, 2],
       [3, 3, 3]])]
```

Here is a useful idiom for getting contiguous copies instead of non-contiguous views.

```
>>> [np.array(a) for a in np.broadcast_arrays(x, y)]
[array([[1, 2, 3],
       [1, 2, 3],
       [1, 2, 3]]), array([[1, 1, 1],
       [2, 2, 2],
       [3, 3, 3]])]
```

numpy.**expand_dims**(*a*, *axis*)

Expand the shape of an array.

Insert a new axis that will appear at the *axis* position in the expanded array shape.

Note: Previous to NumPy 1.13.0, neither `axis < -a.ndim - 1` nor `axis > a.ndim` raised errors or put the new axis where documented. Those axis values are now deprecated and will raise an AxisError in the future.

Parameters **a** : array_like

Input array.

axis : int

Position in the expanded axes where the new axis is placed.

Returns **res** : ndarray

Output array. The number of dimensions is one greater than that of the input array.

See also:

squeeze The inverse operation, removing singleton dimensions

reshape Insert, remove, and combine dimensions, and resize existing ones

`doc.indexing`, *atleast_1d*, *atleast_2d*, *atleast_3d*

Examples

```
>>> x = np.array([1,2])
>>> x.shape
(2,)
```

The following is equivalent to `x[np.newaxis,:]` or `x[np.newaxis]`:

```
>>> y = np.expand_dims(x, axis=0)
>>> y
array([[1, 2]])
>>> y.shape
(1, 2)
```

```
>>> y = np.expand_dims(x, axis=1)  # Equivalent to x[:,np.newaxis]
>>> y
array([[1],
       [2]])
>>> y.shape
(2, 1)
```

Note that some examples may use `None` instead of `np.newaxis`. These are the same objects:

```
>>> np.newaxis is None
True
```

numpy.**squeeze**(*a*, *axis=None*)

Remove single-dimensional entries from the shape of an array.

Parameters **a** : array_like

Input data.

axis : None or int or tuple of ints, optional

New in version 1.7.0.

Selects a subset of the single-dimensional entries in the shape. If an axis is selected with shape entry greater than one, an error is raised.

Returns **squeezed** : ndarray

The input array, but with all or a subset of the dimensions of length 1 removed. This is always *a* itself or a view into *a*.

Raises **ValueError**

If *axis* is not *None*, and an axis being squeezed is not of length 1

See also:

expand_dims The inverse operation, adding singleton dimensions

reshape Insert, remove, and combine dimensions, and resize existing ones

Examples

```
>>> x = np.array([[[0], [1], [2]]])
>>> x.shape
(1, 3, 1)
>>> np.squeeze(x).shape
(3,)
>>> np.squeeze(x, axis=0).shape
(3, 1)
>>> np.squeeze(x, axis=1).shape
Traceback (most recent call last):
...
ValueError: cannot select an axis to squeeze out which has size not equal to one
>>> np.squeeze(x, axis=2).shape
(1, 3)
```

3.2.5 Changing kind of array

asarray(a[, dtype, order])	Convert the input to an array.
asanyarray(a[, dtype, order])	Convert the input to an ndarray, but pass ndarray subclasses through.
asmatrix(data[, dtype])	Interpret the input as a matrix.
asfarray(a[, dtype])	Return an array converted to a float type.
asfortranarray(a[, dtype])	Return an array laid out in Fortran order in memory.
ascontiguousarray(a[, dtype])	Return a contiguous array in memory (C order).
asarray_chkfinite(a[, dtype, order])	Convert the input to an array, checking for NaNs or Infs.
asscalar(a)	Convert an array of size 1 to its scalar equivalent.
require(a[, dtype, requirements])	Return an ndarray of the provided type that satisfies requirements.

numpy.**asfarray**(*a*, *dtype=<class 'numpy.float64'>*)

Return an array converted to a float type.

Parameters **a** : array_like

The input array.

dtype : str or dtype object, optional

Float type code to coerce input array *a*. If *dtype* is one of the 'int' dtypes, it is replaced with float64.

Returns **out** : ndarray

The input *a* as a float ndarray.

Examples

```
>>> np.asfarray([2, 3])
array([ 2.,  3.])
```

(continues on next page)

(continued from previous page)

```
>>> np.asfarray([2, 3], dtype='float')
array([ 2.,  3.])
>>> np.asfarray([2, 3], dtype='int8')
array([ 2.,  3.])
```

numpy.**asfortranarray**(*a*, *dtype=None*)

Return an array laid out in Fortran order in memory.

Parameters **a** : array_like

Input array.

dtype : str or dtype object, optional

By default, the data-type is inferred from the input data.

Returns **out** : ndarray

The input *a* in Fortran, or column-major, order.

See also:

ascontiguousarray Convert input to a contiguous (C order) array.

asanyarray Convert input to an ndarray with either row or column-major memory order.

require Return an ndarray that satisfies requirements.

ndarray.flags Information about the memory layout of the array.

Examples

```
>>> x = np.arange(6).reshape(2,3)
>>> y = np.asfortranarray(x)
>>> x.flags['F_CONTIGUOUS']
False
>>> y.flags['F_CONTIGUOUS']
True
```

numpy.**asarray_chkfinite**(*a*, *dtype=None*, *order=None*)

Convert the input to an array, checking for NaNs or Infs.

Parameters **a** : array_like

Input data, in any form that can be converted to an array. This includes lists, lists of tuples, tuples, tuples of tuples, tuples of lists and ndarrays. Success requires no NaNs or Infs.

dtype : data-type, optional

By default, the data-type is inferred from the input data.

order : {'C', 'F'}, optional

Whether to use row-major (C-style) or column-major (Fortran-style) memory representation. Defaults to 'C'.

Returns **out** : ndarray

Array interpretation of *a*. No copy is performed if the input is already an ndarray. If *a* is a subclass of ndarray, a base class ndarray is returned.

Raises **ValueError**

Raises ValueError if *a* contains NaN (Not a Number) or Inf (Infinity).

See also:

asarray Create and array.

asanyarray Similar function which passes through subclasses.

ascontiguousarray Convert input to a contiguous array.

asfarray Convert input to a floating point ndarray.

asfortranarray Convert input to an ndarray with column-major memory order.

fromiter Create an array from an iterator.

fromfunction Construct an array by executing a function on grid positions.

Examples

Convert a list into an array. If all elements are finite `asarray_chkfinite` is identical to `asarray`.

```
>>> a = [1, 2]
>>> np.asarray_chkfinite(a, dtype=float)
array([1., 2.])
```

Raises ValueError if array_like contains Nans or Infs.

```
>>> a = [1, 2, np.inf]
>>> try:
...     np.asarray_chkfinite(a)
... except ValueError:
...     print('ValueError')
...
ValueError
```

numpy.**asscalar**(*a*)

Convert an array of size 1 to its scalar equivalent.

Parameters **a** : ndarray

Input array of size 1.

Returns **out** : scalar

Scalar representation of *a*. The output data type is the same type returned by the input's *item* method.

Examples

```
>>> np.asscalar(np.array([24]))
24
```

numpy.**require**(*a*, *dtype=None*, *requirements=None*)

Return an ndarray of the provided type that satisfies requirements.

This function is useful to be sure that an array with the correct flags is returned for passing to compiled code (perhaps through ctypes).

Parameters **a** : array_like

The object to be converted to a type-and-requirement-satisfying array.

dtype : data-type

The required data-type. If None preserve the current dtype. If your application requires the data to be in native byteorder, include a byteorder specification as a part of the dtype specification.

requirements : str or list of str

The requirements list can be any of the following

- 'F_CONTIGUOUS' ('F') - ensure a Fortran-contiguous array
- 'C_CONTIGUOUS' ('C') - ensure a C-contiguous array
- 'ALIGNED' ('A') - ensure a data-type aligned array
- 'WRITEABLE' ('W') - ensure a writable array
- 'OWNDATA' ('O') - ensure an array that owns its own data
- 'ENSUREARRAY', ('E') - ensure a base array, instead of a subclass

See also:

asarray Convert input to an ndarray.

asanyarray Convert to an ndarray, but pass through ndarray subclasses.

ascontiguousarray Convert input to a contiguous array.

asfortranarray Convert input to an ndarray with column-major memory order.

ndarray.flags Information about the memory layout of the array.

Notes

The returned array will be guaranteed to have the listed requirements by making a copy if needed.

Examples

```
>>> x = np.arange(6).reshape(2,3)
>>> x.flags
  C_CONTIGUOUS : True
  F_CONTIGUOUS : False
  OWNDATA : False
  WRITEABLE : True
  ALIGNED : True
  WRITEBACKIFCOPY : False
  UPDATEIFCOPY : False
```

```
>>> y = np.require(x, dtype=np.float32, requirements=['A', 'O', 'W', 'F'])
>>> y.flags
  C_CONTIGUOUS : False
  F_CONTIGUOUS : True
  OWNDATA : True
  WRITEABLE : True
```

(continues on next page)

(continued from previous page)

```
  ALIGNED : True
  WRITEBACKIFCOPY : False
  UPDATEIFCOPY : False
```

3.2.6 Joining arrays

concatenate((a1, a2, ...)[, axis, out])	Join a sequence of arrays along an existing axis.
stack(arrays[, axis, out])	Join a sequence of arrays along a new axis.
column_stack(tup)	Stack 1-D arrays as columns into a 2-D array.
dstack(tup)	Stack arrays in sequence depth wise (along third axis).
hstack(tup)	Stack arrays in sequence horizontally (column wise).
vstack(tup)	Stack arrays in sequence vertically (row wise).
block(arrays)	Assemble an nd-array from nested lists of blocks.

numpy.**concatenate**(*(a1, a2, ...), axis=0, out=None*)

Join a sequence of arrays along an existing axis.

Parameters **a1, a2, ...** : sequence of array_like

The arrays must have the same shape, except in the dimension corresponding to *axis* (the first, by default).

axis : int, optional

The axis along which the arrays will be joined. Default is 0.

out : ndarray, optional

If provided, the destination to place the result. The shape must be correct, matching that of what concatenate would have returned if no out argument were specified.

Returns **res** : ndarray

The concatenated array.

See also:

ma.concatenate Concatenate function that preserves input masks.

array_split Split an array into multiple sub-arrays of equal or near-equal size.

split Split array into a list of multiple sub-arrays of equal size.

hsplit Split array into multiple sub-arrays horizontally (column wise)

vsplit Split array into multiple sub-arrays vertically (row wise)

dsplit Split array into multiple sub-arrays along the 3rd axis (depth).

stack Stack a sequence of arrays along a new axis.

hstack Stack arrays in sequence horizontally (column wise)

vstack Stack arrays in sequence vertically (row wise)

dstack Stack arrays in sequence depth wise (along third dimension)

Notes

When one or more of the arrays to be concatenated is a MaskedArray, this function will return a MaskedArray object instead of an ndarray, but the input masks are *not* preserved. In cases where a MaskedArray is expected as input, use the ma.concatenate function from the masked array module instead.

Examples

```
>>> a = np.array([[1, 2], [3, 4]])
>>> b = np.array([[5, 6]])
>>> np.concatenate((a, b), axis=0)
array([[1, 2],
       [3, 4],
       [5, 6]])
>>> np.concatenate((a, b.T), axis=1)
array([[1, 2, 5],
       [3, 4, 6]])
```

This function will not preserve masking of MaskedArray inputs.

```
>>> a = np.ma.arange(3)
>>> a[1] = np.ma.masked
>>> b = np.arange(2, 5)
>>> a
masked_array(data = [0 -- 2],
             mask = [False  True False],
       fill_value = 999999)
>>> b
array([2, 3, 4])
>>> np.concatenate([a, b])
masked_array(data = [0 1 2 2 3 4],
             mask = False,
       fill_value = 999999)
>>> np.ma.concatenate([a, b])
masked_array(data = [0 -- 2 2 3 4],
             mask = [False  True False False False False],
       fill_value = 999999)
```

numpy.**stack**(*arrays*, *axis=0*, *out=None*)

Join a sequence of arrays along a new axis.

The *axis* parameter specifies the index of the new axis in the dimensions of the result. For example, if `axis=0` it will be the first dimension and if `axis=-1` it will be the last dimension.

New in version 1.10.0.

Parameters **arrays** : sequence of array_like

Each array must have the same shape.

axis : int, optional

The axis in the result array along which the input arrays are stacked.

out : ndarray, optional

If provided, the destination to place the result. The shape must be correct, matching that of what stack would have returned if no out argument were specified.

Returns **stacked** : ndarray

The stacked array has one more dimension than the input arrays.

See also:

concatenate Join a sequence of arrays along an existing axis.

split Split array into a list of multiple sub-arrays of equal size.

block Assemble arrays from blocks.

Examples

```
>>> arrays = [np.random.randn(3, 4) for _ in range(10)]
>>> np.stack(arrays, axis=0).shape
(10, 3, 4)
```

```
>>> np.stack(arrays, axis=1).shape
(3, 10, 4)
```

```
>>> np.stack(arrays, axis=2).shape
(3, 4, 10)
```

```
>>> a = np.array([1, 2, 3])
>>> b = np.array([2, 3, 4])
>>> np.stack((a, b))
array([[1, 2, 3],
       [2, 3, 4]])
```

```
>>> np.stack((a, b), axis=-1)
array([[1, 2],
       [2, 3],
       [3, 4]])
```

numpy.**column_stack**(*tup*)

Stack 1-D arrays as columns into a 2-D array.

Take a sequence of 1-D arrays and stack them as columns to make a single 2-D array. 2-D arrays are stacked as-is, just like with *hstack*. 1-D arrays are turned into 2-D columns first.

Parameters **tup** : sequence of 1-D or 2-D arrays.

Arrays to stack. All of them must have the same first dimension.

Returns **stacked** : 2-D array

The array formed by stacking the given arrays.

See also:

stack, *hstack*, *vstack*, *concatenate*

Examples

```
>>> a = np.array((1,2,3))
>>> b = np.array((2,3,4))
>>> np.column_stack((a,b))
array([[1, 2],
       [2, 3],
       [3, 4]])
```

numpy.**dstack**(*tup*)

Stack arrays in sequence depth wise (along third axis).

This is equivalent to concatenation along the third axis after 2-D arrays of shape *(M,N)* have been reshaped to *(M,N,1)* and 1-D arrays of shape *(N,)* have been reshaped to *(1,N,1)*. Rebuilds arrays divided by *dsplit*.

This function makes most sense for arrays with up to 3 dimensions. For instance, for pixel-data with a height (first axis), width (second axis), and r/g/b channels (third axis). The functions *concatenate*, *stack* and *block* provide more general stacking and concatenation operations.

Parameters **tup** : sequence of arrays

The arrays must have the same shape along all but the third axis. 1-D or 2-D arrays must have the same shape.

Returns **stacked** : ndarray

The array formed by stacking the given arrays, will be at least 3-D.

See also:

stack Join a sequence of arrays along a new axis.

vstack Stack along first axis.

hstack Stack along second axis.

concatenate Join a sequence of arrays along an existing axis.

dsplit Split array along third axis.

Examples

```
>>> a = np.array((1,2,3))
>>> b = np.array((2,3,4))
>>> np.dstack((a,b))
array([[[1, 2],
        [2, 3],
        [3, 4]]])
```

```
>>> a = np.array([[1],[2],[3]])
>>> b = np.array([[2],[3],[4]])
>>> np.dstack((a,b))
array([[[1, 2]],
       [[2, 3]],
       [[3, 4]]])
```

numpy.**hstack**(*tup*)

Stack arrays in sequence horizontally (column wise).

This is equivalent to concatenation along the second axis, except for 1-D arrays where it concatenates along the first axis. Rebuilds arrays divided by *hsplit*.

This function makes most sense for arrays with up to 3 dimensions. For instance, for pixel-data with a height (first axis), width (second axis), and r/g/b channels (third axis). The functions *concatenate*, *stack* and *block* provide more general stacking and concatenation operations.

Parameters **tup** : sequence of ndarrays

The arrays must have the same shape along all but the second axis, except 1-D arrays which can be any length.

Returns **stacked** : ndarray

The array formed by stacking the given arrays.

See also:

stack Join a sequence of arrays along a new axis.

vstack Stack arrays in sequence vertically (row wise).

dstack Stack arrays in sequence depth wise (along third axis).

concatenate Join a sequence of arrays along an existing axis.

hsplit Split array along second axis.

block Assemble arrays from blocks.

Examples

```
>>> a = np.array((1,2,3))
>>> b = np.array((2,3,4))
>>> np.hstack((a,b))
array([1, 2, 3, 2, 3, 4])
>>> a = np.array([[1],[2],[3]])
>>> b = np.array([[2],[3],[4]])
>>> np.hstack((a,b))
array([[1, 2],
       [2, 3],
       [3, 4]])
```

numpy.**vstack**(*tup*)

Stack arrays in sequence vertically (row wise).

This is equivalent to concatenation along the first axis after 1-D arrays of shape *(N,)* have been reshaped to *(1,N)*. Rebuilds arrays divided by *vsplit*.

This function makes most sense for arrays with up to 3 dimensions. For instance, for pixel-data with a height (first axis), width (second axis), and r/g/b channels (third axis). The functions *concatenate*, *stack* and *block* provide more general stacking and concatenation operations.

Parameters **tup** : sequence of ndarrays

The arrays must have the same shape along all but the first axis. 1-D arrays must have the same length.

Returns **stacked** : ndarray

The array formed by stacking the given arrays, will be at least 2-D.

See also:

stack Join a sequence of arrays along a new axis.

hstack Stack arrays in sequence horizontally (column wise).

dstack Stack arrays in sequence depth wise (along third dimension).

concatenate Join a sequence of arrays along an existing axis.

vsplit Split array into a list of multiple sub-arrays vertically.

block Assemble arrays from blocks.

Examples

```
>>> a = np.array([1, 2, 3])
>>> b = np.array([2, 3, 4])
>>> np.vstack((a,b))
array([[1, 2, 3],
       [2, 3, 4]])
```

```
>>> a = np.array([[1], [2], [3]])
>>> b = np.array([[2], [3], [4]])
>>> np.vstack((a,b))
array([[1],
       [2],
       [3],
       [2],
       [3],
       [4]])
```

numpy.**block**(*arrays*)

Assemble an nd-array from nested lists of blocks.

Blocks in the innermost lists are concatenated (see *concatenate*) along the last dimension (-1), then these are concatenated along the second-last dimension (-2), and so on until the outermost list is reached.

Blocks can be of any dimension, but will not be broadcasted using the normal rules. Instead, leading axes of size 1 are inserted, to make `block.ndim` the same for all blocks. This is primarily useful for working with scalars, and means that code like `np.block([v, 1])` is valid, where `v.ndim == 1`.

When the nested list is two levels deep, this allows block matrices to be constructed from their components.

New in version 1.13.0.

Parameters **arrays** : nested list of array_like or scalars (but not tuples)

If passed a single ndarray or scalar (a nested list of depth 0), this is returned unmodified (and not copied).

Elements shapes must match along the appropriate axes (without broadcasting), but leading 1s will be prepended to the shape as necessary to make the dimensions match.

Returns **block_array** : ndarray

The array assembled from the given blocks.

The dimensionality of the output is equal to the greatest of: * the dimensionality of all the inputs * the depth to which the input list is nested

Raises **ValueError**

- If list depths are mismatched - for instance, `[[a, b], c]` is illegal, and should be spelt `[[a, b], [c]]`

- If lists are empty - for instance, `[[a, b], []]`

See also:

concatenate Join a sequence of arrays together.

stack Stack arrays in sequence along a new dimension.

hstack Stack arrays in sequence horizontally (column wise).

vstack Stack arrays in sequence vertically (row wise).

dstack Stack arrays in sequence depth wise (along third dimension).

vsplit Split array into a list of multiple sub-arrays vertically.

Notes

When called with only scalars, `np.block` is equivalent to an ndarray call. So `np.block([[1, 2], [3, 4]])` is equivalent to `np.array([[1, 2], [3, 4]])`.

This function does not enforce that the blocks lie on a fixed grid. `np.block([[a, b], [c, d]])` is not restricted to arrays of the form:

```
AAAbb
AAAbb
cccDD
```

But is also allowed to produce, for some `a, b, c, d`:

```
AAAbb
AAAbb
cDDDD
```

Since concatenation happens along the last axis first, *block* is _not_ capable of producing the following directly:

```
AAAbb
cccbb
cccDD
```

Matlab's "square bracket stacking", `[A, B, ...; p, q, ...]`, is equivalent to `np.block([[A, B, ...], [p, q, ...]])`.

Examples

The most common use of this function is to build a block matrix

```
>>> A = np.eye(2) * 2
>>> B = np.eye(3) * 3
>>> np.block([
...     [A,               np.zeros((2, 3))],
...     [np.ones((3, 2)), B               ]
... ])
array([[ 2.,  0.,  0.,  0.,  0.],
       [ 0.,  2.,  0.,  0.,  0.],
       [ 1.,  1.,  3.,  0.,  0.],
```

(continues on next page)

(continued from previous page)

```
       [ 1.,  1.,  0.,  3.,  0.],
       [ 1.,  1.,  0.,  0.,  3.]])
```

With a list of depth 1, *block* can be used as *hstack*

```
>>> np.block([1, 2, 3])              # hstack([1, 2, 3])
array([1, 2, 3])
```

```
>>> a = np.array([1, 2, 3])
>>> b = np.array([2, 3, 4])
>>> np.block([a, b, 10])             # hstack([a, b, 10])
array([1, 2, 3, 2, 3, 4, 10])
```

```
>>> A = np.ones((2, 2), int)
>>> B = 2 * A
>>> np.block([A, B])                 # hstack([A, B])
array([[1, 1, 2, 2],
       [1, 1, 2, 2]])
```

With a list of depth 2, *block* can be used in place of *vstack*:

```
>>> a = np.array([1, 2, 3])
>>> b = np.array([2, 3, 4])
>>> np.block([[a], [b]])             # vstack([a, b])
array([[1, 2, 3],
       [2, 3, 4]])
```

```
>>> A = np.ones((2, 2), int)
>>> B = 2 * A
>>> np.block([[A], [B]])             # vstack([A, B])
array([[1, 1],
       [1, 1],
       [2, 2],
       [2, 2]])
```

It can also be used in places of *atleast_1d* and *atleast_2d*

```
>>> a = np.array(0)
>>> b = np.array([1])
>>> np.block([a])                    # atleast_1d(a)
array([0])
>>> np.block([b])                    # atleast_1d(b)
array([1])
```

```
>>> np.block([[a]])                  # atleast_2d(a)
array([[0]])
>>> np.block([[b]])                  # atleast_2d(b)
array([[1]])
```

3.2.7 Splitting arrays

split(ary, indices_or_sections[, axis])	Split an array into multiple sub-arrays.
array_split(ary, indices_or_sections[, axis])	Split an array into multiple sub-arrays.
dsplit(ary, indices_or_sections)	Split array into multiple sub-arrays along the 3rd axis (depth).
hsplit(ary, indices_or_sections)	Split an array into multiple sub-arrays horizontally (column-wise).
vsplit(ary, indices_or_sections)	Split an array into multiple sub-arrays vertically (row-wise).

numpy.**split**(*ary*, *indices_or_sections*, *axis=0*)

Split an array into multiple sub-arrays.

Parameters **ary** : ndarray

Array to be divided into sub-arrays.

indices_or_sections : int or 1-D array

If *indices_or_sections* is an integer, N, the array will be divided into N equal arrays along *axis*. If such a split is not possible, an error is raised.

If *indices_or_sections* is a 1-D array of sorted integers, the entries indicate where along *axis* the array is split. For example, `[2, 3]` would, for `axis=0`, result in

- ary[:2]
- ary[2:3]
- ary[3:]

If an index exceeds the dimension of the array along *axis*, an empty sub-array is returned correspondingly.

axis : int, optional

The axis along which to split, default is 0.

Returns **sub-arrays** : list of ndarrays

A list of sub-arrays.

Raises **ValueError**

If *indices_or_sections* is given as an integer, but a split does not result in equal division.

See also:

array_split Split an array into multiple sub-arrays of equal or near-equal size. Does not raise an exception if an equal division cannot be made.

hsplit Split array into multiple sub-arrays horizontally (column-wise).

vsplit Split array into multiple sub-arrays vertically (row wise).

dsplit Split array into multiple sub-arrays along the 3rd axis (depth).

concatenate Join a sequence of arrays along an existing axis.

stack Join a sequence of arrays along a new axis.

hstack Stack arrays in sequence horizontally (column wise).

vstack Stack arrays in sequence vertically (row wise).

dstack Stack arrays in sequence depth wise (along third dimension).

Examples

```
>>> x = np.arange(9.0)
>>> np.split(x, 3)
[array([ 0.,  1.,  2.]), array([ 3.,  4.,  5.]), array([ 6.,  7.,  8.])]
```

```
>>> x = np.arange(8.0)
>>> np.split(x, [3, 5, 6, 10])
[array([ 0.,  1.,  2.]),
 array([ 3.,  4.]),
 array([ 5.]),
 array([ 6.,  7.]),
 array([], dtype=float64)]
```

numpy.**array_split**(*ary*, *indices_or_sections*, *axis=0*)

Split an array into multiple sub-arrays.

Please refer to the `split` documentation. The only difference between these functions is that `array_split` allows *indices_or_sections* to be an integer that does *not* equally divide the axis. For an array of length l that should be split into n sections, it returns l % n sub-arrays of size l//n + 1 and the rest of size l//n.

See also:

split Split array into multiple sub-arrays of equal size.

Examples

```
>>> x = np.arange(8.0)
>>> np.array_split(x, 3)
    [array([ 0.,  1.,  2.]), array([ 3.,  4.,  5.]), array([ 6.,  7.])]
```

```
>>> x = np.arange(7.0)
>>> np.array_split(x, 3)
    [array([ 0.,  1.,  2.]), array([ 3.,  4.]), array([ 5.,  6.])]
```

numpy.**dsplit**(*ary*, *indices_or_sections*)

Split array into multiple sub-arrays along the 3rd axis (depth).

Please refer to the *split* documentation. *dsplit* is equivalent to *split* with `axis=2`, the array is always split along the third axis provided the array dimension is greater than or equal to 3.

See also:

split Split an array into multiple sub-arrays of equal size.

Examples

```
>>> x = np.arange(16.0).reshape(2, 2, 4)
>>> x
array([[[  0.,   1.,   2.,   3.],
        [  4.,   5.,   6.,   7.]],
       [[  8.,   9.,  10.,  11.],
        [ 12.,  13.,  14.,  15.]]])
```

(continues on next page)

(continued from previous page)

```
>>> np.dsplit(x, 2)
[array([[[  0.,   1.],
         [  4.,   5.]],
        [[  8.,   9.],
         [ 12.,  13.]]]),
 array([[[  2.,   3.],
         [  6.,   7.]],
        [[ 10.,  11.],
         [ 14.,  15.]]])]
>>> np.dsplit(x, np.array([3, 6]))
[array([[[  0.,   1.,   2.],
         [  4.,   5.,   6.]],
        [[  8.,   9.,  10.],
         [ 12.,  13.,  14.]]]),
 array([[[  3.],
         [  7.]],
        [[ 11.],
         [ 15.]]]),
 array([], dtype=float64)]
```

numpy.**hsplit**(*ary*, *indices_or_sections*)

Split an array into multiple sub-arrays horizontally (column-wise).

Please refer to the *split* documentation. *hsplit* is equivalent to *split* with `axis=1`, the array is always split along the second axis regardless of the array dimension.

See also:

split Split an array into multiple sub-arrays of equal size.

Examples

```
>>> x = np.arange(16.0).reshape(4, 4)
>>> x
array([[  0.,   1.,   2.,   3.],
       [  4.,   5.,   6.,   7.],
       [  8.,   9.,  10.,  11.],
       [ 12.,  13.,  14.,  15.]])
>>> np.hsplit(x, 2)
[array([[  0.,   1.],
       [  4.,   5.],
       [  8.,   9.],
       [ 12.,  13.]]),
 array([[  2.,   3.],
       [  6.,   7.],
       [ 10.,  11.],
       [ 14.,  15.]])]
>>> np.hsplit(x, np.array([3, 6]))
[array([[  0.,   1.,   2.],
       [  4.,   5.,   6.],
       [  8.,   9.,  10.],
       [ 12.,  13.,  14.]]),
 array([[  3.],
       [  7.],
       [ 11.],
```

(continues on next page)

(continued from previous page)

```
       [ 15.]]),
 array([], dtype=float64)]
```

With a higher dimensional array the split is still along the second axis.

```
>>> x = np.arange(8.0).reshape(2, 2, 2)
>>> x
array([[[ 0.,  1.],
        [ 2.,  3.]],
       [[ 4.,  5.],
        [ 6.,  7.]]])
>>> np.hsplit(x, 2)
[array([[[ 0.,  1.]],
       [[ 4.,  5.]]]),
 array([[[ 2.,  3.]],
       [[ 6.,  7.]]])]
```

numpy.**vsplit**(*ary*, *indices_or_sections*)

Split an array into multiple sub-arrays vertically (row-wise).

Please refer to the `split` documentation. `vsplit` is equivalent to `split` with *axis=0* (default), the array is always split along the first axis regardless of the array dimension.

See also:

split Split an array into multiple sub-arrays of equal size.

Examples

```
>>> x = np.arange(16.0).reshape(4, 4)
>>> x
array([[  0.,   1.,   2.,   3.],
       [  4.,   5.,   6.,   7.],
       [  8.,   9.,  10.,  11.],
       [ 12.,  13.,  14.,  15.]])
>>> np.vsplit(x, 2)
[array([[ 0.,  1.,  2.,  3.],
       [ 4.,  5.,  6.,  7.]]),
 array([[  8.,   9.,  10.,  11.],
       [ 12.,  13.,  14.,  15.]])]
>>> np.vsplit(x, np.array([3, 6]))
[array([[  0.,   1.,   2.,   3.],
       [  4.,   5.,   6.,   7.],
       [  8.,   9.,  10.,  11.]]),
 array([[ 12.,  13.,  14.,  15.]]),
 array([], dtype=float64)]
```

With a higher dimensional array the split is still along the first axis.

```
>>> x = np.arange(8.0).reshape(2, 2, 2)
>>> x
array([[[ 0.,  1.],
        [ 2.,  3.]],
       [[ 4.,  5.],
        [ 6.,  7.]]])
```

(continues on next page)

(continued from previous page)

```
>>> np.vsplit(x, 2)
[array([[[ 0.,  1.],
        [ 2.,  3.]]]),
 array([[[ 4.,  5.],
        [ 6.,  7.]]])]
```

3.2.8 Tiling arrays

tile(A, reps)	Construct an array by repeating A the number of times given by reps.
repeat(a, repeats[, axis])	Repeat elements of an array.

numpy.**tile**(*A*, *reps*)

Construct an array by repeating A the number of times given by reps.

If *reps* has length `d`, the result will have dimension of `max(d, A.ndim)`.

If `A.ndim < d`, *A* is promoted to be d-dimensional by prepending new axes. So a shape (3,) array is promoted to (1, 3) for 2-D replication, or shape (1, 1, 3) for 3-D replication. If this is not the desired behavior, promote *A* to d-dimensions manually before calling this function.

If `A.ndim > d`, *reps* is promoted to *A*.ndim by pre-pending 1's to it. Thus for an *A* of shape (2, 3, 4, 5), a *reps* of (2, 2) is treated as (1, 1, 2, 2).

Note : Although tile may be used for broadcasting, it is strongly recommended to use numpy's broadcasting operations and functions.

Parameters **A** : array_like

The input array.

reps : array_like

The number of repetitions of *A* along each axis.

Returns **c** : ndarray

The tiled output array.

See also:

repeat Repeat elements of an array.

broadcast_to Broadcast an array to a new shape

Examples

```
>>> a = np.array([0, 1, 2])
>>> np.tile(a, 2)
array([0, 1, 2, 0, 1, 2])
>>> np.tile(a, (2, 2))
array([[0, 1, 2, 0, 1, 2],
       [0, 1, 2, 0, 1, 2]])
>>> np.tile(a, (2, 1, 2))
array([[[0, 1, 2, 0, 1, 2]],
       [[0, 1, 2, 0, 1, 2]]])
```

```
>>> b = np.array([[1, 2], [3, 4]])
>>> np.tile(b, 2)
array([[1, 2, 1, 2],
       [3, 4, 3, 4]])
>>> np.tile(b, (2, 1))
array([[1, 2],
       [3, 4],
       [1, 2],
       [3, 4]])
```

```
>>> c = np.array([1,2,3,4])
>>> np.tile(c,(4,1))
array([[1, 2, 3, 4],
       [1, 2, 3, 4],
       [1, 2, 3, 4],
       [1, 2, 3, 4]])
```

numpy.**repeat**(*a*, *repeats*, *axis=None*)

Repeat elements of an array.

Parameters **a** : array_like

Input array.

repeats : int or array of ints

The number of repetitions for each element. *repeats* is broadcasted to fit the shape of the given axis.

axis : int, optional

The axis along which to repeat values. By default, use the flattened input array, and return a flat output array.

Returns **repeated_array** : ndarray

Output array which has the same shape as *a*, except along the given axis.

See also:

tile Tile an array.

Examples

```
>>> np.repeat(3, 4)
array([3, 3, 3, 3])
>>> x = np.array([[1,2],[3,4]])
>>> np.repeat(x, 2)
array([1, 1, 2, 2, 3, 3, 4, 4])
>>> np.repeat(x, 3, axis=1)
array([[1, 1, 1, 2, 2, 2],
       [3, 3, 3, 4, 4, 4]])
>>> np.repeat(x, [1, 2], axis=0)
array([[1, 2],
       [3, 4],
       [3, 4]])
```

3.2.9 Adding and removing elements

delete(arr, obj[, axis])	Return a new array with sub-arrays along an axis deleted.
insert(arr, obj, values[, axis])	Insert values along the given axis before the given indices.
append(arr, values[, axis])	Append values to the end of an array.
resize(a, new_shape)	Return a new array with the specified shape.
trim_zeros(filt[, trim])	Trim the leading and/or trailing zeros from a 1-D array or sequence.
unique(ar[, return_index, return_inverse, ...])	Find the unique elements of an array.

numpy.**delete**(*arr*, *obj*, *axis=None*)

Return a new array with sub-arrays along an axis deleted. For a one dimensional array, this returns those entries not returned by *arr[obj]*.

Parameters **arr** : array_like

Input array.

obj : slice, int or array of ints

Indicate which sub-arrays to remove.

axis : int, optional

The axis along which to delete the subarray defined by *obj*. If *axis* is None, *obj* is applied to the flattened array.

Returns **out** : ndarray

A copy of *arr* with the elements specified by *obj* removed. Note that *delete* does not occur in-place. If *axis* is None, *out* is a flattened array.

See also:

insert Insert elements into an array.

append Append elements at the end of an array.

Notes

Often it is preferable to use a boolean mask. For example:

```
>>> mask = np.ones(len(arr), dtype=bool)
>>> mask[[0,2,4]] = False
>>> result = arr[mask,...]
```

Is equivalent to *np.delete(arr, [0,2,4], axis=0)*, but allows further use of *mask*.

Examples

```
>>> arr = np.array([[1,2,3,4], [5,6,7,8], [9,10,11,12]])
>>> arr
array([[ 1,  2,  3,  4],
       [ 5,  6,  7,  8],
       [ 9, 10, 11, 12]])
```

(continues on next page)

(continued from previous page)

```
>>> np.delete(arr, 1, 0)
array([[ 1,  2,  3,  4],
       [ 9, 10, 11, 12]])
```

```
>>> np.delete(arr, np.s_[::2], 1)
array([[ 2,  4],
       [ 6,  8],
       [10, 12]])
>>> np.delete(arr, [1,3,5], None)
array([ 1,  3,  5,  7,  8,  9, 10, 11, 12])
```

numpy.**insert**(*arr*, *obj*, *values*, *axis=None*)

Insert values along the given axis before the given indices.

Parameters **arr** : array_like

Input array.

obj : int, slice or sequence of ints

Object that defines the index or indices before which *values* is inserted.

New in version 1.8.0.

Support for multiple insertions when *obj* is a single scalar or a sequence with one element (similar to calling insert multiple times).

values : array_like

Values to insert into *arr*. If the type of *values* is different from that of *arr*, *values* is converted to the type of *arr*. *values* should be shaped so that `arr[...,obj,...] = values` is legal.

axis : int, optional

Axis along which to insert *values*. If *axis* is None then *arr* is flattened first.

Returns **out** : ndarray

A copy of *arr* with *values* inserted. Note that *insert* does not occur in-place: a new array is returned. If *axis* is None, *out* is a flattened array.

See also:

append Append elements at the end of an array.

concatenate Join a sequence of arrays along an existing axis.

delete Delete elements from an array.

Notes

Note that for higher dimensional inserts *obj=0* behaves very different from *obj=[0]* just like *arr[:,0,:] = values* is different from *arr[:,[0],:] = values*.

Examples

```
>>> a = np.array([[1, 1], [2, 2], [3, 3]])
>>> a
array([[1, 1],
       [2, 2],
       [3, 3]])
>>> np.insert(a, 1, 5)
array([1, 5, 1, 2, 2, 3, 3])
>>> np.insert(a, 1, 5, axis=1)
array([[1, 5, 1],
       [2, 5, 2],
       [3, 5, 3]])
```

Difference between sequence and scalars:

```
>>> np.insert(a, [1], [[1],[2],[3]], axis=1)
array([[1, 1, 1],
       [2, 2, 2],
       [3, 3, 3]])
>>> np.array_equal(np.insert(a, 1, [1, 2, 3], axis=1),
...                np.insert(a, [1], [[1],[2],[3]], axis=1))
True
```

```
>>> b = a.flatten()
>>> b
array([1, 1, 2, 2, 3, 3])
>>> np.insert(b, [2, 2], [5, 6])
array([1, 1, 5, 6, 2, 2, 3, 3])
```

```
>>> np.insert(b, slice(2, 4), [5, 6])
array([1, 1, 5, 2, 6, 2, 3, 3])
```

```
>>> np.insert(b, [2, 2], [7.13, False]) # type casting
array([1, 1, 7, 0, 2, 2, 3, 3])
```

```
>>> x = np.arange(8).reshape(2, 4)
>>> idx = (1, 3)
>>> np.insert(x, idx, 999, axis=1)
array([[  0, 999,   1,   2, 999,   3],
       [  4, 999,   5,   6, 999,   7]])
```

numpy.**append**(*arr*, *values*, *axis=None*)

Append values to the end of an array.

Parameters **arr** : array_like

Values are appended to a copy of this array.

values : array_like

These values are appended to a copy of *arr*. It must be of the correct shape (the same shape as *arr*, excluding *axis*). If *axis* is not specified, *values* can be any shape and will be flattened before use.

axis : int, optional

The axis along which *values* are appended. If *axis* is not given, both *arr* and *values* are flattened before use.

Returns **append** : ndarray

A copy of *arr* with *values* appended to *axis*. Note that *append* does not occur in-place: a new array is allocated and filled. If *axis* is None, *out* is a flattened array.

See also:

insert Insert elements into an array.

delete Delete elements from an array.

Examples

```
>>> np.append([1, 2, 3], [[4, 5, 6], [7, 8, 9]])
array([1, 2, 3, 4, 5, 6, 7, 8, 9])
```

When *axis* is specified, *values* must have the correct shape.

```
>>> np.append([[1, 2, 3], [4, 5, 6]], [[7, 8, 9]], axis=0)
array([[1, 2, 3],
       [4, 5, 6],
       [7, 8, 9]])
>>> np.append([[1, 2, 3], [4, 5, 6]], [7, 8, 9], axis=0)
Traceback (most recent call last):
...
ValueError: arrays must have same number of dimensions
```

numpy.**resize**(*a*, *new_shape*)

Return a new array with the specified shape.

If the new array is larger than the original array, then the new array is filled with repeated copies of *a*. Note that this behavior is different from a.resize(new_shape) which fills with zeros instead of repeated copies of *a*.

Parameters **a** : array_like

Array to be resized.

new_shape : int or tuple of int

Shape of resized array.

Returns **reshaped_array** : ndarray

The new array is formed from the data in the old array, repeated if necessary to fill out the required number of elements. The data are repeated in the order that they are stored in memory.

See also:

ndarray.resize resize an array in-place.

Examples

```
>>> a=np.array([[0,1],[2,3]])
>>> np.resize(a,(2,3))
array([[0, 1, 2],
       [3, 0, 1]])
>>> np.resize(a,(1,4))
array([[0, 1, 2, 3]])
>>> np.resize(a,(2,4))
array([[0, 1, 2, 3],
       [0, 1, 2, 3]])
```

numpy.**trim_zeros**(*filt*, *trim='fb'*)

Trim the leading and/or trailing zeros from a 1-D array or sequence.

Parameters **filt** : 1-D array or sequence

Input array.

trim : str, optional

A string with 'f' representing trim from front and 'b' to trim from back. Default is 'fb', trim zeros from both front and back of the array.

Returns **trimmed** : 1-D array or sequence

The result of trimming the input. The input data type is preserved.

Examples

```
>>> a = np.array((0, 0, 0, 1, 2, 3, 0, 2, 1, 0))
>>> np.trim_zeros(a)
array([1, 2, 3, 0, 2, 1])
```

```
>>> np.trim_zeros(a, 'b')
array([0, 0, 0, 1, 2, 3, 0, 2, 1])
```

The input data type is preserved, list/tuple in means list/tuple out.

```
>>> np.trim_zeros([0, 1, 2, 0])
[1, 2]
```

numpy.**unique**(*ar*, *return_index=False*, *return_inverse=False*, *return_counts=False*, *axis=None*)

Find the unique elements of an array.

Returns the sorted unique elements of an array. There are three optional outputs in addition to the unique elements: the indices of the input array that give the unique values, the indices of the unique array that reconstruct the input array, and the number of times each unique value comes up in the input array.

Parameters **ar** : array_like

Input array. Unless *axis* is specified, this will be flattened if it is not already 1-D.

return_index : bool, optional

If True, also return the indices of *ar* (along the specified axis, if provided, or in the flattened array) that result in the unique array.

return_inverse : bool, optional

If True, also return the indices of the unique array (for the specified axis, if provided) that can be used to reconstruct *ar*.

return_counts : bool, optional

If True, also return the number of times each unique item appears in *ar*.

New in version 1.9.0.

axis : int or None, optional

The axis to operate on. If None, *ar* will be flattened. If an integer, the subarrays indexed by the given axis will be flattened and treated as the elements of a 1-D array with the dimension of the given axis, see the notes for more details. Object arrays or structured arrays that contain objects are not supported if the *axis* kwarg is used. The default is None.

New in version 1.13.0.

Returns **unique** : ndarray

The sorted unique values.

unique_indices : ndarray, optional

The indices of the first occurrences of the unique values in the original array. Only provided if *return_index* is True.

unique_inverse : ndarray, optional

The indices to reconstruct the original array from the unique array. Only provided if *return_inverse* is True.

unique_counts : ndarray, optional

The number of times each of the unique values comes up in the original array. Only provided if *return_counts* is True. .. versionadded:: 1.9.0

See also:

numpy.lib.arraysetops Module with a number of other functions for performing set operations on arrays.

Notes

When an axis is specified the subarrays indexed by the axis are sorted. This is done by making the specified axis the first dimension of the array and then flattening the subarrays in C order. The flattened subarrays are then viewed as a structured type with each element given a label, with the effect that we end up with a 1-D array of structured types that can be treated in the same way as any other 1-D array. The result is that the flattened subarrays are sorted in lexicographic order starting with the first element.

Examples

```
>>> np.unique([1, 1, 2, 2, 3, 3])
array([1, 2, 3])
>>> a = np.array([[1, 1], [2, 3]])
>>> np.unique(a)
array([1, 2, 3])
```

Return the unique rows of a 2D array

```
>>> a = np.array([[1, 0, 0], [1, 0, 0], [2, 3, 4]])
>>> np.unique(a, axis=0)
array([[1, 0, 0], [2, 3, 4]])
```

Return the indices of the original array that give the unique values:

```
>>> a = np.array(['a', 'b', 'b', 'c', 'a'])
>>> u, indices = np.unique(a, return_index=True)
>>> u
array(['a', 'b', 'c'],
      dtype='|S1')
>>> indices
array([0, 1, 3])
>>> a[indices]
array(['a', 'b', 'c'],
      dtype='|S1')
```

Reconstruct the input array from the unique values:

```
>>> a = np.array([1, 2, 6, 4, 2, 3, 2])
>>> u, indices = np.unique(a, return_inverse=True)
>>> u
array([1, 2, 3, 4, 6])
>>> indices
array([0, 1, 4, 3, 1, 2, 1])
>>> u[indices]
array([1, 2, 6, 4, 2, 3, 2])
```

3.2.10 Rearranging elements

flip(m, axis)	Reverse the order of elements in an array along the given axis.
fliplr(m)	Flip array in the left/right direction.
flipud(m)	Flip array in the up/down direction.
reshape(a, newshape[, order])	Gives a new shape to an array without changing its data.
roll(a, shift[, axis])	Roll array elements along a given axis.
rot90(m[, k, axes])	Rotate an array by 90 degrees in the plane specified by axes.

numpy.**flip**(*m*, *axis*)

Reverse the order of elements in an array along the given axis.

The shape of the array is preserved, but the elements are reordered.

New in version 1.12.0.

Parameters **m** : array_like

Input array.

axis : integer

Axis in array, which entries are reversed.

Returns **out** : array_like

A view of *m* with the entries of axis reversed. Since a view is returned, this operation is done in constant time.

See also:

flipud Flip an array vertically (axis=0).

fliplr Flip an array horizontally (axis=1).

Notes

flip(m, 0) is equivalent to flipud(m). flip(m, 1) is equivalent to fliplr(m). flip(m, n) corresponds to `m[...,::-1,...]` with `::-1` at position n.

Examples

```
>>> A = np.arange(8).reshape((2,2,2))
>>> A
array([[[0, 1],
        [2, 3]],
```

[[4, 5], [6, 7]]])

```
>>> flip(A, 0)
array([[[4, 5],
        [6, 7]],
```

[[0, 1], [2, 3]]])

```
>>> flip(A, 1)
array([[[2, 3],
        [0, 1]],
```

[[6, 7], [4, 5]]])

```
>>> A = np.random.randn(3,4,5)
>>> np.all(flip(A,2) == A[:,:,::-1,...])
True
```

numpy.**fliplr**(*m*)

Flip array in the left/right direction.

Flip the entries in each row in the left/right direction. Columns are preserved, but appear in a different order than before.

Parameters **m** : array_like

Input array, must be at least 2-D.

Returns **f** : ndarray

A view of *m* with the columns reversed. Since a view is returned, this operation is $\mathcal{O}(1)$.

See also:

flipud Flip array in the up/down direction.

rot90 Rotate array counterclockwise.

Notes

Equivalent to m[:,::-1]. Requires the array to be at least 2-D.

Examples

```
>>> A = np.diag([1.,2.,3.])
>>> A
array([[ 1.,  0.,  0.],
       [ 0.,  2.,  0.],
       [ 0.,  0.,  3.]])
>>> np.fliplr(A)
array([[ 0.,  0.,  1.],
       [ 0.,  2.,  0.],
       [ 3.,  0.,  0.]])
```

```
>>> A = np.random.randn(2,3,5)
>>> np.all(np.fliplr(A) == A[:,::-1,...])
True
```

numpy.**flipud**(*m*)

Flip array in the up/down direction.

Flip the entries in each column in the up/down direction. Rows are preserved, but appear in a different order than before.

Parameters **m** : array_like

Input array.

Returns **out** : array_like

A view of *m* with the rows reversed. Since a view is returned, this operation is $\mathcal{O}(1)$.

See also:

fliplr Flip array in the left/right direction.

rot90 Rotate array counterclockwise.

Notes

Equivalent to `m[::-1,...]`. Does not require the array to be two-dimensional.

Examples

```
>>> A = np.diag([1.0, 2, 3])
>>> A
array([[ 1.,  0.,  0.],
       [ 0.,  2.,  0.],
       [ 0.,  0.,  3.]])
>>> np.flipud(A)
array([[ 0.,  0.,  3.],
       [ 0.,  2.,  0.],
       [ 1.,  0.,  0.]])
```

```
>>> A = np.random.randn(2,3,5)
>>> np.all(np.flipud(A) == A[::-1,...])
True
```

```
>>> np.flipud([1,2])
array([2, 1])
```

numpy.**roll**(*a*, *shift*, *axis=None*)

Roll array elements along a given axis.

Elements that roll beyond the last position are re-introduced at the first.

Parameters **a** : array_like

Input array.

shift : int or tuple of ints

The number of places by which elements are shifted. If a tuple, then *axis* must be a tuple of the same size, and each of the given axes is shifted by the corresponding number. If an int while *axis* is a tuple of ints, then the same value is used for all given axes.

axis : int or tuple of ints, optional

Axis or axes along which elements are shifted. By default, the array is flattened before shifting, after which the original shape is restored.

Returns **res** : ndarray

Output array, with the same shape as *a*.

See also:

rollaxis Roll the specified axis backwards, until it lies in a given position.

Notes

New in version 1.12.0.

Supports rolling over multiple dimensions simultaneously.

Examples

```
>>> x = np.arange(10)
>>> np.roll(x, 2)
array([8, 9, 0, 1, 2, 3, 4, 5, 6, 7])
```

```
>>> x2 = np.reshape(x, (2,5))
>>> x2
array([[0, 1, 2, 3, 4],
       [5, 6, 7, 8, 9]])
>>> np.roll(x2, 1)
array([[9, 0, 1, 2, 3],
       [4, 5, 6, 7, 8]])
>>> np.roll(x2, 1, axis=0)
array([[5, 6, 7, 8, 9],
       [0, 1, 2, 3, 4]])
```

(continues on next page)

(continued from previous page)

```
>>> np.roll(x2, 1, axis=1)
array([[4, 0, 1, 2, 3],
       [9, 5, 6, 7, 8]])
```

numpy.**rot90**(*m*, *k=1*, *axes=(0, 1)*)

Rotate an array by 90 degrees in the plane specified by axes.

Rotation direction is from the first towards the second axis.

Parameters **m** : array_like

Array of two or more dimensions.

k : integer

Number of times the array is rotated by 90 degrees.

axes: (2,) array_like

The array is rotated in the plane defined by the axes. Axes must be different.

New in version 1.12.0.

Returns **y** : ndarray

A rotated view of *m*.

See also:

flip Reverse the order of elements in an array along the given axis.

fliplr Flip an array horizontally.

flipud Flip an array vertically.

Notes

rot90(m, k=1, axes=(1,0)) is the reverse of rot90(m, k=1, axes=(0,1)) rot90(m, k=1, axes=(1,0)) is equivalent to rot90(m, k=-1, axes=(0,1))

Examples

```
>>> m = np.array([[1,2],[3,4]], int)
>>> m
array([[1, 2],
       [3, 4]])
>>> np.rot90(m)
array([[2, 4],
       [1, 3]])
>>> np.rot90(m, 2)
array([[4, 3],
       [2, 1]])
>>> m = np.arange(8).reshape((2,2,2))
>>> np.rot90(m, 1, (1,2))
array([[[1, 3],
        [0, 2]],
```

[[5, 7], [4, 6]]])

3.3 Binary operations

3.3.1 Elementwise bit operations

bitwise_and(x1, x2, /[, out, where, ...])	Compute the bit-wise AND of two arrays element-wise.
bitwise_or(x1, x2, /[, out, where, casting, ...])	Compute the bit-wise OR of two arrays element-wise.
bitwise_xor(x1, x2, /[, out, where, ...])	Compute the bit-wise XOR of two arrays element-wise.
invert(x, /[, out, where, casting, order, ...])	Compute bit-wise inversion, or bit-wise NOT, element-wise.
left_shift(x1, x2, /[, out, where, casting, ...])	Shift the bits of an integer to the left.
right_shift(x1, x2, /[, out, where, ...])	Shift the bits of an integer to the right.

numpy.**bitwise_and**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'bitwise_and'>**

Compute the bit-wise AND of two arrays element-wise.

Computes the bit-wise AND of the underlying binary representation of the integers in the input arrays. This ufunc implements the C/Python operator `&`.

Parameters **x1, x2** : array_like

Only integer and boolean types are handled.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : array_like

Result.

See also:

logical_and, *bitwise_or*, *bitwise_xor*

binary_repr Return the binary representation of the input number as a string.

Examples

The number 13 is represented by `00001101`. Likewise, 17 is represented by `00010001`. The bit-wise AND of 13 and 17 is therefore `000000001`, or 1:

```
>>> np.bitwise_and(13, 17)
1
```

```
>>> np.bitwise_and(14, 13)
12
>>> np.binary_repr(12)
'1100'
>>> np.bitwise_and([14,3], 13)
array([12,  1])
```

```
>>> np.bitwise_and([11,7], [4,25])
array([0, 1])
>>> np.bitwise_and(np.array([2,5,255]), np.array([3,14,16]))
array([ 2,  4, 16])
>>> np.bitwise_and([True, True], [False, True])
array([False,  True])
```

numpy.**bitwise_or**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'bitwise_or'>**

Compute the bit-wise OR of two arrays element-wise.

Computes the bit-wise OR of the underlying binary representation of the integers in the input arrays. This ufunc implements the C/Python operator `|`.

Parameters **x1, x2** : array_like

Only integer and boolean types are handled.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : array_like

Result.

See also:

logical_or, *bitwise_and*, *bitwise_xor*

binary_repr Return the binary representation of the input number as a string.

Examples

The number 13 has the binaray representation `00001101`. Likewise, 16 is represented by `00010000`. The bit-wise OR of 13 and 16 is then `000111011`, or 29:

```
>>> np.bitwise_or(13, 16)
29
>>> np.binary_repr(29)
'11101'
```

```
>>> np.bitwise_or(32, 2)
34
>>> np.bitwise_or([33, 4], 1)
array([33,  5])
>>> np.bitwise_or([33, 4], [1, 2])
array([33,  6])
```

```
>>> np.bitwise_or(np.array([2, 5, 255]), np.array([4, 4, 4]))
array([  6,   5, 255])
>>> np.array([2, 5, 255]) | np.array([4, 4, 4])
array([  6,   5, 255])
>>> np.bitwise_or(np.array([2, 5, 255, 2147483647L], dtype=np.int32),
...               np.array([4, 4, 4, 2147483647L], dtype=np.int32))
array([         6,          5,        255, 2147483647])
>>> np.bitwise_or([True, True], [False, True])
array([ True,  True])
```

numpy.**bitwise_xor**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'bitwise_xor'>**

Compute the bit-wise XOR of two arrays element-wise.

Computes the bit-wise XOR of the underlying binary representation of the integers in the input arrays. This ufunc implements the C/Python operator ^.

Parameters **x1, x2** : array_like

Only integer and boolean types are handled.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : array_like

Result.

See also:

logical_xor, *bitwise_and*, *bitwise_or*

binary_repr Return the binary representation of the input number as a string.

Examples

The number 13 is represented by `00001101`. Likewise, 17 is represented by `00010001`. The bit-wise XOR of 13 and 17 is therefore `00011100`, or 28:

```
>>> np.bitwise_xor(13, 17)
28
>>> np.binary_repr(28)
'11100'
```

```
>>> np.bitwise_xor(31, 5)
26
>>> np.bitwise_xor([31,3], 5)
array([26,  6])
```

```
>>> np.bitwise_xor([31,3], [5,6])
array([26,  5])
>>> np.bitwise_xor([True, True], [False, True])
array([ True, False])
```

numpy.**invert**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'invert'>**

Compute bit-wise inversion, or bit-wise NOT, element-wise.

Computes the bit-wise NOT of the underlying binary representation of the integers in the input arrays. This ufunc implements the C/Python operator ~.

For signed integer inputs, the two's complement is returned. In a two's-complement system negative numbers are represented by the two's complement of the absolute value. This is the most common method of representing signed integers on computers *[R37]*. A N-bit two's-complement system can represent every integer in the range -2^{N-1} to $+2^{N-1}-1$.

Parameters **x** : array_like

Only integer and boolean types are handled.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : array_like

Result.

See also:

bitwise_and, *bitwise_or*, *bitwise_xor*, *logical_not*

binary_repr Return the binary representation of the input number as a string.

Notes

bitwise_not is an alias for *invert*:

```
>>> np.bitwise_not is np.invert
True
```

References

[R37]

Examples

We've seen that 13 is represented by `00001101`. The invert or bit-wise NOT of 13 is then:

```
>>> np.invert(np.array([13], dtype=uint8))
array([242], dtype=uint8)
>>> np.binary_repr(x, width=8)
'00001101'
>>> np.binary_repr(242, width=8)
'11110010'
```

The result depends on the bit-width:

```
>>> np.invert(np.array([13], dtype=uint16))
array([65522], dtype=uint16)
>>> np.binary_repr(x, width=16)
'0000000000001101'
>>> np.binary_repr(65522, width=16)
'1111111111110010'
```

When using signed integer types the result is the two's complement of the result for the unsigned type:

```
>>> np.invert(np.array([13], dtype=int8))
array([-14], dtype=int8)
>>> np.binary_repr(-14, width=8)
'11110010'
```

Booleans are accepted as well:

```
>>> np.invert(array([True, False]))
array([False,  True])
```

numpy.**left_shift**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'left_shift'>**

Shift the bits of an integer to the left.

Bits are shifted to the left by appending *x2* 0s at the right of *x1*. Since the internal representation of numbers is in binary format, this operation is equivalent to multiplying *x1* by `2**x2`.

Parameters **x1** : array_like of integer type

Input values.

x2 : array_like of integer type

Number of zeros to append to *x1*. Has to be non-negative.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : array of integer type

Return *x1* with bits shifted *x2* times to the left.

See also:

right_shift Shift the bits of an integer to the right.

binary_repr Return the binary representation of the input number as a string.

Examples

```
>>> np.binary_repr(5)
'101'
>>> np.left_shift(5, 2)
20
>>> np.binary_repr(20)
'10100'
```

```
>>> np.left_shift(5, [1,2,3])
array([10, 20, 40])
```

numpy.**right_shift**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'right_shift'>**

Shift the bits of an integer to the right.

Bits are shifted to the right *x2*. Because the internal representation of numbers is in binary format, this operation is equivalent to dividing *x1* by `2**x2`.

Parameters **x1** : array_like, int

Input values.

x2 : array_like, int

Number of bits to remove at the right of *x1*.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : ndarray, int

Return *x1* with bits shifted *x2* times to the right.

See also:

left_shift Shift the bits of an integer to the left.

binary_repr Return the binary representation of the input number as a string.

Examples

```
>>> np.binary_repr(10)
'1010'
>>> np.right_shift(10, 1)
5
>>> np.binary_repr(5)
'101'
```

```
>>> np.right_shift(10, [1,2,3])
array([5, 2, 1])
```

3.3.2 Bit packing

packbits(myarray[, axis])	Packs the elements of a binary-valued array into bits in a uint8 array.
unpackbits(myarray[, axis])	Unpacks elements of a uint8 array into a binary-valued output array.

numpy.**packbits**(*myarray*, *axis=None*)

Packs the elements of a binary-valued array into bits in a uint8 array.

The result is padded to full bytes by inserting zero bits at the end.

Parameters **myarray** : array_like

An array of integers or booleans whose elements should be packed to bits.

axis : int, optional

The dimension over which bit-packing is done. `None` implies packing the flattened array.

Returns **packed** : ndarray

Array of type uint8 whose elements represent bits corresponding to the logical (0 or nonzero) value of the input elements. The shape of *packed* has the same number of dimensions as the input (unless *axis* is None, in which case the output is 1-D).

See also:

unpackbits Unpacks elements of a uint8 array into a binary-valued output array.

Examples

```
>>> a = np.array([[[1,0,1],
...                [0,1,0]],
...               [[1,1,0],
...                [0,0,1]]])
>>> b = np.packbits(a, axis=-1)
>>> b
array([[[160],[64]],[[192],[32]]], dtype=uint8)
```

Note that in binary 160 = 1010 0000, 64 = 0100 0000, 192 = 1100 0000, and 32 = 0010 0000.

`numpy.`**`unpackbits`**(*myarray*, *axis=None*)

Unpacks elements of a uint8 array into a binary-valued output array.

Each element of *myarray* represents a bit-field that should be unpacked into a binary-valued output array. The shape of the output array is either 1-D (if *axis* is None) or the same shape as the input array with unpacking done along the axis specified.

Parameters **myarray** : ndarray, uint8 type

Input array.

axis : int, optional

The dimension over which bit-unpacking is done. `None` implies unpacking the flattened array.

Returns **unpacked** : ndarray, uint8 type

The elements are binary-valued (0 or 1).

See also:

packbits Packs the elements of a binary-valued array into bits in a uint8 array.

Examples

```
>>> a = np.array([[2], [7], [23]], dtype=np.uint8)
>>> a
array([[ 2],
       [ 7],
       [23]], dtype=uint8)
>>> b = np.unpackbits(a, axis=1)
>>> b
array([[0, 0, 0, 0, 0, 0, 1, 0],
       [0, 0, 0, 0, 0, 1, 1, 1],
       [0, 0, 0, 1, 0, 1, 1, 1]], dtype=uint8)
```

3.3.3 Output formatting

binary_repr(num[, width])	Return the binary representation of the input number as a string.

numpy.**binary_repr**(*num*, *width=None*)

Return the binary representation of the input number as a string.

For negative numbers, if width is not given, a minus sign is added to the front. If width is given, the two's complement of the number is returned, with respect to that width.

In a two's-complement system negative numbers are represented by the two's complement of the absolute value. This is the most common method of representing signed integers on computers *[R16]*. A N-bit two's-complement system can represent every integer in the range -2^{N-1} to $+2^{N-1}-1$.

Parameters **num** : int

Only an integer decimal number can be used.

width : int, optional

The length of the returned string if *num* is positive, or the length of the two's complement if *num* is negative, provided that *width* is at least a sufficient number of bits for *num* to be represented in the designated form.

If the *width* value is insufficient, it will be ignored, and *num* will be returned in binary (*num* > 0) or two's complement (*num* < 0) form with its width equal to the minimum number of bits needed to represent the number in the designated form. This behavior is deprecated and will later raise an error.

Deprecated since version 1.12.0.

Returns **bin** : str

Binary representation of *num* or two's complement of *num*.

See also:

base_repr Return a string representation of a number in the given base system.

bin Python's built-in binary representation generator of an integer.

Notes

binary_repr is equivalent to using *base_repr* with base 2, but about 25x faster.

References

[R16]

Examples

```
>>> np.binary_repr(3)
'11'
>>> np.binary_repr(-3)
'-11'
>>> np.binary_repr(3, width=4)
'0011'
```

The two's complement is returned when the input number is negative and width is specified:

```
>>> np.binary_repr(-3, width=3)
'101'
>>> np.binary_repr(-3, width=5)
'11101'
```

3.4 String operations

This module provides a set of vectorized string operations for arrays of type `numpy.string_` or `numpy.unicode_`. All of them are based on the string methods in the Python standard library.

3.4.1 String operations

add(x1, x2)	Return element-wise string concatenation for two arrays of str or unicode.
multiply(a, i)	Return (a * i), that is string multiple concatenation, element-wise.
mod(a, values)	Return (a % i), that is pre-Python 2.6 string formatting (interpolation), element-wise for a pair of array_likes of str or unicode.
capitalize(a)	Return a copy of *a* with only the first character of each element capitalized.
center(a, width[, fillchar])	Return a copy of *a* with its elements centered in a string of length *width*.
decode(a[, encoding, errors])	Calls *str.decode* element-wise.
encode(a[, encoding, errors])	Calls *str.encode* element-wise.
join(sep, seq)	Return a string which is the concatenation of the strings in the sequence *seq*.
ljust(a, width[, fillchar])	Return an array with the elements of *a* left-justified in a string of length *width*.
lower(a)	Return an array with the elements converted to lowercase.
lstrip(a[, chars])	For each element in *a*, return a copy with the leading characters removed.
partition(a, sep)	Partition each element in *a* around *sep*.
replace(a, old, new[, count])	For each element in *a*, return a copy of the string with all occurrences of substring *old* replaced by *new*.
rjust(a, width[, fillchar])	Return an array with the elements of *a* right-justified in a string of length *width*.
rpartition(a, sep)	Partition (split) each element around the right-most separator.
rsplit(a[, sep, maxsplit])	For each element in *a*, return a list of the words in the string, using *sep* as the delimiter string.
rstrip(a[, chars])	For each element in *a*, return a copy with the trailing characters removed.
split(a[, sep, maxsplit])	For each element in *a*, return a list of the words in the string, using *sep* as the delimiter string.
splitlines(a[, keepends])	For each element in *a*, return a list of the lines in the element, breaking at line boundaries.

Continued on next page

Table 21 – continued from previous page

strip(a[, chars])	For each element in *a*, return a copy with the leading and trailing characters removed.
swapcase(a)	Return element-wise a copy of the string with uppercase characters converted to lowercase and vice versa.
title(a)	Return element-wise title cased version of string or unicode.
translate(a, table[, deletechars])	For each element in *a*, return a copy of the string where all characters occurring in the optional argument *deletechars* are removed, and the remaining characters have been mapped through the given translation table.
upper(a)	Return an array with the elements converted to uppercase.
zfill(a, width)	Return the numeric string left-filled with zeros

numpy.core.defchararray.**add**(*x1*, *x2*)

Return element-wise string concatenation for two arrays of str or unicode.

Arrays *x1* and *x2* must have the same shape.

Parameters **x1** : array_like of str or unicode

Input array.

x2 : array_like of str or unicode

Input array.

Returns **add** : ndarray

Output array of `string_` or `unicode_`, depending on input types of the same shape as *x1* and *x2*.

numpy.core.defchararray.**multiply**(*a*, *i*)

Return (a * i), that is string multiple concatenation, element-wise.

Values in *i* of less than 0 are treated as 0 (which yields an empty string).

Parameters **a** : array_like of str or unicode

i : array_like of ints

Returns **out** : ndarray

Output array of str or unicode, depending on input types

numpy.core.defchararray.**mod**(*a*, *values*)

Return (a % i), that is pre-Python 2.6 string formatting (iterpolation), element-wise for a pair of array_likes of str or unicode.

Parameters **a** : array_like of str or unicode

values : array_like of values

These values will be element-wise interpolated into the string.

Returns **out** : ndarray

Output array of str or unicode, depending on input types

See also:

`str.__mod__`

numpy.core.defchararray.**capitalize**(*a*)

Return a copy of *a* with only the first character of each element capitalized.

Calls *str.capitalize* element-wise.

For 8-bit strings, this method is locale-dependent.

Parameters **a** : array_like of str or unicode

Input array of strings to capitalize.

Returns **out** : ndarray

Output array of str or unicode, depending on input types

See also:

`str.capitalize`

Examples

```
>>> c = np.array(['a1b2','1b2a','b2a1','2a1b'],'S4'); c
array(['a1b2', '1b2a', 'b2a1', '2a1b'],
    dtype='|S4')
>>> np.char.capitalize(c)
array(['A1b2', '1b2a', 'B2a1', '2a1b'],
    dtype='|S4')
```

numpy.core.defchararray.**center**(*a*, *width*, *fillchar=' '*)

Return a copy of *a* with its elements centered in a string of length *width*.

Calls *str.center* element-wise.

Parameters **a** : array_like of str or unicode

width : int

The length of the resulting strings

fillchar : str or unicode, optional

The padding character to use (default is space).

Returns **out** : ndarray

Output array of str or unicode, depending on input types

See also:

`str.center`

numpy.core.defchararray.**decode**(*a*, *encoding=None*, *errors=None*)

Calls *str.decode* element-wise.

The set of available codecs comes from the Python standard library, and may be extended at runtime. For more information, see the `codecs` module.

Parameters **a** : array_like of str or unicode

encoding : str, optional

The name of an encoding

errors : str, optional

Specifies how to handle encoding errors

Returns **out** : ndarray

See also:

`str.decode`

Notes

The type of the result will depend on the encoding specified.

Examples

```
>>> c = np.array(['aAaAaA', '  aA  ', 'abBABba'])
>>> c
array(['aAaAaA', '  aA  ', 'abBABba'],
    dtype='|S7')
>>> np.char.encode(c, encoding='cp037')
array(['\x81\xc1\x81\xc1\x81\xc1', '@@\x81\xc1@@',
    '\x81\x82\xc2\xc1\xc2\x82\x81'],
    dtype='|S7')
```

numpy.core.defchararray.**encode**(*a*, *encoding=None*, *errors=None*)

Calls *str.encode* element-wise.

The set of available codecs comes from the Python standard library, and may be extended at runtime. For more information, see the codecs module.

Parameters **a** : array_like of str or unicode

encoding : str, optional

The name of an encoding

errors : str, optional

Specifies how to handle encoding errors

Returns **out** : ndarray

See also:

`str.encode`

Notes

The type of the result will depend on the encoding specified.

numpy.core.defchararray.**join**(*sep*, *seq*)

Return a string which is the concatenation of the strings in the sequence *seq*.

Calls *str.join* element-wise.

Parameters **sep** : array_like of str or unicode

seq : array_like of str or unicode

Returns **out** : ndarray

Output array of str or unicode, depending on input types

See also:

`str.join`

numpy.core.defchararray.**ljust**(*a*, *width*, *fillchar=' '*)

Return an array with the elements of *a* left-justified in a string of length *width*.

Calls *str.ljust* element-wise.

Parameters **a** : array_like of str or unicode

width : int

The length of the resulting strings

fillchar : str or unicode, optional

The character to use for padding

Returns **out** : ndarray

Output array of str or unicode, depending on input type

See also:

`str.ljust`

numpy.core.defchararray.**lower**(*a*)

Return an array with the elements converted to lowercase.

Call *str.lower* element-wise.

For 8-bit strings, this method is locale-dependent.

Parameters **a** : array_like, {str, unicode}

Input array.

Returns **out** : ndarray, {str, unicode}

Output array of str or unicode, depending on input type

See also:

`str.lower`

Examples

```
>>> c = np.array(['A1B C', '1BCA', 'BCA1']); c
array(['A1B C', '1BCA', 'BCA1'],
      dtype='|S5')
>>> np.char.lower(c)
array(['a1b c', '1bca', 'bca1'],
      dtype='|S5')
```

numpy.core.defchararray.**lstrip**(*a*, *chars=None*)

For each element in *a*, return a copy with the leading characters removed.

Calls *str.lstrip* element-wise.

Parameters **a** : array-like, {str, unicode}

Input array.

chars : {str, unicode}, optional

The *chars* argument is a string specifying the set of characters to be removed. If omitted or None, the *chars* argument defaults to removing whitespace. The *chars* argument is not a prefix; rather, all combinations of its values are stripped.

Returns **out** : ndarray, {str, unicode}

Output array of str or unicode, depending on input type

See also:

`str.lstrip`

Examples

```
>>> c = np.array(['aAaAaA', '  aA  ', 'abBABba'])
>>> c
array(['aAaAaA', '  aA  ', 'abBABba'],
    dtype='|S7')
```

The 'a' variable is unstripped from c[1] because whitespace leading.

```
>>> np.char.lstrip(c, 'a')
array(['AaAaA', '  aA  ', 'bBABba'],
    dtype='|S7')
```

```
>>> np.char.lstrip(c, 'A') # leaves c unchanged
array(['aAaAaA', '  aA  ', 'abBABba'],
    dtype='|S7')
>>> (np.char.lstrip(c, ' ') == np.char.lstrip(c, '')).all()
... # XXX: is this a regression? this line now returns False
... # np.char.lstrip(c,'') does not modify c at all.
True
>>> (np.char.lstrip(c, ' ') == np.char.lstrip(c, None)).all()
True
```

numpy.core.defchararray.**partition**(*a*, *sep*)

Partition each element in *a* around *sep*.

Calls *str.partition* element-wise.

For each element in *a*, split the element as the first occurrence of *sep*, and return 3 strings containing the part before the separator, the separator itself, and the part after the separator. If the separator is not found, return 3 strings containing the string itself, followed by two empty strings.

Parameters **a** : array_like, {str, unicode}

Input array

sep : {str, unicode}

Separator to split each string element in *a*.

Returns **out** : ndarray, {str, unicode}

Output array of str or unicode, depending on input type. The output array will have an extra dimension with 3 elements per input element.

See also:

`str.partition`

numpy.core.defchararray.**replace**(*a*, *old*, *new*, *count=None*)
For each element in *a*, return a copy of the string with all occurrences of substring *old* replaced by *new*.

Calls *str.replace* element-wise.

Parameters **a** : array-like of str or unicode

old, new : str or unicode

count : int, optional

If the optional argument `count` is given, only the first `count` occurrences are replaced.

Returns **out** : ndarray

Output array of str or unicode, depending on input type

See also:

`str.replace`

numpy.core.defchararray.**rjust**(*a*, *width*, *fillchar=' '*)
Return an array with the elements of *a* right-justified in a string of length *width*.

Calls *str.rjust* element-wise.

Parameters **a** : array_like of str or unicode

width : int

The length of the resulting strings

fillchar : str or unicode, optional

The character to use for padding

Returns **out** : ndarray

Output array of str or unicode, depending on input type

See also:

`str.rjust`

numpy.core.defchararray.**rpartition**(*a*, *sep*)
Partition (split) each element around the right-most separator.

Calls *str.rpartition* element-wise.

For each element in *a*, split the element as the last occurrence of *sep*, and return 3 strings containing the part before the separator, the separator itself, and the part after the separator. If the separator is not found, return 3 strings containing the string itself, followed by two empty strings.

Parameters **a** : array_like of str or unicode

Input array

sep : str or unicode

Right-most separator to split each element in array.

Returns **out** : ndarray

Output array of string or unicode, depending on input type. The output array will have an extra dimension with 3 elements per input element.

See also:

`str.rpartition`

numpy.core.defchararray.**rsplit**(*a*, *sep=None*, *maxsplit=None*)

For each element in *a*, return a list of the words in the string, using *sep* as the delimiter string.

Calls *str.rsplit* element-wise.

Except for splitting from the right, *rsplit* behaves like *split*.

Parameters **a** : array_like of str or unicode

sep : str or unicode, optional

If *sep* is not specified or *None*, any whitespace string is a separator.

maxsplit : int, optional

If *maxsplit* is given, at most *maxsplit* splits are done, the rightmost ones.

Returns **out** : ndarray

Array of list objects

See also:

str.rsplit, *split*

numpy.core.defchararray.**rstrip**(*a*, *chars=None*)

For each element in *a*, return a copy with the trailing characters removed.

Calls *str.rstrip* element-wise.

Parameters **a** : array-like of str or unicode

chars : str or unicode, optional

The *chars* argument is a string specifying the set of characters to be removed. If omitted or None, the *chars* argument defaults to removing whitespace. The *chars* argument is not a suffix; rather, all combinations of its values are stripped.

Returns **out** : ndarray

Output array of str or unicode, depending on input type

See also:

str.rstrip

Examples

```
>>> c = np.array(['aAaAaA', 'abBABba'], dtype='S7'); c
array(['aAaAaA', 'abBABba'],
    dtype='|S7')
>>> np.char.rstrip(c, 'a')
array(['aAaAaA', 'abBABb'],
    dtype='|S7')
>>> np.char.rstrip(c, 'A')
array(['aAaAa', 'abBABba'],
    dtype='|S7')
```

numpy.core.defchararray.**split**(*a*, *sep=None*, *maxsplit=None*)

For each element in *a*, return a list of the words in the string, using *sep* as the delimiter string.

Calls *str.split* element-wise.

Parameters **a** : array_like of str or unicode

sep : str or unicode, optional

If *sep* is not specified or *None*, any whitespace string is a separator.

maxsplit : int, optional

If *maxsplit* is given, at most *maxsplit* splits are done.

Returns **out** : ndarray

Array of list objects

See also:

`str.split`, *rsplit*

`numpy.core.defchararray.`**`splitlines`**(*a*, *keepends=None*)

For each element in *a*, return a list of the lines in the element, breaking at line boundaries.

Calls *str.splitlines* element-wise.

Parameters **a** : array_like of str or unicode

keepends : bool, optional

Line breaks are not included in the resulting list unless keepends is given and true.

Returns **out** : ndarray

Array of list objects

See also:

`str.splitlines`

`numpy.core.defchararray.`**`strip`**(*a*, *chars=None*)

For each element in *a*, return a copy with the leading and trailing characters removed.

Calls *str.strip* element-wise.

Parameters **a** : array-like of str or unicode

chars : str or unicode, optional

The *chars* argument is a string specifying the set of characters to be removed. If omitted or None, the *chars* argument defaults to removing whitespace. The *chars* argument is not a prefix or suffix; rather, all combinations of its values are stripped.

Returns **out** : ndarray

Output array of str or unicode, depending on input type

See also:

`str.strip`

Examples

```
>>> c = np.array(['aAaAaA', '  aA  ', 'abBABba'])
>>> c
array(['aAaAaA', '  aA  ', 'abBABba'],
    dtype='|S7')
>>> np.char.strip(c)
```

(continues on next page)

(continued from previous page)

```
array(['aAaAaA', 'aA', 'abBABba'],
    dtype='|S7')
>>> np.char.strip(c, 'a') # 'a' unstripped from c[1] because whitespace leads
array(['AaAaA', '  aA  ', 'bBABb'],
    dtype='|S7')
>>> np.char.strip(c, 'A') # 'A' unstripped from c[1] because (unprinted) ws trails
array(['aAaAa', '  aA  ', 'abBABba'],
    dtype='|S7')
```

numpy.core.defchararray.**swapcase**(*a*)

Return element-wise a copy of the string with uppercase characters converted to lowercase and vice versa.

Calls *str.swapcase* element-wise.

For 8-bit strings, this method is locale-dependent.

Parameters **a** : array_like, {str, unicode}

Input array.

Returns **out** : ndarray, {str, unicode}

Output array of str or unicode, depending on input type

See also:

`str.swapcase`

Examples

```
>>> c=np.array(['a1B c','1b Ca','b Ca1','cA1b'],'S5'); c
array(['a1B c', '1b Ca', 'b Ca1', 'cA1b'],
    dtype='|S5')
>>> np.char.swapcase(c)
array(['A1b C', '1B cA', 'B cA1', 'Ca1B'],
    dtype='|S5')
```

numpy.core.defchararray.**title**(*a*)

Return element-wise title cased version of string or unicode.

Title case words start with uppercase characters, all remaining cased characters are lowercase.

Calls *str.title* element-wise.

For 8-bit strings, this method is locale-dependent.

Parameters **a** : array_like, {str, unicode}

Input array.

Returns **out** : ndarray

Output array of str or unicode, depending on input type

See also:

`str.title`

Examples

```
>>> c=np.array(['a1b c','1b ca','b ca1','ca1b'],'S5'); c
array(['a1b c', '1b ca', 'b ca1', 'ca1b'],
    dtype='|S5')
>>> np.char.title(c)
array(['A1B C', '1B Ca', 'B Ca1', 'Ca1B'],
    dtype='|S5')
```

numpy.core.defchararray.**translate**(*a*, *table*, *deletechars=None*)

For each element in *a*, return a copy of the string where all characters occurring in the optional argument *deletechars* are removed, and the remaining characters have been mapped through the given translation table.

Calls *str.translate* element-wise.

Parameters **a** : array-like of str or unicode

table : str of length 256

deletechars : str

Returns **out** : ndarray

Output array of str or unicode, depending on input type

See also:

`str.translate`

numpy.core.defchararray.**upper**(*a*)

Return an array with the elements converted to uppercase.

Calls *str.upper* element-wise.

For 8-bit strings, this method is locale-dependent.

Parameters **a** : array_like, {str, unicode}

Input array.

Returns **out** : ndarray, {str, unicode}

Output array of str or unicode, depending on input type

See also:

`str.upper`

Examples

```
>>> c = np.array(['a1b c', '1bca', 'bca1']); c
array(['a1b c', '1bca', 'bca1'],
    dtype='|S5')
>>> np.char.upper(c)
array(['A1B C', '1BCA', 'BCA1'],
    dtype='|S5')
```

numpy.core.defchararray.**zfill**(*a*, *width*)

Return the numeric string left-filled with zeros

Calls *str.zfill* element-wise.

Parameters **a** : array_like, {str, unicode}

Input array.

width : int

Width of string to left-fill elements in *a*.

Returns **out** : ndarray, {str, unicode}

Output array of str or unicode, depending on input type

See also:

`str.zfill`

3.4.2 Comparison

Unlike the standard numpy comparison operators, the ones in the *char* module strip trailing whitespace characters before performing the comparison.

equal(x1, x2)	Return (x1 == x2) element-wise.
not_equal(x1, x2)	Return (x1 != x2) element-wise.
greater_equal(x1, x2)	Return (x1 >= x2) element-wise.
less_equal(x1, x2)	Return (x1 <= x2) element-wise.
greater(x1, x2)	Return (x1 > x2) element-wise.
less(x1, x2)	Return (x1 < x2) element-wise.

numpy.core.defchararray.**equal**(*x1*, *x2*)

Return (x1 == x2) element-wise.

Unlike *numpy.equal*, this comparison is performed by first stripping whitespace characters from the end of the string. This behavior is provided for backward-compatibility with numarray.

Parameters **x1, x2** : array_like of str or unicode

Input arrays of the same shape.

Returns **out** : ndarray or bool

Output array of bools, or a single bool if x1 and x2 are scalars.

See also:

not_equal, *greater_equal*, *less_equal*, *greater*, *less*

numpy.core.defchararray.**not_equal**(*x1*, *x2*)

Return (x1 != x2) element-wise.

Unlike *numpy.not_equal*, this comparison is performed by first stripping whitespace characters from the end of the string. This behavior is provided for backward-compatibility with numarray.

Parameters **x1, x2** : array_like of str or unicode

Input arrays of the same shape.

Returns **out** : ndarray or bool

Output array of bools, or a single bool if x1 and x2 are scalars.

See also:

equal, *greater_equal*, *less_equal*, *greater*, *less*

numpy.core.defchararray.**greater_equal**(*x1*, *x2*)
Return (x1 >= x2) element-wise.

Unlike *numpy.greater_equal*, this comparison is performed by first stripping whitespace characters from the end of the string. This behavior is provided for backward-compatibility with numarray.

Parameters **x1, x2** : array_like of str or unicode

Input arrays of the same shape.

Returns **out** : ndarray or bool

Output array of bools, or a single bool if x1 and x2 are scalars.

See also:

equal, *not_equal*, *less_equal*, *greater*, *less*

numpy.core.defchararray.**less_equal**(*x1*, *x2*)
Return (x1 <= x2) element-wise.

Unlike *numpy.less_equal*, this comparison is performed by first stripping whitespace characters from the end of the string. This behavior is provided for backward-compatibility with numarray.

Parameters **x1, x2** : array_like of str or unicode

Input arrays of the same shape.

Returns **out** : ndarray or bool

Output array of bools, or a single bool if x1 and x2 are scalars.

See also:

equal, *not_equal*, *greater_equal*, *greater*, *less*

numpy.core.defchararray.**greater**(*x1*, *x2*)
Return (x1 > x2) element-wise.

Unlike *numpy.greater*, this comparison is performed by first stripping whitespace characters from the end of the string. This behavior is provided for backward-compatibility with numarray.

Parameters **x1, x2** : array_like of str or unicode

Input arrays of the same shape.

Returns **out** : ndarray or bool

Output array of bools, or a single bool if x1 and x2 are scalars.

See also:

equal, *not_equal*, *greater_equal*, *less_equal*, *less*

numpy.core.defchararray.**less**(*x1*, *x2*)
Return (x1 < x2) element-wise.

Unlike *numpy.greater*, this comparison is performed by first stripping whitespace characters from the end of the string. This behavior is provided for backward-compatibility with numarray.

Parameters **x1, x2** : array_like of str or unicode

Input arrays of the same shape.

Returns **out** : ndarray or bool

Output array of bools, or a single bool if x1 and x2 are scalars.

See also:

equal, *not_equal*, *greater_equal*, *less_equal*, *greater*

3.4.3 String information

count(a, sub[, start, end])	Returns an array with the number of non-overlapping occurrences of substring *sub* in the range [*start*, *end*].
find(a, sub[, start, end])	For each element, return the lowest index in the string where substring *sub* is found.
index(a, sub[, start, end])	Like *find*, but raises *ValueError* when the substring is not found.
isalpha(a)	Returns true for each element if all characters in the string are alphabetic and there is at least one character, false otherwise.
isdecimal(a)	For each element, return True if there are only decimal characters in the element.
isdigit(a)	Returns true for each element if all characters in the string are digits and there is at least one character, false otherwise.
islower(a)	Returns true for each element if all cased characters in the string are lowercase and there is at least one cased character, false otherwise.
isnumeric(a)	For each element, return True if there are only numeric characters in the element.
isspace(a)	Returns true for each element if there are only whitespace characters in the string and there is at least one character, false otherwise.
istitle(a)	Returns true for each element if the element is a titlecased string and there is at least one character, false otherwise.
isupper(a)	Returns true for each element if all cased characters in the string are uppercase and there is at least one character, false otherwise.
rfind(a, sub[, start, end])	For each element in *a*, return the highest index in the string where substring *sub* is found, such that *sub* is contained within [*start*, *end*].
rindex(a, sub[, start, end])	Like *rfind*, but raises *ValueError* when the substring *sub* is not found.
startswith(a, prefix[, start, end])	Returns a boolean array which is *True* where the string element in *a* starts with *prefix*, otherwise *False*.

numpy.core.defchararray.**count**(*a*, *sub*, *start=0*, *end=None*)

Returns an array with the number of non-overlapping occurrences of substring *sub* in the range [*start*, *end*].

Calls *str.count* element-wise.

Parameters **a** : array_like of str or unicode

sub : str or unicode

The substring to search for.

start, end : int, optional

Optional arguments *start* and *end* are interpreted as slice notation to specify the range in which to count.

Returns **out** : ndarray

Output array of ints.

See also:

`str.count`

Examples

```
>>> c = np.array(['aAaAaA', '  aA  ', 'abBABba'])
>>> c
array(['aAaAaA', '  aA  ', 'abBABba'],
    dtype='|S7')
>>> np.char.count(c, 'A')
array([3, 1, 1])
>>> np.char.count(c, 'aA')
array([3, 1, 0])
>>> np.char.count(c, 'A', start=1, end=4)
array([2, 1, 1])
>>> np.char.count(c, 'A', start=1, end=3)
array([1, 0, 0])
```

numpy.core.defchararray.**find**(*a*, *sub*, *start=0*, *end=None*)

For each element, return the lowest index in the string where substring *sub* is found.

Calls *str.find* element-wise.

For each element, return the lowest index in the string where substring *sub* is found, such that *sub* is contained in the range [*start*, *end*].

Parameters **a** : array_like of str or unicode

sub : str or unicode

start, end : int, optional

Optional arguments *start* and *end* are interpreted as in slice notation.

Returns **out** : ndarray or int

Output array of ints. Returns -1 if *sub* is not found.

See also:

`str.find`

numpy.core.defchararray.**index**(*a*, *sub*, *start=0*, *end=None*)

Like *find*, but raises *ValueError* when the substring is not found.

Calls *str.index* element-wise.

Parameters **a** : array_like of str or unicode

sub : str or unicode

start, end : int, optional

Returns **out** : ndarray

Output array of ints. Returns -1 if *sub* is not found.

See also:

find, `str.find`

numpy.core.defchararray.**isalpha**(*a*)

Returns true for each element if all characters in the string are alphabetic and there is at least one character, false otherwise.

Calls *str.isalpha* element-wise.

For 8-bit strings, this method is locale-dependent.

Parameters **a** : array_like of str or unicode

Returns **out** : ndarray

Output array of bools

See also:

`str.isalpha`

numpy.core.defchararray.**isdecimal**(*a*)

For each element, return True if there are only decimal characters in the element.

Calls *unicode.isdecimal* element-wise.

Decimal characters include digit characters, and all characters that that can be used to form decimal-radix numbers, e.g. `U+0660, ARABIC-INDIC DIGIT ZERO`.

Parameters **a** : array_like, unicode

Input array.

Returns **out** : ndarray, bool

Array of booleans identical in shape to *a*.

See also:

`unicode.isdecimal`

numpy.core.defchararray.**isdigit**(*a*)

Returns true for each element if all characters in the string are digits and there is at least one character, false otherwise.

Calls *str.isdigit* element-wise.

For 8-bit strings, this method is locale-dependent.

Parameters **a** : array_like of str or unicode

Returns **out** : ndarray

Output array of bools

See also:

`str.isdigit`

numpy.core.defchararray.**islower**(*a*)

Returns true for each element if all cased characters in the string are lowercase and there is at least one cased character, false otherwise.

Calls *str.islower* element-wise.

For 8-bit strings, this method is locale-dependent.

Parameters **a** : array_like of str or unicode

Returns **out** : ndarray

Output array of bools

See also:

`str.islower`

numpy.core.defchararray.**isnumeric**(*a*)

For each element, return True if there are only numeric characters in the element.

Calls *unicode.isnumeric* element-wise.

Numeric characters include digit characters, and all characters that have the Unicode numeric value property, e.g. `U+2155, VULGAR FRACTION ONE FIFTH`.

Parameters **a** : array_like, unicode

Input array.

Returns **out** : ndarray, bool

Array of booleans of same shape as *a*.

See also:

`unicode.isnumeric`

numpy.core.defchararray.**isspace**(*a*)

Returns true for each element if there are only whitespace characters in the string and there is at least one character, false otherwise.

Calls *str.isspace* element-wise.

For 8-bit strings, this method is locale-dependent.

Parameters **a** : array_like of str or unicode

Returns **out** : ndarray

Output array of bools

See also:

`str.isspace`

numpy.core.defchararray.**istitle**(*a*)

Returns true for each element if the element is a titlecased string and there is at least one character, false otherwise.

Call *str.istitle* element-wise.

For 8-bit strings, this method is locale-dependent.

Parameters **a** : array_like of str or unicode

Returns **out** : ndarray

Output array of bools

See also:

`str.istitle`

numpy.core.defchararray.**isupper**(*a*)

Returns true for each element if all cased characters in the string are uppercase and there is at least one character, false otherwise.

Call *str.isupper* element-wise.

For 8-bit strings, this method is locale-dependent.

Parameters **a** : array_like of str or unicode

Returns **out** : ndarray

Output array of bools

See also:

`str.isupper`

numpy.core.defchararray.**rfind**(*a*, *sub*, *start=0*, *end=None*)

For each element in *a*, return the highest index in the string where substring *sub* is found, such that *sub* is contained within [*start*, *end*].

Calls *str.rfind* element-wise.

Parameters **a** : array-like of str or unicode

sub : str or unicode

start, end : int, optional

Optional arguments *start* and *end* are interpreted as in slice notation.

Returns **out** : ndarray

Output array of ints. Return -1 on failure.

See also:

`str.rfind`

numpy.core.defchararray.**rindex**(*a*, *sub*, *start=0*, *end=None*)

Like *rfind*, but raises *ValueError* when the substring *sub* is not found.

Calls *str.rindex* element-wise.

Parameters **a** : array-like of str or unicode

sub : str or unicode

start, end : int, optional

Returns **out** : ndarray

Output array of ints.

See also:

rfind, `str.rindex`

numpy.core.defchararray.**startswith**(*a*, *prefix*, *start=0*, *end=None*)

Returns a boolean array which is *True* where the string element in *a* starts with *prefix*, otherwise *False*.

Calls *str.startswith* element-wise.

Parameters **a** : array_like of str or unicode

prefix : str

start, end : int, optional

With optional *start*, test beginning at that position. With optional *end*, stop comparing at that position.

Returns **out** : ndarray

Array of booleans

See also:

`str.startswith`

3.4.4 Convenience class

chararray(shape[, itemsize, unicode, ...])	Provides a convenient view on arrays of string and unicode values.

class numpy.core.defchararray.**chararray**(*shape*, *itemsize=1*, *unicode=False*, *buffer=None*, *offset=0*, *strides=None*, *order=None*)

Provides a convenient view on arrays of string and unicode values.

Note: The *chararray* class exists for backwards compatibility with Numarray, it is not recommended for new development. Starting from numpy 1.4, if one needs arrays of strings, it is recommended to use arrays of *dtype* `object_`, `string_` or `unicode_`, and use the free functions in the `numpy.char` module for fast vectorized string operations.

Versus a regular NumPy array of type *str* or *unicode*, this class adds the following functionality:

1. values automatically have whitespace removed from the end when indexed
2. comparison operators automatically remove whitespace from the end when comparing values
3. vectorized string operations are provided as methods (e.g. *endswith*) and infix operators (e.g. `"+", "*", "%"`)

chararrays should be created using `numpy.char.array` or `numpy.char.asarray`, rather than this constructor directly.

This constructor creates the array, using *buffer* (with *offset* and *strides*) if it is not `None`. If *buffer* is `None`, then constructs a new array with *strides* in "C order", unless both `len(shape) >= 2` and `order='Fortran'`, in which case *strides* is in "Fortran order".

Parameters **shape** : tuple

Shape of the array.

itemsize : int, optional

Length of each array element, in number of characters. Default is 1.

unicode : bool, optional

Are the array elements of type unicode (True) or string (False). Default is False.

buffer : int, optional

Memory address of the start of the array data. Default is None, in which case a new array is created.

offset : int, optional

Fixed stride displacement from the beginning of an axis? Default is 0. Needs to be >=0.

strides : array_like of ints, optional

Strides for the array (see `ndarray.strides` for full description). Default is None.

order : {'C', 'F'}, optional

The order in which the array data is stored in memory: 'C' -> "row major" order (the default), 'F' -> "column major" (Fortran) order.

Examples

```
>>> charar = np.chararray((3, 3))
>>> charar[:] = 'a'
>>> charar
chararray([['a', 'a', 'a'],
       ['a', 'a', 'a'],
       ['a', 'a', 'a']],
      dtype='|S1')
```

```
>>> charar = np.chararray(charar.shape, itemsize=5)
>>> charar[:] = 'abc'
>>> charar
chararray([['abc', 'abc', 'abc'],
       ['abc', 'abc', 'abc'],
       ['abc', 'abc', 'abc']],
      dtype='|S5')
```

Attributes

T	Same as self.transpose(), except that self is returned if self.ndim < 2.
base	Base object if memory is from some other object.
ctypes	An object to simplify the interaction of the array with the ctypes module.
data	Python buffer object pointing to the start of the array's data.
dtype	Data-type of the array's elements.
flags	Information about the memory layout of the array.
flat	A 1-D iterator over the array.
imag	The imaginary part of the array.
itemsize	Length of one array element in bytes.
nbytes	Total bytes consumed by the elements of the array.
ndim	Number of array dimensions.
real	The real part of the array.
shape	Tuple of array dimensions.
size	Number of elements in the array.
strides	Tuple of bytes to step in each dimension when traversing an array.

chararray.**T**
Same as self.transpose(), except that self is returned if self.ndim < 2.

Examples

```
>>> x = np.array([[1.,2.],[3.,4.]])
>>> x
array([[ 1.,  2.],
       [ 3.,  4.]])
>>> x.T
```

(continues on next page)

(continued from previous page)

```
array([[ 1.,  3.],
       [ 2.,  4.]])
>>> x = np.array([1.,2.,3.,4.])
>>> x
array([ 1.,  2.,  3.,  4.])
>>> x.T
array([ 1.,  2.,  3.,  4.])
```

chararray.**base**

Base object if memory is from some other object.

Examples

The base of an array that owns its memory is None:

```
>>> x = np.array([1,2,3,4])
>>> x.base is None
True
```

Slicing creates a view, whose memory is shared with x:

```
>>> y = x[2:]
>>> y.base is x
True
```

chararray.**ctypes**

An object to simplify the interaction of the array with the ctypes module.

This attribute creates an object that makes it easier to use arrays when calling shared libraries with the ctypes module. The returned object has, among others, data, shape, and strides attributes (see Notes below) which themselves return ctypes objects that can be used as arguments to a shared library.

Parameters None

Returns **c** : Python object

Possessing attributes data, shape, strides, etc.

See also:

numpy.ctypeslib

Notes

Below are the public attributes of this object which were documented in "Guide to NumPy" (we have omitted undocumented public attributes, as well as documented private attributes):

- data: A pointer to the memory area of the array as a Python integer. This memory area may contain data that is not aligned, or not in correct byte-order. The memory area may not even be writeable. The array flags and data-type of this array should be respected when passing this attribute to arbitrary C-code to avoid trouble that can include Python crashing. User Beware! The value of this attribute is exactly the same as self._array_interface_['data'][0].
- shape (c_intp*self.ndim): A ctypes array of length self.ndim where the basetype is the C-integer corresponding to dtype('p') on this platform. This base-type could be c_int, c_long, or c_longlong

depending on the platform. The c_intp type is defined accordingly in numpy.ctypeslib. The ctypes array contains the shape of the underlying array.

- strides (c_intp*self.ndim): A ctypes array of length self.ndim where the basetype is the same as for the shape attribute. This ctypes array contains the strides information from the underlying array. This strides information is important for showing how many bytes must be jumped to get to the next element in the array.
- data_as(obj): Return the data pointer cast to a particular c-types object. For example, calling self._as_parameter_ is equivalent to self.data_as(ctypes.c_void_p). Perhaps you want to use the data as a pointer to a ctypes array of floating-point data: self.data_as(ctypes.POINTER(ctypes.c_double)).
- shape_as(obj): Return the shape tuple as an array of some other c-types type. For example: self.shape_as(ctypes.c_short).
- strides_as(obj): Return the strides tuple as an array of some other c-types type. For example: self.strides_as(ctypes.c_longlong).

Be careful using the ctypes attribute - especially on temporary arrays or arrays constructed on the fly. For example, calling `(a+b).ctypes.data_as(ctypes.c_void_p)` returns a pointer to memory that is invalid because the array created as (a+b) is deallocated before the next Python statement. You can avoid this problem using either `c=a+b` or `ct=(a+b).ctypes`. In the latter case, ct will hold a reference to the array until ct is deleted or re-assigned.

If the ctypes module is not available, then the ctypes attribute of array objects still returns something useful, but ctypes objects are not returned and errors may be raised instead. In particular, the object will still have the as parameter attribute which will return an integer equal to the data attribute.

Examples

```
>>> import ctypes
>>> x
array([[0, 1],
       [2, 3]])
>>> x.ctypes.data
30439712
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_long))
<ctypes.LP_c_long object at 0x01F01300>
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_long)).contents
c_long(0)
>>> x.ctypes.data_as(ctypes.POINTER(ctypes.c_longlong)).contents
c_longlong(4294967296L)
>>> x.ctypes.shape
<numpy.core._internal.c_long_Array_2 object at 0x01FFD580>
>>> x.ctypes.shape_as(ctypes.c_long)
<numpy.core._internal.c_long_Array_2 object at 0x01FCE620>
>>> x.ctypes.strides
<numpy.core._internal.c_long_Array_2 object at 0x01FCE620>
>>> x.ctypes.strides_as(ctypes.c_longlong)
<numpy.core._internal.c_longlong_Array_2 object at 0x01F01300>
```

chararray.**data**
Python buffer object pointing to the start of the array's data.

chararray.**dtype**
Data-type of the array's elements.

Parameters None

Returns **d** : numpy dtype object

See also:

numpy.dtype

Examples

```
>>> x
array([[0, 1],
       [2, 3]])
>>> x.dtype
dtype('int32')
>>> type(x.dtype)
<type 'numpy.dtype'>
```

chararray.**flags**

Information about the memory layout of the array.

Notes

The *flags* object can be accessed dictionary-like (as in `a.flags['WRITEABLE']`), or by using lowercased attribute names (as in `a.flags.writeable`). Short flag names are only supported in dictionary access.

Only the WRITEBACKIFCOPY, UPDATEIFCOPY, WRITEABLE, and ALIGNED flags can be changed by the user, via direct assignment to the attribute or dictionary entry, or by calling `ndarray.setflags`.

The array flags cannot be set arbitrarily:

- UPDATEIFCOPY can only be set `False`.
- WRITEBACKIFCOPY can only be set `False`.
- ALIGNED can only be set `True` if the data is truly aligned.
- WRITEABLE can only be set `True` if the array owns its own memory or the ultimate owner of the memory exposes a writeable buffer interface or is a string.

Arrays can be both C-style and Fortran-style contiguous simultaneously. This is clear for 1-dimensional arrays, but can also be true for higher dimensional arrays.

Even for contiguous arrays a stride for a given dimension `arr.strides[dim]` may be *arbitrary* if `arr.shape[dim] == 1` or the array has no elements. It does *not* generally hold that `self.strides[-1] == self.itemsize` for C-style contiguous arrays or `self.strides[0] == self.itemsize` for Fortran-style contiguous arrays is true.

Attributes

C_CONTIGUOUS (C)	The data is in a single, C-style contiguous segment.
F_CONTIGUOUS (F)	The data is in a single, Fortran-style contiguous segment.
OWNDATA (O)	The array owns the memory it uses or borrows it from another object.
WRITEABLE (W)	The data area can be written to. Setting this to False locks the data, making it read-only. A view (slice, etc.) inherits WRITEABLE from its base array at creation time, but a view of a writeable array may be subsequently locked while the base array remains writeable. (The opposite is not true, in that a view of a locked array may not be made writeable. However, currently, locking a base object does not lock any views that already reference it, so under that circumstance it is possible to alter the contents of a locked array via a previously created writeable view onto it.) Attempting to change a non-writeable array raises a RuntimeError exception.
ALIGNED (A)	The data and all elements are aligned appropriately for the hardware.
WRITEBACKIFCOPY (X)	This array is a copy of some other array. The C-API function PyArray_ResolveWritebackIfCopy must be called before deallocating to the base array will be updated with the contents of this array.
UPDATEIFCOPY (U)	(Deprecated, use WRITEBACKIFCOPY) This array is a copy of some other array. When this array is deallocated, the base array will be updated with the contents of this array.
FNC	F_CONTIGUOUS and not C_CONTIGUOUS.
FORC	F_CONTIGUOUS or C_CONTIGUOUS (one-segment test).
BEHAVED (B)	ALIGNED and WRITEABLE.
CARRAY (CA)	BEHAVED and C_CONTIGUOUS.
FARRAY (FA)	BEHAVED and F_CONTIGUOUS and not C_CONTIGUOUS.

chararray.**flat**
A 1-D iterator over the array.

This is a *numpy.flatiter* instance, which acts similarly to, but is not a subclass of, Python's built-in iterator object.

See also:

flatten Return a copy of the array collapsed into one dimension.

flatiter

Examples

```
>>> x = np.arange(1, 7).reshape(2, 3)
>>> x
array([[1, 2, 3],
       [4, 5, 6]])
>>> x.flat[3]
4
>>> x.T
array([[1, 4],
       [2, 5],
       [3, 6]])
>>> x.T.flat[3]
5
>>> type(x.flat)
<type 'numpy.flatiter'>
```

An assignment example:

```
>>> x.flat = 3; x
array([[3, 3, 3],
       [3, 3, 3]])
>>> x.flat[[1,4]] = 1; x
array([[3, 1, 3],
       [3, 1, 3]])
```

chararray.**imag**
The imaginary part of the array.

Examples

```
>>> x = np.sqrt([1+0j, 0+1j])
>>> x.imag
array([ 0.        ,  0.70710678])
>>> x.imag.dtype
dtype('float64')
```

chararray.**itemsize**
Length of one array element in bytes.

Examples

```
>>> x = np.array([1,2,3], dtype=np.float64)
>>> x.itemsize
8
>>> x = np.array([1,2,3], dtype=np.complex128)
>>> x.itemsize
16
```

chararray.**nbytes**
Total bytes consumed by the elements of the array.

Notes

Does not include memory consumed by non-element attributes of the array object.

Examples

```
>>> x = np.zeros((3,5,2), dtype=np.complex128)
>>> x.nbytes
480
>>> np.prod(x.shape) * x.itemsize
480
```

chararray.**ndim**
Number of array dimensions.

Examples

```
>>> x = np.array([1, 2, 3])
>>> x.ndim
1
>>> y = np.zeros((2, 3, 4))
>>> y.ndim
3
```

chararray.**real**
The real part of the array.

See also:

numpy.real equivalent function

Examples

```
>>> x = np.sqrt([1+0j, 0+1j])
>>> x.real
array([ 1.        ,  0.70710678])
>>> x.real.dtype
dtype('float64')
```

chararray.**shape**
Tuple of array dimensions.

The shape property is usually used to get the current shape of an array, but may also be used to reshape the array in-place by assigning a tuple of array dimensions to it. As with *numpy.reshape*, one of the new shape dimensions can be -1, in which case its value is inferred from the size of the array and the remaining dimensions. Reshaping an array in-place will fail if a copy is required.

See also:

numpy.reshape similar function

ndarray.reshape similar method

Examples

```
>>> x = np.array([1, 2, 3, 4])
>>> x.shape
(4,)
>>> y = np.zeros((2, 3, 4))
>>> y.shape
(2, 3, 4)
>>> y.shape = (3, 8)
>>> y
array([[ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.],
       [ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.],
       [ 0.,  0.,  0.,  0.,  0.,  0.,  0.,  0.]])
>>> y.shape = (3, 6)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: total size of new array must be unchanged
>>> np.zeros((4,2))[::2].shape = (-1,)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
AttributeError: incompatible shape for a non-contiguous array
```

chararray.**size**

Number of elements in the array.

Equivalent to `np.prod(a.shape)`, i.e., the product of the array's dimensions.

Examples

```
>>> x = np.zeros((3, 5, 2), dtype=np.complex128)
>>> x.size
30
>>> np.prod(x.shape)
30
```

chararray.**strides**

Tuple of bytes to step in each dimension when traversing an array.

The byte offset of element `(i[0], i[1], ..., i[n])` in an array *a* is:

```
offset = sum(np.array(i) * a.strides)
```

A more detailed explanation of strides can be found in the "ndarray.rst" file in the NumPy reference guide.

See also:

numpy.lib.stride_tricks.as_strided

Notes

Imagine an array of 32-bit integers (each 4 bytes):

```
x = np.array([[0, 1, 2, 3, 4],
              [5, 6, 7, 8, 9]], dtype=np.int32)
```

This array is stored in memory as 40 bytes, one after the other (known as a contiguous block of memory). The strides of an array tell us how many bytes we have to skip in memory to move to the next position along a certain axis. For example, we have to skip 4 bytes (1 value) to move to the next column, but 20 bytes (5 values) to get to the same position in the next row. As such, the strides for the array *x* will be `(20, 4)`.

Examples

```
>>> y = np.reshape(np.arange(2*3*4), (2,3,4))
>>> y
array([[[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]],
       [[12, 13, 14, 15],
        [16, 17, 18, 19],
        [20, 21, 22, 23]]])
>>> y.strides
(48, 16, 4)
>>> y[1,1,1]
17
>>> offset=sum(y.strides * np.array((1,1,1)))
>>> offset/y.itemsize
17
```

```
>>> x = np.reshape(np.arange(5*6*7*8), (5,6,7,8)).transpose(2,3,1,0)
>>> x.strides
(32, 4, 224, 1344)
>>> i = np.array([3,5,2,2])
>>> offset = sum(i * x.strides)
>>> x[3,5,2,2]
813
>>> offset / x.itemsize
813
```

Methods

astype(dtype[, order, casting, subok, copy])	Copy of the array, cast to a specified type.
argsort([axis, kind, order])	Returns the indices that would sort this array.
copy([order])	Return a copy of the array.
count(sub[, start, end])	Returns an array with the number of non-overlapping occurrences of substring *sub* in the range [*start*, *end*].
decode([encoding, errors])	Calls *str.decode* element-wise.
dump(file)	Dump a pickle of the array to the specified file.
dumps()	Returns the pickle of the array as a string.
encode([encoding, errors])	Calls *str.encode* element-wise.
endswith(suffix[, start, end])	Returns a boolean array which is *True* where the string element in *self* ends with *suffix*, otherwise *False*.
expandtabs([tabsize])	Return a copy of each string element where all tab characters are replaced by one or more spaces.
fill(value)	Fill the array with a scalar value.

Continued on next page

Table 26 – continued from previous page

find(sub[, start, end])	For each element, return the lowest index in the string where substring *sub* is found.
flatten([order])	Return a copy of the array collapsed into one dimension.
getfield(dtype[, offset])	Returns a field of the given array as a certain type.
index(sub[, start, end])	Like find, but raises *ValueError* when the substring is not found.
isalnum()	Returns true for each element if all characters in the string are alphanumeric and there is at least one character, false otherwise.
isalpha()	Returns true for each element if all characters in the string are alphabetic and there is at least one character, false otherwise.
isdecimal()	For each element in *self*, return True if there are only decimal characters in the element.
isdigit()	Returns true for each element if all characters in the string are digits and there is at least one character, false otherwise.
islower()	Returns true for each element if all cased characters in the string are lowercase and there is at least one cased character, false otherwise.
isnumeric()	For each element in *self*, return True if there are only numeric characters in the element.
isspace()	Returns true for each element if there are only whitespace characters in the string and there is at least one character, false otherwise.
istitle()	Returns true for each element if the element is a titlecased string and there is at least one character, false otherwise.
isupper()	Returns true for each element if all cased characters in the string are uppercase and there is at least one character, false otherwise.
item(*args)	Copy an element of an array to a standard Python scalar and return it.
join(seq)	Return a string which is the concatenation of the strings in the sequence *seq*.
ljust(width[, fillchar])	Return an array with the elements of *self* left-justified in a string of length *width*.
lower()	Return an array with the elements of *self* converted to lowercase.
lstrip([chars])	For each element in *self*, return a copy with the leading characters removed.
nonzero()	Return the indices of the elements that are non-zero.
put(indices, values[, mode])	Set `a.flat[n] = values[n]` for all *n* in indices.
ravel([order])	Return a flattened array.
repeat(repeats[, axis])	Repeat elements of an array.
replace(old, new[, count])	For each element in *self*, return a copy of the string with all occurrences of substring *old* replaced by *new*.
reshape(shape[, order])	Returns an array containing the same data with a new shape.
resize(new_shape[, refcheck])	Change shape and size of array in-place.

Continued on next page

Table 26 – continued from previous page

rfind(sub[, start, end])	For each element in *self*, return the highest index in the string where substring *sub* is found, such that *sub* is contained within [*start*, *end*].
rindex(sub[, start, end])	Like rfind, but raises *ValueError* when the substring *sub* is not found.
rjust(width[, fillchar])	Return an array with the elements of *self* right-justified in a string of length *width*.
rsplit([sep, maxsplit])	For each element in *self*, return a list of the words in the string, using *sep* as the delimiter string.
rstrip([chars])	For each element in *self*, return a copy with the trailing characters removed.
searchsorted(v[, side, sorter])	Find indices where elements of v should be inserted in a to maintain order.
setfield(val, dtype[, offset])	Put a value into a specified place in a field defined by a data-type.
setflags([write, align, uic])	Set array flags WRITEABLE, ALIGNED, (WRITEBACKIFCOPY and UPDATEIFCOPY), respectively.
sort([axis, kind, order])	Sort an array, in-place.
split([sep, maxsplit])	For each element in *self*, return a list of the words in the string, using *sep* as the delimiter string.
splitlines([keepends])	For each element in *self*, return a list of the lines in the element, breaking at line boundaries.
squeeze([axis])	Remove single-dimensional entries from the shape of *a*.
startswith(prefix[, start, end])	Returns a boolean array which is *True* where the string element in *self* starts with *prefix*, otherwise *False*.
strip([chars])	For each element in *self*, return a copy with the leading and trailing characters removed.
swapaxes(axis1, axis2)	Return a view of the array with *axis1* and *axis2* interchanged.
swapcase()	For each element in *self*, return a copy of the string with uppercase characters converted to lowercase and vice versa.
take(indices[, axis, out, mode])	Return an array formed from the elements of *a* at the given indices.
title()	For each element in *self*, return a titlecased version of the string: words start with uppercase characters, all remaining cased characters are lowercase.
tofile(fid[, sep, format])	Write array to a file as text or binary (default).
tolist()	Return the array as a (possibly nested) list.
tostring([order])	Construct Python bytes containing the raw data bytes in the array.
translate(table[, deletechars])	For each element in *self*, return a copy of the string where all characters occurring in the optional argument *deletechars* are removed, and the remaining characters have been mapped through the given translation table.
transpose(*axes)	Returns a view of the array with axes transposed.
upper()	Return an array with the elements of *self* converted to uppercase.
view([dtype, type])	New view of array with the same data.
zfill(width)	Return the numeric string left-filled with zeros in a string of length *width*.

chararray.**astype**(*dtype*, *order='K'*, *casting='unsafe'*, *subok=True*, *copy=True*)

Copy of the array, cast to a specified type.

Parameters **dtype** : str or dtype

Typecode or data-type to which the array is cast.

order : {'C', 'F', 'A', 'K'}, optional

Controls the memory layout order of the result. 'C' means C order, 'F' means Fortran order, 'A' means 'F' order if all the arrays are Fortran contiguous, 'C' order otherwise, and 'K' means as close to the order the array elements appear in memory as possible. Default is 'K'.

casting : {'no', 'equiv', 'safe', 'same_kind', 'unsafe'}, optional

Controls what kind of data casting may occur. Defaults to 'unsafe' for backwards compatibility.

- 'no' means the data types should not be cast at all.
- 'equiv' means only byte-order changes are allowed.
- 'safe' means only casts which can preserve values are allowed.
- 'same_kind' means only safe casts or casts within a kind, like float64 to float32, are allowed.
- 'unsafe' means any data conversions may be done.

subok : bool, optional

If True, then sub-classes will be passed-through (default), otherwise the returned array will be forced to be a base-class array.

copy : bool, optional

By default, astype always returns a newly allocated array. If this is set to false, and the `dtype`, *order*, and *subok* requirements are satisfied, the input array is returned instead of a copy.

Returns **arr_t** : ndarray

Unless `copy` is False and the other conditions for returning the input array are satisfied (see description for `copy` input parameter), *arr_t* is a new array of the same shape as the input array, with dtype, order given by `dtype`, *order*.

Raises **ComplexWarning**

When casting from complex to float or int. To avoid this, one should use `a.real.astype(t)`.

Notes

Starting in NumPy 1.9, astype method now returns an error if the string dtype to cast to is not long enough in 'safe' casting mode to hold the max value of integer/float array that is being casted. Previously the casting was allowed even if the result was truncated.

Examples

```
>>> x = np.array([1, 2, 2.5])
>>> x
array([ 1. ,  2. ,  2.5])
```

```
>>> x.astype(int)
array([1, 2, 2])
```

chararray.**argsort**(*axis=-1*, *kind='quicksort'*, *order=None*)

Returns the indices that would sort this array.

Refer to *numpy.argsort* for full documentation.

See also:

numpy.argsort equivalent function

chararray.**copy**(*order='C'*)

Return a copy of the array.

Parameters **order** : {'C', 'F', 'A', 'K'}, optional

Controls the memory layout of the copy. 'C' means C-order, 'F' means F-order, 'A' means 'F' if *a* is Fortran contiguous, 'C' otherwise. 'K' means match the layout of *a* as closely as possible. (Note that this function and *numpy.copy* are very similar, but have different default values for their order= arguments.)

See also:

numpy.copy, *numpy.copyto*

Examples

```
>>> x = np.array([[1,2,3],[4,5,6]], order='F')
```

```
>>> y = x.copy()
```

```
>>> x.fill(0)
```

```
>>> x
array([[0, 0, 0],
       [0, 0, 0]])
```

```
>>> y
array([[1, 2, 3],
       [4, 5, 6]])
```

```
>>> y.flags['C_CONTIGUOUS']
True
```

chararray.**count**(*sub*, *start=0*, *end=None*)

Returns an array with the number of non-overlapping occurrences of substring *sub* in the range [*start*, *end*].

See also:

`char.count`

`chararray.`**`decode`**(*encoding=None*, *errors=None*)
Calls *str.decode* element-wise.

See also:

`char.decode`

`chararray.`**`dump`**(*file*)
Dump a pickle of the array to the specified file. The array can be read back with pickle.load or numpy.load.

Parameters **file** : str

A string naming the dump file.

`chararray.`**`dumps`**()
Returns the pickle of the array as a string. pickle.loads or numpy.loads will convert the string back to an array.

Parameters **None**

`chararray.`**`encode`**(*encoding=None*, *errors=None*)
Calls *str.encode* element-wise.

See also:

`char.encode`

`chararray.`**`endswith`**(*suffix*, *start=0*, *end=None*)
Returns a boolean array which is *True* where the string element in *self* ends with *suffix*, otherwise *False*.

See also:

`char.endswith`

`chararray.`**`expandtabs`**(*tabsize=8*)
Return a copy of each string element where all tab characters are replaced by one or more spaces.

See also:

`char.expandtabs`

`chararray.`**`fill`**(*value*)
Fill the array with a scalar value.

Parameters **value** : scalar

All elements of *a* will be assigned this value.

Examples

```
>>> a = np.array([1, 2])
>>> a.fill(0)
>>> a
array([0, 0])
>>> a = np.empty(2)
>>> a.fill(1)
>>> a
array([ 1.,  1.])
```

`chararray.`**`find`**(*sub*, *start=0*, *end=None*)
For each element, return the lowest index in the string where substring *sub* is found.

See also:

`char.find`

`chararray.`**`flatten`**(*order='C'*)

Return a copy of the array collapsed into one dimension.

Parameters **order** : {'C', 'F', 'A', 'K'}, optional

'C' means to flatten in row-major (C-style) order. 'F' means to flatten in column-major (Fortran- style) order. 'A' means to flatten in column-major order if *a* is Fortran *contiguous* in memory, row-major order otherwise. 'K' means to flatten *a* in the order the elements occur in memory. The default is 'C'.

Returns **y** : ndarray

A copy of the input array, flattened to one dimension.

See also:

ravel Return a flattened array.

flat A 1-D flat iterator over the array.

Examples

```
>>> a = np.array([[1,2], [3,4]])
>>> a.flatten()
array([1, 2, 3, 4])
>>> a.flatten('F')
array([1, 3, 2, 4])
```

`chararray.`**`getfield`**(*dtype*, *offset=0*)

Returns a field of the given array as a certain type.

A field is a view of the array data with a given data-type. The values in the view are determined by the given type and the offset into the current array in bytes. The offset needs to be such that the view dtype fits in the array dtype; for example an array of dtype complex128 has 16-byte elements. If taking a view with a 32-bit integer (4 bytes), the offset needs to be between 0 and 12 bytes.

Parameters **dtype** : str or dtype

The data type of the view. The dtype size of the view can not be larger than that of the array itself.

offset : int

Number of bytes to skip before beginning the element view.

Examples

```
>>> x = np.diag([1.+1.j]*2)
>>> x[1, 1] = 2 + 4.j
>>> x
array([[ 1.+1.j,  0.+0.j],
       [ 0.+0.j,  2.+4.j]])
>>> x.getfield(np.float64)
array([[ 1.,  0.],
       [ 0.,  2.]])
```

By choosing an offset of 8 bytes we can select the complex part of the array for our view:

```
>>> x.getfield(np.float64, offset=8)
array([[ 1.,  0.],
   [ 0.,  4.]])
```

chararray.**index**(*sub*, *start=0*, *end=None*)
Like *find*, but raises *ValueError* when the substring is not found.

See also:

char.index

chararray.**isalnum**()
Returns true for each element if all characters in the string are alphanumeric and there is at least one character, false otherwise.

See also:

char.isalnum

chararray.**isalpha**()
Returns true for each element if all characters in the string are alphabetic and there is at least one character, false otherwise.

See also:

char.isalpha

chararray.**isdecimal**()
For each element in *self*, return True if there are only decimal characters in the element.

See also:

char.isdecimal

chararray.**isdigit**()
Returns true for each element if all characters in the string are digits and there is at least one character, false otherwise.

See also:

char.isdigit

chararray.**islower**()
Returns true for each element if all cased characters in the string are lowercase and there is at least one cased character, false otherwise.

See also:

char.islower

chararray.**isnumeric**()
For each element in *self*, return True if there are only numeric characters in the element.

See also:

char.isnumeric

chararray.**isspace**()
Returns true for each element if there are only whitespace characters in the string and there is at least one character, false otherwise.

See also:

char.isspace

chararray.**istitle**()
Returns true for each element if the element is a titlecased string and there is at least one character, false otherwise.

See also:

char.istitle

chararray.**isupper**()
Returns true for each element if all cased characters in the string are uppercase and there is at least one character, false otherwise.

See also:

char.isupper

chararray.**item**(**args*)
Copy an element of an array to a standard Python scalar and return it.

Parameters ***args** : Arguments (variable number and type)

- none: in this case, the method only works for arrays with one element (*a.size == 1*), which element is copied into a standard Python scalar object and returned.
- int_type: this argument is interpreted as a flat index into the array, specifying which element to copy and return.
- tuple of int_types: functions as does a single int_type argument, except that the argument is interpreted as an nd-index into the array.

Returns **z** : Standard Python scalar object

A copy of the specified element of the array as a suitable Python scalar

Notes

When the data type of *a* is longdouble or clongdouble, item() returns a scalar array object because there is no available Python scalar that would not lose information. Void arrays return a buffer object for item(), unless fields are defined, in which case a tuple is returned.

item is very similar to a[args], except, instead of an array scalar, a standard Python scalar is returned. This can be useful for speeding up access to elements of the array and doing arithmetic on elements of the array using Python's optimized math.

Examples

```
>>> x = np.random.randint(9, size=(3, 3))
>>> x
array([[3, 1, 7],
       [2, 8, 3],
       [8, 5, 3]])
>>> x.item(3)
2
>>> x.item(7)
5
>>> x.item((0, 1))
1
>>> x.item((2, 2))
3
```

chararray.**join**(*seq*)
Return a string which is the concatenation of the strings in the sequence *seq*.

See also:

`char.join`

chararray.**ljust**(*width*, *fillchar=' '*)
Return an array with the elements of *self* left-justified in a string of length *width*.

See also:

`char.ljust`

chararray.**lower**()
Return an array with the elements of *self* converted to lowercase.

See also:

`char.lower`

chararray.**lstrip**(*chars=None*)
For each element in *self*, return a copy with the leading characters removed.

See also:

`char.lstrip`

chararray.**nonzero**()
Return the indices of the elements that are non-zero.

Refer to *numpy.nonzero* for full documentation.

See also:

numpy.nonzero equivalent function

chararray.**put**(*indices*, *values*, *mode='raise'*)
Set `a.flat[n] = values[n]` for all *n* in indices.

Refer to *numpy.put* for full documentation.

See also:

numpy.put equivalent function

chararray.**ravel**([*order*])
Return a flattened array.

Refer to *numpy.ravel* for full documentation.

See also:

numpy.ravel equivalent function

ndarray.flat a flat iterator on the array.

chararray.**repeat**(*repeats*, *axis=None*)
Repeat elements of an array.

Refer to *numpy.repeat* for full documentation.

See also:

numpy.repeat equivalent function

chararray.**replace**(*old*, *new*, *count=None*)
For each element in *self*, return a copy of the string with all occurrences of substring *old* replaced by *new*.

See also:

`char.replace`

chararray.**reshape**(*shape*, *order='C'*)
Returns an array containing the same data with a new shape.

Refer to *numpy.reshape* for full documentation.

See also:

numpy.reshape equivalent function

Notes

Unlike the free function *numpy.reshape*, this method on `ndarray` allows the elements of the shape parameter to be passed in as separate arguments. For example, `a.reshape(10, 11)` is equivalent to `a.reshape((10, 11))`.

chararray.**resize**(*new_shape*, *refcheck=True*)
Change shape and size of array in-place.

Parameters **new_shape** : tuple of ints, or *n* ints

Shape of resized array.

refcheck : bool, optional

If False, reference count will not be checked. Default is True.

Returns None

Raises **ValueError**

If *a* does not own its own data or references or views to it exist, and the data memory must be changed. PyPy only: will always raise if the data memory must be changed, since there is no reliable way to determine if references or views to it exist.

SystemError

If the *order* keyword argument is specified. This behaviour is a bug in NumPy.

See also:

resize Return a new array with the specified shape.

Notes

This reallocates space for the data area if necessary.

Only contiguous arrays (data elements consecutive in memory) can be resized.

The purpose of the reference count check is to make sure you do not use this array as a buffer for another Python object and then reallocate the memory. However, reference counts can increase in other ways so if you are sure that you have not shared the memory for this array with another Python object, then you may safely set *refcheck* to False.

Examples

Shrinking an array: array is flattened (in the order that the data are stored in memory), resized, and reshaped:

```
>>> a = np.array([[0, 1], [2, 3]], order='C')
>>> a.resize((2, 1))
>>> a
array([[0],
       [1]])
```

```
>>> a = np.array([[0, 1], [2, 3]], order='F')
>>> a.resize((2, 1))
>>> a
array([[0],
       [2]])
```

Enlarging an array: as above, but missing entries are filled with zeros:

```
>>> b = np.array([[0, 1], [2, 3]])
>>> b.resize(2, 3) # new_shape parameter doesn't have to be a tuple
>>> b
array([[0, 1, 2],
       [3, 0, 0]])
```

Referencing an array prevents resizing...

```
>>> c = a
>>> a.resize((1, 1))
Traceback (most recent call last):
...
ValueError: cannot resize an array that has been referenced ...
```

Unless *refcheck* is False:

```
>>> a.resize((1, 1), refcheck=False)
>>> a
array([[0]])
>>> c
array([[0]])
```

chararray.**rfind**(*sub*, *start=0*, *end=None*)

For each element in *self*, return the highest index in the string where substring *sub* is found, such that *sub* is contained within [*start*, *end*].

See also:

`char.rfind`

chararray.**rindex**(*sub*, *start=0*, *end=None*)

Like *rfind*, but raises *ValueError* when the substring *sub* is not found.

See also:

`char.rindex`

chararray.**rjust**(*width*, *fillchar=' '*)

Return an array with the elements of *self* right-justified in a string of length *width*.

See also:

char.rjust

chararray.**rsplit**(*sep=None*, *maxsplit=None*)
For each element in *self*, return a list of the words in the string, using *sep* as the delimiter string.

See also:

char.rsplit

chararray.**rstrip**(*chars=None*)
For each element in *self*, return a copy with the trailing characters removed.

See also:

char.rstrip

chararray.**searchsorted**(*v*, *side='left'*, *sorter=None*)
Find indices where elements of v should be inserted in a to maintain order.

For full documentation, see *numpy.searchsorted*

See also:

numpy.searchsorted equivalent function

chararray.**setfield**(*val*, *dtype*, *offset=0*)
Put a value into a specified place in a field defined by a data-type.

Place *val* into *a*'s field defined by *dtype* and beginning *offset* bytes into the field.

Parameters **val** : object

Value to be placed in field.

dtype : dtype object

Data-type of the field in which to place *val*.

offset : int, optional

The number of bytes into the field at which to place *val*.

Returns None

See also:

getfield

Examples

```
>>> x = np.eye(3)
>>> x.getfield(np.float64)
array([[ 1.,  0.,  0.],
       [ 0.,  1.,  0.],
       [ 0.,  0.,  1.]])
>>> x.setfield(3, np.int32)
>>> x.getfield(np.int32)
array([[3, 3, 3],
       [3, 3, 3],
       [3, 3, 3]])
>>> x
array([[  1.00000000e+000,   1.48219694e-323,   1.48219694e-323],
```

(continues on next page)

(continued from previous page)

```
       [  1.48219694e-323,   1.00000000e+000,   1.48219694e-323],
       [  1.48219694e-323,   1.48219694e-323,   1.00000000e+000]])
>>> x.setfield(np.eye(3), np.int32)
>>> x
array([[ 1.,  0.,  0.],
       [ 0.,  1.,  0.],
       [ 0.,  0.,  1.]])
```

chararray.**setflags**(*write=None*, *align=None*, *uic=None*)

Set array flags WRITEABLE, ALIGNED, (WRITEBACKIFCOPY and UPDATEIFCOPY), respectively.

These Boolean-valued flags affect how numpy interprets the memory area used by *a* (see Notes below). The ALIGNED flag can only be set to True if the data is actually aligned according to the type. The WRITEBACKIFCOPY and (deprecated) UPDATEIFCOPY flags can never be set to True. The flag WRITEABLE can only be set to True if the array owns its own memory, or the ultimate owner of the memory exposes a writeable buffer interface, or is a string. (The exception for string is made so that unpickling can be done without copying memory.)

Parameters **write** : bool, optional

Describes whether or not *a* can be written to.

align : bool, optional

Describes whether or not *a* is aligned properly for its type.

uic : bool, optional

Describes whether or not *a* is a copy of another "base" array.

Notes

Array flags provide information about how the memory area used for the array is to be interpreted. There are 7 Boolean flags in use, only four of which can be changed by the user: WRITEBACKIFCOPY, UPDATEIFCOPY, WRITEABLE, and ALIGNED.

WRITEABLE (W) the data area can be written to;

ALIGNED (A) the data and strides are aligned appropriately for the hardware (as determined by the compiler);

UPDATEIFCOPY (U) (deprecated), replaced by WRITEBACKIFCOPY;

WRITEBACKIFCOPY (X) this array is a copy of some other array (referenced by .base). When the C-API function PyArray_ResolveWritebackIfCopy is called, the base array will be updated with the contents of this array.

All flags can be accessed using the single (upper case) letter as well as the full name.

Examples

```
>>> y
array([[3, 1, 7],
       [2, 0, 0],
       [8, 5, 9]])
>>> y.flags
  C_CONTIGUOUS : True
```

(continues on next page)

(continued from previous page)

```
  F_CONTIGUOUS : False
  OWNDATA : True
  WRITEABLE : True
  ALIGNED : True
  WRITEBACKIFCOPY : False
  UPDATEIFCOPY : False
>>> y.setflags(write=0, align=0)
>>> y.flags
  C_CONTIGUOUS : True
  F_CONTIGUOUS : False
  OWNDATA : True
  WRITEABLE : False
  ALIGNED : False
  WRITEBACKIFCOPY : False
  UPDATEIFCOPY : False
>>> y.setflags(uic=1)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: cannot set WRITEBACKIFCOPY flag to True
```

chararray.**sort**(*axis=-1*, *kind='quicksort'*, *order=None*)

Sort an array, in-place.

Parameters **axis** : int, optional

Axis along which to sort. Default is -1, which means sort along the last axis.

kind : {'quicksort', 'mergesort', 'heapsort'}, optional

Sorting algorithm. Default is 'quicksort'.

order : str or list of str, optional

When *a* is an array with fields defined, this argument specifies which fields to compare first, second, etc. A single field can be specified as a string, and not all fields need be specified, but unspecified fields will still be used, in the order in which they come up in the dtype, to break ties.

See also:

numpy.sort Return a sorted copy of an array.

argsort Indirect sort.

lexsort Indirect stable sort on multiple keys.

searchsorted Find elements in sorted array.

partition Partial sort.

Notes

See `sort` for notes on the different sorting algorithms.

Examples

```
>>> a = np.array([[1,4], [3,1]])
>>> a.sort(axis=1)
>>> a
array([[1, 4],
       [1, 3]])
>>> a.sort(axis=0)
>>> a
array([[1, 3],
       [1, 4]])
```

Use the *order* keyword to specify a field to use when sorting a structured array:

```
>>> a = np.array([('a', 2), ('c', 1)], dtype=[('x', 'S1'), ('y', int)])
>>> a.sort(order='y')
>>> a
array([('c', 1), ('a', 2)],
      dtype=[('x', '|S1'), ('y', '<i4')])
```

chararray.**split**(*sep=None*, *maxsplit=None*)
For each element in *self*, return a list of the words in the string, using *sep* as the delimiter string.

See also:

`char.split`

chararray.**splitlines**(*keepends=None*)
For each element in *self*, return a list of the lines in the element, breaking at line boundaries.

See also:

`char.splitlines`

chararray.**squeeze**(*axis=None*)
Remove single-dimensional entries from the shape of *a*.

Refer to *numpy.squeeze* for full documentation.

See also:

numpy.squeeze equivalent function

chararray.**startswith**(*prefix*, *start=0*, *end=None*)
Returns a boolean array which is *True* where the string element in *self* starts with *prefix*, otherwise *False*.

See also:

`char.startswith`

chararray.**strip**(*chars=None*)
For each element in *self*, return a copy with the leading and trailing characters removed.

See also:

`char.strip`

chararray.**swapaxes**(*axis1*, *axis2*)
Return a view of the array with *axis1* and *axis2* interchanged.

Refer to *numpy.swapaxes* for full documentation.

See also:

numpy.swapaxes equivalent function

chararray.**swapcase**()
For each element in *self*, return a copy of the string with uppercase characters converted to lowercase and vice versa.

See also:

`char.swapcase`

chararray.**take**(*indices*, *axis=None*, *out=None*, *mode='raise'*)
Return an array formed from the elements of *a* at the given indices.

Refer to *numpy.take* for full documentation.

See also:

numpy.take equivalent function

chararray.**title**()
For each element in *self*, return a titlecased version of the string: words start with uppercase characters, all remaining cased characters are lowercase.

See also:

`char.title`

chararray.**tofile**(*fid*, *sep=""*, *format="%s"*)
Write array to a file as text or binary (default).

Data is always written in 'C' order, independent of the order of *a*. The data produced by this method can be recovered using the function fromfile().

Parameters **fid** : file or str

An open file object, or a string containing a filename.

sep : str

Separator between array items for text output. If "" (empty), a binary file is written, equivalent to `file.write(a.tobytes())`.

format : str

Format string for text file output. Each entry in the array is formatted to text by first converting it to the closest Python type, and then using "format" % item.

Notes

This is a convenience function for quick storage of array data. Information on endianness and precision is lost, so this method is not a good choice for files intended to archive data or transport data between machines with different endianness. Some of these problems can be overcome by outputting the data as text files, at the expense of speed and file size.

chararray.**tolist**()
Return the array as a (possibly nested) list.

Return a copy of the array data as a (nested) Python list. Data items are converted to the nearest compatible Python type.

Parameters **none**

Returns **y** : list

The possibly nested list of array elements.

Notes

The array may be recreated, `a = np.array(a.tolist())`.

Examples

```
>>> a = np.array([1, 2])
>>> a.tolist()
[1, 2]
>>> a = np.array([[1, 2], [3, 4]])
>>> list(a)
[array([1, 2]), array([3, 4])]
>>> a.tolist()
[[1, 2], [3, 4]]
```

chararray.**tostring**(*order='C'*)

Construct Python bytes containing the raw data bytes in the array.

Constructs Python bytes showing a copy of the raw contents of data memory. The bytes object can be produced in either 'C' or 'Fortran', or 'Any' order (the default is 'C'-order). 'Any' order means C-order unless the F_CONTIGUOUS flag in the array is set, in which case it means 'Fortran' order.

This function is a compatibility alias for tobytes. Despite its name it returns bytes not strings.

Parameters **order** : {'C', 'F', None}, optional

Order of the data for multidimensional arrays: C, Fortran, or the same as for the original array.

Returns **s** : bytes

Python bytes exhibiting a copy of *a*'s raw data.

Examples

```
>>> x = np.array([[0, 1], [2, 3]])
>>> x.tobytes()
b'\x00\x00\x00\x00\x01\x00\x00\x00\x02\x00\x00\x00\x03\x00\x00\x00'
>>> x.tobytes('C') == x.tobytes()
True
>>> x.tobytes('F')
b'\x00\x00\x00\x00\x02\x00\x00\x00\x01\x00\x00\x00\x03\x00\x00\x00'
```

chararray.**translate**(*table*, *deletechars=None*)

For each element in *self*, return a copy of the string where all characters occurring in the optional argument *deletechars* are removed, and the remaining characters have been mapped through the given translation table.

See also:

`char.translate`

chararray.**transpose**(**axes*)

Returns a view of the array with axes transposed.

For a 1-D array, this has no effect. (To change between column and row vectors, first cast the 1-D array into a matrix object.) For a 2-D array, this is the usual matrix transpose. For an n-D array, if axes are given, their order indicates how the axes are permuted (see Examples). If axes are not provided and `a.shape = (i[0], i[1], ... i[n-2], i[n-1])`, then `a.transpose().shape = (i[n-1], i[n-2], ... i[1], i[0])`.

Parameters **axes** : None, tuple of ints, or *n* ints

- None or no argument: reverses the order of the axes.
- tuple of ints: *i* in the *j*-th place in the tuple means *a*'s *i*-th axis becomes *a.transpose()*'s *j*-th axis.
- *n* ints: same as an n-tuple of the same ints (this form is intended simply as a "convenience" alternative to the tuple form)

Returns **out** : ndarray

View of *a*, with axes suitably permuted.

See also:

ndarray.T Array property returning the array transposed.

Examples

```
>>> a = np.array([[1, 2], [3, 4]])
>>> a
array([[1, 2],
       [3, 4]])
>>> a.transpose()
array([[1, 3],
       [2, 4]])
>>> a.transpose((1, 0))
array([[1, 3],
       [2, 4]])
>>> a.transpose(1, 0)
array([[1, 3],
       [2, 4]])
```

chararray.**upper**()

Return an array with the elements of *self* converted to uppercase.

See also:

`char.upper`

chararray.**view**(*dtype=None*, *type=None*)

New view of array with the same data.

Parameters **dtype** : data-type or ndarray sub-class, optional

Data-type descriptor of the returned view, e.g., float32 or int16. The default, None, results in the view having the same data-type as *a*. This argument can also be specified as an ndarray sub-class, which then specifies the type of the returned object (this is equivalent to setting the `type` parameter).

type : Python type, optional

Type of the returned view, e.g., ndarray or matrix. Again, the default None results in type preservation.

Notes

`a.view()` is used two different ways:

`a.view(some_dtype)` or `a.view(dtype=some_dtype)` constructs a view of the array's memory with a different data-type. This can cause a reinterpretation of the bytes of memory.

`a.view(ndarray_subclass)` or `a.view(type=ndarray_subclass)` just returns an instance of *ndarray_subclass* that looks at the same array (same shape, dtype, etc.) This does not cause a reinterpretation of the memory.

For `a.view(some_dtype)`, if `some_dtype` has a different number of bytes per entry than the previous dtype (for example, converting a regular array to a structured array), then the behavior of the view cannot be predicted just from the superficial appearance of `a` (shown by `print(a)`). It also depends on exactly how `a` is stored in memory. Therefore if `a` is C-ordered versus fortran-ordered, versus defined as a slice or transpose, etc., the view may give different results.

Examples

```
>>> x = np.array([(1, 2)], dtype=[('a', np.int8), ('b', np.int8)])
```

Viewing array data using a different type and dtype:

```
>>> y = x.view(dtype=np.int16, type=np.matrix)
>>> y
matrix([[513]], dtype=int16)
>>> print(type(y))
<class 'numpy.matrixlib.defmatrix.matrix'>
```

Creating a view on a structured array so it can be used in calculations

```
>>> x = np.array([(1, 2),(3,4)], dtype=[('a', np.int8), ('b', np.int8)])
>>> xv = x.view(dtype=np.int8).reshape(-1,2)
>>> xv
array([[1, 2],
       [3, 4]], dtype=int8)
>>> xv.mean(0)
array([ 2.,  3.])
```

Making changes to the view changes the underlying array

```
>>> xv[0,1] = 20
>>> print(x)
[(1, 20) (3, 4)]
```

Using a view to convert an array to a recarray:

```
>>> z = x.view(np.recarray)
>>> z.a
array([1], dtype=int8)
```

Views share data:

```
>>> x[0] = (9, 10)
>>> z[0]
(9, 10)
```

Views that change the dtype size (bytes per entry) should normally be avoided on arrays defined by slices, transposes, fortran-ordering, etc.:

```
>>> x = np.array([[1,2,3],[4,5,6]], dtype=np.int16)
>>> y = x[:, 0:2]
>>> y
array([[1, 2],
       [4, 5]], dtype=int16)
>>> y.view(dtype=[('width', np.int16), ('length', np.int16)])
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: new type not compatible with array.
>>> z = y.copy()
>>> z.view(dtype=[('width', np.int16), ('length', np.int16)])
array([[(1, 2)],
       [(4, 5)]], dtype=[('width', '<i2'), ('length', '<i2')])
```

chararray.**zfill**(*width*)

Return the numeric string left-filled with zeros in a string of length *width*.

See also:

`char.zfill`

3.5 C-Types Foreign Function Interface (`numpy.ctypeslib`)

numpy.ctypeslib.**as_array**(*obj*, *shape=None*)

Create a numpy array from a ctypes array or a ctypes POINTER. The numpy array shares the memory with the ctypes object.

The size parameter must be given if converting from a ctypes POINTER. The size parameter is ignored if converting from a ctypes array

numpy.ctypeslib.**as_ctypes**(*obj*)

Create and return a ctypes object from a numpy array. Actually anything that exposes the __array_interface__ is accepted.

numpy.ctypeslib.**ctypes_load_library**(**args*, ***kwds*)

ctypes_load_library is deprecated, use *load_library* instead!

It is possible to load a library using >>> lib = ctypes.cdll[<full_path_name>]

But there are cross-platform considerations, such as library file extensions, plus the fact Windows will just load the first library it finds with that name. NumPy supplies the load_library function as a convenience.

Parameters **libname** : str

Name of the library, which can have 'lib' as a prefix, but without an extension.

loader_path : str

Where the library can be found.

Returns **ctypes.cdll[libpath]** : library object

A ctypes library object

Raises **OSError**

If there is no library with the expected extension, or the library is defective and cannot be loaded.

numpy.ctypeslib.**load_library**(*libname*, *loader_path*)

It is possible to load a library using >>> lib = ctypes.cdll[<full_path_name>]

But there are cross-platform considerations, such as library file extensions, plus the fact Windows will just load the first library it finds with that name. NumPy supplies the load_library function as a convenience.

Parameters **libname** : str

Name of the library, which can have 'lib' as a prefix, but without an extension.

loader_path : str

Where the library can be found.

Returns **ctypes.cdll[libpath]** : library object

A ctypes library object

Raises **OSError**

If there is no library with the expected extension, or the library is defective and cannot be loaded.

numpy.ctypeslib.**ndpointer**(*dtype=None*, *ndim=None*, *shape=None*, *flags=None*)

Array-checking restype/argtypes.

An ndpointer instance is used to describe an ndarray in restypes and argtypes specifications. This approach is more flexible than using, for example, `POINTER(c_double)`, since several restrictions can be specified, which are verified upon calling the ctypes function. These include data type, number of dimensions, shape and flags. If a given array does not satisfy the specified restrictions, a `TypeError` is raised.

Parameters **dtype** : data-type, optional

Array data-type.

ndim : int, optional

Number of array dimensions.

shape : tuple of ints, optional

Array shape.

flags : str or tuple of str

Array flags; may be one or more of:

- C_CONTIGUOUS / C / CONTIGUOUS
- F_CONTIGUOUS / F / FORTRAN
- OWNDATA / O
- WRITEABLE / W
- ALIGNED / A
- WRITEBACKIFCOPY / X
- UPDATEIFCOPY / U

Returns **klass** : ndpointer type object

A type object, which is an `_ndtpr` instance containing dtype, ndim, shape and flags information.

Raises **TypeError**

If a given array does not satisfy the specified restrictions.

Examples

```
>>> clib.somefunc.argtypes = [np.ctypeslib.ndpointer(dtype=np.float64,
...                                                  ndim=1,
...                                                  flags='C_CONTIGUOUS')]
...
>>> clib.somefunc(np.array([1, 2, 3], dtype=np.float64))
...
```

3.6 Datetime Support Functions

datetime_as_string(arr[, unit, timezone, ...])	Convert an array of datetimes into an array of strings.
datetime_data(dtype, /)	Get information about the step size of a date or time type.

numpy.**datetime_as_string**(*arr*, *unit=None*, *timezone='naive'*, *casting='same_kind'*)

Convert an array of datetimes into an array of strings.

Parameters **arr** : array_like of datetime64

The array of UTC timestamps to format.

unit : str

One of None, 'auto', or a datetime unit.

timezone : {'naive', 'UTC', 'local'} or tzinfo

Timezone information to use when displaying the datetime. If 'UTC', end with a Z to indicate UTC time. If 'local', convert to the local timezone first, and suffix with a +-#### timezone offset. If a tzinfo object, then do as with 'local', but use the specified timezone.

casting : {'no', 'equiv', 'safe', 'same_kind', 'unsafe'}

Casting to allow when changing between datetime units.

Returns **str_arr** : ndarray

An array of strings the same shape as *arr*.

Examples

```
>>> d = np.arange('2002-10-27T04:30', 4*60, 60, dtype='M8[m]')
>>> d
array(['2002-10-27T04:30', '2002-10-27T05:30', '2002-10-27T06:30',
       '2002-10-27T07:30'], dtype='datetime64[m]')
```

Setting the timezone to UTC shows the same information, but with a Z suffix

```
>>> np.datetime_as_string(d, timezone='UTC')
array(['2002-10-27T04:30Z', '2002-10-27T05:30Z', '2002-10-27T06:30Z',
       '2002-10-27T07:30Z'], dtype='<U35')
```

Note that we picked datetimes that cross a DST boundary. Passing in a `pytz` timezone object will print the appropriate offset:

```
>>> np.datetime_as_string(d, timezone=pytz.timezone('US/Eastern'))
```

array(['2002-10-27T00:30-0400', '2002-10-27T01:30-0400', '2002-10-27T01:30-0500', '2002-10-27T02:30-0500'], dtype='<U39')

Passing in a unit will change the precision:

```
>>> np.datetime_as_string(d, unit='h')
```

array(['2002-10-27T04', '2002-10-27T05', '2002-10-27T06', '2002-10-27T07'], dtype='<U32')

```
>>> np.datetime_as_string(d, unit='s')
array(['2002-10-27T04:30:00', '2002-10-27T05:30:00', '2002-10-27T06:30:00',
       '2002-10-27T07:30:00'], dtype='<U38')
```

But can be made to not lose precision:

```
>>> np.datetime_as_string(d, unit='h', casting='safe')
```

TypeError: Cannot create a datetime string as units 'h' from a NumPy datetime with units 'm' according to the rule 'safe'

numpy.**datetime_data**(*dtype*, */*)

Get information about the step size of a date or time type.

The returned tuple can be passed as the second argument of `datetime64` and `timedelta64`.

Parameters **dtype** : dtype

The dtype object, which must be a `datetime64` or `timedelta64` type.

Returns **unit** : str

The *datetime unit* on which this dtype is based.

count : int

The number of base units in a step.

Examples

```
>>> dt_25s = np.dtype('timedelta64[25s]')
>>> np.datetime_data(dt_25s)
('s', 25)
>>> np.array(10, dt_25s).astype('timedelta64[s]')
array(250, dtype='timedelta64[s]')
```

The result can be used to construct a datetime that uses the same units as a timedelta:

```
>>> np.datetime64('2010', np.datetime_data(dt_25s))
```

numpy.datetime64('2010-01-01T00:00:00','25s')

3.6.1 Business Day Functions

busdaycalendar([weekmask, holidays])	A business day calendar object that efficiently stores information defining valid days for the busday family of functions.
is_busday(dates[, weekmask, holidays, ...])	Calculates which of the given dates are valid days, and which are not.
busday_offset(dates, offsets[, roll, ...])	First adjusts the date to fall on a valid day according to the `roll` rule, then applies offsets to the given dates counted in valid days.
busday_count(begindates, enddates[, ...])	Counts the number of valid days between *begindates* and *enddates*, not including the day of *enddates*.

class numpy.**busdaycalendar**(*weekmask='1111100'*, *holidays=None*)

A business day calendar object that efficiently stores information defining valid days for the busday family of functions.

The default valid days are Monday through Friday ("business days"). A busdaycalendar object can be specified with any set of weekly valid days, plus an optional "holiday" dates that always will be invalid.

Once a busdaycalendar object is created, the weekmask and holidays cannot be modified.

New in version 1.7.0.

Parameters **weekmask** : str or array_like of bool, optional

A seven-element array indicating which of Monday through Sunday are valid days. May be specified as a length-seven list or array, like [1,1,1,1,1,0,0]; a length-seven string, like '1111100'; or a string like "Mon Tue Wed Thu Fri", made up of 3-character abbreviations for weekdays, optionally separated by white space. Valid abbreviations are: Mon Tue Wed Thu Fri Sat Sun

holidays : array_like of datetime64[D], optional

An array of dates to consider as invalid dates, no matter which weekday they fall upon. Holiday dates may be specified in any order, and NaT (not-a-time) dates are ignored. This list is saved in a normalized form that is suited for fast calculations of valid days.

Returns **out** : busdaycalendar

A business day calendar object containing the specified weekmask and holidays values.

See also:

is_busday Returns a boolean array indicating valid days.

busday_offset Applies an offset counted in valid days.

busday_count Counts how many valid days are in a half-open date range.

Examples

```
>>> # Some important days in July
... bdd = np.busdaycalendar(
...             holidays=['2011-07-01', '2011-07-04', '2011-07-17'])
>>> # Default is Monday to Friday weekdays
... bdd.weekmask
array([ True,  True,  True,  True,  True, False, False], dtype='bool')
>>> # Any holidays already on the weekend are removed
... bdd.holidays
array(['2011-07-01', '2011-07-04'], dtype='datetime64[D]')
```

Attributes

weekmask	A copy of the seven-element boolean mask indicating valid days.
holidays	A copy of the holiday array indicating additional invalid days.

busdaycalendar.**weekmask**
A copy of the seven-element boolean mask indicating valid days.

busdaycalendar.**holidays**
A copy of the holiday array indicating additional invalid days.

Note: once a busdaycalendar object is created, you cannot modify the weekmask or holidays. The attributes return copies of internal data.	

numpy.**is_busday**(*dates*, *weekmask='1111100'*, *holidays=None*, *busdaycal=None*, *out=None*)
Calculates which of the given dates are valid days, and which are not.

New in version 1.7.0.

Parameters **dates** : array_like of datetime64[D]

The array of dates to process.

weekmask : str or array_like of bool, optional

A seven-element array indicating which of Monday through Sunday are valid days. May be specified as a length-seven list or array, like [1,1,1,1,1,0,0]; a length-seven string, like '1111100'; or a string like "Mon Tue Wed Thu Fri", made up of 3-character abbreviations for weekdays, optionally separated by white space. Valid abbreviations are: Mon Tue Wed Thu Fri Sat Sun

holidays : array_like of datetime64[D], optional

An array of dates to consider as invalid dates. They may be specified in any order, and NaT (not-a-time) dates are ignored. This list is saved in a normalized form that is suited for fast calculations of valid days.

busdaycal : busdaycalendar, optional

A *busdaycalendar* object which specifies the valid days. If this parameter is provided, neither weekmask nor holidays may be provided.

out : array of bool, optional

If provided, this array is filled with the result.

Returns **out** : array of bool

An array with the same shape as `dates`, containing True for each valid day, and False for each invalid day.

See also:

busdaycalendar An object that specifies a custom set of valid days.

busday_offset Applies an offset counted in valid days.

busday_count Counts how many valid days are in a half-open date range.

Examples

```
>>> # The weekdays are Friday, Saturday, and Monday
... np.is_busday(['2011-07-01', '2011-07-02', '2011-07-18'],
...                 holidays=['2011-07-01', '2011-07-04', '2011-07-17'])
array([False, False,  True], dtype='bool')
```

numpy.**busday_offset**(*dates*, *offsets*, *roll='raise'*, *weekmask='1111100'*, *holidays=None*, *busdaycal=None*, *out=None*)

First adjusts the date to fall on a valid day according to the `roll` rule, then applies offsets to the given dates counted in valid days.

New in version 1.7.0.

Parameters **dates** : array_like of datetime64[D]

The array of dates to process.

offsets : array_like of int

The array of offsets, which is broadcast with `dates`.

roll : {'raise', 'nat', 'forward', 'following', 'backward', 'preceding', 'modifiedfollowing', 'modifiedpreceding'}, optional

How to treat dates that do not fall on a valid day. The default is 'raise'.

- 'raise' means to raise an exception for an invalid day.
- 'nat' means to return a NaT (not-a-time) for an invalid day.
- 'forward' and 'following' mean to take the first valid day later in time.
- 'backward' and 'preceding' mean to take the first valid day earlier in time.
- 'modifiedfollowing' means to take the first valid day later in time unless it is across a Month boundary, in which case to take the first valid day earlier in time.
- 'modifiedpreceding' means to take the first valid day earlier in time unless it is across a Month boundary, in which case to take the first valid day later in time.

weekmask : str or array_like of bool, optional

A seven-element array indicating which of Monday through Sunday are valid days. May be specified as a length-seven list or array, like [1,1,1,1,1,0,0]; a length-seven string, like '1111100'; or a string like "Mon Tue Wed Thu Fri", made up of 3-character

abbreviations for weekdays, optionally separated by white space. Valid abbreviations are: Mon Tue Wed Thu Fri Sat Sun

holidays : array_like of datetime64[D], optional

An array of dates to consider as invalid dates. They may be specified in any order, and NaT (not-a-time) dates are ignored. This list is saved in a normalized form that is suited for fast calculations of valid days.

busdaycal : busdaycalendar, optional

A *busdaycalendar* object which specifies the valid days. If this parameter is provided, neither weekmask nor holidays may be provided.

out : array of datetime64[D], optional

If provided, this array is filled with the result.

Returns **out** : array of datetime64[D]

An array with a shape from broadcasting `dates` and `offsets` together, containing the dates with offsets applied.

See also:

busdaycalendar An object that specifies a custom set of valid days.

is_busday Returns a boolean array indicating valid days.

busday_count Counts how many valid days are in a half-open date range.

Examples

```
>>> # First business day in October 2011 (not accounting for holidays)
... np.busday_offset('2011-10', 0, roll='forward')
numpy.datetime64('2011-10-03','D')
>>> # Last business day in February 2012 (not accounting for holidays)
... np.busday_offset('2012-03', -1, roll='forward')
numpy.datetime64('2012-02-29','D')
>>> # Third Wednesday in January 2011
... np.busday_offset('2011-01', 2, roll='forward', weekmask='Wed')
numpy.datetime64('2011-01-19','D')
>>> # 2012 Mother's Day in Canada and the U.S.
... np.busday_offset('2012-05', 1, roll='forward', weekmask='Sun')
numpy.datetime64('2012-05-13','D')
```

```
>>> # First business day on or after a date
... np.busday_offset('2011-03-20', 0, roll='forward')
numpy.datetime64('2011-03-21','D')
>>> np.busday_offset('2011-03-22', 0, roll='forward')
numpy.datetime64('2011-03-22','D')
>>> # First business day after a date
... np.busday_offset('2011-03-20', 1, roll='backward')
numpy.datetime64('2011-03-21','D')
>>> np.busday_offset('2011-03-22', 1, roll='backward')
numpy.datetime64('2011-03-23','D')
```

numpy.**busday_count**(*begindates*, *enddates*, *weekmask='1111100'*, *holidays=[]*, *busdaycal=None*, *out=None*)

Counts the number of valid days between *begindates* and *enddates*, not including the day of *enddates*.

If `enddates` specifies a date value that is earlier than the corresponding `begindates` date value, the count will be negative.

New in version 1.7.0.

Parameters **begindates** : array_like of datetime64[D]

The array of the first dates for counting.

enddates : array_like of datetime64[D]

The array of the end dates for counting, which are excluded from the count themselves.

weekmask : str or array_like of bool, optional

A seven-element array indicating which of Monday through Sunday are valid days. May be specified as a length-seven list or array, like [1,1,1,1,1,0,0]; a length-seven string, like '1111100'; or a string like "Mon Tue Wed Thu Fri", made up of 3-character abbreviations for weekdays, optionally separated by white space. Valid abbreviations are: Mon Tue Wed Thu Fri Sat Sun

holidays : array_like of datetime64[D], optional

An array of dates to consider as invalid dates. They may be specified in any order, and NaT (not-a-time) dates are ignored. This list is saved in a normalized form that is suited for fast calculations of valid days.

busdaycal : busdaycalendar, optional

A *busdaycalendar* object which specifies the valid days. If this parameter is provided, neither weekmask nor holidays may be provided.

out : array of int, optional

If provided, this array is filled with the result.

Returns **out** : array of int

An array with a shape from broadcasting `begindates` and `enddates` together, containing the number of valid days between the begin and end dates.

See also:

busdaycalendar An object that specifies a custom set of valid days.

is_busday Returns a boolean array indicating valid days.

busday_offset Applies an offset counted in valid days.

Examples

```
>>> # Number of weekdays in January 2011
... np.busday_count('2011-01', '2011-02')
21
>>> # Number of weekdays in 2011
...  np.busday_count('2011', '2012')
260
>>> # Number of Saturdays in 2011
... np.busday_count('2011', '2012', weekmask='Sat')
53
```

3.7 Data type routines

can_cast(from_, to[, casting])	Returns True if cast between data types can occur according to the casting rule.
promote_types(type1, type2)	Returns the data type with the smallest size and smallest scalar kind to which both `type1` and `type2` may be safely cast.
min_scalar_type(a)	For scalar `a`, returns the data type with the smallest size and smallest scalar kind which can hold its value.
result_type(*arrays_and_dtypes)	Returns the type that results from applying the NumPy type promotion rules to the arguments.
common_type(*arrays)	Return a scalar type which is common to the input arrays.
obj2sctype(rep[, default])	Return the scalar dtype or NumPy equivalent of Python type of an object.

numpy.**can_cast**(*from_*, *to*, *casting='safe'*)

Returns True if cast between data types can occur according to the casting rule. If from is a scalar or array scalar, also returns True if the scalar value can be cast without overflow or truncation to an integer.

Parameters **from_** : dtype, dtype specifier, scalar, or array

Data type, scalar, or array to cast from.

to : dtype or dtype specifier

Data type to cast to.

casting : {'no', 'equiv', 'safe', 'same_kind', 'unsafe'}, optional

Controls what kind of data casting may occur.

- 'no' means the data types should not be cast at all.
- 'equiv' means only byte-order changes are allowed.
- 'safe' means only casts which can preserve values are allowed.
- 'same_kind' means only safe casts or casts within a kind, like float64 to float32, are allowed.
- 'unsafe' means any data conversions may be done.

Returns **out** : bool

True if cast can occur according to the casting rule.

See also:

dtype, *result_type*

Notes

Starting in NumPy 1.9, can_cast function now returns False in 'safe' casting mode for integer/float dtype and string dtype if the string dtype length is not long enough to store the max integer/float value converted to a string. Previously can_cast in 'safe' mode returned True for integer/float dtype and a string dtype of any length.

Examples

Basic examples

```
>>> np.can_cast(np.int32, np.int64)
True
>>> np.can_cast(np.float64, complex)
True
>>> np.can_cast(complex, float)
False
```

```
>>> np.can_cast('i8', 'f8')
True
>>> np.can_cast('i8', 'f4')
False
>>> np.can_cast('i4', 'S4')
False
```

Casting scalars

```
>>> np.can_cast(100, 'i1')
True
>>> np.can_cast(150, 'i1')
False
>>> np.can_cast(150, 'u1')
True
```

```
>>> np.can_cast(3.5e100, np.float32)
False
>>> np.can_cast(1000.0, np.float32)
True
```

Array scalar checks the value, array does not

```
>>> np.can_cast(np.array(1000.0), np.float32)
True
>>> np.can_cast(np.array([1000.0]), np.float32)
False
```

Using the casting rules

```
>>> np.can_cast('i8', 'i8', 'no')
True
>>> np.can_cast('<i8', '>i8', 'no')
False
```

```
>>> np.can_cast('<i8', '>i8', 'equiv')
True
>>> np.can_cast('<i4', '>i8', 'equiv')
False
```

```
>>> np.can_cast('<i4', '>i8', 'safe')
True
>>> np.can_cast('<i8', '>i4', 'safe')
False
```

```
>>> np.can_cast('<i8', '>i4', 'same_kind')
True
>>> np.can_cast('<i8', '>u4', 'same_kind')
False
```

```
>>> np.can_cast('<i8', '>u4', 'unsafe')
True
```

numpy.**promote_types**(*type1*, *type2*)

Returns the data type with the smallest size and smallest scalar kind to which both `type1` and `type2` may be safely cast. The returned data type is always in native byte order.

This function is symmetric and associative.

Parameters **type1** : dtype or dtype specifier

First data type.

type2 : dtype or dtype specifier

Second data type.

Returns **out** : dtype

The promoted data type.

See also:

result_type, *dtype*, *can_cast*

Notes

New in version 1.6.0.

Starting in NumPy 1.9, promote_types function now returns a valid string length when given an integer or float dtype as one argument and a string dtype as another argument. Previously it always returned the input string dtype, even if it wasn't long enough to store the max integer/float value converted to a string.

Examples

```
>>> np.promote_types('f4', 'f8')
dtype('float64')
```

```
>>> np.promote_types('i8', 'f4')
dtype('float64')
```

```
>>> np.promote_types('>i8', '<c8')
dtype('complex128')
```

```
>>> np.promote_types('i4', 'S8')
dtype('S11')
```

numpy.**min_scalar_type**(*a*)

For scalar `a`, returns the data type with the smallest size and smallest scalar kind which can hold its value. For non-scalar array `a`, returns the vector's dtype unmodified.

Floating point values are not demoted to integers, and complex values are not demoted to floats.

Parameters **a** : scalar or array_like

The value whose minimal data type is to be found.

Returns **out** : dtype

The minimal data type.

See also:

result_type, *promote_types*, *dtype*, *can_cast*

Notes

New in version 1.6.0.

Examples

```
>>> np.min_scalar_type(10)
dtype('uint8')
```

```
>>> np.min_scalar_type(-260)
dtype('int16')
```

```
>>> np.min_scalar_type(3.1)
dtype('float16')
```

```
>>> np.min_scalar_type(1e50)
dtype('float64')
```

```
>>> np.min_scalar_type(np.arange(4,dtype='f8'))
dtype('float64')
```

numpy.**result_type**(**arrays_and_dtypes*)

Returns the type that results from applying the NumPy type promotion rules to the arguments.

Type promotion in NumPy works similarly to the rules in languages like C++, with some slight differences. When both scalars and arrays are used, the array's type takes precedence and the actual value of the scalar is taken into account.

For example, calculating 3*a, where a is an array of 32-bit floats, intuitively should result in a 32-bit float output. If the 3 is a 32-bit integer, the NumPy rules indicate it can't convert losslessly into a 32-bit float, so a 64-bit float should be the result type. By examining the value of the constant, '3', we see that it fits in an 8-bit integer, which can be cast losslessly into the 32-bit float.

Parameters **arrays_and_dtypes** : list of arrays and dtypes

The operands of some operation whose result type is needed.

Returns **out** : dtype

The result type.

See also:

dtype, *promote_types*, *min_scalar_type*, *can_cast*

Notes

New in version 1.6.0.

The specific algorithm used is as follows.

Categories are determined by first checking which of boolean, integer (int/uint), or floating point (float/complex) the maximum kind of all the arrays and the scalars are.

If there are only scalars or the maximum category of the scalars is higher than the maximum category of the arrays, the data types are combined with *promote_types* to produce the return value.

Otherwise, *min_scalar_type* is called on each array, and the resulting data types are all combined with *promote_types* to produce the return value.

The set of int values is not a subset of the uint values for types with the same number of bits, something not reflected in *min_scalar_type*, but handled as a special case in *result_type*.

Examples

```
>>> np.result_type(3, np.arange(7, dtype='i1'))
dtype('int8')
```

```
>>> np.result_type('i4', 'c8')
dtype('complex128')
```

```
>>> np.result_type(3.0, -2)
dtype('float64')
```

numpy.**common_type**(**arrays*)

Return a scalar type which is common to the input arrays.

The return type will always be an inexact (i.e. floating point) scalar type, even if all the arrays are integer arrays. If one of the inputs is an integer array, the minimum precision type that is returned is a 64-bit floating point dtype.

All input arrays except int64 and uint64 can be safely cast to the returned dtype without loss of information.

Parameters **array1, array2, ...** : ndarrays

Input arrays.

Returns **out** : data type code

Data type code.

See also:

dtype, *mintypecode*

Examples

```
>>> np.common_type(np.arange(2, dtype=np.float32))
<type 'numpy.float32'>
>>> np.common_type(np.arange(2, dtype=np.float32), np.arange(2))
<type 'numpy.float64'>
>>> np.common_type(np.arange(4), np.array([45, 6.j]), np.array([45.0]))
<type 'numpy.complex128'>
```

numpy.**obj2sctype**(*rep*, *default=None*)
Return the scalar dtype or NumPy equivalent of Python type of an object.

Parameters **rep** : any

The object of which the type is returned.

default : any, optional

If given, this is returned for objects whose types can not be determined. If not given, None is returned for those objects.

Returns **dtype** : dtype or Python type

The data type of *rep*.

See also:

sctype2char, *issctype*, *issubsctype*, *issubdtype*, maximum_sctype

Examples

```
>>> np.obj2sctype(np.int32)
<type 'numpy.int32'>
>>> np.obj2sctype(np.array([1., 2.]))
<type 'numpy.float64'>
>>> np.obj2sctype(np.array([1.j]))
<type 'numpy.complex128'>
```

```
>>> np.obj2sctype(dict)
<type 'numpy.object_'>
>>> np.obj2sctype('string')
<type 'numpy.string_'>
```

```
>>> np.obj2sctype(1, default=list)
<type 'list'>
```

3.7.1 Creating data types

dtype(obj[, align, copy])	Create a data type object.
format_parser(formats, names, titles[, ...])	Class to convert formats, names, titles description to a dtype.

class numpy.**format_parser**(*formats*, *names*, *titles*, *aligned=False*, *byteorder=None*)
Class to convert formats, names, titles description to a dtype.

After constructing the format_parser object, the dtype attribute is the converted data-type: `dtype = format_parser(formats, names, titles).dtype`

Parameters **formats** : str or list of str

The format description, either specified as a string with comma-separated format descriptions in the form `'f8, i4, a5'`, or a list of format description strings in the form `['f8', 'i4', 'a5']`.

names : str or list/tuple of str

The field names, either specified as a comma-separated string in the form `'col1, col2, col3'`, or as a list or tuple of strings in the form `['col1', 'col2', 'col3']`. An empty list can be used, in that case default field names ('f0', 'f1', ...) are used.

titles : sequence

Sequence of title strings. An empty list can be used to leave titles out.

aligned : bool, optional

If True, align the fields by padding as the C-compiler would. Default is False.

byteorder : str, optional

If specified, all the fields will be changed to the provided byte-order. Otherwise, the default byte-order is used. For all available string specifiers, see *dtype.newbyteorder*.

See also:

dtype, *typename*, *sctype2char*

Examples

```
>>> np.format_parser(['f8', 'i4', 'a5'], ['col1', 'col2', 'col3'],
...                  ['T1', 'T2', 'T3']).dtype
dtype([(('T1', 'col1'), '<f8'), (('T2', 'col2'), '<i4'),
       (('T3', 'col3'), '|S5')])
```

names and/or *titles* can be empty lists. If *titles* is an empty list, titles will simply not appear. If *names* is empty, default field names will be used.

```
>>> np.format_parser(['f8', 'i4', 'a5'], ['col1', 'col2', 'col3'],
...                  []).dtype
dtype([('col1', '<f8'), ('col2', '<i4'), ('col3', '|S5')])
>>> np.format_parser(['f8', 'i4', 'a5'], [], []).dtype
dtype([('f0', '<f8'), ('f1', '<i4'), ('f2', '|S5')])
```

Attributes

dtype	(dtype) The converted data-type.

3.7.2 Data type information

finfo(dtype)	Machine limits for floating point types.
iinfo(type)	Machine limits for integer types.
MachAr([float_conv, int_conv, ...])	Diagnosing machine parameters.

class numpy.**finfo**(*dtype*)

Machine limits for floating point types.

Parameters **dtype** : float, dtype, or instance

Kind of floating point data-type about which to get information.

See also:

MachAr The implementation of the tests that produce this information.

iinfo The equivalent for integer data types.

Notes

For developers of NumPy: do not instantiate this at the module level. The initial calculation of these parameters is expensive and negatively impacts import times. These objects are cached, so calling `finfo()` repeatedly inside your functions is not a problem.

Attributes

bits	(int) The number of bits occupied by the type.
eps	(float) The smallest representable positive number such that `1.0 + eps != 1.0`. Type of *eps* is an appropriate floating point type.
epsneg	(floating point number of the appropriate type) The smallest representable positive number such that `1.0 - epsneg != 1.0`.
iexp	(int) The number of bits in the exponent portion of the floating point representation.
machar	(MachAr) The object which calculated these parameters and holds more detailed information.
machep	(int) The exponent that yields *eps*.
max	(floating point number of the appropriate type) The largest representable number.
maxexp	(int) The smallest positive power of the base (2) that causes overflow.
min	(floating point number of the appropriate type) The smallest representable number, typically `-max`.
minexp	(int) The most negative power of the base (2) consistent with there being no leading 0's in the mantissa.
negep	(int) The exponent that yields *epsneg*.
nexp	(int) The number of bits in the exponent including its sign and bias.
nmant	(int) The number of bits in the mantissa.
precision	(int) The approximate number of decimal digits to which this kind of float is precise.
resolution	(floating point number of the appropriate type) The approximate decimal resolution of this type, i.e., `10**-precision`.
tiny	(float) The smallest positive usable number. Type of *tiny* is an appropriate floating point type.

class numpy.**iinfo**(*type*)

Machine limits for integer types.

Parameters **int_type** : integer type, dtype, or instance

The kind of integer data type to get information about.

See also:

finfo The equivalent for floating point data types.

Examples

With types:

```
>>> ii16 = np.iinfo(np.int16)
>>> ii16.min
-32768
>>> ii16.max
32767
>>> ii32 = np.iinfo(np.int32)
>>> ii32.min
-2147483648
>>> ii32.max
2147483647
```

With instances:

```
>>> ii32 = np.iinfo(np.int32(10))
>>> ii32.min
-2147483648
>>> ii32.max
2147483647
```

Attributes

min	Minimum value of given dtype.
max	Maximum value of given dtype.

iinfo.**min**
: Minimum value of given dtype.

iinfo.**max**
: Maximum value of given dtype.

bits	(int) The number of bits occupied by the type.

class numpy.**MachAr**(*float_conv=<class 'float'>, int_conv=<class 'int'>, float_to_float=<class 'float'>, float_to_str=<function MachAr.<lambda>>, title='Python floating point number'*)

Diagnosing machine parameters.

Parameters **float_conv** : function, optional

Function that converts an integer or integer array to a float or float array. Default is `float`.

int_conv : function, optional

Function that converts a float or float array to an integer or integer array. Default is `int`.

float_to_float : function, optional

Function that converts a float array to float. Default is `float`. Note that this does not seem to do anything useful in the current implementation.

float_to_str : function, optional

Function that converts a single float to a string. Default is `lambda v:'%24.16e' %v`.

title : str, optional

Title that is printed in the string representation of *MachAr*.

See also:

finfo Machine limits for floating point types.

iinfo Machine limits for integer types.

References

[R1]

Attributes

ibeta	(int) Radix in which numbers are represented.
it	(int) Number of base-*ibeta* digits in the floating point mantissa M.
machep	(int) Exponent of the smallest (most negative) power of *ibeta* that, added to 1.0, gives something different from 1.0
eps	(float) Floating-point number `beta**machep` (floating point precision)
negep	(int) Exponent of the smallest power of *ibeta* that, subtracted from 1.0, gives something different from 1.0.
epsneg	(float) Floating-point number `beta**negep`.
iexp	(int) Number of bits in the exponent (including its sign and bias).
minexp	(int) Smallest (most negative) power of *ibeta* consistent with there being no leading zeros in the mantissa.
xmin	(float) Floating point number `beta**minexp` (the smallest [in magnitude] usable floating value).
maxexp	(int) Smallest (positive) power of *ibeta* that causes overflow.
xmax	(float) `(1-epsneg) * beta**maxexp` (the largest [in magnitude] usable floating value).
irnd	(int) In `range(6)`, information on what kind of rounding is done in addition, and on how underflow is handled.
ngrd	(int) Number of 'guard digits' used when truncating the product of two mantissas to fit the representation.
epsilon	(float) Same as *eps*.
tiny	(float) Same as *xmin*.
huge	(float) Same as *xmax*.
precision	(float) `- int(-log10(eps))`
resolution	(float) `- 10**(-precision)`

3.7.3 Data type testing

issctype(rep)	Determines whether the given object represents a scalar data-type.
issubdtype(arg1, arg2)	Returns True if first argument is a typecode lower/equal in type hierarchy.
issubsctype(arg1, arg2)	Determine if the first argument is a subclass of the second argument.
*issubclass_*(arg1, arg2)	Determine if a class is a subclass of a second class.
find_common_type(array_types, scalar_types)	Determine common type following standard coercion rules.

numpy.**issctype**(*rep*)

Determines whether the given object represents a scalar data-type.

Parameters **rep** : any

If *rep* is an instance of a scalar dtype, True is returned. If not, False is returned.

Returns **out** : bool

Boolean result of check whether *rep* is a scalar dtype.

See also:

issubsctype, *issubdtype*, *obj2sctype*, *sctype2char*

Examples

```
>>> np.issctype(np.int32)
True
>>> np.issctype(list)
False
>>> np.issctype(1.1)
False
```

Strings are also a scalar type:

```
>>> np.issctype(np.dtype('str'))
True
```

numpy.**issubdtype**(*arg1*, *arg2*)

Returns True if first argument is a typecode lower/equal in type hierarchy.

Parameters **arg1, arg2** : dtype_like

dtype or string representing a typecode.

Returns **out** : bool

See also:

issubsctype, *issubclass_*

numpy.core.numerictypes Overview of numpy type hierarchy.

Examples

```
>>> np.issubdtype('S1', np.string_)
True
>>> np.issubdtype(np.float64, np.float32)
False
```

numpy.**issubsctype**(*arg1*, *arg2*)

Determine if the first argument is a subclass of the second argument.

Parameters **arg1, arg2** : dtype or dtype specifier

Data-types.

Returns **out** : bool

The result.

See also:

issctype, *issubdtype*, *obj2sctype*

Examples

```
>>> np.issubsctype('S8', str)
True
>>> np.issubsctype(np.array([1]), int)
True
>>> np.issubsctype(np.array([1]), float)
False
```

numpy.**issubclass_**(*arg1*, *arg2*)

Determine if a class is a subclass of a second class.

*issubclass_* is equivalent to the Python built-in `issubclass`, except that it returns False instead of raising a TypeError if one of the arguments is not a class.

Parameters **arg1** : class

Input class. True is returned if *arg1* is a subclass of *arg2*.

arg2 : class or tuple of classes.

Input class. If a tuple of classes, True is returned if *arg1* is a subclass of any of the tuple elements.

Returns **out** : bool

Whether *arg1* is a subclass of *arg2* or not.

See also:

issubsctype, *issubdtype*, *issctype*

Examples

```
>>> np.issubclass_(np.int32, int)
True
>>> np.issubclass_(np.int32, float)
False
```

numpy.**find_common_type**(*array_types*, *scalar_types*)

Determine common type following standard coercion rules.

Parameters **array_types** : sequence

A list of dtypes or dtype convertible objects representing arrays.

scalar_types : sequence

A list of dtypes or dtype convertible objects representing scalars.

Returns **datatype** : dtype

The common data type, which is the maximum of *array_types* ignoring *scalar_types*, unless the maximum of *scalar_types* is of a different kind (*dtype.kind*). If the kind is not understood, then None is returned.

See also:

dtype, *common_type*, *can_cast*, *mintypecode*

Examples

```
>>> np.find_common_type([], [np.int64, np.float32, complex])
dtype('complex128')
>>> np.find_common_type([np.int64, np.float32], [])
dtype('float64')
```

The standard casting rules ensure that a scalar cannot up-cast an array unless the scalar is of a fundamentally different kind of data (i.e. under a different hierarchy in the data type hierarchy) then the array:

```
>>> np.find_common_type([np.float32], [np.int64, np.float64])
dtype('float32')
```

Complex is of a different type, so it up-casts the float in the *array_types* argument:

```
>>> np.find_common_type([np.float32], [complex])
dtype('complex128')
```

Type specifier strings are convertible to dtypes and can therefore be used instead of dtypes:

```
>>> np.find_common_type(['f4', 'f4', 'i4'], ['c8'])
dtype('complex128')
```

3.7.4 Miscellaneous

typename(char)	Return a description for the given data type code.
sctype2char(sctype)	Return the string representation of a scalar dtype.
mintypecode(typechars[, typeset, default])	Return the character for the minimum-size type to which given types can be safely cast.

numpy.**typename**(*char*)

Return a description for the given data type code.

Parameters **char** : str

Data type code.

Returns **out** : str

Description of the input data type code.

See also:

dtype, typecodes

Examples

```
>>> typechars = ['S1', '?', 'B', 'D', 'G', 'F', 'I', 'H', 'L', 'O', 'Q',
...              'S', 'U', 'V', 'b', 'd', 'g', 'f', 'i', 'h', 'l', 'q']
>>> for typechar in typechars:
...     print(typechar, ' : ', np.typename(typechar))
...
S1  :  character
?  :  bool
B  :  unsigned char
D  :  complex double precision
G  :  complex long double precision
F  :  complex single precision
I  :  unsigned integer
H  :  unsigned short
L  :  unsigned long integer
O  :  object
Q  :  unsigned long long integer
S  :  string
U  :  unicode
V  :  void
b  :  signed char
d  :  double precision
g  :  long precision
f  :  single precision
i  :  integer
h  :  short
l  :  long integer
q  :  long long integer
```

numpy.**sctype2char**(*sctype*)

Return the string representation of a scalar dtype.

Parameters **sctype** : scalar dtype or object

If a scalar dtype, the corresponding string character is returned. If an object, *sctype2char* tries to infer its scalar type and then return the corresponding string character.

Returns **typechar** : str

The string character corresponding to the scalar type.

Raises **ValueError**

If *sctype* is an object for which the type can not be inferred.

See also:

obj2sctype, *issctype*, *issubsctype*, *mintypecode*

Examples

```
>>> for sctype in [np.int32, float, complex, np.string_, np.ndarray]:
...     print(np.sctype2char(sctype))
l
d
D
S
O
```

```
>>> x = np.array([1., 2-1.j])
>>> np.sctype2char(x)
'D'
>>> np.sctype2char(list)
'O'
```

numpy.**mintypecode**(*typechars*, *typeset='GDFgdf'*, *default='d'*)

Return the character for the minimum-size type to which given types can be safely cast.

The returned type character must represent the smallest size dtype such that an array of the returned type can handle the data from an array of all types in *typechars* (or if *typechars* is an array, then its dtype.char).

Parameters **typechars** : list of str or array_like

If a list of strings, each string should represent a dtype. If array_like, the character representation of the array dtype is used.

typeset : str or list of str, optional

The set of characters that the returned character is chosen from. The default set is 'GDFgdf'.

default : str, optional

The default character, this is returned if none of the characters in *typechars* matches a character in *typeset*.

Returns **typechar** : str

The character representing the minimum-size type that was found.

See also:

dtype, *sctype2char*, maximum_sctype

Examples

```
>>> np.mintypecode(['d', 'f', 'S'])
'd'
>>> x = np.array([1.1, 2-3.j])
>>> np.mintypecode(x)
'D'
```

```
>>> np.mintypecode('abceh', default='G')
'G'
```

3.8 Optionally Scipy-accelerated routines (numpy.dual)

Aliases for functions which may be accelerated by Scipy.

Scipy can be built to use accelerated or otherwise improved libraries for FFTs, linear algebra, and special functions. This module allows developers to transparently support these accelerated functions when scipy is available but still support users who have only installed NumPy.

3.8.1 Linear algebra

cholesky(a)	Cholesky decomposition.
det(a)	Compute the determinant of an array.
eig(a)	Compute the eigenvalues and right eigenvectors of a square array.
eigh(a[, UPLO])	Return the eigenvalues and eigenvectors of a Hermitian or symmetric matrix.
eigvals(a)	Compute the eigenvalues of a general matrix.
eigvalsh(a[, UPLO])	Compute the eigenvalues of a Hermitian or real symmetric matrix.
inv(a)	Compute the (multiplicative) inverse of a matrix.
lstsq(a, b[, rcond])	Return the least-squares solution to a linear matrix equation.
norm(x[, ord, axis, keepdims])	Matrix or vector norm.
pinv(a[, rcond])	Compute the (Moore-Penrose) pseudo-inverse of a matrix.
solve(a, b)	Solve a linear matrix equation, or system of linear scalar equations.
svd(a[, full_matrices, compute_uv])	Singular Value Decomposition.

3.8.2 FFT

fft(a[, n, axis, norm])	Compute the one-dimensional discrete Fourier Transform.
fft2(a[, s, axes, norm])	Compute the 2-dimensional discrete Fourier Transform
fftn(a[, s, axes, norm])	Compute the N-dimensional discrete Fourier Transform.
ifft(a[, n, axis, norm])	Compute the one-dimensional inverse discrete Fourier Transform.
ifft2(a[, s, axes, norm])	Compute the 2-dimensional inverse discrete Fourier Transform.
ifftn(a[, s, axes, norm])	Compute the N-dimensional inverse discrete Fourier Transform.

3.8.3 Other

i0(x)	Modified Bessel function of the first kind, order 0.

3.9 Mathematical functions with automatic domain (numpy.emath)

Note: `numpy.emath` is a preferred alias for *numpy.lib.scimath*, available after *numpy* is imported.

Wrapper functions to more user-friendly calling of certain math functions whose output data-type is different than the input data-type in certain domains of the input.

For example, for functions like `log` with branch cuts, the versions in this module provide the mathematically valid answers in the complex plane:

```
>>> import math
>>> from numpy.lib import scimath
>>> scimath.log(-math.exp(1)) == (1+1j*math.pi)
True
```

Similarly, `sqrt`, other base logarithms, `power` and trig functions are correctly handled. See their respective docstrings for specific examples.

3.10 Floating point error handling

3.10.1 Setting and getting error handling

seterr([all, divide, over, under, invalid])	Set how floating-point errors are handled.
geterr()	Get the current way of handling floating-point errors.
seterrcall(func)	Set the floating-point error callback function or log object.
geterrcall()	Return the current callback function used on floating-point errors.
errstate(**kwargs)	Context manager for floating-point error handling.

numpy.**geterr**()

Get the current way of handling floating-point errors.

Returns **res** : dict

A dictionary with keys “divide”, “over”, “under”, and “invalid”, whose values are from the strings “ignore”, “print”, “log”, “warn”, “raise”, and “call”. The keys represent possible floating-point exceptions, and the values define how these exceptions are handled.

See also:

geterrcall, *seterr*, *seterrcall*

Notes

For complete documentation of the types of floating-point exceptions and treatment options, see *seterr*.

Examples

```
>>> np.geterr()
{'over': 'warn', 'divide': 'warn', 'invalid': 'warn',
'under': 'ignore'}
```

(continues on next page)

(continued from previous page)

```
>>> np.arange(3.) / np.arange(3.)
array([ NaN,   1.,   1.])
```

```
>>> oldsettings = np.seterr(all='warn', over='raise')
>>> np.geterr()
{'over': 'raise', 'divide': 'warn', 'invalid': 'warn', 'under': 'warn'}
>>> np.arange(3.) / np.arange(3.)
__main__:1: RuntimeWarning: invalid value encountered in divide
array([ NaN,   1.,   1.])
```

numpy.**geterrcall**()

Return the current callback function used on floating-point errors.

When the error handling for a floating-point error (one of "divide", "over", "under", or "invalid") is set to 'call' or 'log', the function that is called or the log instance that is written to is returned by *geterrcall*. This function or log instance has been set with *seterrcall*.

Returns **errobj** : callable, log instance or None

The current error handler. If no handler was set through *seterrcall*, None is returned.

See also:

seterrcall, *seterr*, *geterr*

Notes

For complete documentation of the types of floating-point exceptions and treatment options, see *seterr*.

Examples

```
>>> np.geterrcall()  # we did not yet set a handler, returns None
```

```
>>> oldsettings = np.seterr(all='call')
>>> def err_handler(type, flag):
...     print("Floating point error (%s), with flag %s" % (type, flag))
>>> oldhandler = np.seterrcall(err_handler)
>>> np.array([1, 2, 3]) / 0.0
Floating point error (divide by zero), with flag 1
array([ Inf,  Inf,  Inf])
```

```
>>> cur_handler = np.geterrcall()
>>> cur_handler is err_handler
True
```

class numpy.**errstate**(***kwargs*)

Context manager for floating-point error handling.

Using an instance of *errstate* as a context manager allows statements in that context to execute with a known error handling behavior. Upon entering the context the error handling is set with *seterr* and *seterrcall*, and upon exiting it is reset to what it was before.

Parameters **kwargs** : {divide, over, under, invalid}

Keyword arguments. The valid keywords are the possible floating-point exceptions. Each keyword should have a string value that defines the treatment for the particular error. Possible values are {'ignore', 'warn', 'raise', 'call', 'print', 'log'}.

See also:

seterr, *geterr*, *seterrcall*, *geterrcall*

Notes

The `with` statement was introduced in Python 2.5, and can only be used there by importing it: `from __future__ import with_statement`. In earlier Python versions the `with` statement is not available.

For complete documentation of the types of floating-point exceptions and treatment options, see *seterr*.

Examples

```
>>> from __future__ import with_statement  # use 'with' in Python 2.5
>>> olderr = np.seterr(all='ignore')  # Set error handling to known state.
```

```
>>> np.arange(3) / 0.
array([ NaN,  Inf,  Inf])
>>> with np.errstate(divide='warn'):
...     np.arange(3) / 0.
...
__main__:2: RuntimeWarning: divide by zero encountered in divide
array([ NaN,  Inf,  Inf])
```

```
>>> np.sqrt(-1)
nan
>>> with np.errstate(invalid='raise'):
...     np.sqrt(-1)
Traceback (most recent call last):
  File "<stdin>", line 2, in <module>
FloatingPointError: invalid value encountered in sqrt
```

Outside the context the error handling behavior has not changed:

```
>>> np.geterr()
{'over': 'warn', 'divide': 'warn', 'invalid': 'warn',
'under': 'ignore'}
```

3.10.2 Internal functions

seterrobj(errobj)	Set the object that defines floating-point error handling.
geterrobj()	Return the current object that defines floating-point error handling.

numpy.**seterrobj**(*errobj*)
Set the object that defines floating-point error handling.

The error object contains all information that defines the error handling behavior in NumPy. *seterrobj* is used internally by the other functions that set error handling behavior (*seterr*, *seterrcall*).

Parameters **errobj** : list

The error object, a list containing three elements: [internal numpy buffer size, error mask, error callback function].

The error mask is a single integer that holds the treatment information on all four floating point errors. The information for each error type is contained in three bits of the integer. If we print it in base 8, we can see what treatment is set for "invalid", "under", "over", and "divide" (in that order). The printed string can be interpreted with

- 0 : 'ignore'
- 1 : 'warn'
- 2 : 'raise'
- 3 : 'call'
- 4 : 'print'
- 5 : 'log'

See also:

geterrobj, *seterr*, *geterr*, *seterrcall*, *geterrcall*, *getbufsize*, *setbufsize*

Notes

For complete documentation of the types of floating-point exceptions and treatment options, see *seterr*.

Examples

```
>>> old_errobj = np.geterrobj()  # first get the defaults
>>> old_errobj
[10000, 0, None]
```

```
>>> def err_handler(type, flag):
...     print("Floating point error (%s), with flag %s" % (type, flag))
...
>>> new_errobj = [20000, 12, err_handler]
>>> np.seterrobj(new_errobj)
>>> np.base_repr(12, 8)  # int for divide=4 ('print') and over=1 ('warn')
'14'
>>> np.geterr()
{'over': 'warn', 'divide': 'print', 'invalid': 'ignore', 'under': 'ignore'}
>>> np.geterrcall() is err_handler
True
```

numpy.**geterrobj**()

Return the current object that defines floating-point error handling.

The error object contains all information that defines the error handling behavior in NumPy. *geterrobj* is used internally by the other functions that get and set error handling behavior (*geterr*, *seterr*, *geterrcall*, *seterrcall*).

Returns **errobj** : list

The error object, a list containing three elements: [internal numpy buffer size, error mask, error callback function].

The error mask is a single integer that holds the treatment information on all four floating point errors. The information for each error type is contained in three bits of the integer. If we print it in base 8, we can see what treatment is set for "invalid", "under", "over", and "divide" (in that order). The printed string can be interpreted with

- 0 : 'ignore'
- 1 : 'warn'
- 2 : 'raise'
- 3 : 'call'
- 4 : 'print'
- 5 : 'log'

See also:

seterrobj, *seterr*, *geterr*, *seterrcall*, *geterrcall*, *getbufsize*, *setbufsize*

Notes

For complete documentation of the types of floating-point exceptions and treatment options, see *seterr*.

Examples

```
>>> np.geterrobj()  # first get the defaults
[10000, 0, None]
```

```
>>> def err_handler(type, flag):
...     print("Floating point error (%s), with flag %s" % (type, flag))
...
>>> old_bufsize = np.setbufsize(20000)
>>> old_err = np.seterr(divide='raise')
>>> old_handler = np.seterrcall(err_handler)
>>> np.geterrobj()
[20000, 2, <function err_handler at 0x91dcaac>]
```

```
>>> old_err = np.seterr(all='ignore')
>>> np.base_repr(np.geterrobj()[1], 8)
'0'
>>> old_err = np.seterr(divide='warn', over='log', under='call',
                        invalid='print')
>>> np.base_repr(np.geterrobj()[1], 8)
'4351'
```

3.11 Discrete Fourier Transform (`numpy.fft`)

3.11.1 Standard FFTs

fft(a[, n, axis, norm])	Compute the one-dimensional discrete Fourier Transform.
ifft(a[, n, axis, norm])	Compute the one-dimensional inverse discrete Fourier Transform.
fft2(a[, s, axes, norm])	Compute the 2-dimensional discrete Fourier Transform
ifft2(a[, s, axes, norm])	Compute the 2-dimensional inverse discrete Fourier Transform.
fftn(a[, s, axes, norm])	Compute the N-dimensional discrete Fourier Transform.
ifftn(a[, s, axes, norm])	Compute the N-dimensional inverse discrete Fourier Transform.

numpy.fft.**fft**(*a*, *n=None*, *axis=-1*, *norm=None*)

Compute the one-dimensional discrete Fourier Transform.

This function computes the one-dimensional *n*-point discrete Fourier Transform (DFT) with the efficient Fast Fourier Transform (FFT) algorithm [CT].

Parameters **a** : array_like

Input array, can be complex.

n : int, optional

Length of the transformed axis of the output. If *n* is smaller than the length of the input, the input is cropped. If it is larger, the input is padded with zeros. If *n* is not given, the length of the input along the axis specified by *axis* is used.

axis : int, optional

Axis over which to compute the FFT. If not given, the last axis is used.

norm : {None, "ortho"}, optional

New in version 1.10.0.

Normalization mode (see *numpy.fft*). Default is None.

Returns **out** : complex ndarray

The truncated or zero-padded input, transformed along the axis indicated by *axis*, or the last one if *axis* is not specified.

Raises **IndexError**

if *axes* is larger than the last axis of *a*.

See also:

numpy.fft for definition of the DFT and conventions used.

ifft The inverse of *fft*.

fft2 The two-dimensional FFT.

fftn The *n*-dimensional FFT.

rfftn The *n*-dimensional FFT of real input.

fftfreq Frequency bins for given FFT parameters.

Notes

FFT (Fast Fourier Transform) refers to a way the discrete Fourier Transform (DFT) can be calculated efficiently, by using symmetries in the calculated terms. The symmetry is highest when *n* is a power of 2, and the transform is therefore most efficient for these sizes.

The DFT is defined, with the conventions used in this implementation, in the documentation for the *numpy.fft* module.

References

[CT19]

Examples

```
>>> np.fft.fft(np.exp(2j * np.pi * np.arange(8) / 8))
array([ -3.44505240e-16 +1.14383329e-17j,
          8.00000000e+00 -5.71092652e-15j,
          2.33482938e-16 +1.22460635e-16j,
          1.64863782e-15 +1.77635684e-15j,
          9.95839695e-17 +2.33482938e-16j,
          0.00000000e+00 +1.66837030e-15j,
          1.14383329e-17 +1.22460635e-16j,
          -1.64863782e-15 +1.77635684e-15j])
```

In this example, real input has an FFT which is Hermitian, i.e., symmetric in the real part and anti-symmetric in the imaginary part, as described in the *numpy.fft* documentation:

```
>>> import matplotlib.pyplot as plt
>>> t = np.arange(256)
>>> sp = np.fft.fft(np.sin(t))
>>> freq = np.fft.fftfreq(t.shape[-1])
>>> plt.plot(freq, sp.real, freq, sp.imag)
[<matplotlib.lines.Line2D object at 0x...>, <matplotlib.lines.Line2D object at 0x.
↪..>]
>>> plt.show()
```

numpy.fft.**ifft**(*a*, *n=None*, *axis=-1*, *norm=None*)

Compute the one-dimensional inverse discrete Fourier Transform.

This function computes the inverse of the one-dimensional *n*-point discrete Fourier transform computed by *fft*. In other words, `ifft(fft(a)) == a` to within numerical accuracy. For a general description of the algorithm and definitions, see *numpy.fft*.

The input should be ordered in the same way as is returned by *fft*, i.e.,

- `a[0]` should contain the zero frequency term,
- `a[1:n//2]` should contain the positive-frequency terms,
- `a[n//2 + 1:]` should contain the negative-frequency terms, in increasing order starting from the most negative frequency.

For an even number of input points, `A[n//2]` represents the sum of the values at the positive and negative Nyquist frequencies, as the two are aliased together. See *numpy.fft* for details.

Parameters **a** : array_like

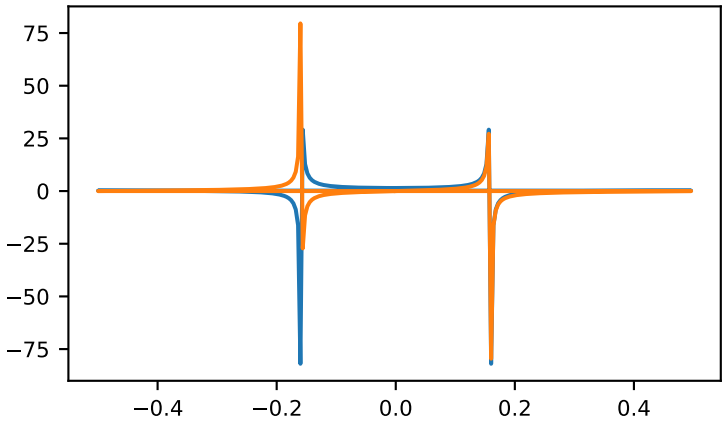

Input array, can be complex.

n : int, optional

Length of the transformed axis of the output. If *n* is smaller than the length of the input, the input is cropped. If it is larger, the input is padded with zeros. If *n* is not given, the length of the input along the axis specified by *axis* is used. See notes about padding issues.

axis : int, optional

Axis over which to compute the inverse DFT. If not given, the last axis is used.

norm : {None, "ortho"}, optional

New in version 1.10.0.

Normalization mode (see `numpy.fft`). Default is None.

Returns **out** : complex ndarray

The truncated or zero-padded input, transformed along the axis indicated by *axis*, or the last one if *axis* is not specified.

Raises **IndexError**

If *axes* is larger than the last axis of *a*.

See also:

`numpy.fft` An introduction, with definitions and general explanations.

`fft` The one-dimensional (forward) FFT, of which `ifft` is the inverse

`ifft2` The two-dimensional inverse FFT.

`ifftn` The n-dimensional inverse FFT.

Notes

If the input parameter *n* is larger than the size of the input, the input is padded by appending zeros at the end. Even though this is the common approach, it might lead to surprising results. If a different padding is desired, it must be performed before calling *ifft*.

Examples

```
>>> np.fft.ifft([0, 4, 0, 0])
array([ 1.+0.j,  0.+1.j, -1.+0.j,  0.-1.j])
```

Create and plot a band-limited signal with random phases:

```
>>> import matplotlib.pyplot as plt
>>> t = np.arange(400)
>>> n = np.zeros((400,), dtype=complex)
>>> n[40:60] = np.exp(1j*np.random.uniform(0, 2*np.pi, (20,)))
>>> s = np.fft.ifft(n)
>>> plt.plot(t, s.real, 'b-', t, s.imag, 'r--')
...
>>> plt.legend(('real', 'imaginary'))
...
>>> plt.show()
```

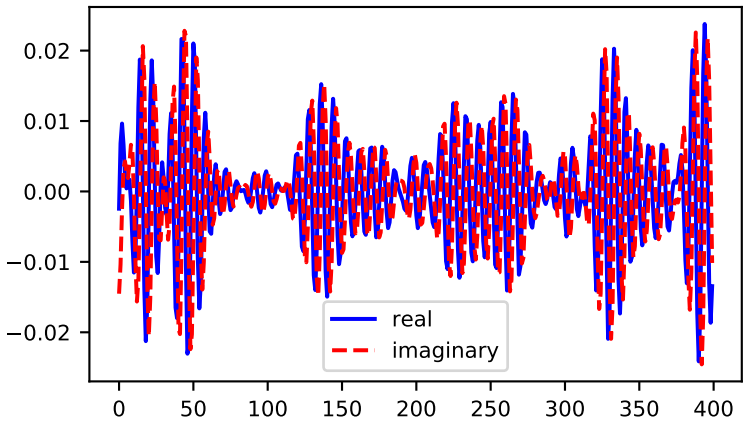

numpy.fft.**fft2**(*a*, *s=None*, *axes=(-2, -1)*, *norm=None*)

Compute the 2-dimensional discrete Fourier Transform

This function computes the *n*-dimensional discrete Fourier Transform over any axes in an *M*-dimensional array by means of the Fast Fourier Transform (FFT). By default, the transform is computed over the last two axes of the input array, i.e., a 2-dimensional FFT.

Parameters **a** : array_like

Input array, can be complex

s : sequence of ints, optional

Shape (length of each transformed axis) of the output (`s[0]` refers to axis 0, `s[1]` to axis 1, etc.). This corresponds to `n` for `fft(x, n)`. Along each axis, if the given shape is smaller than that of the input, the input is cropped. If it is larger, the input is padded with zeros. if *s* is not given, the shape of the input along the axes specified by *axes* is used.

axes : sequence of ints, optional

Axes over which to compute the FFT. If not given, the last two axes are used. A repeated index in *axes* means the transform over that axis is performed multiple times. A one-element sequence means that a one-dimensional FFT is performed.

norm : {None, "ortho"}, optional

New in version 1.10.0.

Normalization mode (see *numpy.fft*). Default is None.

Returns **out** : complex ndarray

The truncated or zero-padded input, transformed along the axes indicated by *axes*, or the last two axes if *axes* is not given.

Raises **ValueError**

If *s* and *axes* have different length, or *axes* not given and `len(s) != 2`.

IndexError

If an element of *axes* is larger than than the number of axes of *a*.

See also:

numpy.fft Overall view of discrete Fourier transforms, with definitions and conventions used.

ifft2 The inverse two-dimensional FFT.

fft The one-dimensional FFT.

fftn The *n*-dimensional FFT.

fftshift Shifts zero-frequency terms to the center of the array. For two-dimensional input, swaps first and third quadrants, and second and fourth quadrants.

Notes

fft2 is just *fftn* with a different default for *axes*.

The output, analogously to *fft*, contains the term for zero frequency in the low-order corner of the transformed axes, the positive frequency terms in the first half of these axes, the term for the Nyquist frequency in the middle of the axes and the negative frequency terms in the second half of the axes, in order of decreasingly negative frequency.

See *fftn* for details and a plotting example, and *numpy.fft* for definitions and conventions used.

Examples

```
>>> a = np.mgrid[:5, :5][0]
>>> np.fft.fft2(a)
array([[ 50.0 +0.j        ,   0.0 +0.j        ,   0.0 +0.j        ,
          0.0 +0.j        ,   0.0 +0.j        ],
       [-12.5+17.20477401j,   0.0 +0.j        ,   0.0 +0.j        ,
          0.0 +0.j        ,   0.0 +0.j        ],
       [-12.5 +4.0614962j ,   0.0 +0.j        ,   0.0 +0.j        ,
          0.0 +0.j        ,   0.0 +0.j        ],
       [-12.5 -4.0614962j ,   0.0 +0.j        ,   0.0 +0.j        ,
            0.0 +0.j        ,   0.0 +0.j        ],
       [-12.5-17.20477401j,   0.0 +0.j        ,   0.0 +0.j        ,
          0.0 +0.j        ,   0.0 +0.j        ]])
```

numpy.fft.**ifft2**(*a*, *s=None*, *axes=(-2, -1)*, *norm=None*)

Compute the 2-dimensional inverse discrete Fourier Transform.

This function computes the inverse of the 2-dimensional discrete Fourier Transform over any number of axes in an M-dimensional array by means of the Fast Fourier Transform (FFT). In other words, `ifft2(fft2(a)) == a` to within numerical accuracy. By default, the inverse transform is computed over the last two axes of the input array.

The input, analogously to *ifft*, should be ordered in the same way as is returned by *fft2*, i.e. it should have the term for zero frequency in the low-order corner of the two axes, the positive frequency terms in the first half of these axes, the term for the Nyquist frequency in the middle of the axes and the negative frequency terms in the second half of both axes, in order of decreasingly negative frequency.

Parameters **a** : array_like

Input array, can be complex.

s : sequence of ints, optional

Shape (length of each axis) of the output (`s[0]` refers to axis 0, `s[1]` to axis 1, etc.). This corresponds to *n* for `ifft(x, n)`. Along each axis, if the given shape is smaller than that of the input, the input is cropped. If it is larger, the input is padded with zeros. if *s* is not given, the shape of the input along the axes specified by *axes* is used. See notes for issue on *ifft* zero padding.

axes : sequence of ints, optional

Axes over which to compute the FFT. If not given, the last two axes are used. A repeated index in *axes* means the transform over that axis is performed multiple times. A one-element sequence means that a one-dimensional FFT is performed.

norm : {None, “ortho”}, optional

New in version 1.10.0.

Normalization mode (see *numpy.fft*). Default is None.

Returns **out** : complex ndarray

The truncated or zero-padded input, transformed along the axes indicated by *axes*, or the last two axes if *axes* is not given.

Raises **ValueError**

If *s* and *axes* have different length, or *axes* not given and `len(s) != 2`.

IndexError

If an element of *axes* is larger than than the number of axes of *a*.

See also:

numpy.fft Overall view of discrete Fourier transforms, with definitions and conventions used.

fft2 The forward 2-dimensional FFT, of which *ifft2* is the inverse.

ifftn The inverse of the *n*-dimensional FFT.

fft The one-dimensional FFT.

ifft The one-dimensional inverse FFT.

Notes

ifft2 is just *ifftn* with a different default for *axes*.

See *ifftn* for details and a plotting example, and *numpy.fft* for definition and conventions used.

Zero-padding, analogously with *ifft*, is performed by appending zeros to the input along the specified dimension. Although this is the common approach, it might lead to surprising results. If another form of zero padding is desired, it must be performed before *ifft2* is called.

Examples

```
>>> a = 4 * np.eye(4)
>>> np.fft.ifft2(a)
array([[ 1.+0.j,  0.+0.j,  0.+0.j,  0.+0.j],
       [ 0.+0.j,  0.+0.j,  0.+0.j,  1.+0.j],
       [ 0.+0.j,  0.+0.j,  1.+0.j,  0.+0.j],
       [ 0.+0.j,  1.+0.j,  0.+0.j,  0.+0.j]])
```

numpy.fft.**fftn**(*a*, *s=None*, *axes=None*, *norm=None*)

Compute the N-dimensional discrete Fourier Transform.

This function computes the *N*-dimensional discrete Fourier Transform over any number of axes in an *M*-dimensional array by means of the Fast Fourier Transform (FFT).

Parameters **a** : array_like

Input array, can be complex.

s : sequence of ints, optional

Shape (length of each transformed axis) of the output (`s[0]` refers to axis 0, `s[1]` to axis 1, etc.). This corresponds to `n` for `fft(x, n)`. Along any axis, if the given shape is smaller than that of the input, the input is cropped. If it is larger, the input is padded with zeros. if *s* is not given, the shape of the input along the axes specified by *axes* is used.

axes : sequence of ints, optional

Axes over which to compute the FFT. If not given, the last `len(s)` axes are used, or all axes if *s* is also not specified. Repeated indices in *axes* means that the transform over that axis is performed multiple times.

norm : {None, "ortho"}, optional

New in version 1.10.0.

Normalization mode (see *numpy.fft*). Default is None.

Returns **out** : complex ndarray

The truncated or zero-padded input, transformed along the axes indicated by *axes*, or by a combination of *s* and *a*, as explained in the parameters section above.

Raises **ValueError**

If *s* and *axes* have different length.

IndexError

If an element of *axes* is larger than than the number of axes of *a*.

See also:

numpy.fft Overall view of discrete Fourier transforms, with definitions and conventions used.

ifftn The inverse of *fftn*, the inverse *n*-dimensional FFT.

fft The one-dimensional FFT, with definitions and conventions used.

rfftn The *n*-dimensional FFT of real input.

fft2 The two-dimensional FFT.

fftshift Shifts zero-frequency terms to centre of array

Notes

The output, analogously to *fft*, contains the term for zero frequency in the low-order corner of all axes, the positive frequency terms in the first half of all axes, the term for the Nyquist frequency in the middle of all axes and the negative frequency terms in the second half of all axes, in order of decreasingly negative frequency.

See *numpy.fft* for details, definitions and conventions used.

Examples

```
>>> a = np.mgrid[:3, :3, :3][0]
>>> np.fft.fftn(a, axes=(1, 2))
array([[[  0.+0.j,   0.+0.j,   0.+0.j],
        [  0.+0.j,   0.+0.j,   0.+0.j],
        [  0.+0.j,   0.+0.j,   0.+0.j]],
       [[  9.+0.j,   0.+0.j,   0.+0.j],
        [  0.+0.j,   0.+0.j,   0.+0.j],
        [  0.+0.j,   0.+0.j,   0.+0.j]],
       [[ 18.+0.j,   0.+0.j,   0.+0.j],
        [  0.+0.j,   0.+0.j,   0.+0.j],
        [  0.+0.j,   0.+0.j,   0.+0.j]]])
>>> np.fft.fftn(a, (2, 2), axes=(0, 1))
array([[[ 2.+0.j,  2.+0.j,  2.+0.j],
        [ 0.+0.j,  0.+0.j,  0.+0.j]],
       [[-2.+0.j, -2.+0.j, -2.+0.j],
        [ 0.+0.j,  0.+0.j,  0.+0.j]]])
```

```
>>> import matplotlib.pyplot as plt
>>> [X, Y] = np.meshgrid(2 * np.pi * np.arange(200) / 12,
...                      2 * np.pi * np.arange(200) / 34)
>>> S = np.sin(X) + np.cos(Y) + np.random.uniform(0, 1, X.shape)
```

(continues on next page)

(continued from previous page)

```
>>> FS = np.fft.fftn(S)
>>> plt.imshow(np.log(np.abs(np.fft.fftshift(FS))**2))
<matplotlib.image.AxesImage object at 0x...>
>>> plt.show()
```

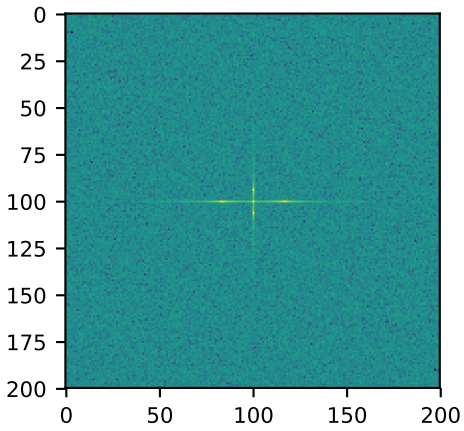

numpy.fft.**ifftn**(*a*, *s=None*, *axes=None*, *norm=None*)

Compute the N-dimensional inverse discrete Fourier Transform.

This function computes the inverse of the N-dimensional discrete Fourier Transform over any number of axes in an M-dimensional array by means of the Fast Fourier Transform (FFT). In other words, `ifftn(fftn(a)) == a` to within numerical accuracy. For a description of the definitions and conventions used, see *numpy.fft*.

The input, analogously to *ifft*, should be ordered in the same way as is returned by *fftn*, i.e. it should have the term for zero frequency in all axes in the low-order corner, the positive frequency terms in the first half of all axes, the term for the Nyquist frequency in the middle of all axes and the negative frequency terms in the second half of all axes, in order of decreasingly negative frequency.

Parameters **a** : array_like

Input array, can be complex.

s : sequence of ints, optional

Shape (length of each transformed axis) of the output (`s[0]` refers to axis 0, `s[1]` to axis 1, etc.). This corresponds to `n` for `ifft(x, n)`. Along any axis, if the given shape is smaller than that of the input, the input is cropped. If it is larger, the input is padded with zeros. if *s* is not given, the shape of the input along the axes specified by *axes* is used. See notes for issue on *ifft* zero padding.

axes : sequence of ints, optional

Axes over which to compute the IFFT. If not given, the last `len(s)` axes are used, or all axes if *s* is also not specified. Repeated indices in *axes* means that the inverse transform over that axis is performed multiple times.

norm : {None, “ortho”}, optional

New in version 1.10.0.

Normalization mode (see *numpy.fft*). Default is None.

Returns **out** : complex ndarray

The truncated or zero-padded input, transformed along the axes indicated by *axes*, or by a combination of *s* or *a*, as explained in the parameters section above.

Raises **ValueError**

If *s* and *axes* have different length.

IndexError

If an element of *axes* is larger than than the number of axes of *a*.

See also:

numpy.fft Overall view of discrete Fourier transforms, with definitions and conventions used.

fftn The forward *n*-dimensional FFT, of which *ifftn* is the inverse.

ifft The one-dimensional inverse FFT.

ifft2 The two-dimensional inverse FFT.

ifftshift Undoes *fftshift*, shifts zero-frequency terms to beginning of array.

Notes

See *numpy.fft* for definitions and conventions used.

Zero-padding, analogously with *ifft*, is performed by appending zeros to the input along the specified dimension. Although this is the common approach, it might lead to surprising results. If another form of zero padding is desired, it must be performed before *ifftn* is called.

Examples

```
>>> a = np.eye(4)
>>> np.fft.ifftn(np.fft.fftn(a, axes=(0,)), axes=(1,))
array([[ 1.+0.j,  0.+0.j,  0.+0.j,  0.+0.j],
       [ 0.+0.j,  1.+0.j,  0.+0.j,  0.+0.j],
       [ 0.+0.j,  0.+0.j,  1.+0.j,  0.+0.j],
       [ 0.+0.j,  0.+0.j,  0.+0.j,  1.+0.j]])
```

Create and plot an image with band-limited frequency content:

```
>>> import matplotlib.pyplot as plt
>>> n = np.zeros((200,200), dtype=complex)
>>> n[60:80, 20:40] = np.exp(1j*np.random.uniform(0, 2*np.pi, (20, 20)))
>>> im = np.fft.ifftn(n).real
>>> plt.imshow(im)
<matplotlib.image.AxesImage object at 0x...>
>>> plt.show()
```

3.11.2 Real FFTs

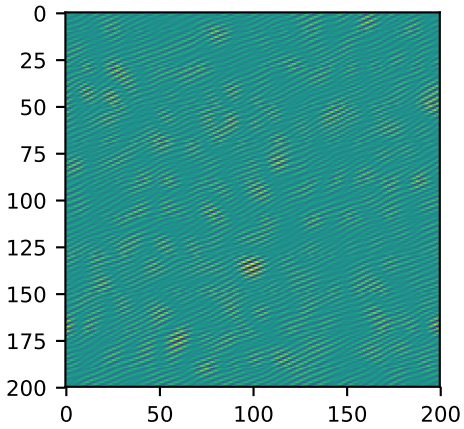

rfft(a[, n, axis, norm])	Compute the one-dimensional discrete Fourier Transform for real input.
irfft(a[, n, axis, norm])	Compute the inverse of the n-point DFT for real input.
rfft2(a[, s, axes, norm])	Compute the 2-dimensional FFT of a real array.
irfft2(a[, s, axes, norm])	Compute the 2-dimensional inverse FFT of a real array.
rfftn(a[, s, axes, norm])	Compute the N-dimensional discrete Fourier Transform for real input.
irfftn(a[, s, axes, norm])	Compute the inverse of the N-dimensional FFT of real input.

numpy.fft.**rfft**(*a*, *n=None*, *axis=-1*, *norm=None*)

Compute the one-dimensional discrete Fourier Transform for real input.

This function computes the one-dimensional *n*-point discrete Fourier Transform (DFT) of a real-valued array by means of an efficient algorithm called the Fast Fourier Transform (FFT).

Parameters **a** : array_like

Input array

n : int, optional

Number of points along transformation axis in the input to use. If *n* is smaller than the length of the input, the input is cropped. If it is larger, the input is padded with zeros. If *n* is not given, the length of the input along the axis specified by *axis* is used.

axis : int, optional

Axis over which to compute the FFT. If not given, the last axis is used.

norm : {None, "ortho"}, optional

New in version 1.10.0.

Normalization mode (see *numpy.fft*). Default is None.

Returns **out** : complex ndarray

The truncated or zero-padded input, transformed along the axis indicated by *axis*, or the last one if *axis* is not specified. If *n* is even, the length of the transformed axis is `(n/2)+1`. If *n* is odd, the length is `(n+1)/2`.

Raises **IndexError**

If *axis* is larger than the last axis of *a*.

See also:

Notes

When the DFT is computed for purely real input, the output is Hermitian-symmetric, i.e. the negative frequency terms are just the complex conjugates of the corresponding positive-frequency terms, and the negative-frequency terms are therefore redundant. This function does not compute the negative frequency terms, and the length of the transformed axis of the output is therefore `n//2 + 1`.

When `A = rfft(a)` and fs is the sampling frequency, `A[0]` contains the zero-frequency term 0*fs, which is real due to Hermitian symmetry.

If *n* is even, `A[-1]` contains the term representing both positive and negative Nyquist frequency (+fs/2 and -fs/2), and must also be purely real. If *n* is odd, there is no term at fs/2; `A[-1]` contains the largest positive frequency (fs/2*(n-1)/n), and is complex in the general case.

If the input *a* contains an imaginary part, it is silently discarded.

Examples

```
>>> np.fft.fft([0, 1, 0, 0])
array([ 1.+0.j,  0.-1.j, -1.+0.j,  0.+1.j])
>>> np.fft.rfft([0, 1, 0, 0])
array([ 1.+0.j,  0.-1.j, -1.+0.j])
```

Notice how the final element of the *fft* output is the complex conjugate of the second element, for real input. For *rfft*, this symmetry is exploited to compute only the non-negative frequency terms.

numpy.fft.**irfft**(*a*, *n=None*, *axis=-1*, *norm=None*)

Compute the inverse of the n-point DFT for real input.

This function computes the inverse of the one-dimensional *n*-point discrete Fourier Transform of real input computed by *rfft*. In other words, `irfft(rfft(a), len(a)) == a` to within numerical accuracy. (See Notes below for why `len(a)` is necessary here.)

The input is expected to be in the form returned by *rfft*, i.e. the real zero-frequency term followed by the complex positive frequency terms in order of increasing frequency. Since the discrete Fourier Transform of real input is Hermitian-symmetric, the negative frequency terms are taken to be the complex conjugates of the corresponding positive frequency terms.

Parameters **a** : array_like

The input array.

n : int, optional

Length of the transformed axis of the output. For *n* output points, `n//2+1` input points are necessary. If the input is longer than this, it is cropped. If it is shorter than this, it is padded with zeros. If *n* is not given, it is determined from the length of the input along the axis specified by *axis*.

axis : int, optional

Axis over which to compute the inverse FFT. If not given, the last axis is used.

norm : {None, “ortho”}, optional

New in version 1.10.0.

Normalization mode (see *numpy.fft*). Default is None.

Returns **out** : ndarray

The truncated or zero-padded input, transformed along the axis indicated by *axis*, or the last one if *axis* is not specified. The length of the transformed axis is *n*, or, if *n* is not given, `2*(m-1)` where `m` is the length of the transformed axis of the input. To get an odd number of output points, *n* must be specified.

Raises **IndexError**

If *axis* is larger than the last axis of *a*.

See also:

numpy.fft For definition of the DFT and conventions used.

rfft The one-dimensional FFT of real input, of which *irfft* is inverse.

fft The one-dimensional FFT.

irfft2 The inverse of the two-dimensional FFT of real input.

irfftn The inverse of the *n*-dimensional FFT of real input.

Notes

Returns the real valued *n*-point inverse discrete Fourier transform of *a*, where *a* contains the non-negative frequency terms of a Hermitian-symmetric sequence. *n* is the length of the result, not the input.

If you specify an *n* such that *a* must be zero-padded or truncated, the extra/removed values will be added/removed at high frequencies. One can thus resample a series to *m* points via Fourier interpolation by: `a_resamp = irfft(rfft(a), m)`.

Examples

```
>>> np.fft.ifft([1, -1j, -1, 1j])
array([ 0.+0.j,  1.+0.j,  0.+0.j,  0.+0.j])
>>> np.fft.irfft([1, -1j, -1])
array([ 0.,  1.,  0.,  0.])
```

Notice how the last term in the input to the ordinary *ifft* is the complex conjugate of the second term, and the output has zero imaginary part everywhere. When calling *irfft*, the negative frequencies are not specified, and the output array is purely real.

numpy.fft.**rfft2**(*a*, *s=None*, *axes=(-2*, *-1)*, *norm=None*)

Compute the 2-dimensional FFT of a real array.

Parameters **a** : array

Input array, taken to be real.

s : sequence of ints, optional

Shape of the FFT.

axes : sequence of ints, optional

Axes over which to compute the FFT.

norm : {None, “ortho”}, optional

New in version 1.10.0.

Normalization mode (see *numpy.fft*). Default is None.

Returns **out** : ndarray

The result of the real 2-D FFT.

See also:

rfftn Compute the N-dimensional discrete Fourier Transform for real input.

Notes

This is really just *rfftn* with different default behavior. For more details see *rfftn*.

numpy.fft.**irfft2**(*a*, *s=None*, *axes=(-2*, *-1)*, *norm=None*)
Compute the 2-dimensional inverse FFT of a real array.

Parameters **a** : array_like

The input array

s : sequence of ints, optional

Shape of the inverse FFT.

axes : sequence of ints, optional

The axes over which to compute the inverse fft. Default is the last two axes.

norm : {None, "ortho"}, optional

New in version 1.10.0.

Normalization mode (see *numpy.fft*). Default is None.

Returns **out** : ndarray

The result of the inverse real 2-D FFT.

See also:

irfftn Compute the inverse of the N-dimensional FFT of real input.

Notes

This is really *irfftn* with different defaults. For more details see *irfftn*.

numpy.fft.**rfftn**(*a*, *s=None*, *axes=None*, *norm=None*)
Compute the N-dimensional discrete Fourier Transform for real input.

This function computes the N-dimensional discrete Fourier Transform over any number of axes in an M-dimensional real array by means of the Fast Fourier Transform (FFT). By default, all axes are transformed, with the real transform performed over the last axis, while the remaining transforms are complex.

Parameters **a** : array_like

Input array, taken to be real.

s : sequence of ints, optional

Shape (length along each transformed axis) to use from the input. (`s[0]` refers to axis 0, `s[1]` to axis 1, etc.). The final element of *s* corresponds to *n* for `rfft(x, n)`, while for the remaining axes, it corresponds to *n* for `fft(x, n)`. Along any axis, if the given shape is smaller than that of the input, the input is cropped. If it is larger,

the input is padded with zeros. if *s* is not given, the shape of the input along the axes specified by *axes* is used.

axes : sequence of ints, optional

Axes over which to compute the FFT. If not given, the last `len(s)` axes are used, or all axes if *s* is also not specified.

norm : {None, "ortho"}, optional

New in version 1.10.0.

Normalization mode (see *numpy.fft*). Default is None.

Returns **out** : complex ndarray

The truncated or zero-padded input, transformed along the axes indicated by *axes*, or by a combination of *s* and *a*, as explained in the parameters section above. The length of the last axis transformed will be `s[-1]//2+1`, while the remaining transformed axes will have lengths according to *s*, or unchanged from the input.

Raises **ValueError**

If *s* and *axes* have different length.

IndexError

If an element of *axes* is larger than than the number of axes of *a*.

See also:

irfftn The inverse of *rfftn*, i.e. the inverse of the n-dimensional FFT of real input.

fft The one-dimensional FFT, with definitions and conventions used.

rfft The one-dimensional FFT of real input.

fftn The n-dimensional FFT.

rfft2 The two-dimensional FFT of real input.

Notes

The transform for real input is performed over the last transformation axis, as by *rfft*, then the transform over the remaining axes is performed as by *fftn*. The order of the output is as for *rfft* for the final transformation axis, and as for *fftn* for the remaining transformation axes.

See *fft* for details, definitions and conventions used.

Examples

```
>>> a = np.ones((2, 2, 2))
>>> np.fft.rfftn(a)
array([[[ 8.+0.j,  0.+0.j],
        [ 0.+0.j,  0.+0.j]],
       [[ 0.+0.j,  0.+0.j],
        [ 0.+0.j,  0.+0.j]]])
```

```
>>> np.fft.rfftn(a, axes=(2, 0))
array([[[ 4.+0.j,  0.+0.j],
        [ 4.+0.j,  0.+0.j]],
       [[ 0.+0.j,  0.+0.j],
        [ 0.+0.j,  0.+0.j]]])
```

numpy.fft.**irfftn**(*a*, *s=None*, *axes=None*, *norm=None*)

Compute the inverse of the N-dimensional FFT of real input.

This function computes the inverse of the N-dimensional discrete Fourier Transform for real input over any number of axes in an M-dimensional array by means of the Fast Fourier Transform (FFT). In other words, `irfftn(rfftn(a), a.shape) == a` to within numerical accuracy. (The `a.shape` is necessary like `len(a)` is for *irfft*, and for the same reason.)

The input should be ordered in the same way as is returned by *rfftn*, i.e. as for *irfft* for the final transformation axis, and as for *ifftn* along all the other axes.

Parameters **a** : array_like

Input array.

s : sequence of ints, optional

Shape (length of each transformed axis) of the output (`s[0]` refers to axis 0, `s[1]` to axis 1, etc.). *s* is also the number of input points used along this axis, except for the last axis, where `s[-1]//2+1` points of the input are used. Along any axis, if the shape indicated by *s* is smaller than that of the input, the input is cropped. If it is larger, the input is padded with zeros. If *s* is not given, the shape of the input along the axes specified by *axes* is used.

axes : sequence of ints, optional

Axes over which to compute the inverse FFT. If not given, the last *len(s)* axes are used, or all axes if *s* is also not specified. Repeated indices in *axes* means that the inverse transform over that axis is performed multiple times.

norm : {None, "ortho"}, optional

New in version 1.10.0.

Normalization mode (see *numpy.fft*). Default is None.

Returns **out** : ndarray

The truncated or zero-padded input, transformed along the axes indicated by *axes*, or by a combination of *s* or *a*, as explained in the parameters section above. The length of each transformed axis is as given by the corresponding element of *s*, or the length of the input in every axis except for the last one if *s* is not given. In the final transformed axis the length of the output when *s* is not given is `2*(m-1)` where `m` is the length of the final transformed axis of the input. To get an odd number of output points in the final axis, *s* must be specified.

Raises **ValueError**

If *s* and *axes* have different length.

IndexError

If an element of *axes* is larger than than the number of axes of *a*.

See also:

rfftn The forward n-dimensional FFT of real input, of which *ifftn* is the inverse.

fft The one-dimensional FFT, with definitions and conventions used.

irfft The inverse of the one-dimensional FFT of real input.

irfft2 The inverse of the two-dimensional FFT of real input.

Notes

See *fft* for definitions and conventions used.

See *rfft* for definitions and conventions used for real input.

Examples

```
>>> a = np.zeros((3, 2, 2))
>>> a[0, 0, 0] = 3 * 2 * 2
>>> np.fft.irfftn(a)
array([[[ 1.,  1.],
        [ 1.,  1.]],
       [[ 1.,  1.],
        [ 1.,  1.]],
       [[ 1.,  1.],
        [ 1.,  1.]]])
```

3.11.3 Hermitian FFTs

hfft(a[, n, axis, norm])	Compute the FFT of a signal that has Hermitian symmetry, i.e., a real spectrum.
ihfft(a[, n, axis, norm])	Compute the inverse FFT of a signal that has Hermitian symmetry.

numpy.fft.**hfft**(*a*, *n=None*, *axis=-1*, *norm=None*)

Compute the FFT of a signal that has Hermitian symmetry, i.e., a real spectrum.

Parameters **a** : array_like

The input array.

n : int, optional

Length of the transformed axis of the output. For *n* output points, `n//2 + 1` input points are necessary. If the input is longer than this, it is cropped. If it is shorter than this, it is padded with zeros. If *n* is not given, it is determined from the length of the input along the axis specified by *axis*.

axis : int, optional

Axis over which to compute the FFT. If not given, the last axis is used.

norm : {None, "ortho"}, optional

Normalization mode (see *numpy.fft*). Default is None.

New in version 1.10.0.

Returns **out** : ndarray

The truncated or zero-padded input, transformed along the axis indicated by *axis*, or the last one if *axis* is not specified. The length of the transformed axis is *n*, or, if *n* is not given, `2*m - 2` where `m` is the length of the transformed axis of the input. To get an odd number of output points, *n* must be specified, for instance as `2*m - 1` in the typical case,

Raises **IndexError**

If *axis* is larger than the last axis of *a*.

See also:

rfft Compute the one-dimensional FFT for real input.

ihfft The inverse of *hfft*.

Notes

hfft/*ihfft* are a pair analogous to *rfft*/*irfft*, but for the opposite case: here the signal has Hermitian symmetry in the time domain and is real in the frequency domain. So here it's *hfft* for which you must supply the length of the result if it is to be odd.

- even: `ihfft(hfft(a, 2*len(a) - 2) == a`, within roundoff error,
- odd: `ihfft(hfft(a, 2*len(a) - 1) == a`, within roundoff error.

Examples

```
>>> signal = np.array([1, 2, 3, 4, 3, 2])
>>> np.fft.fft(signal)
array([ 15.+0.j,  -4.+0.j,   0.+0.j,  -1.-0.j,   0.+0.j,  -4.+0.j])
>>> np.fft.hfft(signal[:4]) # Input first half of signal
array([ 15.,  -4.,   0.,  -1.,   0.,  -4.])
>>> np.fft.hfft(signal, 6)  # Input entire signal and truncate
array([ 15.,  -4.,   0.,  -1.,   0.,  -4.])
```

```
>>> signal = np.array([[1, 1.j], [-1.j, 2]])
>>> np.conj(signal.T) - signal   # check Hermitian symmetry
array([[ 0.-0.j,  0.+0.j],
       [ 0.+0.j,  0.-0.j]])
>>> freq_spectrum = np.fft.hfft(signal)
>>> freq_spectrum
array([[ 1.,  1.],
       [ 2., -2.]])
```

numpy.fft.**ihfft**(*a*, *n=None*, *axis=-1*, *norm=None*)

Compute the inverse FFT of a signal that has Hermitian symmetry.

Parameters **a** : array_like

Input array.

n : int, optional

Length of the inverse FFT, the number of points along transformation axis in the input to use. If *n* is smaller than the length of the input, the input is cropped. If it is larger, the input is padded with zeros. If *n* is not given, the length of the input along the axis specified by *axis* is used.

axis : int, optional

Axis over which to compute the inverse FFT. If not given, the last axis is used.

norm : {None, "ortho"}, optional

Normalization mode (see *numpy.fft*). Default is None.

New in version 1.10.0.

Returns **out** : complex ndarray

The truncated or zero-padded input, transformed along the axis indicated by *axis*, or the last one if *axis* is not specified. The length of the transformed axis is `n//2 + 1`.

See also:

hfft, *irfft*

Notes

hfft/*ihfft* are a pair analogous to *rfft*/*irfft*, but for the opposite case: here the signal has Hermitian symmetry in the time domain and is real in the frequency domain. So here it's *hfft* for which you must supply the length of the result if it is to be odd:

- even: `ihfft(hfft(a, 2*len(a) - 2) == a`, within roundoff error,
- odd: `ihfft(hfft(a, 2*len(a) - 1) == a`, within roundoff error.

Examples

```
>>> spectrum = np.array([ 15, -4, 0, -1, 0, -4])
>>> np.fft.ifft(spectrum)
array([ 1.+0.j,  2.-0.j,  3.+0.j,  4.+0.j,  3.+0.j,  2.-0.j])
>>> np.fft.ihfft(spectrum)
array([ 1.-0.j,  2.-0.j,  3.-0.j,  4.-0.j])
```

3.11.4 Helper routines

fftfreq(n[, d])	Return the Discrete Fourier Transform sample frequencies.
rfftfreq(n[, d])	Return the Discrete Fourier Transform sample frequencies (for usage with rfft, irfft).
fftshift(x[, axes])	Shift the zero-frequency component to the center of the spectrum.
ifftshift(x[, axes])	The inverse of *fftshift*.

numpy.fft.**fftfreq**(*n*, *d=1.0*)

Return the Discrete Fourier Transform sample frequencies.

The returned float array *f* contains the frequency bin centers in cycles per unit of the sample spacing (with zero at the start). For instance, if the sample spacing is in seconds, then the frequency unit is cycles/second.

Given a window length *n* and a sample spacing *d*:

```
f = [0, 1, ...,   n/2-1,     -n/2, ..., -1] / (d*n)   if n is even
f = [0, 1, ..., (n-1)/2, -(n-1)/2, ..., -1] / (d*n)   if n is odd
```

Parameters **n** : int

Window length.

d : scalar, optional

Sample spacing (inverse of the sampling rate). Defaults to 1.

Returns **f** : ndarray

Array of length *n* containing the sample frequencies.

Examples

```
>>> signal = np.array([-2, 8, 6, 4, 1, 0, 3, 5], dtype=float)
>>> fourier = np.fft.fft(signal)
>>> n = signal.size
>>> timestep = 0.1
>>> freq = np.fft.fftfreq(n, d=timestep)
>>> freq
array([ 0.  ,  1.25,  2.5 ,  3.75, -5.  , -3.75, -2.5 , -1.25])
```

numpy.fft.**rfftfreq**(*n*, *d=1.0*)

Return the Discrete Fourier Transform sample frequencies (for usage with rfft, irfft).

The returned float array *f* contains the frequency bin centers in cycles per unit of the sample spacing (with zero at the start). For instance, if the sample spacing is in seconds, then the frequency unit is cycles/second.

Given a window length *n* and a sample spacing *d*:

```
f = [0, 1, ...,     n/2-1,     n/2] / (d*n)   if n is even
f = [0, 1, ..., (n-1)/2-1, (n-1)/2] / (d*n)   if n is odd
```

Unlike *fftfreq* (but like scipy.fftpack.rfftfreq) the Nyquist frequency component is considered to be positive.

Parameters **n** : int

Window length.

d : scalar, optional

Sample spacing (inverse of the sampling rate). Defaults to 1.

Returns **f** : ndarray

Array of length `n//2 + 1` containing the sample frequencies.

Examples

```
>>> signal = np.array([-2, 8, 6, 4, 1, 0, 3, 5, -3, 4], dtype=float)
>>> fourier = np.fft.rfft(signal)
>>> n = signal.size
>>> sample_rate = 100
```

(continues on next page)

(continued from previous page)

```
>>> freq = np.fft.fftfreq(n, d=1./sample_rate)
>>> freq
array([  0.,  10.,  20.,  30.,  40., -50., -40., -30., -20., -10.])
>>> freq = np.fft.rfftfreq(n, d=1./sample_rate)
>>> freq
array([  0.,  10.,  20.,  30.,  40.,  50.])
```

numpy.fft.**fftshift**(*x*, *axes=None*)

Shift the zero-frequency component to the center of the spectrum.

This function swaps half-spaces for all axes listed (defaults to all). Note that `y[0]` is the Nyquist component only if `len(x)` is even.

Parameters **x** : array_like

Input array.

axes : int or shape tuple, optional

Axes over which to shift. Default is None, which shifts all axes.

Returns **y** : ndarray

The shifted array.

See also:

ifftshift The inverse of *fftshift*.

Examples

```
>>> freqs = np.fft.fftfreq(10, 0.1)
>>> freqs
array([ 0.,  1.,  2.,  3.,  4., -5., -4., -3., -2., -1.])
>>> np.fft.fftshift(freqs)
array([-5., -4., -3., -2., -1.,  0.,  1.,  2.,  3.,  4.])
```

Shift the zero-frequency component only along the second axis:

```
>>> freqs = np.fft.fftfreq(9, d=1./9).reshape(3, 3)
>>> freqs
array([[ 0.,  1.,  2.],
       [ 3.,  4., -4.],
       [-3., -2., -1.]])
>>> np.fft.fftshift(freqs, axes=(1,))
array([[ 2.,  0.,  1.],
       [-4.,  3.,  4.],
       [-1., -3., -2.]])
```

numpy.fft.**ifftshift**(*x*, *axes=None*)

The inverse of *fftshift*. Although identical for even-length *x*, the functions differ by one sample for odd-length *x*.

Parameters **x** : array_like

Input array.

axes : int or shape tuple, optional

Axes over which to calculate. Defaults to None, which shifts all axes.

Returns **y** : ndarray

The shifted array.

See also:

fftshift Shift zero-frequency component to the center of the spectrum.

Examples

```
>>> freqs = np.fft.fftfreq(9, d=1./9).reshape(3, 3)
>>> freqs
array([[ 0.,  1.,  2.],
       [ 3.,  4., -4.],
       [-3., -2., -1.]])
>>> np.fft.ifftshift(np.fft.fftshift(freqs))
array([[ 0.,  1.,  2.],
       [ 3.,  4., -4.],
       [-3., -2., -1.]])
```

3.11.5 Background information

Fourier analysis is fundamentally a method for expressing a function as a sum of periodic components, and for recovering the function from those components. When both the function and its Fourier transform are replaced with discretized counterparts, it is called the discrete Fourier transform (DFT). The DFT has become a mainstay of numerical computing in part because of a very fast algorithm for computing it, called the Fast Fourier Transform (FFT), which was known to Gauss (1805) and was brought to light in its current form by Cooley and Tukey *[CT309]*. Press et al. *[NR309]* provide an accessible introduction to Fourier analysis and its applications.

Because the discrete Fourier transform separates its input into components that contribute at discrete frequencies, it has a great number of applications in digital signal processing, e.g., for filtering, and in this context the discretized input to the transform is customarily referred to as a *signal*, which exists in the *time domain*. The output is called a *spectrum* or *transform* and exists in the *frequency domain*.

3.11.6 Implementation details

There are many ways to define the DFT, varying in the sign of the exponent, normalization, etc. In this implementation, the DFT is defined as

$$A_k = \sum_{m=0}^{n-1} a_m \exp\left\{-2\pi i \frac{mk}{n}\right\} \qquad k = 0, \ldots, n-1.$$

The DFT is in general defined for complex inputs and outputs, and a single-frequency component at linear frequency f is represented by a complex exponential $a_m = \exp\{2\pi i\, fm\Delta t\}$, where Δt is the sampling interval.

The values in the result follow so-called "standard" order: If `A = fft(a, n)`, then `A[0]` contains the zero-frequency term (the sum of the signal), which is always purely real for real inputs. Then `A[1:n/2]` contains the positive-frequency terms, and `A[n/2+1:]` contains the negative-frequency terms, in order of decreasingly negative frequency. For an even number of input points, `A[n/2]` represents both positive and negative Nyquist frequency, and is also purely real for real input. For an odd number of input points, `A[(n-1)/2]` contains the largest positive frequency, while `A[(n+1)/2]` contains the largest negative frequency. The routine `np.fft.fftfreq(n)` returns an array giving the frequencies of corresponding elements in the output. The routine `np.fft.fftshift(A)` shifts

transforms and their frequencies to put the zero-frequency components in the middle, and `np.fft.ifftshift(A)` undoes that shift.

When the input *a* is a time-domain signal and `A = fft(a)`, `np.abs(A)` is its amplitude spectrum and `np.abs(A)**2` is its power spectrum. The phase spectrum is obtained by `np.angle(A)`.

The inverse DFT is defined as

$$a_m = \frac{1}{n}\sum_{k=0}^{n-1} A_k \exp\left\{2\pi i\frac{mk}{n}\right\} \qquad m = 0, \ldots, n-1.$$

It differs from the forward transform by the sign of the exponential argument and the default normalization by $1/n$.

3.11.7 Normalization

The default normalization has the direct transforms unscaled and the inverse transforms are scaled by $1/n$. It is possible to obtain unitary transforms by setting the keyword argument `norm` to `"ortho"` (default is *None*) so that both direct and inverse transforms will be scaled by $1/\sqrt{n}$.

3.11.8 Real and Hermitian transforms

When the input is purely real, its transform is Hermitian, i.e., the component at frequency f_k is the complex conjugate of the component at frequency $-f_k$, which means that for real inputs there is no information in the negative frequency components that is not already available from the positive frequency components. The family of *rfft* functions is designed to operate on real inputs, and exploits this symmetry by computing only the positive frequency components, up to and including the Nyquist frequency. Thus, `n` input points produce `n/2+1` complex output points. The inverses of this family assumes the same symmetry of its input, and for an output of `n` points uses `n/2+1` input points.

Correspondingly, when the spectrum is purely real, the signal is Hermitian. The *hfft* family of functions exploits this symmetry by using `n/2+1` complex points in the input (time) domain for `n` real points in the frequency domain.

In higher dimensions, FFTs are used, e.g., for image analysis and filtering. The computational efficiency of the FFT means that it can also be a faster way to compute large convolutions, using the property that a convolution in the time domain is equivalent to a point-by-point multiplication in the frequency domain.

3.11.9 Higher dimensions

In two dimensions, the DFT is defined as

$$A_{kl} = \sum_{m=0}^{M-1}\sum_{n=0}^{N-1} a_{mn} \exp\left\{-2\pi i\left(\frac{mk}{M} + \frac{nl}{N}\right)\right\} \qquad k = 0, \ldots, M-1; \quad l = 0, \ldots, N-1,$$

which extends in the obvious way to higher dimensions, and the inverses in higher dimensions also extend in the same way.

3.11.10 References

3.11.11 Examples

For examples, see the various functions.

3.12 Financial functions

3.12.1 Simple financial functions

fv(rate, nper, pmt, pv[, when])	Compute the future value.
pv(rate, nper, pmt[, fv, when])	Compute the present value.
npv(rate, values)	Returns the NPV (Net Present Value) of a cash flow series.
pmt(rate, nper, pv[, fv, when])	Compute the payment against loan principal plus interest.
ppmt(rate, per, nper, pv[, fv, when])	Compute the payment against loan principal.
ipmt(rate, per, nper, pv[, fv, when])	Compute the interest portion of a payment.
irr(values)	Return the Internal Rate of Return (IRR).
mirr(values, finance_rate, reinvest_rate)	Modified internal rate of return.
nper(rate, pmt, pv[, fv, when])	Compute the number of periodic payments.
rate(nper, pmt, pv, fv[, when, guess, tol, ...])	Compute the rate of interest per period.

numpy.**fv**(*rate*, *nper*, *pmt*, *pv*, *when='end'*)

Compute the future value.

Given:

- a present value, *pv*
- an interest *rate* compounded once per period, of which there are
- *nper* total
- a (fixed) payment, *pmt*, paid either
- at the beginning (*when* = {'begin', 1}) or the end (*when* = {'end', 0}) of each period

Return: the value at the end of the *nper* periods

Parameters **rate** : scalar or array_like of shape(M,)

Rate of interest as decimal (not per cent) per period

nper : scalar or array_like of shape(M,)

Number of compounding periods

pmt : scalar or array_like of shape(M,)

Payment

pv : scalar or array_like of shape(M,)

Present value

when : {{'begin', 1}, {'end', 0}}, {string, int}, optional

When payments are due ('begin' (1) or 'end' (0)). Defaults to {'end', 0}.

Returns **out** : ndarray

Future values. If all input is scalar, returns a scalar float. If any input is array_like, returns future values for each input element. If multiple inputs are array_like, they all must have the same shape.

Notes

The future value is computed by solving the equation:

```
fv +
pv*(1+rate)**nper +
pmt*(1 + rate*when)/rate*((1 + rate)**nper - 1) == 0
```

or, when `rate == 0`:

```
fv + pv + pmt * nper == 0
```

References

[WRW20]

Examples

What is the future value after 10 years of saving $100 now, with an additional monthly savings of $100. Assume the interest rate is 5% (annually) compounded monthly?

```
>>> np.fv(0.05/12, 10*12, -100, -100)
15692.928894335748
```

By convention, the negative sign represents cash flow out (i.e. money not available today). Thus, saving $100 a month at 5% annual interest leads to $15,692.93 available to spend in 10 years.

If any input is array_like, returns an array of equal shape. Let's compare different interest rates from the example above.

```
>>> a = np.array((0.05, 0.06, 0.07))/12
>>> np.fv(a, 10*12, -100, -100)
array([ 15692.92889434,  16569.87435405,  17509.44688102])
```

numpy.**pv**(*rate*, *nper*, *pmt*, *fv=0*, *when='end'*)

Compute the present value.

Given:

- a future value, *fv*
- an interest *rate* compounded once per period, of which there are
- *nper* total
- a (fixed) payment, *pmt*, paid either
- at the beginning (*when* = {'begin', 1}) or the end (*when* = {'end', 0}) of each period

Return: the value now

Parameters **rate** : array_like

Rate of interest (per period)

nper : array_like

Number of compounding periods

pmt : array_like

Payment

fv : array_like, optional

Future value

when : {{'begin', 1}, {'end', 0}}, {string, int}, optional

When payments are due ('begin' (1) or 'end' (0))

Returns **out** : ndarray, float

Present value of a series of payments or investments.

Notes

The present value is computed by solving the equation:

```
fv +
pv*(1 + rate)**nper +
pmt*(1 + rate*when)/rate*((1 + rate)**nper - 1) = 0
```

or, when `rate = 0`:

```
fv + pv + pmt * nper = 0
```

for *pv*, which is then returned.

References

[WRW73]

Examples

What is the present value (e.g., the initial investment) of an investment that needs to total $15692.93 after 10 years of saving $100 every month? Assume the interest rate is 5% (annually) compounded monthly.

```
>>> np.pv(0.05/12, 10*12, -100, 15692.93)
-100.00067131625819
```

By convention, the negative sign represents cash flow out (i.e., money not available today). Thus, to end up with $15,692.93 in 10 years saving $100 a month at 5% annual interest, one's initial deposit should also be $100.

If any input is array_like, `pv` returns an array of equal shape. Let's compare different interest rates in the example above:

```
>>> a = np.array((0.05, 0.04, 0.03))/12
>>> np.pv(a, 10*12, -100, 15692.93)
array([ -100.00067132,  -649.26771385, -1273.78633713])
```

So, to end up with the same $15692.93 under the same $100 per month "savings plan," for annual interest rates of 4% and 3%, one would need initial investments of $649.27 and $1273.79, respectively.

`numpy.`**`npv`**(*rate*, *values*)

Returns the NPV (Net Present Value) of a cash flow series.

Parameters **rate** : scalar

The discount rate.

values : array_like, shape(M,)

The values of the time series of cash flows. The (fixed) time interval between cash flow "events" must be the same as that for which `rate` is given (i.e., if `rate` is per year, then precisely a year is understood to elapse between each cash flow event). By convention, investments or "deposits" are negative, income or "withdrawals" are positive; *values* must begin with the initial investment, thus *values[0]* will typically be negative.

Returns **out** : float

The NPV of the input cash flow series *values* at the discount `rate`.

Notes

Returns the result of: *[G60]*

$$\sum_{t=0}^{M-1} \frac{values_t}{(1+rate)^t}$$

References

[G60]

Examples

```
>>> np.npv(0.281,[-100, 39, 59, 55, 20])
-0.0084785916384548798
```

(Compare with the Example given for numpy.lib.financial.irr)

numpy.**pmt**(*rate*, *nper*, *pv*, *fv=0*, *when='end'*)

Compute the payment against loan principal plus interest.

Given:

- a present value, `pv` (e.g., an amount borrowed)
- a future value, `fv` (e.g., 0)
- an interest `rate` compounded once per period, of which there are
- `nper` total
- and (optional) specification of whether payment is made at the beginning (*when* = {'begin', 1}) or the end (*when* = {'end', 0}) of each period

Return: the (fixed) periodic payment.

Parameters **rate** : array_like

Rate of interest (per period)

nper : array_like

Number of compounding periods

pv : array_like

Present value

fv : array_like, optional

Future value (default = 0)

when : {{'begin', 1}, {'end', 0}}, {string, int}

When payments are due ('begin' (1) or 'end' (0))

Returns **out** : ndarray

Payment against loan plus interest. If all input is scalar, returns a scalar float. If any input is array_like, returns payment for each input element. If multiple inputs are array_like, they all must have the same shape.

Notes

The payment is computed by solving the equation:

```
fv +
pv*(1 + rate)**nper +
pmt*(1 + rate*when)/rate*((1 + rate)**nper - 1) == 0
```

or, when `rate == 0`:

```
fv + pv + pmt * nper == 0
```

for `pmt`.

Note that computing a monthly mortgage payment is only one use for this function. For example, pmt returns the periodic deposit one must make to achieve a specified future balance given an initial deposit, a fixed, periodically compounded interest rate, and the total number of periods.

References

[WRW62]

Examples

What is the monthly payment needed to pay off a $200,000 loan in 15 years at an annual interest rate of 7.5%?

```
>>> np.pmt(0.075/12, 12*15, 200000)
-1854.0247200054619
```

In order to pay-off (i.e., have a future-value of 0) the $200,000 obtained today, a monthly payment of $1,854.02 would be required. Note that this example illustrates usage of *fv* having a default value of 0.

numpy.**ppmt**(*rate*, *per*, *nper*, *pv*, *fv=0*, *when='end'*)

Compute the payment against loan principal.

Parameters **rate** : array_like

Rate of interest (per period)

per : array_like, int

Amount paid against the loan changes. The *per* is the period of interest.

nper : array_like

Number of compounding periods

pv : array_like

Present value

fv : array_like, optional

Future value

when : {{'begin', 1}, {'end', 0}}, {string, int}

When payments are due ('begin' (1) or 'end' (0))

See also:

pmt, *pv*, *ipmt*

numpy.**ipmt**(*rate*, *per*, *nper*, *pv*, *fv=0*, *when='end'*)

Compute the interest portion of a payment.

Parameters **rate** : scalar or array_like of shape(M,)

Rate of interest as decimal (not per cent) per period

per : scalar or array_like of shape(M,)

Interest paid against the loan changes during the life or the loan. The *per* is the payment period to calculate the interest amount.

nper : scalar or array_like of shape(M,)

Number of compounding periods

pv : scalar or array_like of shape(M,)

Present value

fv : scalar or array_like of shape(M,), optional

Future value

when : {{'begin', 1}, {'end', 0}}, {string, int}, optional

When payments are due ('begin' (1) or 'end' (0)). Defaults to {'end', 0}.

Returns **out** : ndarray

Interest portion of payment. If all input is scalar, returns a scalar float. If any input is array_like, returns interest payment for each input element. If multiple inputs are array_like, they all must have the same shape.

See also:

ppmt, *pmt*, *pv*

Notes

The total payment is made up of payment against principal plus interest.

```
pmt = ppmt + ipmt
```

Examples

What is the amortization schedule for a 1 year loan of $2500 at 8.24% interest per year compounded monthly?

```
>>> principal = 2500.00
```

The 'per' variable represents the periods of the loan. Remember that financial equations start the period count at 1!

```
>>> per = np.arange(1*12) + 1
>>> ipmt = np.ipmt(0.0824/12, per, 1*12, principal)
>>> ppmt = np.ppmt(0.0824/12, per, 1*12, principal)
```

Each element of the sum of the 'ipmt' and 'ppmt' arrays should equal 'pmt'.

```
>>> pmt = np.pmt(0.0824/12, 1*12, principal)
>>> np.allclose(ipmt + ppmt, pmt)
True
```

```
>>> fmt = '{0:2d} {1:8.2f} {2:8.2f} {3:8.2f}'
>>> for payment in per:
...     index = payment - 1
...     principal = principal + ppmt[index]
...     print(fmt.format(payment, ppmt[index], ipmt[index], principal))
 1  -200.58   -17.17  2299.42
 2  -201.96   -15.79  2097.46
 3  -203.35   -14.40  1894.11
 4  -204.74   -13.01  1689.37
 5  -206.15   -11.60  1483.22
 6  -207.56   -10.18  1275.66
 7  -208.99    -8.76  1066.67
 8  -210.42    -7.32   856.25
 9  -211.87    -5.88   644.38
10  -213.32    -4.42   431.05
11  -214.79    -2.96   216.26
12  -216.26    -1.49    -0.00
```

```
>>> interestpd = np.sum(ipmt)
>>> np.round(interestpd, 2)
-112.98
```

numpy.**irr**(*values*)

Return the Internal Rate of Return (IRR).

This is the "average" periodically compounded rate of return that gives a net present value of 0.0; for a more complete explanation, see Notes below.

`decimal.Decimal` type is not supported.

Parameters **values** : array_like, shape(N,)

Input cash flows per time period. By convention, net "deposits" are negative and net "withdrawals" are positive. Thus, for example, at least the first element of *values*, which represents the initial investment, will typically be negative.

Returns **out** : float

Internal Rate of Return for periodic input values.

Notes

The IRR is perhaps best understood through an example (illustrated using np.irr in the Examples section below). Suppose one invests 100 units and then makes the following withdrawals at regular (fixed) intervals: 39, 59, 55, 20. Assuming the ending value is 0, one's 100 unit investment yields 173 units; however, due to the combination of compounding and the periodic withdrawals, the "average" rate of return is neither simply 0.73/4 nor (1.73)^0.25-1. Rather, it is the solution (for r) of the equation:

$$-100 + \frac{39}{1+r} + \frac{59}{(1+r)^2} + \frac{55}{(1+r)^3} + \frac{20}{(1+r)^4} = 0$$

In general, for *values* $= [v_0, v_1, ...v_M]$, irr is the solution of the equation: *[G37]*

$$\sum_{t=0}^{M} \frac{v_t}{(1+irr)^t} = 0$$

References

[G37]

Examples

```
>>> round(irr([-100, 39, 59, 55, 20]), 5)
0.28095
>>> round(irr([-100, 0, 0, 74]), 5)
-0.0955
>>> round(irr([-100, 100, 0, -7]), 5)
-0.0833
>>> round(irr([-100, 100, 0, 7]), 5)
0.06206
>>> round(irr([-5, 10.5, 1, -8, 1]), 5)
0.0886
```

(Compare with the Example given for numpy.lib.financial.npv)

numpy.**mirr**(*values*, *finance_rate*, *reinvest_rate*)

Modified internal rate of return.

Parameters **values** : array_like

Cash flows (must contain at least one positive and one negative value) or nan is returned. The first value is considered a sunk cost at time zero.

finance_rate : scalar

Interest rate paid on the cash flows

reinvest_rate : scalar

Interest rate received on the cash flows upon reinvestment

Returns **out** : float

Modified internal rate of return

numpy.**nper**(*rate*, *pmt*, *pv*, *fv=0*, *when='end'*)

Compute the number of periodic payments.

`decimal.Decimal` type is not supported.

Parameters **rate** : array_like

Rate of interest (per period)

pmt : array_like

Payment

pv : array_like

Present value

fv : array_like, optional

Future value

when : {{'begin', 1}, {'end', 0}}, {string, int}, optional

When payments are due ('begin' (1) or 'end' (0))

Notes

The number of periods `nper` is computed by solving the equation:

```
fv + pv*(1+rate)**nper + pmt*(1+rate*when)/rate*((1+rate)**nper-1) = 0
```

but if `rate = 0` then:

```
fv + pv + pmt*nper = 0
```

Examples

If you only had $150/month to pay towards the loan, how long would it take to pay-off a loan of $8,000 at 7% annual interest?

```
>>> print(round(np.nper(0.07/12, -150, 8000), 5))
64.07335
```

So, over 64 months would be required to pay off the loan.

The same analysis could be done with several different interest rates and/or payments and/or total amounts to produce an entire table.

```
>>> np.nper(*(np.ogrid[0.07/12: 0.08/12: 0.01/12,
...                    -150   : -99     : 50    ,
...                    8000   : 9001    : 1000]))
array([[[  64.07334877,   74.06368256],
        [ 108.07548412,  127.99022654]],
       [[  66.12443902,   76.87897353],
        [ 114.70165583,  137.90124779]]])
```

numpy.**rate**(*nper*, *pmt*, *pv*, *fv*, *when='end'*, *guess=None*, *tol=None*, *maxiter=100*)

Compute the rate of interest per period.

Parameters **nper** : array_like

Number of compounding periods

pmt : array_like

Payment

pv : array_like

Present value

fv : array_like

Future value

when : {{'begin', 1}, {'end', 0}}, {string, int}, optional

When payments are due ('begin' (1) or 'end' (0))

guess : Number, optional

Starting guess for solving the rate of interest, default 0.1

tol : Number, optional

Required tolerance for the solution, default 1e-6

maxiter : int, optional

Maximum iterations in finding the solution

Notes

The rate of interest is computed by iteratively solving the (non-linear) equation:

```
fv + pv*(1+rate)**nper + pmt*(1+rate*when)/rate * ((1+rate)**nper - 1) = 0
```

for `rate`.

References

Wheeler, D. A., E. Rathke, and R. Weir (Eds.) (2009, May). Open Document Format for Office Applications (OpenDocument)v1.2, Part 2: Recalculated Formula (OpenFormula) Format - Annotated Version, Pre-Draft 12. Organization for the Advancement of Structured Information Standards (OASIS). Billerica, MA, USA. [ODT Document]. Available: http://www.oasis-open.org/committees/documents.php?wg_abbrev=office-formula OpenDocument-formula-20090508.odt

3.13 Functional programming

apply_along_axis(func1d, axis, arr, *args, ...)	Apply a function to 1-D slices along the given axis.
apply_over_axes(func, a, axes)	Apply a function repeatedly over multiple axes.
vectorize(pyfunc[, otypes, doc, excluded, ...])	Generalized function class.
frompyfunc(func, nin, nout)	Takes an arbitrary Python function and returns a NumPy ufunc.
piecewise(x, condlist, funclist, *args, **kw)	Evaluate a piecewise-defined function.

numpy.**apply_along_axis** (*func1d*, *axis*, *arr*, **args*, ***kwargs*)

Apply a function to 1-D slices along the given axis.

Execute *func1d(a, *args)* where *func1d* operates on 1-D arrays and *a* is a 1-D slice of *arr* along *axis*.

This is equivalent to (but faster than) the following use of *ndindex* and *s_*, which sets each of `ii`, `jj`, and `kk` to a tuple of indices:

```
Ni, Nk = a.shape[:axis], a.shape[axis+1:]
for ii in ndindex(Ni):
    for kk in ndindex(Nk):
        f = func1d(arr[ii + s_[:,] + kk])
        Nj = f.shape
        for jj in ndindex(Nj):
            out[ii + jj + kk] = f[jj]
```

Equivalently, eliminating the inner loop, this can be expressed as:

```
Ni, Nk = a.shape[:axis], a.shape[axis+1:]
for ii in ndindex(Ni):
    for kk in ndindex(Nk):
        out[ii + s_[...,] + kk] = func1d(arr[ii + s_[:,] + kk])
```

Parameters **func1d** : function (M,) -> (Nj...)

This function should accept 1-D arrays. It is applied to 1-D slices of *arr* along the specified axis.

axis : integer

Axis along which *arr* is sliced.

arr : ndarray (Ni..., M, Nk...)

Input array.

args : any

Additional arguments to *func1d*.

kwargs : any

Additional named arguments to *func1d*.

New in version 1.9.0.

Returns **out** : ndarray (Ni..., Nj..., Nk...)

The output array. The shape of *out* is identical to the shape of *arr*, except along the *axis* dimension. This axis is removed, and replaced with new dimensions equal to the shape of the return value of *func1d*. So if *func1d* returns a scalar *out* will have one fewer dimensions than *arr*.

See also:

apply_over_axes Apply a function repeatedly over multiple axes.

Examples

```
>>> def my_func(a):
...     """Average first and last element of a 1-D array"""
...     return (a[0] + a[-1]) * 0.5
>>> b = np.array([[1,2,3], [4,5,6], [7,8,9]])
>>> np.apply_along_axis(my_func, 0, b)
```

(continues on next page)

(continued from previous page)

```
array([ 4.,  5.,  6.])
>>> np.apply_along_axis(my_func, 1, b)
array([ 2.,  5.,  8.])
```

For a function that returns a 1D array, the number of dimensions in *outarr* is the same as *arr*.

```
>>> b = np.array([[8,1,7], [4,3,9], [5,2,6]])
>>> np.apply_along_axis(sorted, 1, b)
array([[1, 7, 8],
       [3, 4, 9],
       [2, 5, 6]])
```

For a function that returns a higher dimensional array, those dimensions are inserted in place of the *axis* dimension.

```
>>> b = np.array([[1,2,3], [4,5,6], [7,8,9]])
>>> np.apply_along_axis(np.diag, -1, b)
array([[[1, 0, 0],
        [0, 2, 0],
        [0, 0, 3]],
       [[4, 0, 0],
        [0, 5, 0],
        [0, 0, 6]],
       [[7, 0, 0],
        [0, 8, 0],
        [0, 0, 9]]])
```

numpy.**apply_over_axes**(*func*, *a*, *axes*)

Apply a function repeatedly over multiple axes.

func is called as *res* = *func(a, axis)*, where *axis* is the first element of *axes*. The result *res* of the function call must have either the same dimensions as *a* or one less dimension. If *res* has one less dimension than *a*, a dimension is inserted before *axis*. The call to *func* is then repeated for each axis in *axes*, with *res* as the first argument.

Parameters **func** : function

This function must take two arguments, *func(a, axis)*.

a : array_like

Input array.

axes : array_like

Axes over which *func* is applied; the elements must be integers.

Returns **apply_over_axis** : ndarray

The output array. The number of dimensions is the same as *a*, but the shape can be different. This depends on whether *func* changes the shape of its output with respect to its input.

See also:

apply_along_axis Apply a function to 1-D slices of an array along the given axis.

Notes

This function is equivalent to tuple axis arguments to reorderable ufuncs with keepdims=True. Tuple axis arguments to ufuncs have been available since version 1.7.0.

Examples

```
>>> a = np.arange(24).reshape(2,3,4)
>>> a
array([[[ 0,  1,  2,  3],
        [ 4,  5,  6,  7],
        [ 8,  9, 10, 11]],
       [[12, 13, 14, 15],
        [16, 17, 18, 19],
        [20, 21, 22, 23]]])
```

Sum over axes 0 and 2. The result has same number of dimensions as the original array:

```
>>> np.apply_over_axes(np.sum, a, [0,2])
array([[[ 60],
        [ 92],
        [124]]])
```

Tuple axis arguments to ufuncs are equivalent:

```
>>> np.sum(a, axis=(0,2), keepdims=True)
array([[[ 60],
        [ 92],
        [124]]])
```

class numpy.**vectorize**(*pyfunc*, *otypes=None*, *doc=None*, *excluded=None*, *cache=False*, *signature=None*)

Generalized function class.

Define a vectorized function which takes a nested sequence of objects or numpy arrays as inputs and returns an single or tuple of numpy array as output. The vectorized function evaluates *pyfunc* over successive tuples of the input arrays like the python map function, except it uses the broadcasting rules of numpy.

The data type of the output of *vectorized* is determined by calling the function with the first element of the input. This can be avoided by specifying the *otypes* argument.

Parameters **pyfunc** : callable

A python function or method.

otypes : str or list of dtypes, optional

The output data type. It must be specified as either a string of typecode characters or a list of data type specifiers. There should be one data type specifier for each output.

doc : str, optional

The docstring for the function. If *None*, the docstring will be the `pyfunc.__doc__`.

excluded : set, optional

Set of strings or integers representing the positional or keyword arguments for which the function will not be vectorized. These will be passed directly to *pyfunc* unmodified.

New in version 1.7.0.

cache : bool, optional

If *True*, then cache the first function call that determines the number of outputs if *otypes* is not provided.

New in version 1.7.0.

signature : string, optional

Generalized universal function signature, e.g., `(m,n),(n)->(m)` for vectorized matrix-vector multiplication. If provided, `pyfunc` will be called with (and expected to return) arrays with shapes given by the size of corresponding core dimensions. By default, `pyfunc` is assumed to take scalars as input and output.

New in version 1.12.0.

Returns **vectorized** : callable

Vectorized function.

See also:

frompyfunc Takes an arbitrary Python function and returns a ufunc

Notes

The *vectorize* function is provided primarily for convenience, not for performance. The implementation is essentially a for loop.

If *otypes* is not specified, then a call to the function with the first argument will be used to determine the number of outputs. The results of this call will be cached if *cache* is *True* to prevent calling the function twice. However, to implement the cache, the original function must be wrapped which will slow down subsequent calls, so only do this if your function is expensive.

The new keyword argument interface and *excluded* argument support further degrades performance.

References

[R297]

Examples

```
>>> def myfunc(a, b):
...     "Return a-b if a>b, otherwise return a+b"
...     if a > b:
...         return a - b
...     else:
...         return a + b
```

```
>>> vfunc = np.vectorize(myfunc)
>>> vfunc([1, 2, 3, 4], 2)
array([3, 4, 1, 2])
```

The docstring is taken from the input function to *vectorize* unless it is specified:

```
>>> vfunc.__doc__
'Return a-b if a>b, otherwise return a+b'
>>> vfunc = np.vectorize(myfunc, doc='Vectorized `myfunc`')
>>> vfunc.__doc__
'Vectorized `myfunc`'
```

The output type is determined by evaluating the first element of the input, unless it is specified:

```
>>> out = vfunc([1, 2, 3, 4], 2)
>>> type(out[0])
<type 'numpy.int32'>
>>> vfunc = np.vectorize(myfunc, otypes=[float])
>>> out = vfunc([1, 2, 3, 4], 2)
>>> type(out[0])
<type 'numpy.float64'>
```

The *excluded* argument can be used to prevent vectorizing over certain arguments. This can be useful for array-like arguments of a fixed length such as the coefficients for a polynomial as in *polyval*:

```
>>> def mypolyval(p, x):
...     _p = list(p)
...     res = _p.pop(0)
...     while _p:
...         res = res*x + _p.pop(0)
...     return res
>>> vpolyval = np.vectorize(mypolyval, excluded=['p'])
>>> vpolyval(p=[1, 2, 3], x=[0, 1])
array([3, 6])
```

Positional arguments may also be excluded by specifying their position:

```
>>> vpolyval.excluded.add(0)
>>> vpolyval([1, 2, 3], x=[0, 1])
array([3, 6])
```

The *signature* argument allows for vectorizing functions that act on non-scalar arrays of fixed length. For example, you can use it for a vectorized calculation of Pearson correlation coefficient and its p-value:

```
>>> import scipy.stats
>>> pearsonr = np.vectorize(scipy.stats.pearsonr,
...                         signature='(n),(n)->(),()')
>>> pearsonr([[0, 1, 2, 3]], [[1, 2, 3, 4], [4, 3, 2, 1]])
(array([ 1., -1.]), array([ 0.,  0.]))
```

Or for a vectorized convolution:

```
>>> convolve = np.vectorize(np.convolve, signature='(n),(m)->(k)')
>>> convolve(np.eye(4), [1, 2, 1])
array([[ 1.,  2.,  1.,  0.,  0.,  0.],
       [ 0.,  1.,  2.,  1.,  0.,  0.],
       [ 0.,  0.,  1.,  2.,  1.,  0.],
       [ 0.,  0.,  0.,  1.,  2.,  1.]])
```

Methods

__call__(*args, **kwargs)	Return arrays with the results of *pyfunc* broadcast (vectorized) over *args* and *kwargs* not in *excluded*.

vectorize.**__call__**(**args*, ***kwargs*)
Return arrays with the results of *pyfunc* broadcast (vectorized) over *args* and *kwargs* not in *excluded*.

numpy.**frompyfunc**(*func*, *nin*, *nout*)
Takes an arbitrary Python function and returns a NumPy ufunc.

Can be used, for example, to add broadcasting to a built-in Python function (see Examples section).

Parameters **func** : Python function object

An arbitrary Python function.

nin : int

The number of input arguments.

nout : int

The number of objects returned by *func*.

Returns **out** : ufunc

Returns a NumPy universal function (`ufunc`) object.

See also:

vectorize evaluates pyfunc over input arrays using broadcasting rules of numpy

Notes

The returned ufunc always returns PyObject arrays.

Examples

Use frompyfunc to add broadcasting to the Python function `oct`:

```
>>> oct_array = np.frompyfunc(oct, 1, 1)
>>> oct_array(np.array((10, 30, 100)))
array([012, 036, 0144], dtype=object)
>>> np.array((oct(10), oct(30), oct(100))) # for comparison
array(['012', '036', '0144'],
      dtype='|S4')
```

numpy.**piecewise**(*x*, *condlist*, *funclist*, **args*, ***kw*)
Evaluate a piecewise-defined function.

Given a set of conditions and corresponding functions, evaluate each function on the input data wherever its condition is true.

Parameters **x** : ndarray or scalar

The input domain.

condlist : list of bool arrays or bool scalars

Each boolean array corresponds to a function in *funclist*. Wherever *condlist[i]* is True, *funclist[i](x)* is used as the output value.

Each boolean array in *condlist* selects a piece of *x*, and should therefore be of the same shape as *x*.

The length of *condlist* must correspond to that of *funclist*. If one extra function is given, i.e. if `len(funclist) == len(condlist) + 1`, then that extra function is the default value, used wherever all conditions are false.

funclist : list of callables, f(x,*args,**kw), or scalars

Each function is evaluated over *x* wherever its corresponding condition is True. It should take a 1d array as input and give an 1d array or a scalar value as output. If, instead of a callable, a scalar is provided then a constant function (`lambda x: scalar`) is assumed.

args : tuple, optional

Any further arguments given to *piecewise* are passed to the functions upon execution, i.e., if called `piecewise(..., ..., 1, 'a')`, then each function is called as `f(x, 1, 'a')`.

kw : dict, optional

Keyword arguments used in calling *piecewise* are passed to the functions upon execution, i.e., if called `piecewise(..., ..., alpha=1)`, then each function is called as `f(x, alpha=1)`.

Returns **out** : ndarray

The output is the same shape and type as x and is found by calling the functions in *funclist* on the appropriate portions of *x*, as defined by the boolean arrays in *condlist*. Portions not covered by any condition have a default value of 0.

See also:

choose, *select*, *where*

Notes

This is similar to choose or select, except that functions are evaluated on elements of *x* that satisfy the corresponding condition from *condlist*.

The result is:

```
      |--
      |funclist[0](x[condlist[0]])
out = |funclist[1](x[condlist[1]])
      |...
      |funclist[n2](x[condlist[n2]])
      |--
```

Examples

Define the sigma function, which is -1 for `x < 0` and +1 for `x >= 0`.

```
>>> x = np.linspace(-2.5, 2.5, 6)
>>> np.piecewise(x, [x < 0, x >= 0], [-1, 1])
array([-1., -1., -1.,  1.,  1.,  1.])
```

Define the absolute value, which is `-x` for `x <0` and `x` for `x >= 0`.

```
>>> np.piecewise(x, [x < 0, x >= 0], [lambda x: -x, lambda x: x])
array([ 2.5,  1.5,  0.5,  0.5,  1.5,  2.5])
```

Apply the same function to a scalar value.

```
>>> y = -2
>>> np.piecewise(y, [y < 0, y >= 0], [lambda x: -x, lambda x: x])
array(2)
```

3.14 NumPy-specific help functions

3.14.1 Finding help

lookfor(what[, module, import_modules, ...])	Do a keyword search on docstrings.

numpy.**lookfor**(*what*, *module=None*, *import_modules=True*, *regenerate=False*, *output=None*)

Do a keyword search on docstrings.

A list of of objects that matched the search is displayed, sorted by relevance. All given keywords need to be found in the docstring for it to be returned as a result, but the order does not matter.

Parameters **what** : str

String containing words to look for.

module : str or list, optional

Name of module(s) whose docstrings to go through.

import_modules : bool, optional

Whether to import sub-modules in packages. Default is True.

regenerate : bool, optional

Whether to re-generate the docstring cache. Default is False.

output : file-like, optional

File-like object to write the output to. If omitted, use a pager.

See also:

source, *info*

Notes

Relevance is determined only roughly, by checking if the keywords occur in the function name, at the start of a docstring, etc.

Examples

```
>>> np.lookfor('binary representation')
Search results for 'binary representation'
------------------------------------------
numpy.binary_repr
    Return the binary representation of the input number as a string.
numpy.core.setup_common.long_double_representation
    Given a binary dump as given by GNU od -b, look for long double
numpy.base_repr
    Return a string representation of a number in the given base system.
...
```

3.14.2 Reading help

info([object, maxwidth, output, toplevel])	Get help information for a function, class, or module.
source(object[, output])	Print or write to a file the source code for a NumPy object.

numpy.**info**(*object=None*, *maxwidth=76*, *output=<_io.TextIOWrapper name='<stdout>' mode='w' encoding='ANSI_X3.4-1968'>*, *toplevel='numpy'*)

Get help information for a function, class, or module.

Parameters **object** : object or str, optional

Input object or name to get information about. If `object` is a numpy object, its docstring is given. If it is a string, available modules are searched for matching objects. If None, information about *info* itself is returned.

maxwidth : int, optional

Printing width.

output : file like object, optional

File like object that the output is written to, default is `stdout`. The object has to be opened in 'w' or 'a' mode.

toplevel : str, optional

Start search at this level.

See also:

source, *lookfor*

Notes

When used interactively with an object, `np.info(obj)` is equivalent to `help(obj)` on the Python prompt or `obj?` on the IPython prompt.

Examples

```
>>> np.info(np.polyval)
   polyval(p, x)
     Evaluate the polynomial p at x.
     ...
```

When using a string for `object` it is possible to get multiple results.

```
>>> np.info('fft')
     *** Found in numpy ***
Core FFT routines
...
     *** Found in numpy.fft ***
 fft(a, n=None, axis=-1)
...
     *** Repeat reference found in numpy.fft.fftpack ***
     *** Total of 3 references found. ***
```

numpy.**source**(*object*, *output=<_io.TextIOWrapper name='<stdout>' mode='w' encoding='ANSI_X3.4-1968'>*)

Print or write to a file the source code for a NumPy object.

The source code is only returned for objects written in Python. Many functions and classes are defined in C and will therefore not return useful information.

Parameters **object** : numpy object

Input object. This can be any object (function, class, module, ...).

output : file object, optional

If *output* not supplied then source code is printed to screen (sys.stdout). File object must be created with either write 'w' or append 'a' modes.

See also:

lookfor, *info*

Examples

```
>>> np.source(np.interp)
In file: /usr/lib/python2.6/dist-packages/numpy/lib/function_base.py
def interp(x, xp, fp, left=None, right=None):
    """.... (full docstring printed)"""
    if isinstance(x, (float, int, number)):
        return compiled_interp([x], xp, fp, left, right).item()
    else:
        return compiled_interp(x, xp, fp, left, right)
```

The source code is only returned for objects written in Python.

```
>>> np.source(np.array)
Not available for this object.
```

3.15 Indexing routines

See also:

Indexing

3.15.1 Generating index arrays

*c_*	Translates slice objects to concatenation along the second axis.
*r_*	Translates slice objects to concatenation along the first axis.
*s_*	A nicer way to build up index tuples for arrays.
nonzero(a)	Return the indices of the elements that are non-zero.
where(condition, [x, y])	Return elements, either from *x* or *y*, depending on *condition*.
indices(dimensions[, dtype])	Return an array representing the indices of a grid.
*ix_*(*args)	Construct an open mesh from multiple sequences.
ogrid	*nd_grid* instance which returns an open multi-dimensional "meshgrid".
ravel_multi_index(multi_index, dims[, mode, ...])	Converts a tuple of index arrays into an array of flat indices, applying boundary modes to the multi-index.
unravel_index(indices, dims[, order])	Converts a flat index or array of flat indices into a tuple of coordinate arrays.
diag_indices(n[, ndim])	Return the indices to access the main diagonal of an array.
diag_indices_from(arr)	Return the indices to access the main diagonal of an n-dimensional array.
mask_indices(n, mask_func[, k])	Return the indices to access (n, n) arrays, given a masking function.
tril_indices(n[, k, m])	Return the indices for the lower-triangle of an (n, m) array.
tril_indices_from(arr[, k])	Return the indices for the lower-triangle of arr.
triu_indices(n[, k, m])	Return the indices for the upper-triangle of an (n, m) array.
triu_indices_from(arr[, k])	Return the indices for the upper-triangle of arr.

numpy.**c_ = <numpy.lib.index_tricks.CClass object>**

Translates slice objects to concatenation along the second axis.

This is short-hand for `np.r_['-1,2,0', index expression]`, which is useful because of its common occurrence. In particular, arrays will be stacked along their last axis after being upgraded to at least 2-D with 1's post-pended to the shape (column vectors made out of 1-D arrays).

See also:

column_stack Stack 1-D arrays as columns into a 2-D array.

r_ For more detailed documentation.

Examples

```
>>> np.c_[np.array([1,2,3]), np.array([4,5,6])]
array([[1, 4],
       [2, 5],
       [3, 6]])
>>> np.c_[np.array([[1,2,3]]), 0, 0, np.array([[4,5,6]])]
array([[1, 2, 3, 0, 0, 4, 5, 6]])
```

numpy.**r_ = <numpy.lib.index_tricks.RClass object>**

Translates slice objects to concatenation along the first axis.

This is a simple way to build up arrays quickly. There are two use cases.

1. If the index expression contains comma separated arrays, then stack them along their first axis.
2. If the index expression contains slice notation or scalars then create a 1-D array with a range indicated by the slice notation.

If slice notation is used, the syntax `start:stop:step` is equivalent to `np.arange(start, stop, step)` inside of the brackets. However, if `step` is an imaginary number (i.e. 100j) then its integer portion is interpreted as a number-of-points desired and the start and stop are inclusive. In other words `start:stop:stepj` is interpreted as `np.linspace(start, stop, step, endpoint=1)` inside of the brackets. After expansion of slice notation, all comma separated sequences are concatenated together.

Optional character strings placed as the first element of the index expression can be used to change the output. The strings 'r' or 'c' result in matrix output. If the result is 1-D and 'r' is specified a 1 x N (row) matrix is produced. If the result is 1-D and 'c' is specified, then a N x 1 (column) matrix is produced. If the result is 2-D then both provide the same matrix result.

A string integer specifies which axis to stack multiple comma separated arrays along. A string of two comma-separated integers allows indication of the minimum number of dimensions to force each entry into as the second integer (the axis to concatenate along is still the first integer).

A string with three comma-separated integers allows specification of the axis to concatenate along, the minimum number of dimensions to force the entries to, and which axis should contain the start of the arrays which are less than the specified number of dimensions. In other words the third integer allows you to specify where the 1's should be placed in the shape of the arrays that have their shapes upgraded. By default, they are placed in the front of the shape tuple. The third argument allows you to specify where the start of the array should be instead. Thus, a third argument of '0' would place the 1's at the end of the array shape. Negative integers specify where in the new shape tuple the last dimension of upgraded arrays should be placed, so the default is '-1'.

Parameters **Not a function, so takes no parameters**

Returns A concatenated ndarray or matrix.

See also:

concatenate Join a sequence of arrays along an existing axis.

c_ Translates slice objects to concatenation along the second axis.

Examples

```
>>> np.r_[np.array([1,2,3]), 0, 0, np.array([4,5,6])]
array([1, 2, 3, 0, 0, 4, 5, 6])
>>> np.r_[-1:1:6j, [0]*3, 5, 6]
array([-1. , -0.6, -0.2,  0.2,  0.6,  1. ,  0. ,  0. ,  0. ,  5. ,  6. ])
```

String integers specify the axis to concatenate along or the minimum number of dimensions to force entries into.

```
>>> a = np.array([[0, 1, 2], [3, 4, 5]])
>>> np.r_['-1', a, a] # concatenate along last axis
array([[0, 1, 2, 0, 1, 2],
       [3, 4, 5, 3, 4, 5]])
>>> np.r_['0,2', [1,2,3], [4,5,6]] # concatenate along first axis, dim>=2
array([[1, 2, 3],
       [4, 5, 6]])
```

```
>>> np.r_['0,2,0', [1,2,3], [4,5,6]]
array([[1],
       [2],
       [3],
       [4],
       [5],
       [6]])
>>> np.r_['1,2,0', [1,2,3], [4,5,6]]
array([[1, 4],
       [2, 5],
       [3, 6]])
```

Using ‘r’ or ‘c’ as a first string argument creates a matrix.

```
>>> np.r_['r',[1,2,3], [4,5,6]]
matrix([[1, 2, 3, 4, 5, 6]])
```

numpy.**s_ = <numpy.lib.index_tricks.IndexExpression object>**

A nicer way to build up index tuples for arrays.

Note: Use one of the two predefined instances `index_exp` or *s_* rather than directly using *IndexExpression*.

For any index combination, including slicing and axis insertion, `a[indices]` is the same as `a[np.index_exp[indices]]` for any array *a*. However, `np.index_exp[indices]` can be used anywhere in Python code and returns a tuple of slice objects that can be used in the construction of complex index expressions.

Parameters **maketuple** : bool

If True, always returns a tuple.

See also:

index_exp Predefined instance that always returns a tuple: *index_exp = IndexExpression(maketuple=True)*.

s_ Predefined instance without tuple conversion: *s_ = IndexExpression(maketuple=False)*.

Notes

You can do all this with *slice()* plus a few special objects, but there’s a lot to remember and this version is simpler because it uses the standard array indexing syntax.

Examples

```
>>> np.s_[2::2]
slice(2, None, 2)
>>> np.index_exp[2::2]
(slice(2, None, 2),)
```

```
>>> np.array([0, 1, 2, 3, 4])[np.s_[2::2]]
array([2, 4])
```

numpy.**nonzero**(*a*)

Return the indices of the elements that are non-zero.

Returns a tuple of arrays, one for each dimension of *a*, containing the indices of the non-zero elements in that dimension. The values in *a* are always tested and returned in row-major, C-style order. The corresponding non-zero values can be obtained with:

```
a[nonzero(a)]
```

To group the indices by element, rather than dimension, use:

```
transpose(nonzero(a))
```

The result of this is always a 2-D array, with a row for each non-zero element.

Parameters **a** : array_like

Input array.

Returns **tuple_of_arrays** : tuple

Indices of elements that are non-zero.

See also:

flatnonzero Return indices that are non-zero in the flattened version of the input array.

ndarray.nonzero Equivalent ndarray method.

count_nonzero Counts the number of non-zero elements in the input array.

Examples

```
>>> x = np.array([[1,0,0], [0,2,0], [1,1,0]])
>>> x
array([[1, 0, 0],
       [0, 2, 0],
       [1, 1, 0]])
>>> np.nonzero(x)
(array([0, 1, 2, 2]), array([0, 1, 0, 1]))
```

```
>>> x[np.nonzero(x)]
array([1, 2, 1, 1])
>>> np.transpose(np.nonzero(x))
array([[0, 0],
       [1, 1],
       [2, 0],
       [2, 1])
```

A common use for `nonzero` is to find the indices of an array, where a condition is True. Given an array *a*, the condition *a* > 3 is a boolean array and since False is interpreted as 0, np.nonzero(a > 3) yields the indices of the *a* where the condition is true.

```
>>> a = np.array([[1,2,3],[4,5,6],[7,8,9]])
>>> a > 3
array([[False, False, False],
       [ True,  True,  True],
       [ True,  True,  True]])
```

(continues on next page)

(continued from previous page)

```
>>> np.nonzero(a > 3)
(array([1, 1, 1, 2, 2, 2]), array([0, 1, 2, 0, 1, 2]))
```

The `nonzero` method of the boolean array can also be called.

```
>>> (a > 3).nonzero()
(array([1, 1, 1, 2, 2, 2]), array([0, 1, 2, 0, 1, 2]))
```

`numpy.`**`where`**(*condition*[, *x*, *y*])

Return elements, either from *x* or *y*, depending on *condition*.

If only *condition* is given, return `condition.nonzero()`.

Parameters **condition** : array_like, bool

When True, yield *x*, otherwise yield *y*.

x, y : array_like, optional

Values from which to choose. *x*, *y* and *condition* need to be broadcastable to some shape.

Returns **out** : ndarray or tuple of ndarrays

If both *x* and *y* are specified, the output array contains elements of *x* where *condition* is True, and elements from *y* elsewhere.

If only *condition* is given, return the tuple `condition.nonzero()`, the indices where *condition* is True.

See also:

nonzero, *choose*

Notes

If *x* and *y* are given and input arrays are 1-D, *where* is equivalent to:

```
[xv if c else yv for (c,xv,yv) in zip(condition,x,y)]
```

Examples

```
>>> np.where([[True, False], [True, True]],
...          [[1, 2], [3, 4]],
...          [[9, 8], [7, 6]])
array([[1, 8],
       [3, 4]])
```

```
>>> np.where([[0, 1], [1, 0]])
(array([0, 1]), array([1, 0]))
```

```
>>> x = np.arange(9.).reshape(3, 3)
>>> np.where( x > 5 )
(array([2, 2, 2]), array([0, 1, 2]))
>>> x[np.where( x > 3.0 )]               # Note: result is 1D.
```

(continues on next page)

(continued from previous page)

```
array([ 4.,  5.,  6.,  7.,  8.])
>>> np.where(x < 5, x, -1)               # Note: broadcasting.
array([[ 0.,  1.,  2.],
       [ 3.,  4., -1.],
       [-1., -1., -1.]])
```

Find the indices of elements of *x* that are in *goodvalues*.

```
>>> goodvalues = [3, 4, 7]
>>> ix = np.isin(x, goodvalues)
>>> ix
array([[False, False, False],
       [ True,  True, False],
       [False,  True, False]])
>>> np.where(ix)
(array([1, 1, 2]), array([0, 1, 1]))
```

numpy.**indices**(*dimensions*, *dtype=<class 'int'>*)

Return an array representing the indices of a grid.

Compute an array where the subarrays contain index values 0,1,... varying only along the corresponding axis.

Parameters **dimensions** : sequence of ints

The shape of the grid.

dtype : dtype, optional

Data type of the result.

Returns **grid** : ndarray

The array of grid indices, `grid.shape = (len(dimensions),) + tuple(dimensions).`

See also:

mgrid, *meshgrid*

Notes

The output shape is obtained by prepending the number of dimensions in front of the tuple of dimensions, i.e. if *dimensions* is a tuple `(r0, ..., rN-1)` of length `N`, the output shape is `(N,r0,...,rN-1)`.

The subarrays `grid[k]` contains the N-D array of indices along the `k-th` axis. Explicitly:

```
grid[k,i0,i1,...,iN-1] = ik
```

Examples

```
>>> grid = np.indices((2, 3))
>>> grid.shape
(2, 2, 3)
>>> grid[0]        # row indices
array([[0, 0, 0],
       [1, 1, 1]])
```

(continues on next page)

(continued from previous page)

```
>>> grid[1]        # column indices
array([[0, 1, 2],
       [0, 1, 2]])
```

The indices can be used as an index into an array.

```
>>> x = np.arange(20).reshape(5, 4)
>>> row, col = np.indices((2, 3))
>>> x[row, col]
array([[0, 1, 2],
       [4, 5, 6]])
```

Note that it would be more straightforward in the above example to extract the required elements directly with `x[:2, :3]`.

numpy.**ix_**(**args*)

Construct an open mesh from multiple sequences.

This function takes N 1-D sequences and returns N outputs with N dimensions each, such that the shape is 1 in all but one dimension and the dimension with the non-unit shape value cycles through all N dimensions.

Using *ix_* one can quickly construct index arrays that will index the cross product. `a[np.ix_([1,3],[2,5])]` returns the array `[[a[1,2] a[1,5]], [a[3,2] a[3,5]]]`.

Parameters **args** : 1-D sequences

Each sequence should be of integer or boolean type. Boolean sequences will be interpreted as boolean masks for the corresponding dimension (equivalent to passing in `np.nonzero(boolean_sequence)`).

Returns **out** : tuple of ndarrays

N arrays with N dimensions each, with N the number of input sequences. Together these arrays form an open mesh.

See also:

ogrid, *mgrid*, *meshgrid*

Examples

```
>>> a = np.arange(10).reshape(2, 5)
>>> a
array([[0, 1, 2, 3, 4],
       [5, 6, 7, 8, 9]])
>>> ixgrid = np.ix_([0, 1], [2, 4])
>>> ixgrid
(array([[0],
       [1]]), array([[2, 4]]))
>>> ixgrid[0].shape, ixgrid[1].shape
((2, 1), (1, 2))
>>> a[ixgrid]
array([[2, 4],
       [7, 9]])
```

```
>>> ixgrid = np.ix_([True, True], [2, 4])
>>> a[ixgrid]
```

(continues on next page)

(continued from previous page)

```
array([[2, 4],
       [7, 9]])
>>> ixgrid = np.ix_([True, True], [False, False, True, False, True])
>>> a[ixgrid]
array([[2, 4],
       [7, 9]])
```

numpy.**ravel_multi_index**(*multi_index*, *dims*, *mode='raise'*, *order='C'*)

Converts a tuple of index arrays into an array of flat indices, applying boundary modes to the multi-index.

Parameters **multi_index** : tuple of array_like

A tuple of integer arrays, one array for each dimension.

dims : tuple of ints

The shape of array into which the indices from `multi_index` apply.

mode : {'raise', 'wrap', 'clip'}, optional

Specifies how out-of-bounds indices are handled. Can specify either one mode or a tuple of modes, one mode per index.

- 'raise' – raise an error (default)
- 'wrap' – wrap around
- 'clip' – clip to the range

In 'clip' mode, a negative index which would normally wrap will clip to 0 instead.

order : {'C', 'F'}, optional

Determines whether the multi-index should be viewed as indexing in row-major (C-style) or column-major (Fortran-style) order.

Returns **raveled_indices** : ndarray

An array of indices into the flattened version of an array of dimensions `dims`.

See also:

unravel_index

Notes

New in version 1.6.0.

Examples

```
>>> arr = np.array([[3,6,6],[4,5,1]])
>>> np.ravel_multi_index(arr, (7,6))
array([22, 41, 37])
>>> np.ravel_multi_index(arr, (7,6), order='F')
array([31, 41, 13])
>>> np.ravel_multi_index(arr, (4,6), mode='clip')
array([22, 23, 19])
>>> np.ravel_multi_index(arr, (4,4), mode=('clip','wrap'))
array([12, 13, 13])
```

```
>>> np.ravel_multi_index((3,1,4,1), (6,7,8,9))
1621
```

numpy.**unravel_index**(*indices*, *dims*, *order='C'*)

Converts a flat index or array of flat indices into a tuple of coordinate arrays.

Parameters **indices** : array_like

An integer array whose elements are indices into the flattened version of an array of dimensions `dims`. Before version 1.6.0, this function accepted just one index value.

dims : tuple of ints

The shape of the array to use for unraveling `indices`.

order : {'C', 'F'}, optional

Determines whether the indices should be viewed as indexing in row-major (C-style) or column-major (Fortran-style) order.

New in version 1.6.0.

Returns **unraveled_coords** : tuple of ndarray

Each array in the tuple has the same shape as the `indices` array.

See also:

ravel_multi_index

Examples

```
>>> np.unravel_index([22, 41, 37], (7,6))
(array([3, 6, 6]), array([4, 5, 1]))
>>> np.unravel_index([31, 41, 13], (7,6), order='F')
(array([3, 6, 6]), array([4, 5, 1]))
```

```
>>> np.unravel_index(1621, (6,7,8,9))
(3, 1, 4, 1)
```

numpy.**diag_indices**(*n*, *ndim=2*)

Return the indices to access the main diagonal of an array.

This returns a tuple of indices that can be used to access the main diagonal of an array *a* with `a.ndim >= 2` dimensions and shape (n, n, ..., n). For `a.ndim = 2` this is the usual diagonal, for `a.ndim > 2` this is the set of indices to access `a[i, i, ..., i]` for `i = [0..n-1]`.

Parameters **n** : int

The size, along each dimension, of the arrays for which the returned indices can be used.

ndim : int, optional

The number of dimensions.

See also:

diag_indices_from

Notes

New in version 1.4.0.

Examples

Create a set of indices to access the diagonal of a (4, 4) array:

```
>>> di = np.diag_indices(4)
>>> di
(array([0, 1, 2, 3]), array([0, 1, 2, 3]))
>>> a = np.arange(16).reshape(4, 4)
>>> a
array([[ 0,  1,  2,  3],
       [ 4,  5,  6,  7],
       [ 8,  9, 10, 11],
       [12, 13, 14, 15]])
>>> a[di] = 100
>>> a
array([[100,   1,   2,   3],
       [  4, 100,   6,   7],
       [  8,   9, 100,  11],
       [ 12,  13,  14, 100]])
```

Now, we create indices to manipulate a 3-D array:

```
>>> d3 = np.diag_indices(2, 3)
>>> d3
(array([0, 1]), array([0, 1]), array([0, 1]))
```

And use it to set the diagonal of an array of zeros to 1:

```
>>> a = np.zeros((2, 2, 2), dtype=int)
>>> a[d3] = 1
>>> a
array([[[1, 0],
        [0, 0]],
       [[0, 0],
        [0, 1]]])
```

numpy.**diag_indices_from**(*arr*)

Return the indices to access the main diagonal of an n-dimensional array.

See *diag_indices* for full details.

Parameters **arr** : array, at least 2-D

See also:

diag_indices

Notes

New in version 1.4.0.

numpy.**mask_indices**(*n*, *mask_func*, *k=0*)

Return the indices to access (n, n) arrays, given a masking function.

Assume *mask_func* is a function that, for a square array a of size `(n, n)` with a possible offset argument *k*, when called as `mask_func(a, k)` returns a new array with zeros in certain locations (functions like *triu* or *tril* do precisely this). Then this function returns the indices where the non-zero values would be located.

Parameters **n** : int

The returned indices will be valid to access arrays of shape (n, n).

mask_func : callable

A function whose call signature is similar to that of *triu*, *tril*. That is, `mask_func(x, k)` returns a boolean array, shaped like *x*. *k* is an optional argument to the function.

k : scalar

An optional argument which is passed through to *mask_func*. Functions like *triu*, *tril* take a second argument that is interpreted as an offset.

Returns **indices** : tuple of arrays.

The *n* arrays of indices corresponding to the locations where `mask_func(np.ones((n, n)), k)` is True.

See also:

triu, *tril*, *triu_indices*, *tril_indices*

Notes

New in version 1.4.0.

Examples

These are the indices that would allow you to access the upper triangular part of any 3x3 array:

```
>>> iu = np.mask_indices(3, np.triu)
```

For example, if *a* is a 3x3 array:

```
>>> a = np.arange(9).reshape(3, 3)
>>> a
array([[0, 1, 2],
       [3, 4, 5],
       [6, 7, 8]])
>>> a[iu]
array([0, 1, 2, 4, 5, 8])
```

An offset can be passed also to the masking function. This gets us the indices starting on the first diagonal right of the main one:

```
>>> iu1 = np.mask_indices(3, np.triu, 1)
```

with which we now extract only three elements:

```
>>> a[iu1]
array([1, 2, 5])
```

numpy.**tril_indices**(*n*, *k=0*, *m=None*)

Return the indices for the lower-triangle of an (n, m) array.

Parameters **n** : int

The row dimension of the arrays for which the returned indices will be valid.

k : int, optional

Diagonal offset (see *tril* for details).

m : int, optional

New in version 1.9.0.

The column dimension of the arrays for which the returned arrays will be valid. By default *m* is taken equal to *n*.

Returns **inds** : tuple of arrays

The indices for the triangle. The returned tuple contains two arrays, each with the indices along one dimension of the array.

See also:

triu_indices similar function, for upper-triangular.

mask_indices generic function accepting an arbitrary mask function.

tril, *triu*

Notes

New in version 1.4.0.

Examples

Compute two different sets of indices to access 4x4 arrays, one for the lower triangular part starting at the main diagonal, and one starting two diagonals further right:

```
>>> il1 = np.tril_indices(4)
>>> il2 = np.tril_indices(4, 2)
```

Here is how they can be used with a sample array:

```
>>> a = np.arange(16).reshape(4, 4)
>>> a
array([[ 0,  1,  2,  3],
       [ 4,  5,  6,  7],
       [ 8,  9, 10, 11],
       [12, 13, 14, 15]])
```

Both for indexing:

```
>>> a[il1]
array([ 0,  4,  5,  8,  9, 10, 12, 13, 14, 15])
```

And for assigning values:

```
>>> a[il1] = -1
>>> a
array([[-1,  1,  2,  3],
       [-1, -1,  6,  7],
       [-1, -1, -1, 11],
       [-1, -1, -1, -1]])
```

These cover almost the whole array (two diagonals right of the main one):

```
>>> a[il2] = -10
>>> a
array([[-10, -10, -10,   3],
       [-10, -10, -10, -10],
       [-10, -10, -10, -10],
       [-10, -10, -10, -10]])
```

numpy.**tril_indices_from**(*arr*, *k=0*)

Return the indices for the lower-triangle of arr.

See *tril_indices* for full details.

Parameters **arr** : array_like

The indices will be valid for square arrays whose dimensions are the same as arr.

k : int, optional

Diagonal offset (see *tril* for details).

See also:

tril_indices, *tril*

Notes

New in version 1.4.0.

numpy.**triu_indices**(*n*, *k=0*, *m=None*)

Return the indices for the upper-triangle of an (n, m) array.

Parameters **n** : int

The size of the arrays for which the returned indices will be valid.

k : int, optional

Diagonal offset (see *triu* for details).

m : int, optional

New in version 1.9.0.

The column dimension of the arrays for which the returned arrays will be valid. By default *m* is taken equal to *n*.

Returns **inds** : tuple, shape(2) of ndarrays, shape(*n*)

The indices for the triangle. The returned tuple contains two arrays, each with the indices along one dimension of the array. Can be used to slice a ndarray of shape(*n*, *n*).

See also:

tril_indices similar function, for lower-triangular.

mask_indices generic function accepting an arbitrary mask function.

triu, *tril*

Notes

New in version 1.4.0.

Examples

Compute two different sets of indices to access 4x4 arrays, one for the upper triangular part starting at the main diagonal, and one starting two diagonals further right:

```
>>> iu1 = np.triu_indices(4)
>>> iu2 = np.triu_indices(4, 2)
```

Here is how they can be used with a sample array:

```
>>> a = np.arange(16).reshape(4, 4)
>>> a
array([[ 0,  1,  2,  3],
       [ 4,  5,  6,  7],
       [ 8,  9, 10, 11],
       [12, 13, 14, 15]])
```

Both for indexing:

```
>>> a[iu1]
array([ 0,  1,  2,  3,  5,  6,  7, 10, 11, 15])
```

And for assigning values:

```
>>> a[iu1] = -1
>>> a
array([[-1, -1, -1, -1],
       [ 4, -1, -1, -1],
       [ 8,  9, -1, -1],
       [12, 13, 14, -1]])
```

These cover only a small part of the whole array (two diagonals right of the main one):

```
>>> a[iu2] = -10
>>> a
array([[ -1,  -1, -10, -10],
       [  4,  -1,  -1, -10],
       [  8,   9,  -1,  -1],
       [ 12,  13,  14,  -1]])
```

numpy.**triu_indices_from**(*arr*, *k=0*)

Return the indices for the upper-triangle of arr.

See *triu_indices* for full details.

Parameters **arr** : ndarray, shape(N, N)

The indices will be valid for square arrays.

k : int, optional

Diagonal offset (see *triu* for details).

Returns **triu_indices_from** : tuple, shape(2) of ndarray, shape(N)

Indices for the upper-triangle of *arr*.

See also:

triu_indices, *triu*

Notes

New in version 1.4.0.

3.15.2 Indexing-like operations

take(a, indices[, axis, out, mode])	Take elements from an array along an axis.
choose(a, choices[, out, mode])	Construct an array from an index array and a set of arrays to choose from.
compress(condition, a[, axis, out])	Return selected slices of an array along given axis.
diag(v[, k])	Extract a diagonal or construct a diagonal array.
diagonal(a[, offset, axis1, axis2])	Return specified diagonals.
select(condlist, choicelist[, default])	Return an array drawn from elements in choicelist, depending on conditions.
lib.stride_tricks.as_strided(x[, shape, ...])	Create a view into the array with the given shape and strides.

numpy.**take**(*a*, *indices*, *axis=None*, *out=None*, *mode='raise'*)

Take elements from an array along an axis.

When axis is not None, this function does the same thing as "fancy" indexing (indexing arrays using arrays); however, it can be easier to use if you need elements along a given axis. A call such as `np.take(arr, indices, axis=3)` is equivalent to `arr[:,:,:,indices,...]`.

Explained without fancy indexing, this is equivalent to the following use of *ndindex*, which sets each of `ii`, `jj`, and `kk` to a tuple of indices:

```
Ni, Nk = a.shape[:axis], a.shape[axis+1:]
Nj = indices.shape
for ii in ndindex(Ni):
    for jj in ndindex(Nj):
        for kk in ndindex(Nk):
            out[ii + jj + kk] = a[ii + (indices[jj],) + kk]
```

Parameters **a** : array_like (Ni..., M, Nk...)

The source array.

indices : array_like (Nj...)

The indices of the values to extract.

New in version 1.8.0.

Also allow scalars for indices.

axis : int, optional

The axis over which to select values. By default, the flattened input array is used.

out : ndarray, optional (Ni..., Nj..., Nk...)

If provided, the result will be placed in this array. It should be of the appropriate shape and dtype.

mode : {'raise', 'wrap', 'clip'}, optional

Specifies how out-of-bounds indices will behave.

- 'raise' – raise an error (default)
- 'wrap' – wrap around
- 'clip' – clip to the range

'clip' mode means that all indices that are too large are replaced by the index that addresses the last element along that axis. Note that this disables indexing with negative numbers.

Returns **out** : ndarray (Ni..., Nj..., Nk...)

The returned array has the same type as *a*.

See also:

compress Take elements using a boolean mask

ndarray.take equivalent method

Notes

By eliminating the inner loop in the description above, and using *s_* to build simple slice objects, *take* can be expressed in terms of applying fancy indexing to each 1-d slice:

```
Ni, Nk = a.shape[:axis], a.shape[axis+1:]
for ii in ndindex(Ni):
    for kk in ndindex(Nj):
        out[ii + s_[...,] + kk] = a[ii + s_[:,] + kk][indices]
```

For this reason, it is equivalent to (but faster than) the following use of *apply_along_axis*:

```
out = np.apply_along_axis(lambda a_1d: a_1d[indices], axis, a)
```

Examples

```
>>> a = [4, 3, 5, 7, 6, 8]
>>> indices = [0, 1, 4]
>>> np.take(a, indices)
array([4, 3, 6])
```

In this example if *a* is an ndarray, "fancy" indexing can be used.

```
>>> a = np.array(a)
>>> a[indices]
array([4, 3, 6])
```

If *indices* is not one dimensional, the output also has these dimensions.

```
>>> np.take(a, [[0, 1], [2, 3]])
array([[4, 3],
       [5, 7]])
```

numpy.**choose**(*a*, *choices*, *out=None*, *mode='raise'*)

Construct an array from an index array and a set of arrays to choose from.

First of all, if confused or uncertain, definitely look at the Examples - in its full generality, this function is less simple than it might seem from the following code description (below ndi = `numpy.lib.index_tricks`):

`np.choose(a,c) == np.array([c[a[I]][I] for I in ndi.ndindex(a.shape)])`.

But this omits some subtleties. Here is a fully general summary:

Given an "index" array (*a*) of integers and a sequence of *n* arrays (*choices*), *a* and each choice array are first broadcast, as necessary, to arrays of a common shape; calling these *Ba* and *Bchoices[i], i = 0,...,n-1* we have that, necessarily, `Ba.shape == Bchoices[i].shape` for each *i*. Then, a new array with shape `Ba.shape` is created as follows:

- if `mode=raise` (the default), then, first of all, each element of *a* (and thus *Ba*) must be in the range *[0, n-1]*; now, suppose that *i* (in that range) is the value at the *(j0, j1, ..., jm)* position in *Ba* - then the value at the same position in the new array is the value in *Bchoices[i]* at that same position;
- if `mode=wrap`, values in *a* (and thus *Ba*) may be any (signed) integer; modular arithmetic is used to map integers outside the range *[0, n-1]* back into that range; and then the new array is constructed as above;
- if `mode=clip`, values in *a* (and thus *Ba*) may be any (signed) integer; negative integers are mapped to 0; values greater than *n-1* are mapped to *n-1*; and then the new array is constructed as above.

Parameters **a** : int array

This array must contain integers in *[0, n-1]*, where *n* is the number of choices, unless `mode=wrap` or `mode=clip`, in which cases any integers are permissible.

choices : sequence of arrays

Choice arrays. *a* and all of the choices must be broadcastable to the same shape. If *choices* is itself an array (not recommended), then its outermost dimension (i.e., the one corresponding to `choices.shape[0]`) is taken as defining the "sequence".

out : array, optional

If provided, the result will be inserted into this array. It should be of the appropriate shape and dtype.

mode : {'raise' (default), 'wrap', 'clip'}, optional

Specifies how indices outside *[0, n-1]* will be treated:

- 'raise' : an exception is raised
- 'wrap' : value becomes value mod *n*
- 'clip' : values < 0 are mapped to 0, values > n-1 are mapped to n-1

Returns **merged_array** : array

The merged result.

Raises **ValueError: shape mismatch**

If *a* and each choice array are not all broadcastable to the same shape.

See also:

ndarray.choose equivalent method

Notes

To reduce the chance of misinterpretation, even though the following "abuse" is nominally supported, *choices* should neither be, nor be thought of as, a single array, i.e., the outermost sequence-like container should be either a list or a tuple.

Examples

```
>>> choices = [[0, 1, 2, 3], [10, 11, 12, 13],
...   [20, 21, 22, 23], [30, 31, 32, 33]]
>>> np.choose([2, 3, 1, 0], choices
... # the first element of the result will be the first element of the
... # third (2+1) "array" in choices, namely, 20; the second element
... # will be the second element of the fourth (3+1) choice array, i.e.,
... # 31, etc.
... )
array([20, 31, 12,  3])
>>> np.choose([2, 4, 1, 0], choices, mode='clip') # 4 goes to 3 (4-1)
array([20, 31, 12,  3])
>>> # because there are 4 choice arrays
>>> np.choose([2, 4, 1, 0], choices, mode='wrap') # 4 goes to (4 mod 4)
array([20,  1, 12,  3])
>>> # i.e., 0
```

A couple examples illustrating how choose broadcasts:

```
>>> a = [[1, 0, 1], [0, 1, 0], [1, 0, 1]]
>>> choices = [-10, 10]
>>> np.choose(a, choices)
array([[ 10, -10,  10],
       [-10,  10, -10],
       [ 10, -10,  10]])
```

```
>>> # With thanks to Anne Archibald
>>> a = np.array([0, 1]).reshape((2,1,1))
>>> c1 = np.array([1, 2, 3]).reshape((1,3,1))
>>> c2 = np.array([-1, -2, -3, -4, -5]).reshape((1,1,5))
>>> np.choose(a, (c1, c2)) # result is 2x3x5, res[0,:,:]=c1, res[1,:,:]=c2
array([[[ 1,  1,  1,  1,  1],
        [ 2,  2,  2,  2,  2],
        [ 3,  3,  3,  3,  3]],
       [[-1, -2, -3, -4, -5],
        [-1, -2, -3, -4, -5],
        [-1, -2, -3, -4, -5]]])
```

numpy.**compress**(*condition*, *a*, *axis=None*, *out=None*)

Return selected slices of an array along given axis.

When working along a given axis, a slice along that axis is returned in *output* for each index where *condition* evaluates to True. When working on a 1-D array, *compress* is equivalent to *extract*.

Parameters **condition** : 1-D array of bools

Array that selects which entries to return. If len(condition) is less than the size of *a* along the given axis, then output is truncated to the length of the condition array.

a : array_like

Array from which to extract a part.

axis : int, optional

Axis along which to take slices. If None (default), work on the flattened array.

out : ndarray, optional

Output array. Its type is preserved and it must be of the right shape to hold the output.

Returns **compressed_array** : ndarray

A copy of *a* without the slices along axis for which *condition* is false.

See also:

take, *choose*, *diag*, *diagonal*, *select*

ndarray.compress Equivalent method in ndarray

np.extract Equivalent method when working on 1-D arrays

numpy.doc.ufuncs Section "Output arguments"

Examples

```
>>> a = np.array([[1, 2], [3, 4], [5, 6]])
>>> a
array([[1, 2],
       [3, 4],
       [5, 6]])
>>> np.compress([0, 1], a, axis=0)
array([[3, 4]])
>>> np.compress([False, True, True], a, axis=0)
array([[3, 4],
       [5, 6]])
>>> np.compress([False, True], a, axis=1)
array([[2],
       [4],
       [6]])
```

Working on the flattened array does not return slices along an axis but selects elements.

```
>>> np.compress([False, True], a)
array([2])
```

numpy.**diagonal**(*a*, *offset=0*, *axis1=0*, *axis2=1*)

Return specified diagonals.

If *a* is 2-D, returns the diagonal of *a* with the given offset, i.e., the collection of elements of the form `a[i, i+offset]`. If *a* has more than two dimensions, then the axes specified by *axis1* and *axis2* are used to

determine the 2-D sub-array whose diagonal is returned. The shape of the resulting array can be determined by removing *axis1* and *axis2* and appending an index to the right equal to the size of the resulting diagonals.

In versions of NumPy prior to 1.7, this function always returned a new, independent array containing a copy of the values in the diagonal.

In NumPy 1.7 and 1.8, it continues to return a copy of the diagonal, but depending on this fact is deprecated. Writing to the resulting array continues to work as it used to, but a FutureWarning is issued.

Starting in NumPy 1.9 it returns a read-only view on the original array. Attempting to write to the resulting array will produce an error.

In some future release, it will return a read/write view and writing to the returned array will alter your original array. The returned array will have the same type as the input array.

If you don't write to the array returned by this function, then you can just ignore all of the above.

If you depend on the current behavior, then we suggest copying the returned array explicitly, i.e., use `np.diagonal(a).copy()` instead of just `np.diagonal(a)`. This will work with both past and future versions of NumPy.

Parameters **a** : array_like

Array from which the diagonals are taken.

offset : int, optional

Offset of the diagonal from the main diagonal. Can be positive or negative. Defaults to main diagonal (0).

axis1 : int, optional

Axis to be used as the first axis of the 2-D sub-arrays from which the diagonals should be taken. Defaults to first axis (0).

axis2 : int, optional

Axis to be used as the second axis of the 2-D sub-arrays from which the diagonals should be taken. Defaults to second axis (1).

Returns **array_of_diagonals** : ndarray

If *a* is 2-D and not a *matrix*, a 1-D array of the same type as *a* containing the diagonal is returned. If *a* is a *matrix*, a 1-D array containing the diagonal is returned in order to maintain backward compatibility. If `a.ndim > 2`, then the dimensions specified by *axis1* and *axis2* are removed, and a new axis inserted at the end corresponding to the diagonal.

Raises **ValueError**

If the dimension of *a* is less than 2.

See also:

diag MATLAB work-a-like for 1-D and 2-D arrays.

diagflat Create diagonal arrays.

trace Sum along diagonals.

Examples

```
>>> a = np.arange(4).reshape(2,2)
>>> a
array([[0, 1],
       [2, 3]])
>>> a.diagonal()
array([0, 3])
>>> a.diagonal(1)
array([1])
```

A 3-D example:

```
>>> a = np.arange(8).reshape(2,2,2); a
array([[[0, 1],
        [2, 3]],
       [[4, 5],
        [6, 7]]])
>>> a.diagonal(0, # Main diagonals of two arrays created by skipping
...            0, # across the outer(left)-most axis last and
...            1) # the "middle" (row) axis first.
array([[0, 6],
       [1, 7]])
```

The sub-arrays whose main diagonals we just obtained; note that each corresponds to fixing the right-most (column) axis, and that the diagonals are "packed" in rows.

```
>>> a[:,:,0] # main diagonal is [0 6]
array([[0, 2],
       [4, 6]])
>>> a[:,:,1] # main diagonal is [1 7]
array([[1, 3],
       [5, 7]])
```

numpy.**select**(*condlist*, *choicelist*, *default=0*)

Return an array drawn from elements in choicelist, depending on conditions.

Parameters **condlist** : list of bool ndarrays

The list of conditions which determine from which array in *choicelist* the output elements are taken. When multiple conditions are satisfied, the first one encountered in *condlist* is used.

choicelist : list of ndarrays

The list of arrays from which the output elements are taken. It has to be of the same length as *condlist*.

default : scalar, optional

The element inserted in *output* when all conditions evaluate to False.

Returns **output** : ndarray

The output at position m is the m-th element of the array in *choicelist* where the m-th element of the corresponding array in *condlist* is True.

See also:

where Return elements from one of two arrays depending on condition.

take, *choose*, *compress*, *diag*, *diagonal*

Examples

```
>>> x = np.arange(10)
>>> condlist = [x<3, x>5]
>>> choicelist = [x, x**2]
>>> np.select(condlist, choicelist)
array([ 0,  1,  2,  0,  0,  0, 36, 49, 64, 81])
```

numpy.lib.stride_tricks.**as_strided**(*x*, *shape=None*, *strides=None*, *subok=False*, *writeable=True*)

Create a view into the array with the given shape and strides.

Warning: This function has to be used with extreme care, see notes.

Parameters **x** : ndarray

Array to create a new.

shape : sequence of int, optional

The shape of the new array. Defaults to `x.shape`.

strides : sequence of int, optional

The strides of the new array. Defaults to `x.strides`.

subok : bool, optional

New in version 1.10.

If True, subclasses are preserved.

writeable : bool, optional

New in version 1.12.

If set to False, the returned array will always be readonly. Otherwise it will be writable if the original array was. It is advisable to set this to False if possible (see Notes).

Returns **view** : ndarray

See also:

broadcast_to broadcast an array to a given shape.

reshape reshape an array.

Notes

`as_strided` creates a view into the array given the exact strides and shape. This means it manipulates the internal data structure of ndarray and, if done incorrectly, the array elements can point to invalid memory and can corrupt results or crash your program. It is advisable to always use the original `x.strides` when calculating new strides to avoid reliance on a contiguous memory layout.

Furthermore, arrays created with this function often contain self overlapping memory, so that two elements are identical. Vectorized write operations on such arrays will typically be unpredictable. They may even give

different results for small, large, or transposed arrays. Since writing to these arrays has to be tested and done with great care, you may want to use `writeable=False` to avoid accidental write operations.

For these reasons it is advisable to avoid `as_strided` when possible.

3.15.3 Inserting data into arrays

place(arr, mask, vals)	Change elements of an array based on conditional and input values.
put(a, ind, v[, mode])	Replaces specified elements of an array with given values.
putmask(a, mask, values)	Changes elements of an array based on conditional and input values.
fill_diagonal(a, val[, wrap])	Fill the main diagonal of the given array of any dimensionality.

numpy.**place**(*arr*, *mask*, *vals*)

Change elements of an array based on conditional and input values.

Similar to `np.copyto(arr, vals, where=mask)`, the difference is that *place* uses the first N elements of *vals*, where N is the number of True values in *mask*, while *copyto* uses the elements where *mask* is True.

Note that *extract* does the exact opposite of *place*.

Parameters **arr** : ndarray

Array to put data into.

mask : array_like

Boolean mask array. Must have the same size as *a*.

vals : 1-D sequence

Values to put into *a*. Only the first N elements are used, where N is the number of True values in *mask*. If *vals* is smaller than N, it will be repeated, and if elements of *a* are to be masked, this sequence must be non-empty.

See also:

copyto, *put*, *take*, *extract*

Examples

```
>>> arr = np.arange(6).reshape(2, 3)
>>> np.place(arr, arr>2, [44, 55])
>>> arr
array([[ 0,  1,  2],
       [44, 55, 44]])
```

numpy.**put**(*a*, *ind*, *v*, *mode='raise'*)

Replaces specified elements of an array with given values.

The indexing works on the flattened target array. *put* is roughly equivalent to:

```
a.flat[ind] = v
```

Parameters **a** : ndarray

Target array.

ind : array_like

Target indices, interpreted as integers.

v : array_like

Values to place in *a* at target indices. If *v* is shorter than *ind* it will be repeated as necessary.

mode : {'raise', 'wrap', 'clip'}, optional

Specifies how out-of-bounds indices will behave.

- 'raise' – raise an error (default)
- 'wrap' – wrap around
- 'clip' – clip to the range

'clip' mode means that all indices that are too large are replaced by the index that addresses the last element along that axis. Note that this disables indexing with negative numbers.

See also:

putmask, *place*

Examples

```
>>> a = np.arange(5)
>>> np.put(a, [0, 2], [-44, -55])
>>> a
array([-44,   1, -55,   3,   4])
```

```
>>> a = np.arange(5)
>>> np.put(a, 22, -5, mode='clip')
>>> a
array([ 0,  1,  2,  3, -5])
```

numpy.**putmask**(*a*, *mask*, *values*)

Changes elements of an array based on conditional and input values.

Sets `a.flat[n] = values[n]` for each n where `mask.flat[n]==True`.

If *values* is not the same size as *a* and *mask* then it will repeat. This gives behavior different from `a[mask] = values`.

Parameters **a** : array_like

Target array.

mask : array_like

Boolean mask array. It has to be the same shape as *a*.

values : array_like

Values to put into *a* where *mask* is True. If *values* is smaller than *a* it will be repeated.

See also:

place, *put*, *take*, *copyto*

Examples

```
>>> x = np.arange(6).reshape(2, 3)
>>> np.putmask(x, x>2, x**2)
>>> x
array([[ 0,  1,  2],
       [ 9, 16, 25]])
```

If *values* is smaller than *a* it is repeated:

```
>>> x = np.arange(5)
>>> np.putmask(x, x>1, [-33, -44])
>>> x
array([  0,   1, -33, -44, -33])
```

numpy.**fill_diagonal**(*a*, *val*, *wrap=False*)

Fill the main diagonal of the given array of any dimensionality.

For an array *a* with `a.ndim >= 2`, the diagonal is the list of locations with indices `a[i, ..., i]` all identical. This function modifies the input array in-place, it does not return a value.

Parameters **a** : array, at least 2-D.

Array whose diagonal is to be filled, it gets modified in-place.

val : scalar

Value to be written on the diagonal, its type must be compatible with that of the array a.

wrap : bool

For tall matrices in NumPy version up to 1.6.2, the diagonal "wrapped" after N columns. You can have this behavior with this option. This affects only tall matrices.

See also:

diag_indices, *diag_indices_from*

Notes

New in version 1.4.0.

This functionality can be obtained via *diag_indices*, but internally this version uses a much faster implementation that never constructs the indices and uses simple slicing.

Examples

```
>>> a = np.zeros((3, 3), int)
>>> np.fill_diagonal(a, 5)
>>> a
array([[5, 0, 0],
       [0, 5, 0],
       [0, 0, 5]])
```

The same function can operate on a 4-D array:

```
>>> a = np.zeros((3, 3, 3, 3), int)
>>> np.fill_diagonal(a, 4)
```

We only show a few blocks for clarity:

```
>>> a[0, 0]
array([[4, 0, 0],
       [0, 0, 0],
       [0, 0, 0]])
>>> a[1, 1]
array([[0, 0, 0],
       [0, 4, 0],
       [0, 0, 0]])
>>> a[2, 2]
array([[0, 0, 0],
       [0, 0, 0],
       [0, 0, 4]])
```

The wrap option affects only tall matrices:

```
>>> # tall matrices no wrap
>>> a = np.zeros((5, 3),int)
>>> fill_diagonal(a, 4)
>>> a
array([[4, 0, 0],
       [0, 4, 0],
       [0, 0, 4],
       [0, 0, 0],
       [0, 0, 0]])
```

```
>>> # tall matrices wrap
>>> a = np.zeros((5, 3),int)
>>> fill_diagonal(a, 4, wrap=True)
>>> a
array([[4, 0, 0],
       [0, 4, 0],
       [0, 0, 4],
       [0, 0, 0],
       [4, 0, 0]])
```

```
>>> # wide matrices
>>> a = np.zeros((3, 5),int)
>>> fill_diagonal(a, 4, wrap=True)
>>> a
array([[4, 0, 0, 0, 0],
       [0, 4, 0, 0, 0],
       [0, 0, 4, 0, 0]])
```

3.15.4 Iterating over arrays

nditer	Efficient multi-dimensional iterator object to iterate over arrays.

Continued on next page

Table 53 – continued from previous page

ndenumerate(arr)	Multidimensional index iterator.
ndindex(*shape)	An N-dimensional iterator object to index arrays.
flatiter	Flat iterator object to iterate over arrays.
lib.Arrayterator(var[, buf_size])	Buffered iterator for big arrays.

class numpy.**nditer**

Efficient multi-dimensional iterator object to iterate over arrays. To get started using this object, see the *introductory guide to array iteration*.

Parameters **op** : ndarray or sequence of array_like

The array(s) to iterate over.

flags : sequence of str, optional

Flags to control the behavior of the iterator.

- "buffered" enables buffering when required.
- "c_index" causes a C-order index to be tracked.
- "f_index" causes a Fortran-order index to be tracked.
- "multi_index" causes a multi-index, or a tuple of indices with one per iteration dimension, to be tracked.
- "common_dtype" causes all the operands to be converted to a common data type, with copying or buffering as necessary.
- "copy_if_overlap" causes the iterator to determine if read operands have overlap with write operands, and make temporary copies as necessary to avoid overlap. False positives (needless copying) are possible in some cases.
- "delay_bufalloc" delays allocation of the buffers until a reset() call is made. Allows "allocate" operands to be initialized before their values are copied into the buffers.
- "external_loop" causes the *values* given to be one-dimensional arrays with multiple values instead of zero-dimensional arrays.
- "grow_inner" allows the `value` array sizes to be made larger than the buffer size when both "buffered" and "external_loop" is used.
- "ranged" allows the iterator to be restricted to a sub-range of the iterindex values.
- "refs_ok" enables iteration of reference types, such as object arrays.
- "reduce_ok" enables iteration of "readwrite" operands which are broadcasted, also known as reduction operands.
- "zerosize_ok" allows `itersize` to be zero.

op_flags : list of list of str, optional

This is a list of flags for each operand. At minimum, one of "readonly", "readwrite", or "writeonly" must be specified.

- "readonly" indicates the operand will only be read from.
- "readwrite" indicates the operand will be read from and written to.
- "writeonly" indicates the operand will only be written to.
- "no_broadcast" prevents the operand from being broadcasted.
- "contig" forces the operand data to be contiguous.

- "aligned" forces the operand data to be aligned.
- "nbo" forces the operand data to be in native byte order.
- "copy" allows a temporary read-only copy if required.
- "updateifcopy" allows a temporary read-write copy if required.
- "allocate" causes the array to be allocated if it is None in the *op* parameter.
- "no_subtype" prevents an "allocate" operand from using a subtype.
- "arraymask" indicates that this operand is the mask to use for selecting elements when writing to operands with the 'writemasked' flag set. The iterator does not enforce this, but when writing from a buffer back to the array, it only copies those elements indicated by this mask.
- 'writemasked' indicates that only elements where the chosen 'arraymask' operand is True will be written to.
- "overlap_assume_elementwise" can be used to mark operands that are accessed only in the iterator order, to allow less conservative copying when "copy_if_overlap" is present.

op_dtypes : dtype or tuple of dtype(s), optional

The required data type(s) of the operands. If copying or buffering is enabled, the data will be converted to/from their original types.

order : {'C', 'F', 'A', 'K'}, optional

Controls the iteration order. 'C' means C order, 'F' means Fortran order, 'A' means 'F' order if all the arrays are Fortran contiguous, 'C' order otherwise, and 'K' means as close to the order the array elements appear in memory as possible. This also affects the element memory order of "allocate" operands, as they are allocated to be compatible with iteration order. Default is 'K'.

casting : {'no', 'equiv', 'safe', 'same_kind', 'unsafe'}, optional

Controls what kind of data casting may occur when making a copy or buffering. Setting this to 'unsafe' is not recommended, as it can adversely affect accumulations.

- 'no' means the data types should not be cast at all.
- 'equiv' means only byte-order changes are allowed.
- 'safe' means only casts which can preserve values are allowed.
- 'same_kind' means only safe casts or casts within a kind, like float64 to float32, are allowed.
- 'unsafe' means any data conversions may be done.

op_axes : list of list of ints, optional

If provided, is a list of ints or None for each operands. The list of axes for an operand is a mapping from the dimensions of the iterator to the dimensions of the operand. A value of -1 can be placed for entries, causing that dimension to be treated as "newaxis".

itershape : tuple of ints, optional

The desired shape of the iterator. This allows "allocate" operands with a dimension mapped by op_axes not corresponding to a dimension of a different operand to get a value not equal to 1 for that dimension.

buffersize : int, optional

When buffering is enabled, controls the size of the temporary buffers. Set to 0 for the default value.

Notes

nditer supersedes *flatiter*. The iterator implementation behind *nditer* is also exposed by the NumPy C API.

The Python exposure supplies two iteration interfaces, one which follows the Python iterator protocol, and another which mirrors the C-style do-while pattern. The native Python approach is better in most cases, but if you need the iterator's coordinates or index, use the C-style pattern.

Examples

Here is how we might write an `iter_add` function, using the Python iterator protocol:

```
def iter_add_py(x, y, out=None):
    addop = np.add
    it = np.nditer([x, y, out], [],
                [['readonly'], ['readonly'], ['writeonly','allocate']])
    for (a, b, c) in it:
        addop(a, b, out=c)
    return it.operands[2]
```

Here is the same function, but following the C-style pattern:

```
def iter_add(x, y, out=None):
    addop = np.add

    it = np.nditer([x, y, out], [],
                [['readonly'], ['readonly'], ['writeonly','allocate']])

    while not it.finished:
        addop(it[0], it[1], out=it[2])
        it.iternext()

    return it.operands[2]
```

Here is an example outer product function:

```
def outer_it(x, y, out=None):
    mulop = np.multiply

    it = np.nditer([x, y, out], ['external_loop'],
            [['readonly'], ['readonly'], ['writeonly', 'allocate']],
            op_axes=[range(x.ndim)+[-1]*y.ndim,
                     [-1]*x.ndim+range(y.ndim),
                     None])

    for (a, b, c) in it:
        mulop(a, b, out=c)

    return it.operands[2]

>>> a = np.arange(2)+1
```

(continues on next page)

(continued from previous page)

```
>>> b = np.arange(3)+1
>>> outer_it(a,b)
array([[1, 2, 3],
       [2, 4, 6]])
```

Here is an example function which operates like a "lambda" ufunc:

```
def luf(lamdaexpr, *args, **kwargs):
    "luf(lambdaexpr, op1, ..., opn, out=None, order='K', casting='safe',␣
↪buffersize=0)"
    nargs = len(args)
    op = (kwargs.get('out',None),) + args
    it = np.nditer(op, ['buffered','external_loop'],
            [['writeonly','allocate','no_broadcast']] +
                            [['readonly','nbo','aligned']]*nargs,
            order=kwargs.get('order','K'),
            casting=kwargs.get('casting','safe'),
            buffersize=kwargs.get('buffersize',0))
    while not it.finished:
        it[0] = lamdaexpr(*it[1:])
        it.iternext()
    return it.operands[0]

>>> a = np.arange(5)
>>> b = np.ones(5)
>>> luf(lambda i,j:i*i + j/2, a, b)
array([  0.5,   1.5,   4.5,   9.5,  16.5])
```

Attributes

dtypes	(tuple of dtype(s)) The data types of the values provided in `value`. This may be different from the operand data types if buffering is enabled.
finished	(bool) Whether the iteration over the operands is finished or not.
has_delayed_bufalloc	(bool) If True, the iterator was created with the "delay_bufalloc" flag, and no reset() function was called on it yet.
has_index	(bool) If True, the iterator was created with either the "c_index" or the "f_index" flag, and the property `index` can be used to retrieve it.
has_multi_index	(bool) If True, the iterator was created with the "multi_index" flag, and the property `multi_index` can be used to retrieve it.
index	When the "c_index" or "f_index" flag was used, this property provides access to the index. Raises a ValueError if accessed and `has_index` is False.
iterationneedsapi	(bool) Whether iteration requires access to the Python API, for example if one of the operands is an object array.
iterindex	(int) An index which matches the order of iteration.
itersize	(int) Size of the iterator.
itviews	Structured view(s) of `operands` in memory, matching the reordered and optimized iterator access pattern.
multi_index	When the "multi_index" flag was used, this property provides access to the index. Raises a ValueError if accessed accessed and `has_multi_index` is False.
ndim	(int) The iterator's dimension.
nop	(int) The number of iterator operands.
operands	(tuple of operand(s)) The array(s) to be iterated over.
shape	(tuple of ints) Shape tuple, the shape of the iterator.
value	Value of `operands` at current iteration. Normally, this is a tuple of array scalars, but if the flag "external_loop" is used, it is a tuple of one dimensional arrays.

Methods

copy()	Get a copy of the iterator in its current state.
debug_print()	Print the current state of the *nditer* instance and debug info to stdout.
enable_external_loop()	When the "external_loop" was not used during construction, but is desired, this modifies the iterator to behave as if the flag was specified.
iternext()	Check whether iterations are left, and perform a single internal iteration without returning the result.
remove_axis(i)	Removes axis *i* from the iterator.
remove_multi_index()	When the "multi_index" flag was specified, this removes it, allowing the internal iteration structure to be optimized further.
reset()	Reset the iterator to its initial state.

nditer.**copy**()
Get a copy of the iterator in its current state.

Examples

```
>>> x = np.arange(10)
>>> y = x + 1
>>> it = np.nditer([x, y])
>>> it.next()
(array(0), array(1))
>>> it2 = it.copy()
>>> it2.next()
(array(1), array(2))
```

nditer.**debug_print**()
Print the current state of the *nditer* instance and debug info to stdout.

nditer.**enable_external_loop**()
When the "external_loop" was not used during construction, but is desired, this modifies the iterator to behave as if the flag was specified.

nditer.**iternext**()
Check whether iterations are left, and perform a single internal iteration without returning the result. Used in the C-style pattern do-while pattern. For an example, see *nditer*.

Returns **iternext** : bool

Whether or not there are iterations left.

nditer.**remove_axis**(*i*)
Removes axis *i* from the iterator. Requires that the flag "multi_index" be enabled.

nditer.**remove_multi_index**()
When the "multi_index" flag was specified, this removes it, allowing the internal iteration structure to be optimized further.

nditer.**reset**()
Reset the iterator to its initial state.

class numpy.**ndindex**(**shape*)
An N-dimensional iterator object to index arrays.

Given the shape of an array, an *ndindex* instance iterates over the N-dimensional index of the array. At each iteration a tuple of indices is returned, the last dimension is iterated over first.

Parameters **'*args'** : ints

The size of each dimension of the array.

See also:

ndenumerate, *flatiter*

Examples

```
>>> for index in np.ndindex(3, 2, 1):
...     print(index)
(0, 0, 0)
(0, 1, 0)
(1, 0, 0)
(1, 1, 0)
```

(continues on next page)

(continued from previous page)

```
(2, 0, 0)
(2, 1, 0)
```

Methods

ndincr()	Increment the multi-dimensional index by one.
next()	Standard iterator method, updates the index and returns the index tuple.

ndindex.**ndincr**()
Increment the multi-dimensional index by one.

This method is for backward compatibility only: do not use.

ndindex.**next**()
Standard iterator method, updates the index and returns the index tuple.

Returns **val** : tuple of ints

Returns a tuple containing the indices of the current iteration.

class numpy.**flatiter**
Flat iterator object to iterate over arrays.

A *flatiter* iterator is returned by `x.flat` for any array *x*. It allows iterating over the array as if it were a 1-D array, either in a for-loop or by calling its *next* method.

Iteration is done in row-major, C-style order (the last index varying the fastest). The iterator can also be indexed using basic slicing or advanced indexing.

See also:

ndarray.flat Return a flat iterator over an array.

ndarray.flatten Returns a flattened copy of an array.

Notes

A *flatiter* iterator can not be constructed directly from Python code by calling the *flatiter* constructor.

Examples

```
>>> x = np.arange(6).reshape(2, 3)
>>> fl = x.flat
>>> type(fl)
<type 'numpy.flatiter'>
>>> for item in fl:
...     print(item)
...
0
1
2
3
```

(continues on next page)

(continued from previous page)

```
4
5
```

```
>>> fl[2:4]
array([2, 3])
```

Attributes

coords	An N-dimensional tuple of current coordinates.

`flatiter.`**`coords`**
An N-dimensional tuple of current coordinates.

Examples

```
>>> x = np.arange(6).reshape(2, 3)
>>> fl = x.flat
>>> fl.coords
(0, 0)
>>> fl.next()
0
>>> fl.coords
(0, 1)
```

Methods

copy()	Get a copy of the iterator as a 1-D array.

`flatiter.`**`copy`**`()`
Get a copy of the iterator as a 1-D array.

Examples

```
>>> x = np.arange(6).reshape(2, 3)
>>> x
array([[0, 1, 2],
       [3, 4, 5]])
>>> fl = x.flat
>>> fl.copy()
array([0, 1, 2, 3, 4, 5])
```

`class` `numpy.lib.`**`Arrayterator`**(*var*, *buf_size=None*)
Buffered iterator for big arrays.

Arrayterator creates a buffered iterator for reading big arrays in small contiguous blocks. The class is useful for objects stored in the file system. It allows iteration over the object *without* reading everything in memory; instead, small blocks are read and iterated over.

Arrayterator can be used with any object that supports multidimensional slices. This includes NumPy arrays, but also variables from Scientific.IO.NetCDF or pynetcdf for example.

Parameters **var** : array_like

The object to iterate over.

buf_size : int, optional

The buffer size. If *buf_size* is supplied, the maximum amount of data that will be read into memory is *buf_size* elements. Default is None, which will read as many element as possible into memory.

See also:

ndenumerate Multidimensional array iterator.

flatiter Flat array iterator.

memmap Create a memory-map to an array stored in a binary file on disk.

Notes

The algorithm works by first finding a "running dimension", along which the blocks will be extracted. Given an array of dimensions `(d1, d2, ..., dn)`, e.g. if *buf_size* is smaller than `d1`, the first dimension will be used. If, on the other hand, `d1 < buf_size < d1*d2` the second dimension will be used, and so on. Blocks are extracted along this dimension, and when the last block is returned the process continues from the next dimension, until all elements have been read.

Examples

```
>>> a = np.arange(3 * 4 * 5 * 6).reshape(3, 4, 5, 6)
>>> a_itor = np.lib.Arrayterator(a, 2)
>>> a_itor.shape
(3, 4, 5, 6)
```

Now we can iterate over `a_itor`, and it will return arrays of size two. Since *buf_size* was smaller than any dimension, the first dimension will be iterated over first:

```
>>> for subarr in a_itor:
...     if not subarr.all():
...         print(subarr, subarr.shape)
...
[[[[0 1]]]] (1, 1, 1, 2)
```

Attributes

shape	The shape of the array to be iterated over.
flat	A 1-D flat iterator for Arrayterator objects.

Arrayterator.**shape**
The shape of the array to be iterated over.

For an example, see *Arrayterator*.

Arrayterator.**flat**
A 1-D flat iterator for Arrayterator objects.

This iterator returns elements of the array to be iterated over in *Arrayterator* one by one. It is similar to *flatiter*.

See also:

Arrayterator, flatiter

Examples

```
>>> a = np.arange(3 * 4 * 5 * 6).reshape(3, 4, 5, 6)
>>> a_itor = np.lib.Arrayterator(a, 2)
```

```
>>> for subarr in a_itor.flat:
...     if not subarr:
...         print(subarr, type(subarr))
...
0 <type 'numpy.int32'>
```

var	
buf_size	
start	
stop	
step	

3.16 Input and output

3.16.1 NumPy binary files (NPY, NPZ)

load(file[, mmap_mode, allow_pickle, ...])	Load arrays or pickled objects from .npy, .npz or pickled files.
save(file, arr[, allow_pickle, fix_imports])	Save an array to a binary file in NumPy .npy format.
savez(file, *args, **kwds)	Save several arrays into a single file in uncompressed .npz format.
savez_compressed(file, *args, **kwds)	Save several arrays into a single file in compressed .npz format.

numpy.**load**(*file*, *mmap_mode=None*, *allow_pickle=True*, *fix_imports=True*, *encoding='ASCII'*)
Load arrays or pickled objects from .npy, .npz or pickled files.

Parameters **file** : file-like object, string, or pathlib.Path

The file to read. File-like objects must support the seek() and read() methods. Pickled files require that the file-like object support the readline() method as well.

mmap_mode : {None, 'r+', 'r', 'w+', 'c'}, optional

If not None, then memory-map the file, using the given mode (see *numpy.memmap* for a detailed description of the modes). A memory-mapped array is kept on disk. However, it can be accessed and sliced like any ndarray. Memory mapping is especially useful for

accessing small fragments of large files without reading the entire file into memory.

allow_pickle : bool, optional

Allow loading pickled object arrays stored in npy files. Reasons for disallowing pickles include security, as loading pickled data can execute arbitrary code. If pickles are disallowed, loading object arrays will fail. Default: True

fix_imports : bool, optional

Only useful when loading Python 2 generated pickled files on Python 3, which includes npy/npz files containing object arrays. If *fix_imports* is True, pickle will try to map the old Python 2 names to the new names used in Python 3.

encoding : str, optional

What encoding to use when reading Python 2 strings. Only useful when loading Python 2 generated pickled files in Python 3, which includes npy/npz files containing object arrays. Values other than 'latin1', 'ASCII', and 'bytes' are not allowed, as they can corrupt numerical data. Default: 'ASCII'

Returns **result** : array, tuple, dict, etc.

Data stored in the file. For `.npz` files, the returned instance of NpzFile class must be closed to avoid leaking file descriptors.

Raises **IOError**

If the input file does not exist or cannot be read.

ValueError

The file contains an object array, but allow_pickle=False given.

See also:

save, *savez*, *savez_compressed*, *loadtxt*

memmap Create a memory-map to an array stored in a file on disk.

`lib.format.open_memmap` Create or load a memory-mapped `.npy` file.

Notes

- If the file contains pickle data, then whatever object is stored in the pickle is returned.
- If the file is a `.npy` file, then a single array is returned.
- If the file is a `.npz` file, then a dictionary-like object is returned, containing `{filename: array}` key-value pairs, one for each file in the archive.
- If the file is a `.npz` file, the returned value supports the context manager protocol in a similar fashion to the open function:

```
with load('foo.npz') as data:
    a = data['a']
```

The underlying file descriptor is closed when exiting the 'with' block.

Examples

Store data to disk, and load it again:

```
>>> np.save('/tmp/123', np.array([[1, 2, 3], [4, 5, 6]]))
>>> np.load('/tmp/123.npy')
array([[1, 2, 3],
       [4, 5, 6]])
```

Store compressed data to disk, and load it again:

```
>>> a=np.array([[1, 2, 3], [4, 5, 6]])
>>> b=np.array([1, 2])
>>> np.savez('/tmp/123.npz', a=a, b=b)
>>> data = np.load('/tmp/123.npz')
>>> data['a']
array([[1, 2, 3],
       [4, 5, 6]])
>>> data['b']
array([1, 2])
>>> data.close()
```

Mem-map the stored array, and then access the second row directly from disk:

```
>>> X = np.load('/tmp/123.npy', mmap_mode='r')
>>> X[1, :]
memmap([4, 5, 6])
```

numpy.**save** (*file*, *arr*, *allow_pickle=True*, *fix_imports=True*)

Save an array to a binary file in NumPy `.npy` format.

Parameters **file** : file, str, or pathlib.Path

File or filename to which the data is saved. If file is a file-object, then the filename is unchanged. If file is a string or Path, a `.npy` extension will be appended to the file name if it does not already have one.

arr : array_like

Array data to be saved.

allow_pickle : bool, optional

Allow saving object arrays using Python pickles. Reasons for disallowing pickles include security (loading pickled data can execute arbitrary code) and portability (pickled objects may not be loadable on different Python installations, for example if the stored objects require libraries that are not available, and not all pickled data is compatible between Python 2 and Python 3). Default: True

fix_imports : bool, optional

Only useful in forcing objects in object arrays on Python 3 to be pickled in a Python 2 compatible way. If *fix_imports* is True, pickle will try to map the new Python 3 names to the old module names used in Python 2, so that the pickle data stream is readable with Python 2.

See also:

savez Save several arrays into a `.npz` archive

savetxt, *load*

Notes

For a description of the `.npy` format, see the module docstring of `numpy.lib.format` or the NumPy Enhancement Proposal http://docs.scipy.org/doc/numpy/neps/npy-format.html

Examples

```
>>> from tempfile import TemporaryFile
>>> outfile = TemporaryFile()
```

```
>>> x = np.arange(10)
>>> np.save(outfile, x)
```

```
>>> outfile.seek(0) # Only needed here to simulate closing & reopening file
>>> np.load(outfile)
array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
```

numpy.**savez**(*file*, **args*, ***kwds*)

Save several arrays into a single file in uncompressed `.npz` format.

If arguments are passed in with no keywords, the corresponding variable names, in the `.npz` file, are 'arr_0', 'arr_1', etc. If keyword arguments are given, the corresponding variable names, in the `.npz` file will match the keyword names.

Parameters **file** : str or file

Either the file name (string) or an open file (file-like object) where the data will be saved. If file is a string or a Path, the `.npz` extension will be appended to the file name if it is not already there.

args : Arguments, optional

Arrays to save to the file. Since it is not possible for Python to know the names of the arrays outside *savez*, the arrays will be saved with names "arr_0", "arr_1", and so on. These arguments can be any expression.

kwds : Keyword arguments, optional

Arrays to save to the file. Arrays will be saved in the file with the keyword names.

Returns None

See also:

save Save a single array to a binary file in NumPy format.

savetxt Save an array to a file as plain text.

savez_compressed Save several arrays into a compressed `.npz` archive

Notes

The `.npz` file format is a zipped archive of files named after the variables they contain. The archive is not compressed and each file in the archive contains one variable in `.npy` format. For a description of the `.npy` for-

mat, see `numpy.lib.format` or the NumPy Enhancement Proposal http://docs.scipy.org/doc/numpy/neps/npy-format.html

When opening the saved `.npz` file with *load* a *NpzFile* object is returned. This is a dictionary-like object which can be queried for its list of arrays (with the `.files` attribute), and for the arrays themselves.

Examples

```
>>> from tempfile import TemporaryFile
>>> outfile = TemporaryFile()
>>> x = np.arange(10)
>>> y = np.sin(x)
```

Using *savez* with *args, the arrays are saved with default names.

```
>>> np.savez(outfile, x, y)
>>> outfile.seek(0) # Only needed here to simulate closing & reopening file
>>> npzfile = np.load(outfile)
>>> npzfile.files
['arr_1', 'arr_0']
>>> npzfile['arr_0']
array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
```

Using *savez* with **kwds, the arrays are saved with the keyword names.

```
>>> outfile = TemporaryFile()
>>> np.savez(outfile, x=x, y=y)
>>> outfile.seek(0)
>>> npzfile = np.load(outfile)
>>> npzfile.files
['y', 'x']
>>> npzfile['x']
array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
```

numpy.**savez_compressed**(*file*, **args*, ***kwds*)

Save several arrays into a single file in compressed `.npz` format.

If keyword arguments are given, then filenames are taken from the keywords. If arguments are passed in with no keywords, then stored file names are arr_0, arr_1, etc.

Parameters **file** : str or file

Either the file name (string) or an open file (file-like object) where the data will be saved. If file is a string or a Path, the `.npz` extension will be appended to the file name if it is not already there.

args : Arguments, optional

Arrays to save to the file. Since it is not possible for Python to know the names of the arrays outside *savez*, the arrays will be saved with names "arr_0", "arr_1", and so on. These arguments can be any expression.

kwds : Keyword arguments, optional

Arrays to save to the file. Arrays will be saved in the file with the keyword names.

Returns None

See also:

numpy.save Save a single array to a binary file in NumPy format.

numpy.savetxt Save an array to a file as plain text.

numpy.savez Save several arrays into an uncompressed `.npz` file format

numpy.load Load the files created by savez_compressed.

Notes

The `.npz` file format is a zipped archive of files named after the variables they contain. The archive is compressed with `zipfile.ZIP_DEFLATED` and each file in the archive contains one variable in `.npy` format. For a description of the `.npy` format, see `numpy.lib.format` or the NumPy Enhancement Proposal http://docs.scipy.org/doc/numpy/neps/npy-format.html

When opening the saved `.npz` file with *load* a *NpzFile* object is returned. This is a dictionary-like object which can be queried for its list of arrays (with the `.files` attribute), and for the arrays themselves.

Examples

```
>>> test_array = np.random.rand(3, 2)
>>> test_vector = np.random.rand(4)
>>> np.savez_compressed('/tmp/123', a=test_array, b=test_vector)
>>> loaded = np.load('/tmp/123.npz')
>>> print(np.array_equal(test_array, loaded['a']))
True
>>> print(np.array_equal(test_vector, loaded['b']))
True
```

The format of these binary file types is documented in http://docs.scipy.org/doc/numpy/neps/npy-format.html

3.16.2 Text files

loadtxt(fname[, dtype, comments, delimiter, ...])	Load data from a text file.
savetxt(fname, X[, fmt, delimiter, newline, ...])	Save an array to a text file.
genfromtxt(fname[, dtype, comments, ...])	Load data from a text file, with missing values handled as specified.
fromregex(file, regexp, dtype[, encoding])	Construct an array from a text file, using regular expression parsing.
fromstring(string[, dtype, count, sep])	A new 1-D array initialized from text data in a string.
ndarray.tofile(fid[, sep, format])	Write array to a file as text or binary (default).
ndarray.tolist()	Return the array as a (possibly nested) list.

numpy.**savetxt**(*fname*, *X*, *fmt='%.18e'*, *delimiter=' '*, *newline='\n'*, *header=''*, *footer=''*, *comments='# '*, *encoding=None*)

Save an array to a text file.

Parameters **fname** : filename or file handle

If the filename ends in `.gz`, the file is automatically saved in compressed gzip format. *loadtxt* understands gzipped files transparently.

X : 1D or 2D array_like

Data to be saved to a text file.

fmt : str or sequence of strs, optional

A single format (%10.5f), a sequence of formats, or a multi-format string, e.g. 'Iteration %d – %10.5f', in which case *delimiter* is ignored. For complex *X*, the legal options for *fmt* are:

1. a single specifier, *fmt='%.4e'*, resulting in numbers formatted like *' (%s+%sj)' % (fmt, fmt)*
2. a full string specifying every real and imaginary part, e.g. *' %.4e %+.4ej %.4e %+.4ej %.4e %+.4ej'* for 3 columns
3. a list of specifiers, one per column - in this case, the real and imaginary part must have separate specifiers, e.g. *['%.3e + %.3ej', '(%.15e%+.15ej)']* for 2 columns

delimiter : str, optional

String or character separating columns.

newline : str, optional

String or character separating lines.

New in version 1.5.0.

header : str, optional

String that will be written at the beginning of the file.

New in version 1.7.0.

footer : str, optional

String that will be written at the end of the file.

New in version 1.7.0.

comments : str, optional

String that will be prepended to the `header` and `footer` strings, to mark them as comments. Default: '# ', as expected by e.g. `numpy.loadtxt`.

New in version 1.7.0.

encoding : {None, str}, optional

Encoding used to encode the outputfile. Does not apply to output streams. If the encoding is something other than 'bytes' or 'latin1' you will not be able to load the file in NumPy versions < 1.14. Default is 'latin1'.

New in version 1.14.0.

See also:

save Save an array to a binary file in NumPy `.npy` format

savez Save several arrays into an uncompressed `.npz` archive

savez_compressed Save several arrays into a compressed `.npz` archive

Notes

Further explanation of the *fmt* parameter (`%[flag]width[.precision]specifier`):

flags: `-` : left justify

`+` : Forces to precede result with + or -.

`0` : Left pad the number with zeros instead of space (see width).

width: Minimum number of characters to be printed. The value is not truncated if it has more characters.

precision:

- For integer specifiers (eg. `d,i,o,x`), the minimum number of digits.
- For `e, E` and `f` specifiers, the number of digits to print after the decimal point.
- For `g` and `G`, the maximum number of significant digits.
- For `s`, the maximum number of characters.

specifiers: `c` : character

`d` or `i` : signed decimal integer

`e` or `E` : scientific notation with `e` or `E`.

`f` : decimal floating point

`g,G` : use the shorter of `e,E` or `f`

`o` : signed octal

`s` : string of characters

`u` : unsigned decimal integer

`x,X` : unsigned hexadecimal integer

This explanation of `fmt` is not complete, for an exhaustive specification see *[R289]*.

References

[R289]

Examples

```
>>> x = y = z = np.arange(0.0,5.0,1.0)
>>> np.savetxt('test.out', x, delimiter=',')   # X is an array
>>> np.savetxt('test.out', (x,y,z))   # x,y,z equal sized 1D arrays
>>> np.savetxt('test.out', x, fmt='%1.4e')   # use exponential notation
```

numpy.**genfromtxt**(*fname*, *dtype=<class 'float'>*, *comments='#'*, *delimiter=None*, *skip_header=0*, *skip_footer=0*, *converters=None*, *missing_values=None*, *filling_values=None*, *usecols=None*, *names=None*, *excludelist=None*, *deletechars=None*, *replace_space='_'*, *autostrip=False*, *case_sensitive=True*, *defaultfmt='f%i'*, *unpack=None*, *usemask=False*, *loose=True*, *invalid_raise=True*, *max_rows=None*, *encoding='bytes'*)

Load data from a text file, with missing values handled as specified.

Each line past the first *skip_header* lines is split at the *delimiter* character, and characters following the *comments* character are discarded.

Parameters **fname** : file, str, pathlib.Path, list of str, generator

File, filename, list, or generator to read. If the filename extension is *gz* or `bz2`, the file is first decompressed. Note that generators must return byte strings in Python 3k. The strings in a list or produced by a generator are treated as lines.

dtype : dtype, optional

Data type of the resulting array. If None, the dtypes will be determined by the contents of each column, individually.

comments : str, optional

The character used to indicate the start of a comment. All the characters occurring on a line after a comment are discarded

delimiter : str, int, or sequence, optional

The string used to separate values. By default, any consecutive whitespaces act as delimiter. An integer or sequence of integers can also be provided as width(s) of each field.

skiprows : int, optional

skiprows was removed in numpy 1.10. Please use *skip_header* instead.

skip_header : int, optional

The number of lines to skip at the beginning of the file.

skip_footer : int, optional

The number of lines to skip at the end of the file.

converters : variable, optional

The set of functions that convert the data of a column to a value. The converters can also be used to provide a default value for missing data: `converters = {3: lambda s: float(s or 0)}`.

missing : variable, optional

missing was removed in numpy 1.10. Please use *missing_values* instead.

missing_values : variable, optional

The set of strings corresponding to missing data.

filling_values : variable, optional

The set of values to be used as default when the data are missing.

usecols : sequence, optional

Which columns to read, with 0 being the first. For example, `usecols = (1, 4, 5)` will extract the 2nd, 5th and 6th columns.

names : {None, True, str, sequence}, optional

If *names* is True, the field names are read from the first line after the first *skip_header* lines. This line can optionally be proceeded by a comment delimeter. If *names* is a sequence or a single-string of comma-separated names, the names will be used to define the field names in a structured dtype. If *names* is None, the names of the dtype fields will be used, if any.

excludelist : sequence, optional

A list of names to exclude. This list is appended to the default list ['return','file','print']. Excluded names are appended an underscore: for example, *file* would become *file_*.

deletechars : str, optional

A string combining invalid characters that must be deleted from the names.

defaultfmt : str, optional

A format used to define default field names, such as "f%i" or "f_%02i".

autostrip : bool, optional

Whether to automatically strip white spaces from the variables.

replace_space : char, optional

Character(s) used in replacement of white spaces in the variables names. By default, use a '_'.

case_sensitive : {True, False, 'upper', 'lower'}, optional

If True, field names are case sensitive. If False or 'upper', field names are converted to upper case. If 'lower', field names are converted to lower case.

unpack : bool, optional

If True, the returned array is transposed, so that arguments may be unpacked using `x, y, z = loadtxt(...)`

usemask : bool, optional

If True, return a masked array. If False, return a regular array.

loose : bool, optional

If True, do not raise errors for invalid values.

invalid_raise : bool, optional

If True, an exception is raised if an inconsistency is detected in the number of columns. If False, a warning is emitted and the offending lines are skipped.

max_rows : int, optional

The maximum number of rows to read. Must not be used with skip_footer at the same time. If given, the value must be at least 1. Default is to read the entire file.

New in version 1.10.0.

encoding : str, optional

Encoding used to decode the inputfile. Does not apply when *fname* is a file object. The special value 'bytes' enables backward compatibility workarounds that ensure that you receive byte arrays when possible and passes latin1 encoded strings to converters. Override this value to receive unicode arrays and pass strings as input to converters. If set to None the system default is used. The default value is 'bytes'.

New in version 1.14.0.

Returns **out** : ndarray

Data read from the text file. If *usemask* is True, this is a masked array.

See also:

numpy.loadtxt equivalent function when no data is missing.

Notes

- When spaces are used as delimiters, or when no delimiter has been given as input, there should not be any missing data between two fields.
- When the variables are named (either by a flexible dtype or with *names*, there must not be any header in the file (else a ValueError exception is raised).
- Individual values are not stripped of spaces by default. When using a custom converter, make sure the function does remove spaces.

References

[R22]

Examples

```
>>> from io import StringIO
>>> import numpy as np
```

Comma delimited file with mixed dtype

```
>>> s = StringIO("1,1.3,abcde")
>>> data = np.genfromtxt(s, dtype=[('myint','i8'),('myfloat','f8'),
... ('mystring','S5')], delimiter=",")
>>> data
array((1, 1.3, 'abcde'),
      dtype=[('myint', '<i8'), ('myfloat', '<f8'), ('mystring', '|S5')])
```

Using dtype = None

```
>>> s.seek(0) # needed for StringIO example only
>>> data = np.genfromtxt(s, dtype=None,
... names = ['myint','myfloat','mystring'], delimiter=",")
>>> data
array((1, 1.3, 'abcde'),
      dtype=[('myint', '<i8'), ('myfloat', '<f8'), ('mystring', '|S5')])
```

Specifying dtype and names

```
>>> s.seek(0)
>>> data = np.genfromtxt(s, dtype="i8,f8,S5",
... names=['myint','myfloat','mystring'], delimiter=",")
>>> data
array((1, 1.3, 'abcde'),
      dtype=[('myint', '<i8'), ('myfloat', '<f8'), ('mystring', '|S5')])
```

An example with fixed-width columns

```
>>> s = StringIO("11.3abcde")
>>> data = np.genfromtxt(s, dtype=None, names=['intvar','fltvar','strvar'],
...     delimiter=[1,3,5])
>>> data
array((1, 1.3, 'abcde'),
      dtype=[('intvar', '<i8'), ('fltvar', '<f8'), ('strvar', '|S5')])
```

numpy.**fromregex**(*file*, *regexp*, *dtype*, *encoding=None*)

Construct an array from a text file, using regular expression parsing.

The returned array is always a structured array, and is constructed from all matches of the regular expression in the file. Groups in the regular expression are converted to fields of the structured array.

Parameters **file** : str or file

File name or file object to read.

regexp : str or regexp

Regular expression used to parse the file. Groups in the regular expression correspond to fields in the dtype.

dtype : dtype or list of dtypes

Dtype for the structured array.

encoding : str, optional

Encoding used to decode the inputfile. Does not apply to input streams.

New in version 1.14.0.

Returns **output** : ndarray

The output array, containing the part of the content of *file* that was matched by *regexp*. *output* is always a structured array.

Raises **TypeError**

When *dtype* is not a valid dtype for a structured array.

See also:

fromstring, *loadtxt*

Notes

Dtypes for structured arrays can be specified in several forms, but all forms specify at least the data type and field name. For details see `doc.structured_arrays`.

Examples

```
>>> f = open('test.dat', 'w')
>>> f.write("1312 foo\n1534  bar\n444   qux")
>>> f.close()
```

```
>>> regexp = r"(\d+)\s+(...)"  # match [digits, whitespace, anything]
>>> output = np.fromregex('test.dat', regexp,
...                       [('num', np.int64), ('key', 'S3')])
>>> output
array([(1312L, 'foo'), (1534L, 'bar'), (444L, 'qux')],
      dtype=[('num', '<i8'), ('key', '|S3')])
>>> output['num']
array([1312, 1534,  444], dtype=int64)
```

3.16.3 Raw binary files

fromfile(file[, dtype, count, sep])	Construct an array from data in a text or binary file.
ndarray.tofile(fid[, sep, format])	Write array to a file as text or binary (default).

3.16.4 String formatting

array2string(a[, max_line_width, precision, ...])	Return a string representation of an array.
array_repr(arr[, max_line_width, precision, ...])	Return the string representation of an array.
array_str(a[, max_line_width, precision, ...])	Return a string representation of the data in an array.
format_float_positional(x[, precision, ...])	Format a floating-point scalar as a decimal string in positional notation.
format_float_scientific(x[, precision, ...])	Format a floating-point scalar as a decimal string in scientific notation.

numpy.**array2string**(*a*, *max_line_width=None*, *precision=None*, *suppress_small=None*, *separator=' '*, *prefix=''*, *style=<class 'numpy._globals._NoValue'>*, *formatter=None*, *threshold=None*, *edgeitems=None*, *sign=None*, *floatmode=None*, *suffix=''*, ***kwarg*)

Return a string representation of an array.

Parameters **a** : array_like

Input array.

max_line_width : int, optional

The maximum number of columns the string should span. Newline characters splits the string appropriately after array elements.

precision : int or None, optional

Floating point precision. Default is the current printing precision (usually 8), which can be altered using *set_printoptions*.

suppress_small : bool, optional

Represent very small numbers as zero. A number is "very small" if it is smaller than the current printing precision.

separator : str, optional

Inserted between elements.

prefix : str, optional

suffix: str, optional

The length of the prefix and suffix strings are used to respectively align and wrap the output. An array is typically printed as:

```
prefix + array2string(a) + suffix
```

The output is left-padded by the length of the prefix string, and wrapping is forced at the column `max_line_width - len(suffix)`.

style : _NoValue, optional

Has no effect, do not use.

Deprecated since version 1.14.0.

formatter : dict of callables, optional

If not None, the keys should indicate the type(s) that the respective formatting function applies to. Callables should return a string. Types that are not specified (by their corresponding keys) are handled by the default formatters. Individual types for which a formatter can be set are:

```
- 'bool'
- 'int'
- 'timedelta' : a `numpy.timedelta64`
- 'datetime' : a `numpy.datetime64`
- 'float'
- 'longfloat' : 128-bit floats
- 'complexfloat'
- 'longcomplexfloat' : composed of two 128-bit floats
- 'void' : type `numpy.void`
- 'numpystr' : types `numpy.string_` and `numpy.unicode_`
- 'str' : all other strings
```

Other keys that can be used to set a group of types at once are:

```
- 'all' : sets all types
- 'int_kind' : sets 'int'
- 'float_kind' : sets 'float' and 'longfloat'
- 'complex_kind' : sets 'complexfloat' and 'longcomplexfloat'
- 'str_kind' : sets 'str' and 'numpystr'
```

threshold : int, optional

Total number of array elements which trigger summarization rather than full repr.

edgeitems : int, optional

Number of array items in summary at beginning and end of each dimension.

sign : string, either '-', '+', or ' ', optional

Controls printing of the sign of floating-point types. If '+', always print the sign of positive values. If ' ', always prints a space (whitespace character) in the sign position of positive values. If '-', omit the sign character of positive values.

floatmode : str, optional

Controls the interpretation of the *precision* option for floating-point types. Can take the following values:

- **'fixed'** [Always print exactly *precision* fractional digits,] even if this would print more or fewer digits than necessary to specify the value uniquely.
- **'unique** [Print the minimum number of fractional digits necessary] to represent each value uniquely. Different elements may have a different number of digits. The value of the *precision* option is ignored.
- **'maxprec'** [Print at most *precision* fractional digits, but if] an element can be uniquely represented with fewer digits only print it with that many.
- **'maxprec_equal'** [Print at most *precision* fractional digits,] but if every element in the array can be uniquely represented with an equal number of fewer digits, use that many digits for all elements.

legacy : string or *False*, optional

If set to the string *'1.13'* enables 1.13 legacy printing mode. This approximates numpy 1.13 print output by including a space in the sign position of floats and different behavior for 0d arrays. If set to *False*, disables legacy mode. Unrecognized strings will be ignored with a warning for forward compatibility.

New in version 1.14.0.

Returns **array_str** : str

String representation of the array.

Raises **TypeError**

if a callable in `formatter` does not return a string.

See also:

array_str, *array_repr*, *set_printoptions*, *get_printoptions*

Notes

If a formatter is specified for a certain type, the *precision* keyword is ignored for that type.

This is a very flexible function; *array_repr* and *array_str* are using *array2string* internally so keywords with the same name should work identically in all three functions.

Examples

```
>>> x = np.array([1e-16,1,2,3])
>>> print(np.array2string(x, precision=2, separator=',',
...                       suppress_small=True))
[ 0., 1., 2., 3.]
```

```
>>> x  = np.arange(3.)
>>> np.array2string(x, formatter={'float_kind':lambda x: "%.2f" % x})
'[0.00 1.00 2.00]'
```

```
>>> x  = np.arange(3)
>>> np.array2string(x, formatter={'int':lambda x: hex(x)})
'[0x0L 0x1L 0x2L]'
```

numpy.**array_repr**(*arr*, *max_line_width=None*, *precision=None*, *suppress_small=None*)

Return the string representation of an array.

Parameters **arr** : ndarray

Input array.

max_line_width : int, optional

The maximum number of columns the string should span. Newline characters split the string appropriately after array elements.

precision : int, optional

Floating point precision. Default is the current printing precision (usually 8), which can be altered using *set_printoptions*.

suppress_small : bool, optional

Represent very small numbers as zero, default is False. Very small is defined by *precision*, if the precision is 8 then numbers smaller than 5e-9 are represented as zero.

Returns **string** : str

The string representation of an array.

See also:

array_str, *array2string*, *set_printoptions*

Examples

```
>>> np.array_repr(np.array([1,2]))
'array([1, 2])'
>>> np.array_repr(np.ma.array([0.]))
'MaskedArray([ 0.])'
>>> np.array_repr(np.array([], np.int32))
'array([], dtype=int32)'
```

```
>>> x = np.array([1e-6, 4e-7, 2, 3])
>>> np.array_repr(x, precision=6, suppress_small=True)
'array([ 0.000001,  0.      ,  2.      ,  3.      ])'
```

numpy.**array_str**(*a*, *max_line_width=None*, *precision=None*, *suppress_small=None*)

Return a string representation of the data in an array.

The data in the array is returned as a single string. This function is similar to *array_repr*, the difference being that *array_repr* also returns information on the kind of array and its data type.

Parameters **a** : ndarray

Input array.

max_line_width : int, optional

Inserts newlines if text is longer than *max_line_width*. The default is, indirectly, 75.

precision : int, optional

Floating point precision. Default is the current printing precision (usually 8), which can be altered using *set_printoptions*.

suppress_small : bool, optional

Represent numbers "very close" to zero as zero; default is False. Very close is defined by precision: if the precision is 8, e.g., numbers smaller (in absolute value) than 5e-9 are represented as zero.

See also:

array2string, *array_repr*, *set_printoptions*

Examples

```
>>> np.array_str(np.arange(3))
'[0 1 2]'
```

numpy.**format_float_positional**(*x*, *precision=None*, *unique=True*, *fractional=True*, *trim='k'*, *sign=False*, *pad_left=None*, *pad_right=None*)

Format a floating-point scalar as a decimal string in positional notation.

Provides control over rounding, trimming and padding. Uses and assumes IEEE unbiased rounding. Uses the "Dragon4" algorithm.

Parameters **x** : python float or numpy floating scalar

Value to format.

precision : non-negative integer or None, optional

Maximum number of digits to print. May be None if *unique* is *True*, but must be an integer if unique is *False*.

unique : boolean, optional

If *True*, use a digit-generation strategy which gives the shortest representation which uniquely identifies the floating-point number from other values of the same type, by judicious rounding. If *precision* was omitted, print out all necessary digits, otherwise digit generation is cut off after *precision* digits and the remaining value is rounded. If *False*, digits are generated as if printing an infinite-precision value and stopping after *precision* digits, rounding the remaining value.

fractional : boolean, optional

If *True*, the cutoff of *precision* digits refers to the total number of digits after the decimal point, including leading zeros. If *False*, *precision* refers to the total number of significant digits, before or after the decimal point, ignoring leading zeros.

trim : one of 'k', '.', '0', '-', optional

Controls post-processing trimming of trailing digits, as follows: k : keep trailing zeros, keep decimal point (no trimming) . : trim all trailing zeros, leave decimal point 0 : trim all but the zero before the decimal point. Insert the

zero if it is missing.

- : trim trailing zeros and any trailing decimal point

sign : boolean, optional

Whether to show the sign for positive values.

pad_left : non-negative integer, optional

Pad the left side of the string with whitespace until at least that many characters are to the left of the decimal point.

pad_right : non-negative integer, optional

Pad the right side of the string with whitespace until at least that many characters are to the right of the decimal point.

Returns **rep** : string

The string representation of the floating point value

See also:

format_float_scientific

Examples

```
>>> np.format_float_scientific(np.float32(np.pi))
'3.1415927'
>>> np.format_float_positional(np.float16(np.pi))
'3.14'
>>> np.format_float_positional(np.float16(0.3))
'0.3'
>>> np.format_float_positional(np.float16(0.3), unique=False, precision=10)
'0.3000488281'
```

numpy.**format_float_scientific**(*x*, *precision=None*, *unique=True*, *trim='k'*, *sign=False*, *pad_left=None*, *exp_digits=None*)

Format a floating-point scalar as a decimal string in scientific notation.

Provides control over rounding, trimming and padding. Uses and assumes IEEE unbiased rounding. Uses the "Dragon4" algorithm.

Parameters **x** : python float or numpy floating scalar

Value to format.

precision : non-negative integer or None, optional

Maximum number of digits to print. May be None if `unique` is *True*, but must be an integer if unique is *False*.

unique : boolean, optional

If *True*, use a digit-generation strategy which gives the shortest representation which uniquely identifies the floating-point number from other values of the same type, by judicious rounding. If *precision* was omitted, print all necessary digits, otherwise digit generation is cut off after *precision* digits and the remaining value is rounded. If *False*, digits are generated as if printing an infinite-precision value and stopping after *precision* digits, rounding the remaining value.

trim : one of 'k', '.', '0', '-', optional

Controls post-processing trimming of trailing digits, as follows: k : keep trailing zeros, keep decimal point (no trimming) . : trim all trailing zeros, leave decimal point 0 : trim all but the zero before the decimal point. Insert the

zero if it is missing.

- : trim trailing zeros and any trailing decimal point

sign : boolean, optional

Whether to show the sign for positive values.

pad_left : non-negative integer, optional

Pad the left side of the string with whitespace until at least that many characters are to the left of the decimal point.

exp_digits : non-negative integer, optional

Pad the exponent with zeros until it contains at least this many digits. If omitted, the exponent will be at least 2 digits.

Returns **rep** : string

The string representation of the floating point value

See also:

format_float_positional

Examples

```
>>> np.format_float_scientific(np.float32(np.pi))
'3.1415927e+00'
>>> s = np.float32(1.23e24)
>>> np.format_float_scientific(s, unique=False, precision=15)
'1.230000071797338e+24'
>>> np.format_float_scientific(s, exp_digits=4)
'1.23e+0024'
```

3.16.5 Memory mapping files

memmap	Create a memory-map to an array stored in a *binary* file on disk.

3.16.6 Text formatting options

set_printoptions([precision, threshold, ...])	Set printing options.
get_printoptions()	Return the current print options.
set_string_function(f[, repr])	Set a Python function to be used when pretty printing arrays.

numpy.**set_printoptions**(*precision=None*, *threshold=None*, *edgeitems=None*, *linewidth=None*, *suppress=None*, *nanstr=None*, *infstr=None*, *formatter=None*, *sign=None*, *floatmode=None*, ***kwarg*)

Set printing options.

These options determine the way floating point numbers, arrays and other NumPy objects are displayed.

Parameters **precision** : int or None, optional

Number of digits of precision for floating point output (default 8). May be *None* if *floatmode* is not *fixed*, to print as many digits as necessary to uniquely specify the value.

threshold : int, optional

Total number of array elements which trigger summarization rather than full repr (default 1000).

edgeitems : int, optional

Number of array items in summary at beginning and end of each dimension (default 3).

linewidth : int, optional

The number of characters per line for the purpose of inserting line breaks (default 75).

suppress : bool, optional

If True, always print floating point numbers using fixed point notation, in which case numbers equal to zero in the current precision will print as zero. If False, then scientific

notation is used when absolute value of the smallest number is < 1e-4 or the ratio of the maximum absolute value to the minimum is > 1e3. The default is False.

nanstr : str, optional

String representation of floating point not-a-number (default nan).

infstr : str, optional

String representation of floating point infinity (default inf).

sign : string, either '-', '+', or ' ', optional

Controls printing of the sign of floating-point types. If '+', always print the sign of positive values. If ' ', always prints a space (whitespace character) in the sign position of positive values. If '-', omit the sign character of positive values. (default '-')

formatter : dict of callables, optional

If not None, the keys should indicate the type(s) that the respective formatting function applies to. Callables should return a string. Types that are not specified (by their corresponding keys) are handled by the default formatters. Individual types for which a formatter can be set are:

```
- 'bool'
- 'int'
- 'timedelta' : a `numpy.timedelta64`
- 'datetime' : a `numpy.datetime64`
- 'float'
- 'longfloat' : 128-bit floats
- 'complexfloat'
- 'longcomplexfloat' : composed of two 128-bit floats
- 'numpystr' : types `numpy.string_` and `numpy.unicode_`
- 'object' : `np.object_` arrays
- 'str' : all other strings
```

Other keys that can be used to set a group of types at once are:

```
- 'all' : sets all types
- 'int_kind' : sets 'int'
- 'float_kind' : sets 'float' and 'longfloat'
- 'complex_kind' : sets 'complexfloat' and 'longcomplexfloat'
- 'str_kind' : sets 'str' and 'numpystr'
```

floatmode : str, optional

Controls the interpretation of the *precision* option for floating-point types. Can take the following values:

- **'fixed'** [Always print exactly *precision* fractional digits,] even if this would print more or fewer digits than necessary to specify the value uniquely.
- **'unique** [Print the minimum number of fractional digits necessary] to represent each value uniquely. Different elements may have a different number of digits. The value of the *precision* option is ignored.
- **'maxprec'** [Print at most *precision* fractional digits, but if] an element can be uniquely represented with fewer digits only print it with that many.
- **'maxprec_equal'** [Print at most *precision* fractional digits,] but if every element in the array can be uniquely represented with an equal number of fewer digits, use that many digits for all elements.

legacy : string or *False*, optional

If set to the string *'1.13'* enables 1.13 legacy printing mode. This approximates numpy 1.13 print output by including a space in the sign position of floats and different behavior for 0d arrays. If set to *False*, disables legacy mode. Unrecognized strings will be ignored with a warning for forward compatibility.

New in version 1.14.0.

See also:

get_printoptions, *set_string_function*, *array2string*

Notes

`formatter` is always reset with a call to *set_printoptions*.

Examples

Floating point precision can be set:

```
>>> np.set_printoptions(precision=4)
>>> print(np.array([1.123456789]))
[ 1.1235]
```

Long arrays can be summarised:

```
>>> np.set_printoptions(threshold=5)
>>> print(np.arange(10))
[0 1 2 ..., 7 8 9]
```

Small results can be suppressed:

```
>>> eps = np.finfo(float).eps
>>> x = np.arange(4.)
>>> x**2 - (x + eps)**2
array([ -4.9304e-32,  -4.4409e-16,   0.0000e+00,   0.0000e+00])
>>> np.set_printoptions(suppress=True)
>>> x**2 - (x + eps)**2
array([-0., -0.,  0.,  0.])
```

A custom formatter can be used to display array elements as desired:

```
>>> np.set_printoptions(formatter={'all':lambda x: 'int: '+str(-x)})
>>> x = np.arange(3)
>>> x
array([int: 0, int: -1, int: -2])
>>> np.set_printoptions()  # formatter gets reset
>>> x
array([0, 1, 2])
```

To put back the default options, you can use:

```
>>> np.set_printoptions(edgeitems=3,infstr='inf',
... linewidth=75, nanstr='nan', precision=8,
... suppress=False, threshold=1000, formatter=None)
```

numpy.**get_printoptions**()
Return the current print options.

Returns **print_opts** : dict

Dictionary of current print options with keys

- precision : int
- threshold : int
- edgeitems : int
- linewidth : int
- suppress : bool
- nanstr : str
- infstr : str
- formatter : dict of callables
- sign : str

For a full description of these options, see *set_printoptions*.

See also:

set_printoptions, *set_string_function*

numpy.**set_string_function**(*f*, *repr=True*)
Set a Python function to be used when pretty printing arrays.

Parameters **f** : function or None

Function to be used to pretty print arrays. The function should expect a single array argument and return a string of the representation of the array. If None, the function is reset to the default NumPy function to print arrays.

repr : bool, optional

If True (default), the function for pretty printing (__repr__) is set, if False the function that returns the default string representation (__str__) is set.

See also:

set_printoptions, *get_printoptions*

Examples

```
>>> def pprint(arr):
...     return 'HA! - What are you going to do now?'
...
>>> np.set_string_function(pprint)
>>> a = np.arange(10)
>>> a
HA! - What are you going to do now?
>>> print(a)
[0 1 2 3 4 5 6 7 8 9]
```

We can reset the function to the default:

```
>>> np.set_string_function(None)
>>> a
array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
```

repr affects either pretty printing or normal string representation. Note that `__repr__` is still affected by setting `__str__` because the width of each array element in the returned string becomes equal to the length of the result of `__str__()`.

```
>>> x = np.arange(4)
>>> np.set_string_function(lambda x:'random', repr=False)
>>> x.__str__()
'random'
>>> x.__repr__()
'array([     0,      1,      2,      3])'
```

3.16.7 Base-n representations

binary_repr(num[, width])	Return the binary representation of the input number as a string.
base_repr(number[, base, padding])	Return a string representation of a number in the given base system.

numpy.**base_repr**(*number*, *base=2*, *padding=0*)

Return a string representation of a number in the given base system.

Parameters **number** : int

The value to convert. Positive and negative values are handled.

base : int, optional

Convert `number` to the *base* number system. The valid range is 2-36, the default value is 2.

padding : int, optional

Number of zeros padded on the left. Default is 0 (no padding).

Returns **out** : str

String representation of `number` in *base* system.

See also:

binary_repr Faster version of *base_repr* for base 2.

Examples

```
>>> np.base_repr(5)
'101'
>>> np.base_repr(6, 5)
'11'
>>> np.base_repr(7, base=5, padding=3)
'00012'
```

```
>>> np.base_repr(10, base=16)
'A'
>>> np.base_repr(32, base=16)
'20'
```

3.16.8 Data sources

DataSource([destpath])	A generic data source file (file, http, ftp, ...).

class numpy.**DataSource**(*destpath='.'*)

A generic data source file (file, http, ftp, ...).

DataSources can be local files or remote files/URLs. The files may also be compressed or uncompressed. DataSource hides some of the low-level details of downloading the file, allowing you to simply pass in a valid file path (or URL) and obtain a file object.

Parameters **destpath** : str or None, optional

Path to the directory where the source file gets downloaded to for use. If *destpath* is None, a temporary directory will be created. The default path is the current directory.

Notes

URLs require a scheme string (`http://`) to be used, without it they will fail:

```
>>> repos = DataSource()
>>> repos.exists('www.google.com/index.html')
False
>>> repos.exists('http://www.google.com/index.html')
True
```

Temporary directories are deleted when the DataSource is deleted.

Examples

```
>>> ds = DataSource('/home/guido')
>>> urlname = 'http://www.google.com/index.html'
>>> gfile = ds.open('http://www.google.com/index.html')  # remote file
>>> ds.abspath(urlname)
'/home/guido/www.google.com/site/index.html'

>>> ds = DataSource(None)  # use with temporary file
>>> ds.open('/home/guido/foobar.txt')
<open file '/home/guido.foobar.txt', mode 'r' at 0x91d4430>
>>> ds.abspath('/home/guido/foobar.txt')
'/tmp/tmpy4pgsP/home/guido/foobar.txt'
```

Methods

abspath(path)	Return absolute path of file in the DataSource directory.
exists(path)	Test if path exists.
open(path[, mode, encoding, newline])	Open and return file-like object.

DataSource.**abspath**(*path*)

Return absolute path of file in the DataSource directory.

If `path` is an URL, then *abspath* will return either the location the file exists locally or the location it would exist when opened using the *open* method.

Parameters **path** : str

Can be a local file or a remote URL.

Returns **out** : str

Complete path, including the *DataSource* destination directory.

Notes

The functionality is based on `os.path.abspath`.

DataSource.**exists**(*path*)

Test if path exists.

Test if `path` exists as (and in this order):

- a local file.
- a remote URL that has been downloaded and stored locally in the *DataSource* directory.
- a remote URL that has not been downloaded, but is valid and accessible.

Parameters **path** : str

Can be a local file or a remote URL.

Returns **out** : bool

True if `path` exists.

Notes

When `path` is an URL, *exists* will return True if it's either stored locally in the *DataSource* directory, or is a valid remote URL. *DataSource* does not discriminate between the two, the file is accessible if it exists in either location.

DataSource.**open**(*path*, *mode='r'*, *encoding=None*, *newline=None*)

Open and return file-like object.

If `path` is an URL, it will be downloaded, stored in the *DataSource* directory and opened from there.

Parameters **path** : str

Local file path or URL to open.

mode : {'r', 'w', 'a'}, optional

Mode to open `path`. Mode 'r' for reading, 'w' for writing, 'a' to append. Available modes depend on the type of object specified by `path`. Default is 'r'.

encoding : {None, str}, optional

Open text file with given encoding. The default encoding will be what `io.open` uses.

newline : {None, str}, optional

Newline to use when reading text file.

Returns **out** : file object

File object.

3.17 Linear algebra (`numpy.linalg`)

3.17.1 Matrix and vector products

dot(a, b[, out])	Dot product of two arrays.
linalg.multi_dot(arrays)	Compute the dot product of two or more arrays in a single function call, while automatically selecting the fastest evaluation order.
vdot(a, b)	Return the dot product of two vectors.
inner(a, b)	Inner product of two arrays.
outer(a, b[, out])	Compute the outer product of two vectors.
matmul(a, b[, out])	Matrix product of two arrays.
tensordot(a, b[, axes])	Compute tensor dot product along specified axes for arrays >= 1-D.
einsum(subscripts, *operands[, out, dtype, ...])	Evaluates the Einstein summation convention on the operands.
einsum_path(subscripts, *operands[, optimize])	Evaluates the lowest cost contraction order for an einsum expression by considering the creation of intermediate arrays.
linalg.matrix_power(M, n)	Raise a square matrix to the (integer) power *n*.
kron(a, b)	Kronecker product of two arrays.

numpy.**dot**(*a*, *b*, *out=None*)

Dot product of two arrays. Specifically,

- If both *a* and *b* are 1-D arrays, it is inner product of vectors (without complex conjugation).
- If both *a* and *b* are 2-D arrays, it is matrix multiplication, but using *matmul* or `a @ b` is preferred.
- If either *a* or *b* is 0-D (scalar), it is equivalent to *multiply* and using `numpy.multiply(a, b)` or `a * b` is preferred.
- If *a* is an N-D array and *b* is a 1-D array, it is a sum product over the last axis of *a* and *b*.
- If *a* is an N-D array and *b* is an M-D array (where `M>=2`), it is a sum product over the last axis of *a* and the second-to-last axis of *b*:

```
dot(a, b)[i,j,k,m] = sum(a[i,j,:] * b[k,:,m])
```

Parameters **a** : array_like

First argument.

b : array_like

Second argument.

out : ndarray, optional

Output argument. This must have the exact kind that would be returned if it was not used. In particular, it must have the right type, must be C-contiguous, and its dtype must be the dtype that would be returned for *dot(a,b)*. This is a performance feature. Therefore, if these conditions are not met, an exception is raised, instead of attempting to be flexible.

Returns **output** : ndarray

Returns the dot product of *a* and *b*. If *a* and *b* are both scalars or both 1-D arrays then a scalar is returned; otherwise an array is returned. If *out* is given, then it is returned.

Raises **ValueError**

If the last dimension of *a* is not the same size as the second-to-last dimension of *b*.

See also:

vdot Complex-conjugating dot product.

tensordot Sum products over arbitrary axes.

einsum Einstein summation convention.

matmul '@' operator as method with out parameter.

Examples

```
>>> np.dot(3, 4)
12
```

Neither argument is complex-conjugated:

```
>>> np.dot([2j, 3j], [2j, 3j])
(-13+0j)
```

For 2-D arrays it is the matrix product:

```
>>> a = [[1, 0], [0, 1]]
>>> b = [[4, 1], [2, 2]]
>>> np.dot(a, b)
array([[4, 1],
       [2, 2]])
```

```
>>> a = np.arange(3*4*5*6).reshape((3,4,5,6))
>>> b = np.arange(3*4*5*6)[::-1].reshape((5,4,6,3))
>>> np.dot(a, b)[2,3,2,1,2,2]
499128
>>> sum(a[2,3,2,:] * b[1,2,:,2])
499128
```

numpy.linalg.**multi_dot**(*arrays*)

Compute the dot product of two or more arrays in a single function call, while automatically selecting the fastest evaluation order.

multi_dot chains *numpy.dot* and uses optimal parenthesization of the matrices *[R46] [R47]*. Depending on the shapes of the matrices, this can speed up the multiplication a lot.

If the first argument is 1-D it is treated as a row vector. If the last argument is 1-D it is treated as a column vector. The other arguments must be 2-D.

Think of *multi_dot* as:

```
def multi_dot(arrays): return functools.reduce(np.dot, arrays)
```

Parameters **arrays** : sequence of array_like

If the first argument is 1-D it is treated as row vector. If the last argument is 1-D it is treated as column vector. The other arguments must be 2-D.

Returns **output** : ndarray

Returns the dot product of the supplied arrays.

See also:

dot dot multiplication with two arguments.

Notes

The cost for a matrix multiplication can be calculated with the following function:

```
def cost(A, B):
    return A.shape[0] * A.shape[1] * B.shape[1]
```

Let's assume we have three matrices $A_{10x100}, B_{100x5}, C_{5x50}$.

The costs for the two different parenthesizations are as follows:

```
cost((AB)C) = 10*100*5 + 10*5*50   = 5000 + 2500   = 7500
cost(A(BC)) = 10*100*50 + 100*5*50 = 50000 + 25000 = 75000
```

References

[R46], *[R47]*

Examples

multi_dot allows you to write:

```
>>> from numpy.linalg import multi_dot
>>> # Prepare some data
>>> A = np.random.random(10000, 100)
>>> B = np.random.random(100, 1000)
>>> C = np.random.random(1000, 5)
>>> D = np.random.random(5, 333)
>>> # the actual dot multiplication
>>> multi_dot([A, B, C, D])
```

instead of:

```
>>> np.dot(np.dot(np.dot(A, B), C), D)
>>> # or
>>> A.dot(B).dot(C).dot(D)
```

numpy.**vdot**(*a*, *b*)

Return the dot product of two vectors.

The vdot(*a*, *b*) function handles complex numbers differently than dot(*a*, *b*). If the first argument is complex the complex conjugate of the first argument is used for the calculation of the dot product.

Note that *vdot* handles multidimensional arrays differently than *dot*: it does *not* perform a matrix product, but flattens input arguments to 1-D vectors first. Consequently, it should only be used for vectors.

Parameters **a** : array_like

If *a* is complex the complex conjugate is taken before calculation of the dot product.

b : array_like

Second argument to the dot product.

Returns **output** : ndarray

Dot product of *a* and *b*. Can be an int, float, or complex depending on the types of *a* and *b*.

See also:

dot Return the dot product without using the complex conjugate of the first argument.

Examples

```
>>> a = np.array([1+2j,3+4j])
>>> b = np.array([5+6j,7+8j])
>>> np.vdot(a, b)
(70-8j)
>>> np.vdot(b, a)
(70+8j)
```

Note that higher-dimensional arrays are flattened!

```
>>> a = np.array([[1, 4], [5, 6]])
>>> b = np.array([[4, 1], [2, 2]])
>>> np.vdot(a, b)
30
>>> np.vdot(b, a)
30
>>> 1*4 + 4*1 + 5*2 + 6*2
30
```

numpy.**inner**(*a*, *b*)

Inner product of two arrays.

Ordinary inner product of vectors for 1-D arrays (without complex conjugation), in higher dimensions a sum product over the last axes.

Parameters **a, b** : array_like

If *a* and *b* are nonscalar, their last dimensions must match.

Returns **out** : ndarray

out.shape = a.shape[:-1] + b.shape[:-1]

Raises **ValueError**

If the last dimension of *a* and *b* has different size.

See also:

`tensordot` Sum products over arbitrary axes.

`dot` Generalised matrix product, using second last dimension of *b*.

`einsum` Einstein summation convention.

Notes

For vectors (1-D arrays) it computes the ordinary inner-product:

```
np.inner(a, b) = sum(a[:]*b[:])
```

More generally, if *ndim(a) = r > 0* and *ndim(b) = s > 0*:

```
np.inner(a, b) = np.tensordot(a, b, axes=(-1,-1))
```

or explicitly:

```
np.inner(a, b)[i0,...,ir-1,j0,...,js-1]
     = sum(a[i0,...,ir-1,:]*b[j0,...,js-1,:])
```

In addition *a* or *b* may be scalars, in which case:

```
np.inner(a,b) = a*b
```

Examples

Ordinary inner product for vectors:

```
>>> a = np.array([1,2,3])
>>> b = np.array([0,1,0])
>>> np.inner(a, b)
2
```

A multidimensional example:

```
>>> a = np.arange(24).reshape((2,3,4))
>>> b = np.arange(4)
>>> np.inner(a, b)
array([[ 14,  38,  62],
       [ 86, 110, 134]])
```

An example where *b* is a scalar:

```
>>> np.inner(np.eye(2), 7)
array([[ 7.,  0.],
       [ 0.,  7.]])
```

numpy.**outer**(*a*, *b*, *out=None*)

Compute the outer product of two vectors.

Given two vectors, `a = [a0, a1, ..., aM]` and `b = [b0, b1, ..., bN]`, the outer product *[R62]* is:

```
[[a0*b0  a0*b1 ... a0*bN ]
 [a1*b0    .
 [ ...          .
 [aM*b0            aM*bN ]]
```

Parameters **a** : (M,) array_like

First input vector. Input is flattened if not already 1-dimensional.

b : (N,) array_like

Second input vector. Input is flattened if not already 1-dimensional.

out : (M, N) ndarray, optional

A location where the result is stored

New in version 1.9.0.

Returns **out** : (M, N) ndarray

`out[i, j] = a[i] * b[j]`

See also:

inner

einsum `einsum('i,j->ij', a.ravel(), b.ravel())` is the equivalent.

ufunc.outer A generalization to N dimensions and other operations. `np.multiply.outer(a.ravel(), b.ravel())` is the equivalent.

References

[R62]

Examples

Make a (*very* coarse) grid for computing a Mandelbrot set:

```
>>> rl = np.outer(np.ones((5,)), np.linspace(-2, 2, 5))
>>> rl
array([[-2., -1.,  0.,  1.,  2.],
       [-2., -1.,  0.,  1.,  2.],
       [-2., -1.,  0.,  1.,  2.],
       [-2., -1.,  0.,  1.,  2.],
       [-2., -1.,  0.,  1.,  2.]])
>>> im = np.outer(1j*np.linspace(2, -2, 5), np.ones((5,)))
>>> im
array([[ 0.+2.j,  0.+2.j,  0.+2.j,  0.+2.j,  0.+2.j],
       [ 0.+1.j,  0.+1.j,  0.+1.j,  0.+1.j,  0.+1.j],
       [ 0.+0.j,  0.+0.j,  0.+0.j,  0.+0.j,  0.+0.j],
```

(continues on next page)

(continued from previous page)

```
       [ 0.-1.j,  0.-1.j,  0.-1.j,  0.-1.j,  0.-1.j],
       [ 0.-2.j,  0.-2.j,  0.-2.j,  0.-2.j,  0.-2.j]])
>>> grid = rl + im
>>> grid
array([[-2.+2.j, -1.+2.j,  0.+2.j,  1.+2.j,  2.+2.j],
       [-2.+1.j, -1.+1.j,  0.+1.j,  1.+1.j,  2.+1.j],
       [-2.+0.j, -1.+0.j,  0.+0.j,  1.+0.j,  2.+0.j],
       [-2.-1.j, -1.-1.j,  0.-1.j,  1.-1.j,  2.-1.j],
       [-2.-2.j, -1.-2.j,  0.-2.j,  1.-2.j,  2.-2.j]])
```

An example using a "vector" of letters:

```
>>> x = np.array(['a', 'b', 'c'], dtype=object)
>>> np.outer(x, [1, 2, 3])
array([[a, aa, aaa],
       [b, bb, bbb],
       [c, cc, ccc]], dtype=object)
```

numpy.**matmul**(*a*, *b*, *out=None*)

Matrix product of two arrays.

The behavior depends on the arguments in the following way.

- If both arguments are 2-D they are multiplied like conventional matrices.
- If either argument is N-D, N > 2, it is treated as a stack of matrices residing in the last two indexes and broadcast accordingly.
- If the first argument is 1-D, it is promoted to a matrix by prepending a 1 to its dimensions. After matrix multiplication the prepended 1 is removed.
- If the second argument is 1-D, it is promoted to a matrix by appending a 1 to its dimensions. After matrix multiplication the appended 1 is removed.

Multiplication by a scalar is not allowed, use $*$ instead. Note that multiplying a stack of matrices with a vector will result in a stack of vectors, but matmul will not recognize it as such.

`matmul` differs from `dot` in two important ways.

- Multiplication by scalars is not allowed.
- Stacks of matrices are broadcast together as if the matrices were elements.

Warning: This function is preliminary and included in NumPy 1.10.0 for testing and documentation. Its semantics will not change, but the number and order of the optional arguments will.

New in version 1.10.0.

Parameters **a** : array_like

First argument.

b : array_like

Second argument.

out : ndarray, optional

Output argument. This must have the exact kind that would be returned if it was not used. In particular, it must have the right type, must be C-contiguous, and its dtype

must be the dtype that would be returned for *dot(a,b)*. This is a performance feature. Therefore, if these conditions are not met, an exception is raised, instead of attempting to be flexible.

Returns **output** : ndarray

Returns the dot product of *a* and *b*. If *a* and *b* are both 1-D arrays then a scalar is returned; otherwise an array is returned. If *out* is given, then it is returned.

Raises **ValueError**

If the last dimension of *a* is not the same size as the second-to-last dimension of *b*.

If scalar value is passed.

See also:

vdot Complex-conjugating dot product.

tensordot Sum products over arbitrary axes.

einsum Einstein summation convention.

dot alternative matrix product with different broadcasting rules.

Notes

The matmul function implements the semantics of the @ operator introduced in Python 3.5 following PEP465.

Examples

For 2-D arrays it is the matrix product:

```
>>> a = [[1, 0], [0, 1]]
>>> b = [[4, 1], [2, 2]]
>>> np.matmul(a, b)
array([[4, 1],
       [2, 2]])
```

For 2-D mixed with 1-D, the result is the usual.

```
>>> a = [[1, 0], [0, 1]]
>>> b = [1, 2]
>>> np.matmul(a, b)
array([1, 2])
>>> np.matmul(b, a)
array([1, 2])
```

Broadcasting is conventional for stacks of arrays

```
>>> a = np.arange(2*2*4).reshape((2,2,4))
>>> b = np.arange(2*2*4).reshape((2,4,2))
>>> np.matmul(a,b).shape
(2, 2, 2)
>>> np.matmul(a,b)[0,1,1]
98
>>> sum(a[0,1,:] * b[0,:,1])
98
```

Vector, vector returns the scalar inner product, but neither argument is complex-conjugated:

```
>>> np.matmul([2j, 3j], [2j, 3j])
(-13+0j)
```

Scalar multiplication raises an error.

```
>>> np.matmul([1,2], 3)
Traceback (most recent call last):
...
ValueError: Scalar operands are not allowed, use '*' instead
```

numpy.**tensordot**(*a*, *b*, *axes=2*)

Compute tensor dot product along specified axes for arrays >= 1-D.

Given two tensors (arrays of dimension greater than or equal to one), *a* and *b*, and an array_like object containing two array_like objects, `(a_axes, b_axes)`, sum the products of *a*'s and *b*'s elements (components) over the axes specified by `a_axes` and `b_axes`. The third argument can be a single non-negative integer_like scalar, `N`; if it is such, then the last `N` dimensions of *a* and the first `N` dimensions of *b* are summed over.

Parameters **a, b** : array_like, len(shape) >= 1

Tensors to "dot".

axes : int or (2,) array_like

- integer_like If an int N, sum over the last N axes of *a* and the first N axes of *b* in order. The sizes of the corresponding axes must match.
- (2,) array_like Or, a list of axes to be summed over, first sequence applying to *a*, second to *b*. Both elements array_like must be of the same length.

See also:

dot, *einsum*

Notes

Three common use cases are:

- `axes = 0` : tensor product $a \otimes b$
- `axes = 1` : tensor dot product $a \cdot b$
- `axes = 2` : (default) tensor double contraction $a : b$

When *axes* is integer_like, the sequence for evaluation will be: first the -Nth axis in *a* and 0th axis in *b*, and the -1th axis in *a* and Nth axis in *b* last.

When there is more than one axis to sum over - and they are not the last (first) axes of *a* (*b*) - the argument *axes* should consist of two sequences of the same length, with the first axis to sum over given first in both sequences, the second axis second, and so forth.

Examples

A "traditional" example:

```
>>> a = np.arange(60.).reshape(3,4,5)
>>> b = np.arange(24.).reshape(4,3,2)
>>> c = np.tensordot(a,b, axes=([1,0],[0,1]))
>>> c.shape
(5, 2)
>>> c
array([[ 4400.,  4730.],
       [ 4532.,  4874.],
       [ 4664.,  5018.],
       [ 4796.,  5162.],
       [ 4928.,  5306.]])
>>> # A slower but equivalent way of computing the same...
>>> d = np.zeros((5,2))
>>> for i in range(5):
...   for j in range(2):
...     for k in range(3):
...       for n in range(4):
...         d[i,j] += a[k,n,i] * b[n,k,j]
>>> c == d
array([[ True,  True],
       [ True,  True],
       [ True,  True],
       [ True,  True],
       [ True,  True]])
```

An extended example taking advantage of the overloading of + and *:

```
>>> a = np.array(range(1, 9))
>>> a.shape = (2, 2, 2)
>>> A = np.array(('a', 'b', 'c', 'd'), dtype=object)
>>> A.shape = (2, 2)
>>> a; A
array([[[1, 2],
        [3, 4]],
       [[5, 6],
        [7, 8]]])
array([[a, b],
       [c, d]], dtype=object)
```

```
>>> np.tensordot(a, A) # third argument default is 2 for double-contraction
array([abbcccdddd, aaaaabbbbbbccccccdddddddd], dtype=object)
```

```
>>> np.tensordot(a, A, 1)
array([[[acc, bdd],
        [aaacccc, bbbdddd]],
       [[aaaaacccccc, bbbbbddddddd],
        [aaaaaaaccccccc, bbbbbbbddddddddd]]], dtype=object)
```

```
>>> np.tensordot(a, A, 0) # tensor product (result too long to incl.)
array([[[[[a, b],
          [c, d]],
          ...
```

```
>>> np.tensordot(a, A, (0, 1))
array([[[abbbbb, cddddd],
        [aabbbbbb, ccdddddd]],
```

(continues on next page)

(continued from previous page)

```
       [[aaabbbbbbb, cccddddddd],
        [aaaabbbbbbbb, ccccddddddddd]]], dtype=object)
```

```
>>> np.tensordot(a, A, (2, 1))
array([[[abb, cdd],
        [aaabbbb, cccdddd]],
       [[aaaaabbbbbb, cccccddddddd],
        [aaaaaaabbbbbbbb, ccccccccddddddddd]]], dtype=object)
```

```
>>> np.tensordot(a, A, ((0, 1), (0, 1)))
array([abbbcccccddddddd, aabbbbccccccddddddddd], dtype=object)
```

```
>>> np.tensordot(a, A, ((2, 1), (1, 0)))
array([acccbbdddd, aaaaacccccccbbbbbbddddddddd], dtype=object)
```

numpy.**einsum**(*subscripts*, **operands*, *out=None*, *dtype=None*, *order='K'*, *casting='safe'*, *optimize=False*)

Evaluates the Einstein summation convention on the operands.

Using the Einstein summation convention, many common multi-dimensional array operations can be represented in a simple fashion. This function provides a way to compute such summations. The best way to understand this function is to try the examples below, which show how many common NumPy functions can be implemented as calls to *einsum*.

Parameters **subscripts** : str

Specifies the subscripts for summation.

operands : list of array_like

These are the arrays for the operation.

out : {ndarray, None}, optional

If provided, the calculation is done into this array.

dtype : {data-type, None}, optional

If provided, forces the calculation to use the data type specified. Note that you may have to also give a more liberal *casting* parameter to allow the conversions. Default is None.

order : {'C', 'F', 'A', 'K'}, optional

Controls the memory layout of the output. 'C' means it should be C contiguous. 'F' means it should be Fortran contiguous, 'A' means it should be 'F' if the inputs are all 'F', 'C' otherwise. 'K' means it should be as close to the layout as the inputs as is possible, including arbitrarily permuted axes. Default is 'K'.

casting : {'no', 'equiv', 'safe', 'same_kind', 'unsafe'}, optional

Controls what kind of data casting may occur. Setting this to 'unsafe' is not recommended, as it can adversely affect accumulations.

- 'no' means the data types should not be cast at all.
- 'equiv' means only byte-order changes are allowed.
- 'safe' means only casts which can preserve values are allowed.
- 'same_kind' means only safe casts or casts within a kind, like float64 to float32, are allowed.

- 'unsafe' means any data conversions may be done.

Default is 'safe'.

optimize : {False, True, 'greedy', 'optimal'}, optional

Controls if intermediate optimization should occur. No optimization will occur if False and True will default to the 'greedy' algorithm. Also accepts an explicit contraction list from the `np.einsum_path` function. See `np.einsum_path` for more details. Default is False.

Returns **output** : ndarray

The calculation based on the Einstein summation convention.

See also:

einsum_path, *dot*, *inner*, *outer*, *tensordot*, *linalg.multi_dot*

Notes

New in version 1.6.0.

The subscripts string is a comma-separated list of subscript labels, where each label refers to a dimension of the corresponding operand. Repeated subscripts labels in one operand take the diagonal. For example, `np.einsum('ii', a)` is equivalent to `np.trace(a)`.

Whenever a label is repeated, it is summed, so `np.einsum('i,i', a, b)` is equivalent to `np.inner(a, b)`. If a label appears only once, it is not summed, so `np.einsum('i', a)` produces a view of `a` with no changes.

The order of labels in the output is by default alphabetical. This means that `np.einsum('ij', a)` doesn't affect a 2D array, while `np.einsum('ji', a)` takes its transpose.

The output can be controlled by specifying output subscript labels as well. This specifies the label order, and allows summing to be disallowed or forced when desired. The call `np.einsum('i->', a)` is like `np.sum(a, axis=-1)`, and `np.einsum('ii->i', a)` is like `np.diag(a)`. The difference is that *einsum* does not allow broadcasting by default.

To enable and control broadcasting, use an ellipsis. Default NumPy-style broadcasting is done by adding an ellipsis to the left of each term, like `np.einsum('...ii->...i', a)`. To take the trace along the first and last axes, you can do `np.einsum('i...i', a)`, or to do a matrix-matrix product with the left-most indices instead of rightmost, you can do `np.einsum('ij...,jk...->ik...', a, b)`.

When there is only one operand, no axes are summed, and no output parameter is provided, a view into the operand is returned instead of a new array. Thus, taking the diagonal as `np.einsum('ii->i', a)` produces a view.

An alternative way to provide the subscripts and operands is as `einsum(op0, sublist0, op1, sublist1, ..., [sublistout])`. The examples below have corresponding *einsum* calls with the two parameter methods.

New in version 1.10.0.

Views returned from einsum are now writeable whenever the input array is writeable. For example, `np.einsum('ijk...->kji...', a)` will now have the same effect as `np.swapaxes(a, 0, 2)` and `np.einsum('ii->i', a)` will return a writeable view of the diagonal of a 2D array.

New in version 1.12.0.

Added the `optimize` argument which will optimize the contraction order of an einsum expression. For a contraction with three or more operands this can greatly increase the computational efficiency at the cost of a larger memory footprint during computation.

See `np.einsum_path` for more details.

Examples

```
>>> a = np.arange(25).reshape(5,5)
>>> b = np.arange(5)
>>> c = np.arange(6).reshape(2,3)
```

```
>>> np.einsum('ii', a)
60
>>> np.einsum(a, [0,0])
60
>>> np.trace(a)
60
```

```
>>> np.einsum('ii->i', a)
array([ 0,  6, 12, 18, 24])
>>> np.einsum(a, [0,0], [0])
array([ 0,  6, 12, 18, 24])
>>> np.diag(a)
array([ 0,  6, 12, 18, 24])
```

```
>>> np.einsum('ij,j', a, b)
array([ 30,  80, 130, 180, 230])
>>> np.einsum(a, [0,1], b, [1])
array([ 30,  80, 130, 180, 230])
>>> np.dot(a, b)
array([ 30,  80, 130, 180, 230])
>>> np.einsum('...j,j', a, b)
array([ 30,  80, 130, 180, 230])
```

```
>>> np.einsum('ji', c)
array([[0, 3],
       [1, 4],
       [2, 5]])
>>> np.einsum(c, [1,0])
array([[0, 3],
       [1, 4],
       [2, 5]])
>>> c.T
array([[0, 3],
       [1, 4],
       [2, 5]])
```

```
>>> np.einsum('..., ...', 3, c)
array([[ 0,  3,  6],
       [ 9, 12, 15]])
>>> np.einsum(',ij', 3, C)
array([[ 0,  3,  6],
       [ 9, 12, 15]])
```

(continues on next page)

(continued from previous page)

```
>>> np.einsum(3, [Ellipsis], c, [Ellipsis])
array([[ 0,  3,  6],
       [ 9, 12, 15]])
>>> np.multiply(3, c)
array([[ 0,  3,  6],
       [ 9, 12, 15]])
```

```
>>> np.einsum('i,i', b, b)
30
>>> np.einsum(b, [0], b, [0])
30
>>> np.inner(b,b)
30
```

```
>>> np.einsum('i,j', np.arange(2)+1, b)
array([[0, 1, 2, 3, 4],
       [0, 2, 4, 6, 8]])
>>> np.einsum(np.arange(2)+1, [0], b, [1])
array([[0, 1, 2, 3, 4],
       [0, 2, 4, 6, 8]])
>>> np.outer(np.arange(2)+1, b)
array([[0, 1, 2, 3, 4],
       [0, 2, 4, 6, 8]])
```

```
>>> np.einsum('i...->...', a)
array([50, 55, 60, 65, 70])
>>> np.einsum(a, [0,Ellipsis], [Ellipsis])
array([50, 55, 60, 65, 70])
>>> np.sum(a, axis=0)
array([50, 55, 60, 65, 70])
```

```
>>> a = np.arange(60.).reshape(3,4,5)
>>> b = np.arange(24.).reshape(4,3,2)
>>> np.einsum('ijk,jil->kl', a, b)
array([[ 4400.,  4730.],
       [ 4532.,  4874.],
       [ 4664.,  5018.],
       [ 4796.,  5162.],
       [ 4928.,  5306.]])
>>> np.einsum(a, [0,1,2], b, [1,0,3], [2,3])
array([[ 4400.,  4730.],
       [ 4532.,  4874.],
       [ 4664.,  5018.],
       [ 4796.,  5162.],
       [ 4928.,  5306.]])
>>> np.tensordot(a,b, axes=([1,0],[0,1]))
array([[ 4400.,  4730.],
       [ 4532.,  4874.],
       [ 4664.,  5018.],
       [ 4796.,  5162.],
       [ 4928.,  5306.]])
```

```
>>> a = np.arange(6).reshape((3,2))
>>> b = np.arange(12).reshape((4,3))
>>> np.einsum('ki,jk->ij', a, b)
```

(continues on next page)

(continued from previous page)

```
array([[10, 28, 46, 64],
       [13, 40, 67, 94]])
>>> np.einsum('ki,...k->i...', a, b)
array([[10, 28, 46, 64],
       [13, 40, 67, 94]])
>>> np.einsum('k...,jk', a, b)
array([[10, 28, 46, 64],
       [13, 40, 67, 94]])
```

```
>>> # since version 1.10.0
>>> a = np.zeros((3, 3))
>>> np.einsum('ii->i', a)[:] = 1
>>> a
array([[ 1.,  0.,  0.],
       [ 0.,  1.,  0.],
       [ 0.,  0.,  1.]])
```

numpy.**einsum_path**(*subscripts*, **operands*, *optimize='greedy'*)

Evaluates the lowest cost contraction order for an einsum expression by considering the creation of intermediate arrays.

Parameters **subscripts** : str

Specifies the subscripts for summation.

***operands** : list of array_like

These are the arrays for the operation.

optimize : {bool, list, tuple, 'greedy', 'optimal'}

Choose the type of path. If a tuple is provided, the second argument is assumed to be the maximum intermediate size created. If only a single argument is provided the largest input or output array size is used as a maximum intermediate size.

- if a list is given that starts with `einsum_path`, uses this as the contraction path
- if False no optimization is taken
- if True defaults to the 'greedy' algorithm
- 'optimal' An algorithm that combinatorially explores all possible ways of contracting the listed tensors and choosest the least costly path. Scales exponentially with the number of terms in the contraction.
- 'greedy' An algorithm that chooses the best pair contraction at each step. Effectively, this algorithm searches the largest inner, Hadamard, and then outer products at each step. Scales cubically with the number of terms in the contraction. Equivalent to the 'optimal' path for most contractions.

Default is 'greedy'.

Returns **path** : list of tuples

A list representation of the einsum path.

string_repr : str

A printable representation of the einsum path.

See also:

einsum, *linalg.multi_dot*

Notes

The resulting path indicates which terms of the input contraction should be contracted first, the result of this contraction is then appended to the end of the contraction list. This list can then be iterated over until all intermediate contractions are complete.

Examples

We can begin with a chain dot example. In this case, it is optimal to contract the `b` and `c` tensors first as reprsented by the first element of the path `(1, 2)`. The resulting tensor is added to the end of the contraction and the remaining contraction `(0, 1)` is then completed.

```
>>> a = np.random.rand(2, 2)
>>> b = np.random.rand(2, 5)
>>> c = np.random.rand(5, 2)
>>> path_info = np.einsum_path('ij,jk,kl->il', a, b, c, optimize='greedy')
>>> print(path_info[0])
['einsum_path', (1, 2), (0, 1)]
>>> print(path_info[1])
  Complete contraction:  ij,jk,kl->il
         Naive scaling:  4
     Optimized scaling:  3
      Naive FLOP count:  1.600e+02
  Optimized FLOP count:  5.600e+01
   Theoretical speedup:  2.857
  Largest intermediate:  4.000e+00 elements
-------------------------------------------------------------------------
scaling                  current                                remaining
-------------------------------------------------------------------------
   3                   kl,jk->jl                              ij,jl->il
   3                   jl,ij->il                                 il->il
```

A more complex index transformation example.

```
>>> I = np.random.rand(10, 10, 10, 10)
>>> C = np.random.rand(10, 10)
>>> path_info = np.einsum_path('ea,fb,abcd,gc,hd->efgh', C, C, I, C, C,
                               optimize='greedy')
```

```
>>> print(path_info[0])
['einsum_path', (0, 2), (0, 3), (0, 2), (0, 1)]
>>> print(path_info[1])
  Complete contraction:  ea,fb,abcd,gc,hd->efgh
         Naive scaling:  8
     Optimized scaling:  5
      Naive FLOP count:  8.000e+08
  Optimized FLOP count:  8.000e+05
   Theoretical speedup:  1000.000
  Largest intermediate:  1.000e+04 elements
--------------------------------------------------------------------------
scaling                  current                                 remaining
--------------------------------------------------------------------------
   5               abcd,ea->bcde                       fb,gc,hd,bcde->efgh
   5               bcde,fb->cdef                          gc,hd,cdef->efgh
   5               cdef,gc->defg                             hd,defg->efgh
   5               defg,hd->efgh                                efgh->efgh
```

numpy.linalg.**matrix_power**(*M*, *n*)

Raise a square matrix to the (integer) power *n*.

For positive integers *n*, the power is computed by repeated matrix squarings and matrix multiplications. If `n == 0`, the identity matrix of the same shape as M is returned. If `n < 0`, the inverse is computed and then raised to the `abs(n)`.

Parameters **M** : ndarray or matrix object

Matrix to be "powered." Must be square, i.e. `M.shape == (m, m)`, with *m* a positive integer.

n : int

The exponent can be any integer or long integer, positive, negative, or zero.

Returns **M**n** : ndarray or matrix object

The return value is the same shape and type as *M*; if the exponent is positive or zero then the type of the elements is the same as those of *M*. If the exponent is negative the elements are floating-point.

Raises **LinAlgError**

If the matrix is not numerically invertible.

See also:

matrix Provides an equivalent function as the exponentiation operator (`**`, not `^`).

Examples

```
>>> from numpy import linalg as LA
>>> i = np.array([[0, 1], [-1, 0]]) # matrix equiv. of the imaginary unit
>>> LA.matrix_power(i, 3) # should = -i
array([[ 0, -1],
       [ 1,  0]])
>>> LA.matrix_power(np.matrix(i), 3) # matrix arg returns matrix
matrix([[ 0, -1],
        [ 1,  0]])
>>> LA.matrix_power(i, 0)
array([[1, 0],
       [0, 1]])
>>> LA.matrix_power(i, -3) # should = 1/(-i) = i, but w/ f.p. elements
array([[ 0.,  1.],
       [-1.,  0.]])
```

Somewhat more sophisticated example

```
>>> q = np.zeros((4, 4))
>>> q[0:2, 0:2] = -i
>>> q[2:4, 2:4] = i
>>> q # one of the three quaternion units not equal to 1
array([[ 0., -1.,  0.,  0.],
       [ 1.,  0.,  0.,  0.],
       [ 0.,  0.,  0.,  1.],
       [ 0.,  0., -1.,  0.]])
>>> LA.matrix_power(q, 2) # = -np.eye(4)
array([[-1.,  0.,  0.,  0.],
```

(continues on next page)

(continued from previous page)

```
       [ 0., -1.,  0.,  0.],
       [ 0.,  0., -1.,  0.],
       [ 0.,  0.,  0., -1.]])
```

numpy.**kron**(*a*, *b*)

Kronecker product of two arrays.

Computes the Kronecker product, a composite array made of blocks of the second array scaled by the first.

Parameters **a, b** : array_like

Returns **out** : ndarray

See also:

outer The outer product

Notes

The function assumes that the number of dimensions of *a* and *b* are the same, if necessary prepending the smallest with ones. If *a.shape = (r0,r1,..,rN)* and *b.shape = (s0,s1,...,sN)*, the Kronecker product has shape *(r0*s0, r1*s1, ..., rN*SN)*. The elements are products of elements from *a* and *b*, organized explicitly by:

```
kron(a,b)[k0,k1,...,kN] = a[i0,i1,...,iN] * b[j0,j1,...,jN]
```

where:

```
kt = it * st + jt,  t = 0,...,N
```

In the common 2-D case (N=1), the block structure can be visualized:

```
[[ a[0,0]*b,   a[0,1]*b,  ... , a[0,-1]*b  ],
 [  ...                              ...   ],
 [ a[-1,0]*b,  a[-1,1]*b, ... , a[-1,-1]*b ]]
```

Examples

```
>>> np.kron([1,10,100], [5,6,7])
array([  5,   6,   7,  50,  60,  70, 500, 600, 700])
>>> np.kron([5,6,7], [1,10,100])
array([  5,  50, 500,   6,  60, 600,   7,  70, 700])
```

```
>>> np.kron(np.eye(2), np.ones((2,2)))
array([[ 1.,  1.,  0.,  0.],
       [ 1.,  1.,  0.,  0.],
       [ 0.,  0.,  1.,  1.],
       [ 0.,  0.,  1.,  1.]])
```

```
>>> a = np.arange(100).reshape((2,5,2,5))
>>> b = np.arange(24).reshape((2,3,4))
>>> c = np.kron(a,b)
>>> c.shape
(2, 10, 6, 20)
```

(continues on next page)

(continued from previous page)

```
>>> I = (1,3,0,2)
>>> J = (0,2,1)
>>> J1 = (0,) + J              # extend to ndim=4
>>> S1 = (1,) + b.shape
>>> K = tuple(np.array(I) * np.array(S1) + np.array(J1))
>>> c[K] == a[I]*b[J]
True
```

3.17.2 Decompositions

linalg.cholesky(a)	Cholesky decomposition.
linalg.qr(a[, mode])	Compute the qr factorization of a matrix.
linalg.svd(a[, full_matrices, compute_uv])	Singular Value Decomposition.

numpy.linalg.**cholesky**(*a*)

Cholesky decomposition.

Return the Cholesky decomposition, *L* * *L.H*, of the square matrix *a*, where *L* is lower-triangular and .H is the conjugate transpose operator (which is the ordinary transpose if *a* is real-valued). *a* must be Hermitian (symmetric if real-valued) and positive-definite. Only *L* is actually returned.

Parameters **a** : (..., M, M) array_like

Hermitian (symmetric if all elements are real), positive-definite input matrix.

Returns **L** : (..., M, M) array_like

Upper or lower-triangular Cholesky factor of *a*. Returns a matrix object if *a* is a matrix object.

Raises **LinAlgError**

If the decomposition fails, for example, if *a* is not positive-definite.

Notes

New in version 1.8.0.

Broadcasting rules apply, see the numpy.linalg documentation for details.

The Cholesky decomposition is often used as a fast way of solving

$$A\mathbf{x} = \mathbf{b}$$

(when *A* is both Hermitian/symmetric and positive-definite).

First, we solve for $\mathbf{y}$ in

$$L\mathbf{y} = \mathbf{b},$$

and then for $\mathbf{x}$ in

$$L.H\mathbf{x} = \mathbf{y}.$$

Examples

```
>>> A = np.array([[1,-2j],[2j,5]])
>>> A
array([[ 1.+0.j,  0.-2.j],
       [ 0.+2.j,  5.+0.j]])
>>> L = np.linalg.cholesky(A)
>>> L
array([[ 1.+0.j,  0.+0.j],
       [ 0.+2.j,  1.+0.j]])
>>> np.dot(L, L.T.conj()) # verify that L * L.H = A
array([[ 1.+0.j,  0.-2.j],
       [ 0.+2.j,  5.+0.j]])
>>> A = [[1,-2j],[2j,5]] # what happens if A is only array_like?
>>> np.linalg.cholesky(A) # an ndarray object is returned
array([[ 1.+0.j,  0.+0.j],
       [ 0.+2.j,  1.+0.j]])
>>> # But a matrix object is returned if A is a matrix object
>>> LA.cholesky(np.matrix(A))
matrix([[ 1.+0.j,  0.+0.j],
        [ 0.+2.j,  1.+0.j]])
```

numpy.linalg.**qr**(*a*, *mode='reduced'*)

Compute the qr factorization of a matrix.

Factor the matrix *a* as *qr*, where *q* is orthonormal and *r* is upper-triangular.

Parameters **a** : array_like, shape (M, N)

Matrix to be factored.

mode : {'reduced', 'complete', 'r', 'raw', 'full', 'economic'}, optional

If K = min(M, N), then

- 'reduced' : returns q, r with dimensions (M, K), (K, N) (default)
- 'complete' : returns q, r with dimensions (M, M), (M, N)
- 'r' : returns r only with dimensions (K, N)
- 'raw' : returns h, tau with dimensions (N, M), (K,)
- 'full' : alias of 'reduced', deprecated
- 'economic' : returns h from 'raw', deprecated.

The options 'reduced', 'complete, and 'raw' are new in numpy 1.8, see the notes for more information. The default is 'reduced', and to maintain backward compatibility with earlier versions of numpy both it and the old default 'full' can be omitted. Note that array h returned in 'raw' mode is transposed for calling Fortran. The 'economic' mode is deprecated. The modes 'full' and 'economic' may be passed using only the first letter for backwards compatibility, but all others must be spelled out. See the Notes for more explanation.

Returns **q** : ndarray of float or complex, optional

A matrix with orthonormal columns. When mode = 'complete' the result is an orthogonal/unitary matrix depending on whether or not a is real/complex. The determinant may be either +/- 1 in that case.

r : ndarray of float or complex, optional

The upper-triangular matrix.

(h, tau) : ndarrays of np.double or np.cdouble, optional

The array h contains the Householder reflectors that generate q along with r. The tau array contains scaling factors for the reflectors. In the deprecated 'economic' mode only h is returned.

Raises **LinAlgError**

If factoring fails.

Notes

This is an interface to the LAPACK routines dgeqrf, zgeqrf, dorgqr, and zungqr.

For more information on the qr factorization, see for example: http://en.wikipedia.org/wiki/QR_factorization

Subclasses of *ndarray* are preserved except for the 'raw' mode. So if *a* is of type *matrix*, all the return values will be matrices too.

New 'reduced', 'complete', and 'raw' options for mode were added in NumPy 1.8.0 and the old option 'full' was made an alias of 'reduced'. In addition the options 'full' and 'economic' were deprecated. Because 'full' was the previous default and 'reduced' is the new default, backward compatibility can be maintained by letting *mode* default. The 'raw' option was added so that LAPACK routines that can multiply arrays by q using the Householder reflectors can be used. Note that in this case the returned arrays are of type np.double or np.cdouble and the h array is transposed to be FORTRAN compatible. No routines using the 'raw' return are currently exposed by numpy, but some are available in lapack_lite and just await the necessary work.

Examples

```
>>> a = np.random.randn(9, 6)
>>> q, r = np.linalg.qr(a)
>>> np.allclose(a, np.dot(q, r))  # a does equal qr
True
>>> r2 = np.linalg.qr(a, mode='r')
>>> r3 = np.linalg.qr(a, mode='economic')
>>> np.allclose(r, r2)  # mode='r' returns the same r as mode='full'
True
>>> # But only triu parts are guaranteed equal when mode='economic'
>>> np.allclose(r, np.triu(r3[:6,:6], k=0))
True
```

Example illustrating a common use of `qr`: solving of least squares problems

What are the least-squares-best *m* and *y0* in `y = y0 + mx` for the following data: {(0,1), (1,0), (1,2), (2,1)}. (Graph the points and you'll see that it should be y0 = 0, m = 1.) The answer is provided by solving the over-determined matrix equation `Ax = b`, where:

```
A = array([[0, 1], [1, 1], [1, 1], [2, 1]])
x = array([[y0], [m]])
b = array([[1], [0], [2], [1]])
```

If A = qr such that q is orthonormal (which is always possible via Gram-Schmidt), then `x = inv(r) * (q.T) * b`. (In numpy practice, however, we simply use `lstsq`.)

```
>>> A = np.array([[0, 1], [1, 1], [1, 1], [2, 1]])
>>> A
array([[0, 1],
       [1, 1],
       [1, 1],
       [2, 1]])
>>> b = np.array([1, 0, 2, 1])
>>> q, r = LA.qr(A)
>>> p = np.dot(q.T, b)
>>> np.dot(LA.inv(r), p)
array([  1.1e-16,   1.0e+00])
```

numpy.linalg.**svd**(*a*, *full_matrices=True*, *compute_uv=True*)

Singular Value Decomposition.

When *a* is a 2D array, it is factorized as `u @ np.diag(s) @ vh = (u * s) @ vh`, where *u* and *vh* are 2D unitary arrays and *s* is a 1D array of *a*'s singular values. When *a* is higher-dimensional, SVD is applied in stacked mode as explained below.

Parameters **a** : (..., M, N) array_like

A real or complex array with `a.ndim >= 2`.

full_matrices : bool, optional

If True (default), *u* and *vh* have the shapes `(..., M, M)` and `(..., N, N)`, respectively. Otherwise, the shapes are `(..., M, K)` and `(..., K, N)`, respectively, where `K = min(M, N)`.

compute_uv : bool, optional

Whether or not to compute *u* and *vh* in addition to *s*. True by default.

Returns **u** : { (..., M, M), (..., M, K) } array

Unitary array(s). The first `a.ndim - 2` dimensions have the same size as those of the input *a*. The size of the last two dimensions depends on the value of *full_matrices*. Only returned when *compute_uv* is True.

s : (..., K) array

Vector(s) with the singular values, within each vector sorted in descending order. The first `a.ndim - 2` dimensions have the same size as those of the input *a*.

vh : { (..., N, N), (..., K, N) } array

Unitary array(s). The first `a.ndim - 2` dimensions have the same size as those of the input *a*. The size of the last two dimensions depends on the value of *full_matrices*. Only returned when *compute_uv* is True.

Raises **LinAlgError**

If SVD computation does not converge.

Notes

Changed in version 1.8.0: Broadcasting rules apply, see the `numpy.linalg` documentation for details.

The decomposition is performed using LAPACK routine `_gesdd`.

SVD is usually described for the factorization of a 2D matrix A. The higher-dimensional case will be discussed below. In the 2D case, SVD is written as $A = USV^H$, where $A = a$, $U = u$, $S = \mathtt{np.diag}(s)$ and $V^H = vh$.

The 1D array *s* contains the singular values of *a* and *u* and *vh* are unitary. The rows of *vh* are the eigenvectors of $A^H A$ and the columns of *u* are the eigenvectors of AA^H. In both cases the corresponding (possibly non-zero) eigenvalues are given by `s**2`.

If *a* has more than two dimensions, then broadcasting rules apply, as explained in *Linear algebra on several matrices at once*. This means that SVD is working in "stacked" mode: it iterates over all indices of the first `a.ndim - 2` dimensions and for each combination SVD is applied to the last two indices. The matrix *a* can be reconstructed from the decomposition with either `(u * s[..., None, :]) @ vh` or `u @ (s[..., None] * vh)`. (The `@` operator can be replaced by the function `np.matmul` for python versions below 3.5.)

If *a* is a `matrix` object (as opposed to an `ndarray`), then so are all the return values.

Examples

```
>>> a = np.random.randn(9, 6) + 1j*np.random.randn(9, 6)
>>> b = np.random.randn(2, 7, 8, 3) + 1j*np.random.randn(2, 7, 8, 3)
```

Reconstruction based on full SVD, 2D case:

```
>>> u, s, vh = np.linalg.svd(a, full_matrices=True)
>>> u.shape, s.shape, vh.shape
((9, 9), (6,), (6, 6))
>>> np.allclose(a, np.dot(u[:, :6] * s, vh))
True
>>> smat = np.zeros((9, 6), dtype=complex)
>>> smat[:6, :6] = np.diag(s)
>>> np.allclose(a, np.dot(u, np.dot(smat, vh)))
True
```

Reconstruction based on reduced SVD, 2D case:

```
>>> u, s, vh = np.linalg.svd(a, full_matrices=False)
>>> u.shape, s.shape, vh.shape
((9, 6), (6,), (6, 6))
>>> np.allclose(a, np.dot(u * s, vh))
True
>>> smat = np.diag(s)
>>> np.allclose(a, np.dot(u, np.dot(smat, vh)))
True
```

Reconstruction based on full SVD, 4D case:

```
>>> u, s, vh = np.linalg.svd(b, full_matrices=True)
>>> u.shape, s.shape, vh.shape
((2, 7, 8, 8), (2, 7, 3), (2, 7, 3, 3))
>>> np.allclose(b, np.matmul(u[..., :3] * s[..., None, :], vh))
True
>>> np.allclose(b, np.matmul(u[..., :3], s[..., None] * vh))
True
```

Reconstruction based on reduced SVD, 4D case:

```
>>> u, s, vh = np.linalg.svd(b, full_matrices=False)
>>> u.shape, s.shape, vh.shape
((2, 7, 8, 3), (2, 7, 3), (2, 7, 3, 3))
>>> np.allclose(b, np.matmul(u * s[..., None, :], vh))
```

(continues on next page)

(continued from previous page)

```
True
>>> np.allclose(b, np.matmul(u, s[..., None] * vh))
True
```

3.17.3 Matrix eigenvalues

linalg.eig(a)	Compute the eigenvalues and right eigenvectors of a square array.
linalg.eigh(a[, UPLO])	Return the eigenvalues and eigenvectors of a Hermitian or symmetric matrix.
linalg.eigvals(a)	Compute the eigenvalues of a general matrix.
linalg.eigvalsh(a[, UPLO])	Compute the eigenvalues of a Hermitian or real symmetric matrix.

numpy.linalg.**eig**(*a*)

Compute the eigenvalues and right eigenvectors of a square array.

Parameters **a** : (..., M, M) array

Matrices for which the eigenvalues and right eigenvectors will be computed

Returns **w** : (..., M) array

The eigenvalues, each repeated according to its multiplicity. The eigenvalues are not necessarily ordered. The resulting array will be of complex type, unless the imaginary part is zero in which case it will be cast to a real type. When *a* is real the resulting eigenvalues will be real (0 imaginary part) or occur in conjugate pairs

v : (..., M, M) array

The normalized (unit "length") eigenvectors, such that the column `v[:,i]` is the eigenvector corresponding to the eigenvalue `w[i]`.

Raises **LinAlgError**

If the eigenvalue computation does not converge.

See also:

eigvals eigenvalues of a non-symmetric array.

eigh eigenvalues and eigenvectors of a symmetric or Hermitian (conjugate symmetric) array.

eigvalsh eigenvalues of a symmetric or Hermitian (conjugate symmetric) array.

Notes

New in version 1.8.0.

Broadcasting rules apply, see the `numpy.linalg` documentation for details.

This is implemented using the _geev LAPACK routines which compute the eigenvalues and eigenvectors of general square arrays.

The number *w* is an eigenvalue of *a* if there exists a vector *v* such that `dot(a,v) = w * v`. Thus, the arrays *a*, *w*, and *v* satisfy the equations `dot(a[:,:], v[:,i]) = w[i] * v[:,i]` for $i \in \{0, ..., M-1\}$.

The array *v* of eigenvectors may not be of maximum rank, that is, some of the columns may be linearly dependent, although round-off error may obscure that fact. If the eigenvalues are all different, then theoretically the eigenvectors are linearly independent. Likewise, the (complex-valued) matrix of eigenvectors *v* is unitary if the matrix *a* is normal, i.e., if `dot(a, a.H) = dot(a.H, a)`, where *a.H* denotes the conjugate transpose of *a*.

Finally, it is emphasized that *v* consists of the *right* (as in right-hand side) eigenvectors of *a*. A vector *y* satisfying `dot(y.T, a) = z * y.T` for some number *z* is called a *left* eigenvector of *a*, and, in general, the left and right eigenvectors of a matrix are not necessarily the (perhaps conjugate) transposes of each other.

References

G. Strang, *Linear Algebra and Its Applications*, 2nd Ed., Orlando, FL, Academic Press, Inc., 1980, Various pp.

Examples

```
>>> from numpy import linalg as LA
```

(Almost) trivial example with real e-values and e-vectors.

```
>>> w, v = LA.eig(np.diag((1, 2, 3)))
>>> w; v
array([ 1.,  2.,  3.])
array([[ 1.,  0.,  0.],
       [ 0.,  1.,  0.],
       [ 0.,  0.,  1.]])
```

Real matrix possessing complex e-values and e-vectors; note that the e-values are complex conjugates of each other.

```
>>> w, v = LA.eig(np.array([[1, -1], [1, 1]]))
>>> w; v
array([ 1. + 1.j,  1. - 1.j])
array([[ 0.70710678+0.j        ,  0.70710678+0.j        ],
       [ 0.00000000-0.70710678j,  0.00000000+0.70710678j]])
```

Complex-valued matrix with real e-values (but complex-valued e-vectors); note that a.conj().T = a, i.e., a is Hermitian.

```
>>> a = np.array([[1, 1j], [-1j, 1]])
>>> w, v = LA.eig(a)
>>> w; v
array([  2.00000000e+00+0.j,   5.98651912e-36+0.j]) # i.e., {2, 0}
array([[ 0.00000000+0.70710678j,  0.70710678+0.j        ],
       [ 0.70710678+0.j        ,  0.00000000+0.70710678j]])
```

Be careful about round-off error!

```
>>> a = np.array([[1 + 1e-9, 0], [0, 1 - 1e-9]])
>>> # Theor. e-values are 1 +/- 1e-9
>>> w, v = LA.eig(a)
>>> w; v
array([ 1.,  1.])
array([[ 1.,  0.],
       [ 0.,  1.]])
```

numpy.linalg.**eigh**(*a*, *UPLO='L'*)

Return the eigenvalues and eigenvectors of a Hermitian or symmetric matrix.

Returns two objects, a 1-D array containing the eigenvalues of *a*, and a 2-D square array or matrix (depending on the input type) of the corresponding eigenvectors (in columns).

Parameters **a** : (..., M, M) array

Hermitian/Symmetric matrices whose eigenvalues and eigenvectors are to be computed.

UPLO : {'L', 'U'}, optional

Specifies whether the calculation is done with the lower triangular part of *a* ('L', default) or the upper triangular part ('U'). Irrespective of this value only the real parts of the diagonal will be considered in the computation to preserve the notion of a Hermitian matrix. It therefore follows that the imaginary part of the diagonal will always be treated as zero.

Returns **w** : (..., M) ndarray

The eigenvalues in ascending order, each repeated according to its multiplicity.

v : {(..., M, M) ndarray, (..., M, M) matrix}

The column `v[:, i]` is the normalized eigenvector corresponding to the eigenvalue `w[i]`. Will return a matrix object if *a* is a matrix object.

Raises **LinAlgError**

If the eigenvalue computation does not converge.

See also:

eigvalsh eigenvalues of symmetric or Hermitian arrays.

eig eigenvalues and right eigenvectors for non-symmetric arrays.

eigvals eigenvalues of non-symmetric arrays.

Notes

New in version 1.8.0.

Broadcasting rules apply, see the `numpy.linalg` documentation for details.

The eigenvalues/eigenvectors are computed using LAPACK routines _syevd, _heevd

The eigenvalues of real symmetric or complex Hermitian matrices are always real. *[R43]* The array *v* of (column) eigenvectors is unitary and *a*, *w*, and *v* satisfy the equations `dot(a, v[:, i]) = w[i] * v[:, i]`.

References

[R43]

Examples

```
>>> from numpy import linalg as LA
>>> a = np.array([[1, -2j], [2j, 5]])
>>> a
array([[ 1.+0.j,  0.-2.j],
       [ 0.+2.j,  5.+0.j]])
>>> w, v = LA.eigh(a)
>>> w; v
array([ 0.17157288,  5.82842712])
array([[-0.92387953+0.j        , -0.38268343+0.j        ],
       [ 0.00000000+0.38268343j,  0.00000000-0.92387953j]])
```

```
>>> np.dot(a, v[:, 0]) - w[0] * v[:, 0] # verify 1st e-val/vec pair
array([2.77555756e-17 + 0.j, 0. + 1.38777878e-16j])
>>> np.dot(a, v[:, 1]) - w[1] * v[:, 1] # verify 2nd e-val/vec pair
array([ 0.+0.j,  0.+0.j])
```

```
>>> A = np.matrix(a) # what happens if input is a matrix object
>>> A
matrix([[ 1.+0.j,  0.-2.j],
        [ 0.+2.j,  5.+0.j]])
>>> w, v = LA.eigh(A)
>>> w; v
array([ 0.17157288,  5.82842712])
matrix([[-0.92387953+0.j        , -0.38268343+0.j        ],
        [ 0.00000000+0.38268343j,  0.00000000-0.92387953j]])
```

```
>>> # demonstrate the treatment of the imaginary part of the diagonal
>>> a = np.array([[5+2j, 9-2j], [0+2j, 2-1j]])
>>> a
array([[ 5.+2.j,  9.-2.j],
       [ 0.+2.j,  2.-1.j]])
>>> # with UPLO='L' this is numerically equivalent to using LA.eig() with:
>>> b = np.array([[5.+0.j, 0.-2.j], [0.+2.j, 2.-0.j]])
>>> b
array([[ 5.+0.j,  0.-2.j],
       [ 0.+2.j,  2.+0.j]])
>>> wa, va = LA.eigh(a)
>>> wb, vb = LA.eig(b)
>>> wa; wb
array([ 1.,  6.])
array([ 6.+0.j,  1.+0.j])
>>> va; vb
array([[-0.44721360-0.j        , -0.89442719+0.j        ],
       [ 0.00000000+0.89442719j,  0.00000000-0.4472136j ]])
array([[ 0.89442719+0.j       ,  0.00000000-0.4472136j],
       [ 0.00000000-0.4472136j,  0.89442719+0.j       ]])
```

numpy.linalg.**eigvals**(*a*)

Compute the eigenvalues of a general matrix.

Main difference between *eigvals* and *eig*: the eigenvectors aren't returned.

Parameters **a** : (..., M, M) array_like

A complex- or real-valued matrix whose eigenvalues will be computed.

Returns **w** : (..., M,) ndarray

The eigenvalues, each repeated according to its multiplicity. They are not necessarily ordered, nor are they necessarily real for real matrices.

Raises **LinAlgError**

If the eigenvalue computation does not converge.

See also:

eig eigenvalues and right eigenvectors of general arrays

eigvalsh eigenvalues of symmetric or Hermitian arrays.

eigh eigenvalues and eigenvectors of symmetric/Hermitian arrays.

Notes

New in version 1.8.0.

Broadcasting rules apply, see the `numpy.linalg` documentation for details.

This is implemented using the _geev LAPACK routines which compute the eigenvalues and eigenvectors of general square arrays.

Examples

Illustration, using the fact that the eigenvalues of a diagonal matrix are its diagonal elements, that multiplying a matrix on the left by an orthogonal matrix, *Q*, and on the right by *Q.T* (the transpose of *Q*), preserves the eigenvalues of the "middle" matrix. In other words, if *Q* is orthogonal, then `Q * A * Q.T` has the same eigenvalues as `A`:

```
>>> from numpy import linalg as LA
>>> x = np.random.random()
>>> Q = np.array([[np.cos(x), -np.sin(x)], [np.sin(x), np.cos(x)]])
>>> LA.norm(Q[0, :]), LA.norm(Q[1, :]), np.dot(Q[0, :],Q[1, :])
(1.0, 1.0, 0.0)
```

Now multiply a diagonal matrix by Q on one side and by Q.T on the other:

```
>>> D = np.diag((-1,1))
>>> LA.eigvals(D)
array([-1.,  1.])
>>> A = np.dot(Q, D)
>>> A = np.dot(A, Q.T)
>>> LA.eigvals(A)
array([ 1., -1.])
```

`numpy.linalg.`**`eigvalsh`**(*a*, *UPLO='L'*)

Compute the eigenvalues of a Hermitian or real symmetric matrix.

Main difference from eigh: the eigenvectors are not computed.

Parameters **a** : (..., M, M) array_like

A complex- or real-valued matrix whose eigenvalues are to be computed.

UPLO : {'L', 'U'}, optional

Specifies whether the calculation is done with the lower triangular part of *a* ('L', default) or the upper triangular part ('U'). Irrespective of this value only the real parts of the diagonal will be considered in the computation to preserve the notion of a Hermitian matrix. It therefore follows that the imaginary part of the diagonal will always be treated as zero.

Returns **w** : (. . . , M,) ndarray

The eigenvalues in ascending order, each repeated according to its multiplicity.

Raises **LinAlgError**

If the eigenvalue computation does not converge.

See also:

eigh eigenvalues and eigenvectors of symmetric/Hermitian arrays.

eigvals eigenvalues of general real or complex arrays.

eig eigenvalues and right eigenvectors of general real or complex arrays.

Notes

New in version 1.8.0.

Broadcasting rules apply, see the `numpy.linalg` documentation for details.

The eigenvalues are computed using LAPACK routines _syevd, _heevd

Examples

```
>>> from numpy import linalg as LA
>>> a = np.array([[1, -2j], [2j, 5]])
>>> LA.eigvalsh(a)
array([ 0.17157288,  5.82842712])
```

```
>>> # demonstrate the treatment of the imaginary part of the diagonal
>>> a = np.array([[5+2j, 9-2j], [0+2j, 2-1j]])
>>> a
array([[ 5.+2.j,  9.-2.j],
       [ 0.+2.j,  2.-1.j]])
>>> # with UPLO='L' this is numerically equivalent to using LA.eigvals()
>>> # with:
>>> b = np.array([[5.+0.j, 0.-2.j], [0.+2.j, 2.-0.j]])
>>> b
array([[ 5.+0.j,  0.-2.j],
       [ 0.+2.j,  2.+0.j]])
>>> wa = LA.eigvalsh(a)
>>> wb = LA.eigvals(b)
>>> wa; wb
array([ 1.,  6.])
array([ 6.+0.j,  1.+0.j])
```

3.17.4 Norms and other numbers

linalg.norm(x[, ord, axis, keepdims])	Matrix or vector norm.
linalg.cond(x[, p])	Compute the condition number of a matrix.
linalg.det(a)	Compute the determinant of an array.
linalg.matrix_rank(M[, tol, hermitian])	Return matrix rank of array using SVD method
linalg.slogdet(a)	Compute the sign and (natural) logarithm of the determinant of an array.
trace(a[, offset, axis1, axis2, dtype, out])	Return the sum along diagonals of the array.

numpy.linalg.**norm**(*x*, *ord=None*, *axis=None*, *keepdims=False*)

Matrix or vector norm.

This function is able to return one of eight different matrix norms, or one of an infinite number of vector norms (described below), depending on the value of the `ord` parameter.

Parameters **x** : array_like

Input array. If *axis* is None, *x* must be 1-D or 2-D.

ord : {non-zero int, inf, -inf, 'fro', 'nuc'}, optional

Order of the norm (see table under `Notes`). inf means numpy's *inf* object.

axis : {int, 2-tuple of ints, None}, optional

If *axis* is an integer, it specifies the axis of *x* along which to compute the vector norms. If *axis* is a 2-tuple, it specifies the axes that hold 2-D matrices, and the matrix norms of these matrices are computed. If *axis* is None then either a vector norm (when *x* is 1-D) or a matrix norm (when *x* is 2-D) is returned.

keepdims : bool, optional

If this is set to True, the axes which are normed over are left in the result as dimensions with size one. With this option the result will broadcast correctly against the original *x*.

New in version 1.10.0.

Returns **n** : float or ndarray

Norm of the matrix or vector(s).

Notes

For values of `ord <= 0`, the result is, strictly speaking, not a mathematical 'norm', but it may still be useful for various numerical purposes.

The following norms can be calculated:

ord	norm for matrices	norm for vectors
None	Frobenius norm	2-norm
‘fro’	Frobenius norm	–
‘nuc’	nuclear norm	–
inf	max(sum(abs(x), axis=1))	max(abs(x))
-inf	min(sum(abs(x), axis=1))	min(abs(x))
0	–	sum(x != 0)
1	max(sum(abs(x), axis=0))	as below
-1	min(sum(abs(x), axis=0))	as below
2	2-norm (largest sing. value)	as below
-2	smallest singular value	as below
other	–	sum(abs(x)**ord)**(1./ord)

The Frobenius norm is given by *[R48]*:

$$||A||_F = [\sum_{i,j} abs(a_{i,j})^2]^{1/2}$$

The nuclear norm is the sum of the singular values.

References

[R48]

Examples

```
>>> from numpy import linalg as LA
>>> a = np.arange(9) - 4
>>> a
array([-4, -3, -2, -1,  0,  1,  2,  3,  4])
>>> b = a.reshape((3, 3))
>>> b
array([[-4, -3, -2],
       [-1,  0,  1],
       [ 2,  3,  4]])
```

```
>>> LA.norm(a)
7.745966692414834
>>> LA.norm(b)
7.745966692414834
>>> LA.norm(b, 'fro')
7.745966692414834
>>> LA.norm(a, np.inf)
4.0
>>> LA.norm(b, np.inf)
9.0
>>> LA.norm(a, -np.inf)
0.0
>>> LA.norm(b, -np.inf)
2.0
```

```
>>> LA.norm(a, 1)
20.0
```

(continues on next page)

(continued from previous page)

```
>>> LA.norm(b, 1)
7.0
>>> LA.norm(a, -1)
-4.6566128774142013e-010
>>> LA.norm(b, -1)
6.0
>>> LA.norm(a, 2)
7.745966692414834
>>> LA.norm(b, 2)
7.3484692283495345
```

```
>>> LA.norm(a, -2)
nan
>>> LA.norm(b, -2)
1.8570331885190563e-016
>>> LA.norm(a, 3)
5.8480354764257312
>>> LA.norm(a, -3)
nan
```

Using the *axis* argument to compute vector norms:

```
>>> c = np.array([[ 1, 2, 3],
...               [-1, 1, 4]])
>>> LA.norm(c, axis=0)
array([ 1.41421356,  2.23606798,  5.        ])
>>> LA.norm(c, axis=1)
array([ 3.74165739,  4.24264069])
>>> LA.norm(c, ord=1, axis=1)
array([ 6.,  6.])
```

Using the *axis* argument to compute matrix norms:

```
>>> m = np.arange(8).reshape(2,2,2)
>>> LA.norm(m, axis=(1,2))
array([  3.74165739,  11.22497216])
>>> LA.norm(m[0, :, :]), LA.norm(m[1, :, :])
(3.7416573867739413, 11.224972160321824)
```

numpy.linalg.**cond**(*x*, *p=None*)

Compute the condition number of a matrix.

This function is capable of returning the condition number using one of seven different norms, depending on the value of *p* (see Parameters below).

Parameters **x** : (…, M, N) array_like

The matrix whose condition number is sought.

p : {None, 1, -1, 2, -2, inf, -inf, 'fro'}, optional

Order of the norm:

p	norm for matrices
None	2-norm, computed directly using the SVD
'fro'	Frobenius norm
inf	max(sum(abs(x), axis=1))
-inf	min(sum(abs(x), axis=1))
1	max(sum(abs(x), axis=0))
-1	min(sum(abs(x), axis=0))
2	2-norm (largest sing. value)
-2	smallest singular value

inf means the numpy.inf object, and the Frobenius norm is the root-of-sum-of-squares norm.

Returns **c** : {float, inf}

The condition number of the matrix. May be infinite.

See also:

numpy.linalg.norm

Notes

The condition number of *x* is defined as the norm of *x* times the norm of the inverse of *x* *[R42]*; the norm can be the usual L2-norm (root-of-sum-of-squares) or one of a number of other matrix norms.

References

[R42]

Examples

```
>>> from numpy import linalg as LA
>>> a = np.array([[1, 0, -1], [0, 1, 0], [1, 0, 1]])
>>> a
array([[ 1,  0, -1],
       [ 0,  1,  0],
       [ 1,  0,  1]])
>>> LA.cond(a)
1.4142135623730951
>>> LA.cond(a, 'fro')
3.1622776601683795
>>> LA.cond(a, np.inf)
2.0
>>> LA.cond(a, -np.inf)
1.0
>>> LA.cond(a, 1)
2.0
>>> LA.cond(a, -1)
1.0
>>> LA.cond(a, 2)
1.4142135623730951
```

(continues on next page)

(continued from previous page)

```
>>> LA.cond(a, -2)
0.70710678118654746
>>> min(LA.svd(a, compute_uv=0))*min(LA.svd(LA.inv(a), compute_uv=0))
0.70710678118654746
```

numpy.linalg.**det**(*a*)

Compute the determinant of an array.

Parameters **a** : (..., M, M) array_like

Input array to compute determinants for.

Returns **det** : (...) array_like

Determinant of *a*.

See also:

slogdet Another way to representing the determinant, more suitable for large matrices where underflow/overflow may occur.

Notes

New in version 1.8.0.

Broadcasting rules apply, see the `numpy.linalg` documentation for details.

The determinant is computed via LU factorization using the LAPACK routine z/dgetrf.

Examples

The determinant of a 2-D array [[a, b], [c, d]] is ad - bc:

```
>>> a = np.array([[1, 2], [3, 4]])
>>> np.linalg.det(a)
-2.0
```

Computing determinants for a stack of matrices:

```
>>> a = np.array([ [[1, 2], [3, 4]], [[1, 2], [2, 1]], [[1, 3], [3, 1]] ])
>>> a.shape
(3, 2, 2)
>>> np.linalg.det(a)
array([-2., -3., -8.])
```

numpy.linalg.**matrix_rank**(*M*, *tol=None*, *hermitian=False*)

Return matrix rank of array using SVD method

Rank of the array is the number of singular values of the array that are greater than *tol*.

Changed in version 1.14: Can now operate on stacks of matrices

Parameters **M** : {(M,), (..., M, N)} array_like

input vector or stack of matrices

tol : (...) array_like, float, optional

threshold below which SVD values are considered zero. If *tol* is None, and `S` is an array with singular values for *M*, and `eps` is the epsilon value for datatype of `S`, then *tol* is set to `S.max() * max(M.shape) * eps`.

Changed in version 1.14: Broadcasted against the stack of matrices

hermitian : bool, optional

If True, *M* is assumed to be Hermitian (symmetric if real-valued), enabling a more efficient method for finding singular values. Defaults to False.

New in version 1.14.

Notes

The default threshold to detect rank deficiency is a test on the magnitude of the singular values of *M*. By default, we identify singular values less than `S.max() * max(M.shape) * eps` as indicating rank deficiency (with the symbols defined above). This is the algorithm MATLAB uses [1]. It also appears in *Numerical recipes* in the discussion of SVD solutions for linear least squares [2].

This default threshold is designed to detect rank deficiency accounting for the numerical errors of the SVD computation. Imagine that there is a column in *M* that is an exact (in floating point) linear combination of other columns in *M*. Computing the SVD on *M* will not produce a singular value exactly equal to 0 in general: any difference of the smallest SVD value from 0 will be caused by numerical imprecision in the calculation of the SVD. Our threshold for small SVD values takes this numerical imprecision into account, and the default threshold will detect such numerical rank deficiency. The threshold may declare a matrix *M* rank deficient even if the linear combination of some columns of *M* is not exactly equal to another column of *M* but only numerically very close to another column of *M*.

We chose our default threshold because it is in wide use. Other thresholds are possible. For example, elsewhere in the 2007 edition of *Numerical recipes* there is an alternative threshold of `S.max() * np.finfo(M.dtype).eps / 2. * np.sqrt(m + n + 1.)`. The authors describe this threshold as being based on "expected roundoff error" (p 71).

The thresholds above deal with floating point roundoff error in the calculation of the SVD. However, you may have more information about the sources of error in *M* that would make you consider other tolerance values to detect *effective* rank deficiency. The most useful measure of the tolerance depends on the operations you intend to use on your matrix. For example, if your data come from uncertain measurements with uncertainties greater than floating point epsilon, choosing a tolerance near that uncertainty may be preferable. The tolerance may be absolute if the uncertainties are absolute rather than relative.

References

[R44], *[R45]*

Examples

```
>>> from numpy.linalg import matrix_rank
>>> matrix_rank(np.eye(4)) # Full rank matrix
4
>>> I=np.eye(4); I[-1,-1] = 0. # rank deficient matrix
>>> matrix_rank(I)
3
>>> matrix_rank(np.ones((4,))) # 1 dimension - rank 1 unless all 0
```

(continues on next page)

(continued from previous page)

```
1
>>> matrix_rank(np.zeros((4,)))
0
```

numpy.linalg.**slogdet**(*a*)

Compute the sign and (natural) logarithm of the determinant of an array.

If an array has a very small or very large determinant, then a call to *det* may overflow or underflow. This routine is more robust against such issues, because it computes the logarithm of the determinant rather than the determinant itself.

Parameters **a** : (..., M, M) array_like

Input array, has to be a square 2-D array.

Returns **sign** : (...) array_like

A number representing the sign of the determinant. For a real matrix, this is 1, 0, or -1. For a complex matrix, this is a complex number with absolute value 1 (i.e., it is on the unit circle), or else 0.

logdet : (...) array_like

The natural log of the absolute value of the determinant.

If the determinant is zero, then *sign* will be 0 and *logdet* will be

-Inf. In all cases, the determinant is equal to `sign * np.exp(logdet)`.

See also:

det

Notes

New in version 1.8.0.

Broadcasting rules apply, see the `numpy.linalg` documentation for details.

New in version 1.6.0.

The determinant is computed via LU factorization using the LAPACK routine z/dgetrf.

Examples

The determinant of a 2-D array `[[a, b], [c, d]]` is `ad - bc`:

```
>>> a = np.array([[1, 2], [3, 4]])
>>> (sign, logdet) = np.linalg.slogdet(a)
>>> (sign, logdet)
(-1, 0.69314718055994529)
>>> sign * np.exp(logdet)
-2.0
```

Computing log-determinants for a stack of matrices:

```
>>> a = np.array([ [[1, 2], [3, 4]], [[1, 2], [2, 1]], [[1, 3], [3, 1]] ])
>>> a.shape
(3, 2, 2)
>>> sign, logdet = np.linalg.slogdet(a)
>>> (sign, logdet)
(array([-1., -1., -1.]), array([ 0.69314718,  1.09861229,  2.07944154]))
>>> sign * np.exp(logdet)
array([-2., -3., -8.])
```

This routine succeeds where ordinary *det* does not:

```
>>> np.linalg.det(np.eye(500) * 0.1)
0.0
>>> np.linalg.slogdet(np.eye(500) * 0.1)
(1, -1151.2925464970228)
```

numpy.**trace**(*a*, *offset=0*, *axis1=0*, *axis2=1*, *dtype=None*, *out=None*)

Return the sum along diagonals of the array.

If *a* is 2-D, the sum along its diagonal with the given offset is returned, i.e., the sum of elements `a[i, i+offset]` for all i.

If *a* has more than two dimensions, then the axes specified by axis1 and axis2 are used to determine the 2-D sub-arrays whose traces are returned. The shape of the resulting array is the same as that of *a* with *axis1* and *axis2* removed.

Parameters **a** : array_like

Input array, from which the diagonals are taken.

offset : int, optional

Offset of the diagonal from the main diagonal. Can be both positive and negative. Defaults to 0.

axis1, axis2 : int, optional

Axes to be used as the first and second axis of the 2-D sub-arrays from which the diagonals should be taken. Defaults are the first two axes of *a*.

dtype : dtype, optional

Determines the data-type of the returned array and of the accumulator where the elements are summed. If dtype has the value None and *a* is of integer type of precision less than the default integer precision, then the default integer precision is used. Otherwise, the precision is the same as that of *a*.

out : ndarray, optional

Array into which the output is placed. Its type is preserved and it must be of the right shape to hold the output.

Returns **sum_along_diagonals** : ndarray

If *a* is 2-D, the sum along the diagonal is returned. If *a* has larger dimensions, then an array of sums along diagonals is returned.

See also:

diag, *diagonal*, *diagflat*

Examples

```
>>> np.trace(np.eye(3))
3.0
>>> a = np.arange(8).reshape((2,2,2))
>>> np.trace(a)
array([6, 8])
```

```
>>> a = np.arange(24).reshape((2,2,2,3))
>>> np.trace(a).shape
(2, 3)
```

3.17.5 Solving equations and inverting matrices

linalg.solve(a, b)	Solve a linear matrix equation, or system of linear scalar equations.
linalg.tensorsolve(a, b[, axes])	Solve the tensor equation `a x = b` for x.
linalg.lstsq(a, b[, rcond])	Return the least-squares solution to a linear matrix equation.
linalg.inv(a)	Compute the (multiplicative) inverse of a matrix.
linalg.pinv(a[, rcond])	Compute the (Moore-Penrose) pseudo-inverse of a matrix.
linalg.tensorinv(a[, ind])	Compute the 'inverse' of an N-dimensional array.

numpy.linalg.**solve**(*a*, *b*)

Solve a linear matrix equation, or system of linear scalar equations.

Computes the "exact" solution, *x*, of the well-determined, i.e., full rank, linear matrix equation *ax* = *b*.

Parameters **a** : (..., M, M) array_like

Coefficient matrix.

b : {(..., M,), (..., M, K)}, array_like

Ordinate or "dependent variable" values.

Returns **x** : {(..., M,), (..., M, K)} ndarray

Solution to the system a x = b. Returned shape is identical to *b*.

Raises **LinAlgError**

If *a* is singular or not square.

Notes

New in version 1.8.0.

Broadcasting rules apply, see the numpy.linalg documentation for details.

The solutions are computed using LAPACK routine _gesv

a must be square and of full-rank, i.e., all rows (or, equivalently, columns) must be linearly independent; if either is not true, use *lstsq* for the least-squares best "solution" of the system/equation.

References

[R50]

Examples

Solve the system of equations `3 * x0 + x1 = 9` and `x0 + 2 * x1 = 8`:

```
>>> a = np.array([[3,1], [1,2]])
>>> b = np.array([9,8])
>>> x = np.linalg.solve(a, b)
>>> x
array([ 2.,  3.])
```

Check that the solution is correct:

```
>>> np.allclose(np.dot(a, x), b)
True
```

numpy.linalg.**tensorsolve**(*a*, *b*, *axes=None*)

Solve the tensor equation `a x = b` for x.

It is assumed that all indices of *x* are summed over in the product, together with the rightmost indices of *a*, as is done in, for example, `tensordot(a, x, axes=b.ndim)`.

Parameters **a** : array_like

Coefficient tensor, of shape `b.shape + Q`. *Q*, a tuple, equals the shape of that sub-tensor of *a* consisting of the appropriate number of its rightmost indices, and must be such that `prod(Q) == prod(b.shape)` (in which sense *a* is said to be 'square').

b : array_like

Right-hand tensor, which can be of any shape.

axes : tuple of ints, optional

Axes in *a* to reorder to the right, before inversion. If None (default), no reordering is done.

Returns **x** : ndarray, shape Q

Raises **LinAlgError**

If *a* is singular or not 'square' (in the above sense).

See also:

numpy.tensordot, *tensorinv*, *numpy.einsum*

Examples

```
>>> a = np.eye(2*3*4)
>>> a.shape = (2*3, 4, 2, 3, 4)
>>> b = np.random.randn(2*3, 4)
>>> x = np.linalg.tensorsolve(a, b)
>>> x.shape
(2, 3, 4)
```

(continues on next page)

(continued from previous page)

```
>>> np.allclose(np.tensordot(a, x, axes=3), b)
True
```

numpy.linalg.**lstsq**(*a*, *b*, *rcond='warn'*)

Return the least-squares solution to a linear matrix equation.

Solves the equation *a x = b* by computing a vector *x* that minimizes the Euclidean 2-norm || *b - a x* ||^2. The equation may be under-, well-, or over- determined (i.e., the number of linearly independent rows of *a* can be less than, equal to, or greater than its number of linearly independent columns). If *a* is square and of full rank, then *x* (but for round-off error) is the "exact" solution of the equation.

Parameters **a** : (M, N) array_like

"Coefficient" matrix.

b : {(M,), (M, K)} array_like

Ordinate or "dependent variable" values. If *b* is two-dimensional, the least-squares solution is calculated for each of the *K* columns of *b*.

rcond : float, optional

Cut-off ratio for small singular values of *a*. For the purposes of rank determination, singular values are treated as zero if they are smaller than *rcond* times the largest singular value of *a*.

Changed in version 1.14.0: If not set, a FutureWarning is given. The previous default of `-1` will use the machine precision as *rcond* parameter, the new default will use the machine precision times *max(M, N)*. To silence the warning and use the new default, use `rcond=None`, to keep using the old behavior, use `rcond=-1`.

Returns **x** : {(N,), (N, K)} ndarray

Least-squares solution. If *b* is two-dimensional, the solutions are in the *K* columns of *x*.

residuals : {(1,), (K,), (0,)} ndarray

Sums of residuals; squared Euclidean 2-norm for each column in `b - a*x`. If the rank of *a* is < N or M <= N, this is an empty array. If *b* is 1-dimensional, this is a (1,) shape array. Otherwise the shape is (K,).

rank : int

Rank of matrix *a*.

s : (min(M, N),) ndarray

Singular values of *a*.

Raises **LinAlgError**

If computation does not converge.

Notes

If *b* is a matrix, then all array results are returned as matrices.

Examples

Fit a line, `y = mx + c`, through some noisy data-points:

```
>>> x = np.array([0, 1, 2, 3])
>>> y = np.array([-1, 0.2, 0.9, 2.1])
```

By examining the coefficients, we see that the line should have a gradient of roughly 1 and cut the y-axis at, more or less, -1.

We can rewrite the line equation as `y = Ap`, where `A = [[x 1]]` and `p = [[m], [c]]`. Now use *`lstsq`* to solve for *p*:

```
>>> A = np.vstack([x, np.ones(len(x))]).T
>>> A
array([[ 0.,  1.],
       [ 1.,  1.],
       [ 2.,  1.],
       [ 3.,  1.]])
```

```
>>> m, c = np.linalg.lstsq(A, y)[0]
>>> print(m, c)
1.0 -0.95
```

Plot the data along with the fitted line:

```
>>> import matplotlib.pyplot as plt
>>> plt.plot(x, y, 'o', label='Original data', markersize=10)
>>> plt.plot(x, m*x + c, 'r', label='Fitted line')
>>> plt.legend()
>>> plt.show()
```

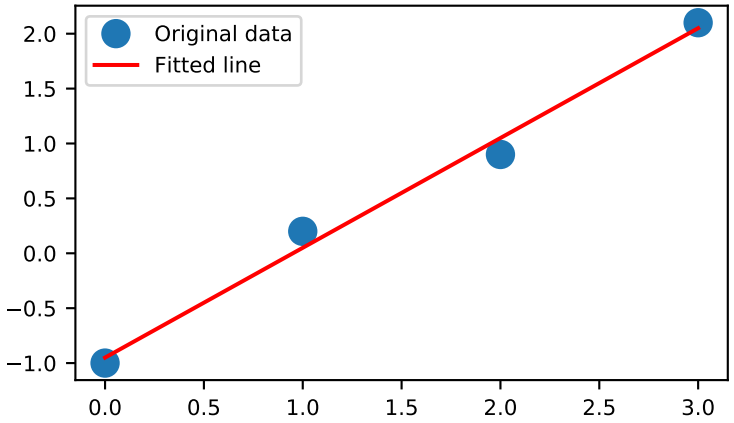

`numpy.linalg.`**`inv`**`(a)`

Compute the (multiplicative) inverse of a matrix.

Given a square matrix *a*, return the matrix *ainv* satisfying `dot(a, ainv) = dot(ainv, a) = eye(a.shape[0])`.

Parameters **a** : (..., M, M) array_like

Matrix to be inverted.

Returns **ainv** : (..., M, M) ndarray or matrix

(Multiplicative) inverse of the matrix *a*.

Raises **LinAlgError**

If *a* is not square or inversion fails.

Notes

New in version 1.8.0.

Broadcasting rules apply, see the `numpy.linalg` documentation for details.

Examples

```
>>> from numpy.linalg import inv
>>> a = np.array([[1., 2.], [3., 4.]])
>>> ainv = inv(a)
>>> np.allclose(np.dot(a, ainv), np.eye(2))
True
>>> np.allclose(np.dot(ainv, a), np.eye(2))
True
```

If a is a matrix object, then the return value is a matrix as well:

```
>>> ainv = inv(np.matrix(a))
>>> ainv
matrix([[-2. ,  1. ],
        [ 1.5, -0.5]])
```

Inverses of several matrices can be computed at once:

```
>>> a = np.array([[[1., 2.], [3., 4.]], [[1, 3], [3, 5]]])
>>> inv(a)
array([[[-2. ,  1. ],
        [ 1.5, -0.5]],
       [[-5. ,  2. ],
        [ 3. , -1. ]]])
```

`numpy.linalg.`**`pinv`**(*a*, *rcond=1e-15*)

Compute the (Moore-Penrose) pseudo-inverse of a matrix.

Calculate the generalized inverse of a matrix using its singular-value decomposition (SVD) and including all *large* singular values.

Changed in version 1.14: Can now operate on stacks of matrices

Parameters **a** : (..., M, N) array_like

Matrix or stack of matrices to be pseudo-inverted.

rcond : (...) array_like of float

Cutoff for small singular values. Singular values smaller (in modulus) than *rcond* * largest_singular_value (again, in modulus) are set to zero. Broadcasts against the stack of matrices

Returns **B** : (..., N, M) ndarray

The pseudo-inverse of *a*. If *a* is a *matrix* instance, then so is *B*.

Raises **LinAlgError**

If the SVD computation does not converge.

Notes

The pseudo-inverse of a matrix A, denoted A^+, is defined as: "the matrix that 'solves' [the least-squares problem] $Ax = b$," i.e., if $\bar{x}$ is said solution, then A^+ is that matrix such that $\bar{x} = A^+b$.

It can be shown that if $Q_1\Sigma Q_2^T = A$ is the singular value decomposition of A, then $A^+ = Q_2\Sigma^+Q_1^T$, where $Q_{1,2}$ are orthogonal matrices, Σ is a diagonal matrix consisting of A's so-called singular values, (followed, typically, by zeros), and then Σ^+ is simply the diagonal matrix consisting of the reciprocals of A's singular values (again, followed by zeros). *[R49]*

References

[R49]

Examples

The following example checks that `a * a+ * a == a` and `a+ * a * a+ == a+`:

```
>>> a = np.random.randn(9, 6)
>>> B = np.linalg.pinv(a)
>>> np.allclose(a, np.dot(a, np.dot(B, a)))
True
>>> np.allclose(B, np.dot(B, np.dot(a, B)))
True
```

numpy.linalg.**tensorinv**(*a*, *ind=2*)

Compute the 'inverse' of an N-dimensional array.

The result is an inverse for *a* relative to the tensordot operation `tensordot(a, b, ind)`, i. e., up to floating-point accuracy, `tensordot(tensorinv(a), a, ind)` is the "identity" tensor for the tensordot operation.

Parameters **a** : array_like

Tensor to 'invert'. Its shape must be 'square', i. e., `prod(a.shape[:ind]) == prod(a.shape[ind:])`.

ind : int, optional

Number of first indices that are involved in the inverse sum. Must be a positive integer, default is 2.

Returns **b** : ndarray

a's tensordot inverse, shape `a.shape[ind:] + a.shape[:ind]`.

Raises **LinAlgError**

If *a* is singular or not 'square' (in the above sense).

See also:

numpy.tensordot, *tensorsolve*

Examples

```
>>> a = np.eye(4*6)
>>> a.shape = (4, 6, 8, 3)
>>> ainv = np.linalg.tensorinv(a, ind=2)
>>> ainv.shape
(8, 3, 4, 6)
>>> b = np.random.randn(4, 6)
>>> np.allclose(np.tensordot(ainv, b), np.linalg.tensorsolve(a, b))
True
```

```
>>> a = np.eye(4*6)
>>> a.shape = (24, 8, 3)
>>> ainv = np.linalg.tensorinv(a, ind=1)
>>> ainv.shape
(8, 3, 24)
>>> b = np.random.randn(24)
>>> np.allclose(np.tensordot(ainv, b, 1), np.linalg.tensorsolve(a, b))
True
```

3.17.6 Exceptions

linalg.LinAlgError	Generic Python-exception-derived object raised by linalg functions.

exception numpy.linalg.**LinAlgError**

Generic Python-exception-derived object raised by linalg functions.

General purpose exception class, derived from Python's exception.Exception class, programmatically raised in linalg functions when a Linear Algebra-related condition would prevent further correct execution of the function.

Parameters **None**

Examples

```
>>> from numpy import linalg as LA
>>> LA.inv(np.zeros((2,2)))
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
  File "...linalg.py", line 350,
    in inv return wrap(solve(a, identity(a.shape[0], dtype=a.dtype)))
  File "...linalg.py", line 249,
    in solve
    raise LinAlgError('Singular matrix')
numpy.linalg.LinAlgError: Singular matrix
```

3.17.7 Linear algebra on several matrices at once

New in version 1.8.0.

Several of the linear algebra routines listed above are able to compute results for several matrices at once, if they are stacked into the same array.

This is indicated in the documentation via input parameter specifications such as `a : (..., M, M) array_like`. This means that if for instance given an input array `a.shape == (N, M, M)`, it is interpreted as a "stack" of N matrices, each of size M-by-M. Similar specification applies to return values, for instance the determinant has `det : (...)` and will in this case return an array of shape `det(a).shape == (N,)`. This generalizes to linear algebra operations on higher-dimensional arrays: the last 1 or 2 dimensions of a multidimensional array are interpreted as vectors or matrices, as appropriate for each operation.

3.18 Logic functions

3.18.1 Truth value testing

all(a[, axis, out, keepdims])	Test whether all array elements along a given axis evaluate to True.
any(a[, axis, out, keepdims])	Test whether any array element along a given axis evaluates to True.

numpy.**all**(*a*, *axis=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Test whether all array elements along a given axis evaluate to True.

Parameters **a** : array_like

Input array or object that can be converted to an array.

axis : None or int or tuple of ints, optional

Axis or axes along which a logical AND reduction is performed. The default (*axis = None*) is to perform a logical AND over all the dimensions of the input array. *axis* may be negative, in which case it counts from the last to the first axis.

New in version 1.7.0.

If this is a tuple of ints, a reduction is performed on multiple axes, instead of a single axis or all the axes as before.

out : ndarray, optional

Alternate output array in which to place the result. It must have the same shape as the expected output and its type is preserved (e.g., if `dtype(out)` is float, the result will consist of 0.0's and 1.0's). See `doc.ufuncs` (Section "Output arguments") for more details.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the input array.

If the default value is passed, then *keepdims* will not be passed through to the *all* method of sub-classes of *ndarray*, however any non-default value will be. If the sub-classes *sum* method does not implement *keepdims* any exceptions will be raised.

Returns **all** : ndarray, bool

A new boolean or array is returned unless *out* is specified, in which case a reference to *out* is returned.

See also:

ndarray.all equivalent method

any Test whether any element along a given axis evaluates to True.

Notes

Not a Number (NaN), positive infinity and negative infinity evaluate to *True* because these are not equal to zero.

Examples

```
>>> np.all([[True,False],[True,True]])
False
```

```
>>> np.all([[True,False],[True,True]], axis=0)
array([ True, False])
```

```
>>> np.all([-1, 4, 5])
True
```

```
>>> np.all([1.0, np.nan])
True
```

```
>>> o=np.array([False])
>>> z=np.all([-1, 4, 5], out=o)
>>> id(z), id(o), z
(28293632, 28293632, array([ True]))
```

numpy.**any**(*a*, *axis=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Test whether any array element along a given axis evaluates to True.

Returns single boolean unless *axis* is not `None`

Parameters **a** : array_like

Input array or object that can be converted to an array.

axis : None or int or tuple of ints, optional

Axis or axes along which a logical OR reduction is performed. The default (*axis* = *None*) is to perform a logical OR over all the dimensions of the input array. *axis* may be negative, in which case it counts from the last to the first axis.

New in version 1.7.0.

If this is a tuple of ints, a reduction is performed on multiple axes, instead of a single axis or all the axes as before.

out : ndarray, optional

Alternate output array in which to place the result. It must have the same shape as the expected output and its type is preserved (e.g., if it is of type float, then it will remain so, returning 1.0 for True and 0.0 for False, regardless of the type of *a*). See `doc.ufuncs` (Section "Output arguments") for details.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the input array.

If the default value is passed, then *keepdims* will not be passed through to the *any* method of sub-classes of *ndarray*, however any non-default value will be. If the sub-classes *sum* method does not implement *keepdims* any exceptions will be raised.

Returns **any** : bool or ndarray

A new boolean or *ndarray* is returned unless *out* is specified, in which case a reference to *out* is returned.

See also:

ndarray.any equivalent method

all Test whether all elements along a given axis evaluate to True.

Notes

Not a Number (NaN), positive infinity and negative infinity evaluate to *True* because these are not equal to zero.

Examples

```
>>> np.any([[True, False], [True, True]])
True
```

```
>>> np.any([[True, False], [False, False]], axis=0)
array([ True, False])
```

```
>>> np.any([-1, 0, 5])
True
```

```
>>> np.any(np.nan)
True
```

```
>>> o=np.array([False])
>>> z=np.any([-1, 4, 5], out=o)
>>> z, o
(array([ True]), array([ True]))
>>> # Check now that z is a reference to o
>>> z is o
True
>>> id(z), id(o) # identity of z and o
(191614240, 191614240)
```

3.18.2 Array contents

isfinite(x, /[, out, where, casting, order, ...])	Test element-wise for finiteness (not infinity or not Not a Number).
isinf(x, /[, out, where, casting, order, ...])	Test element-wise for positive or negative infinity.
isnan(x, /[, out, where, casting, order, ...])	Test element-wise for NaN and return result as a boolean array.

Continued on next page

Table 75 – continued from previous page

isnat(x, /[, out, where, casting, order, ...])	Test element-wise for NaT (not a time) and return result as a boolean array.
isneginf(x[, out])	Test element-wise for negative infinity, return result as bool array.
isposinf(x[, out])	Test element-wise for positive infinity, return result as bool array.

numpy.**isfinite**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'isfinite'>**

Test element-wise for finiteness (not infinity or not Not a Number).

The result is returned as a boolean array.

Parameters **x** : array_like

Input values.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray, bool

For scalar input, the result is a new boolean with value True if the input is finite; otherwise the value is False (input is either positive infinity, negative infinity or Not a Number).

For array input, the result is a boolean array with the same dimensions as the input and the values are True if the corresponding element of the input is finite; otherwise the values are False (element is either positive infinity, negative infinity or Not a Number).

See also:

isinf, *isneginf*, *isposinf*, *isnan*

Notes

Not a Number, positive infinity and negative infinity are considered to be non-finite.

NumPy uses the IEEE Standard for Binary Floating-Point for Arithmetic (IEEE 754). This means that Not a Number is not equivalent to infinity. Also that positive infinity is not equivalent to negative infinity. But infinity is equivalent to positive infinity. Errors result if the second argument is also supplied when *x* is a scalar input, or if first and second arguments have different shapes.

Examples

```
>>> np.isfinite(1)
True
>>> np.isfinite(0)
True
>>> np.isfinite(np.nan)
False
>>> np.isfinite(np.inf)
False
>>> np.isfinite(np.NINF)
False
>>> np.isfinite([np.log(-1.),1.,np.log(0)])
array([False,  True, False])
```

```
>>> x = np.array([-np.inf, 0., np.inf])
>>> y = np.array([2, 2, 2])
>>> np.isfinite(x, y)
array([0, 1, 0])
>>> y
array([0, 1, 0])
```

numpy.**isinf**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'isinf'>**

Test element-wise for positive or negative infinity.

Returns a boolean array of the same shape as *x*, True where `x == +/-inf`, otherwise False.

Parameters **x** : array_like

Input values

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : bool (scalar) or boolean ndarray

For scalar input, the result is a new boolean with value True if the input is positive or negative infinity; otherwise the value is False.

For array input, the result is a boolean array with the same shape as the input and the values are True where the corresponding element of the input is positive or negative infinity; elsewhere the values are False. If a second argument was supplied the result is stored there. If the type of that array is a numeric type the result is represented as zeros and ones, if the type is boolean then as False and True, respectively. The return value *y* is then a reference to that array.

See also:

isneginf, *isposinf*, *isnan*, *isfinite*

Notes

NumPy uses the IEEE Standard for Binary Floating-Point for Arithmetic (IEEE 754).

Errors result if the second argument is supplied when the first argument is a scalar, or if the first and second arguments have different shapes.

Examples

```
>>> np.isinf(np.inf)
True
>>> np.isinf(np.nan)
False
>>> np.isinf(np.NINF)
True
>>> np.isinf([np.inf, -np.inf, 1.0, np.nan])
array([ True,  True, False, False])
```

```
>>> x = np.array([-np.inf, 0., np.inf])
>>> y = np.array([2, 2, 2])
>>> np.isinf(x, y)
array([1, 0, 1])
>>> y
array([1, 0, 1])
```

numpy.**isnan**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'isnan'>**

Test element-wise for NaN and return result as a boolean array.

Parameters **x** : array_like

Input array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray or bool

For scalar input, the result is a new boolean with value True if the input is NaN; otherwise the value is False.

For array input, the result is a boolean array of the same dimensions as the input and the values are True if the corresponding element of the input is NaN; otherwise the values are False.

See also:

isinf, *isneginf*, *isposinf*, *isfinite*, *isnat*

Notes

NumPy uses the IEEE Standard for Binary Floating-Point for Arithmetic (IEEE 754). This means that Not a Number is not equivalent to infinity.

Examples

```
>>> np.isnan(np.nan)
True
>>> np.isnan(np.inf)
False
>>> np.isnan([np.log(-1.),1.,np.log(0)])
array([ True, False, False])
```

numpy.**isnat**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'isnat'>**

Test element-wise for NaT (not a time) and return result as a boolean array.

Parameters **x** : array_like

Input array with datetime or timedelta data type.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray or bool

For scalar input, the result is a new boolean with value True if the input is NaT; otherwise the value is False.

For array input, the result is a boolean array of the same dimensions as the input and the values are True if the corresponding element of the input is NaT; otherwise the values are False.

See also:

isnan, *isinf*, *isneginf*, *isposinf*, *isfinite*

Examples

```
>>> np.isnat(np.datetime64("NaT"))
True
>>> np.isnat(np.datetime64("2016-01-01"))
False
>>> np.isnat(np.array(["NaT", "2016-01-01"], dtype="datetime64[ns]"))
array([ True, False])
```

numpy.**isneginf**(*x*, *out=None*)

Test element-wise for negative infinity, return result as bool array.

Parameters **x** : array_like

The input array.

out : array_like, optional

A boolean array with the same shape and type as *x* to store the result.

Returns **out** : ndarray

A boolean array with the same dimensions as the input. If second argument is not supplied then a numpy boolean array is returned with values True where the corresponding element of the input is negative infinity and values False where the element of the input is not negative infinity.

If a second argument is supplied the result is stored there. If the type of that array is a numeric type the result is represented as zeros and ones, if the type is boolean then as False and True. The return value *out* is then a reference to that array.

See also:

isinf, *isposinf*, *isnan*, *isfinite*

Notes

NumPy uses the IEEE Standard for Binary Floating-Point for Arithmetic (IEEE 754).

Errors result if the second argument is also supplied when x is a scalar input, or if first and second arguments have different shapes.

Examples

```
>>> np.isneginf(np.NINF)
array(True, dtype=bool)
>>> np.isneginf(np.inf)
array(False, dtype=bool)
>>> np.isneginf(np.PINF)
array(False, dtype=bool)
>>> np.isneginf([-np.inf, 0., np.inf])
array([ True, False, False])
```

```
>>> x = np.array([-np.inf, 0., np.inf])
>>> y = np.array([2, 2, 2])
>>> np.isneginf(x, y)
```

(continues on next page)

(continued from previous page)

```
array([1, 0, 0])
>>> y
array([1, 0, 0])
```

numpy.**isposinf**(*x*, *out=None*)

Test element-wise for positive infinity, return result as bool array.

Parameters **x** : array_like

The input array.

y : array_like, optional

A boolean array with the same shape as *x* to store the result.

Returns **out** : ndarray

A boolean array with the same dimensions as the input. If second argument is not supplied then a boolean array is returned with values True where the corresponding element of the input is positive infinity and values False where the element of the input is not positive infinity.

If a second argument is supplied the result is stored there. If the type of that array is a numeric type the result is represented as zeros and ones, if the type is boolean then as False and True. The return value *out* is then a reference to that array.

See also:

isinf, *isneginf*, *isfinite*, *isnan*

Notes

NumPy uses the IEEE Standard for Binary Floating-Point for Arithmetic (IEEE 754).

Errors result if the second argument is also supplied when *x* is a scalar input, or if first and second arguments have different shapes.

Examples

```
>>> np.isposinf(np.PINF)
array(True, dtype=bool)
>>> np.isposinf(np.inf)
array(True, dtype=bool)
>>> np.isposinf(np.NINF)
array(False, dtype=bool)
>>> np.isposinf([-np.inf, 0., np.inf])
array([False, False,  True])
```

```
>>> x = np.array([-np.inf, 0., np.inf])
>>> y = np.array([2, 2, 2])
>>> np.isposinf(x, y)
array([0, 0, 1])
>>> y
array([0, 0, 1])
```

3.18.3 Array type testing

iscomplex(x)	Returns a bool array, where True if input element is complex.
iscomplexobj(x)	Check for a complex type or an array of complex numbers.
isfortran(a)	Returns True if the array is Fortran contiguous but *not* C contiguous.
isreal(x)	Returns a bool array, where True if input element is real.
isrealobj(x)	Return True if x is a not complex type or an array of complex numbers.
isscalar(num)	Returns True if the type of *num* is a scalar type.

numpy.**iscomplex**(*x*)

Returns a bool array, where True if input element is complex.

What is tested is whether the input has a non-zero imaginary part, not if the input type is complex.

Parameters **x** : array_like

Input array.

Returns **out** : ndarray of bools

Output array.

See also:

isreal

iscomplexobj Return True if x is a complex type or an array of complex numbers.

Examples

```
>>> np.iscomplex([1+1j, 1+0j, 4.5, 3, 2, 2j])
array([ True, False, False, False, False,  True])
```

numpy.**iscomplexobj**(*x*)

Check for a complex type or an array of complex numbers.

The type of the input is checked, not the value. Even if the input has an imaginary part equal to zero, *iscomplexobj* evaluates to True.

Parameters **x** : any

The input can be of any type and shape.

Returns **iscomplexobj** : bool

The return value, True if *x* is of a complex type or has at least one complex element.

See also:

isrealobj, *iscomplex*

Examples

```
>>> np.iscomplexobj(1)
False
>>> np.iscomplexobj(1+0j)
True
>>> np.iscomplexobj([3, 1+0j, True])
True
```

numpy.**isfortran**(*a*)

Returns True if the array is Fortran contiguous but *not* C contiguous.

This function is obsolete and, because of changes due to relaxed stride checking, its return value for the same array may differ for versions of NumPy >= 1.10.0 and previous versions. If you only want to check if an array is Fortran contiguous use `a.flags.f_contiguous` instead.

Parameters **a** : ndarray

Input array.

Examples

np.array allows to specify whether the array is written in C-contiguous order (last index varies the fastest), or FORTRAN-contiguous order in memory (first index varies the fastest).

```
>>> a = np.array([[1, 2, 3], [4, 5, 6]], order='C')
>>> a
array([[1, 2, 3],
       [4, 5, 6]])
>>> np.isfortran(a)
False
```

```
>>> b = np.array([[1, 2, 3], [4, 5, 6]], order='FORTRAN')
>>> b
array([[1, 2, 3],
       [4, 5, 6]])
>>> np.isfortran(b)
True
```

The transpose of a C-ordered array is a FORTRAN-ordered array.

```
>>> a = np.array([[1, 2, 3], [4, 5, 6]], order='C')
>>> a
array([[1, 2, 3],
       [4, 5, 6]])
>>> np.isfortran(a)
False
>>> b = a.T
>>> b
array([[1, 4],
       [2, 5],
       [3, 6]])
>>> np.isfortran(b)
True
```

C-ordered arrays evaluate as False even if they are also FORTRAN-ordered.

```
>>> np.isfortran(np.array([1, 2], order='FORTRAN'))
False
```

numpy.**isreal**(*x*)

Returns a bool array, where True if input element is real.

If element has complex type with zero complex part, the return value for that element is True.

Parameters **x** : array_like

Input array.

Returns **out** : ndarray, bool

Boolean array of same shape as *x*.

See also:

iscomplex

isrealobj Return True if x is not a complex type.

Examples

```
>>> np.isreal([1+1j, 1+0j, 4.5, 3, 2, 2j])
array([False,  True,  True,  True,  True, False])
```

numpy.**isrealobj**(*x*)

Return True if x is a not complex type or an array of complex numbers.

The type of the input is checked, not the value. So even if the input has an imaginary part equal to zero, *isrealobj* evaluates to False if the data type is complex.

Parameters **x** : any

The input can be of any type and shape.

Returns **y** : bool

The return value, False if *x* is of a complex type.

See also:

iscomplexobj, *isreal*

Examples

```
>>> np.isrealobj(1)
True
>>> np.isrealobj(1+0j)
False
>>> np.isrealobj([3, 1+0j, True])
False
```

numpy.**isscalar**(*num*)

Returns True if the type of *num* is a scalar type.

Parameters **num** : any

Input argument, can be of any type and shape.

Returns **val** : bool

True if *num* is a scalar type, False if it is not.

Examples

```
>>> np.isscalar(3.1)
True
>>> np.isscalar([3.1])
False
>>> np.isscalar(False)
True
>>> np.isscalar('numpy')
True
```

NumPy supports PEP 3141 numbers:

```
>>> from fractions import Fraction
>>> isscalar(Fraction(5, 17))
True
>>> from numbers import Number
>>> isscalar(Number())
True
```

3.18.4 Logical operations

logical_and(x1, x2, /[, out, where, ...])	Compute the truth value of x1 AND x2 element-wise.
logical_or(x1, x2, /[, out, where, casting, ...])	Compute the truth value of x1 OR x2 element-wise.
logical_not(x, /[, out, where, casting, ...])	Compute the truth value of NOT x element-wise.
logical_xor(x1, x2, /[, out, where, ...])	Compute the truth value of x1 XOR x2, element-wise.

numpy.**logical_and**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'logical_and'>**

Compute the truth value of x1 AND x2 element-wise.

Parameters **x1, x2** : array_like

Input arrays. *x1* and *x2* must be of the same shape.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray or bool

Boolean result with the same shape as *x1* and *x2* of the logical AND operation on corresponding elements of *x1* and *x2*.

See also:

logical_or, *logical_not*, *logical_xor*, *bitwise_and*

Examples

```
>>> np.logical_and(True, False)
False
>>> np.logical_and([True, False], [False, False])
array([False, False])
```

```
>>> x = np.arange(5)
>>> np.logical_and(x>1, x<4)
array([False, False,  True,  True, False])
```

numpy.**logical_or**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'logical_or'>**

Compute the truth value of x1 OR x2 element-wise.

Parameters **x1, x2** : array_like

Logical OR is applied to the elements of *x1* and *x2*. They have to be of the same shape.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray or bool

Boolean result with the same shape as *x1* and *x2* of the logical OR operation on elements of *x1* and *x2*.

See also:

logical_and, *logical_not*, *logical_xor*, *bitwise_or*

Examples

```
>>> np.logical_or(True, False)
True
>>> np.logical_or([True, False], [False, False])
array([ True, False])
```

```
>>> x = np.arange(5)
>>> np.logical_or(x < 1, x > 3)
array([ True, False, False, False,  True])
```

numpy.**logical_not**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'logical_not'>**

Compute the truth value of NOT x element-wise.

Parameters **x** : array_like

Logical NOT is applied to the elements of *x*.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : bool or ndarray of bool

Boolean result with the same shape as *x* of the NOT operation on elements of *x*.

See also:

logical_and, *logical_or*, *logical_xor*

Examples

```
>>> np.logical_not(3)
False
>>> np.logical_not([True, False, 0, 1])
array([False,  True,  True, False])
```

```
>>> x = np.arange(5)
>>> np.logical_not(x<3)
array([False, False, False,  True,  True])
```

numpy.**logical_xor**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'logical_xor'>**

Compute the truth value of x1 XOR x2, element-wise.

Parameters **x1, x2** : array_like

Logical XOR is applied to the elements of *x1* and *x2*. They must be broadcastable to the same shape.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : bool or ndarray of bool

Boolean result of the logical XOR operation applied to the elements of *x1* and *x2*; the shape is determined by whether or not broadcasting of one or both arrays was required.

See also:

logical_and, *logical_or*, *logical_not*, *bitwise_xor*

Examples

```
>>> np.logical_xor(True, False)
True
>>> np.logical_xor([True, True, False, False], [True, False, True, False])
array([False,  True,  True, False])
```

```
>>> x = np.arange(5)
>>> np.logical_xor(x < 1, x > 3)
array([ True, False, False, False,  True])
```

Simple example showing support of broadcasting

```
>>> np.logical_xor(0, np.eye(2))
array([[ True, False],
       [False,  True]])
```

3.18.5 Comparison

allclose(a, b[, rtol, atol, equal_nan])	Returns True if two arrays are element-wise equal within a tolerance.
isclose(a, b[, rtol, atol, equal_nan])	Returns a boolean array where two arrays are element-wise equal within a tolerance.
array_equal(a1, a2)	True if two arrays have the same shape and elements, False otherwise.
array_equiv(a1, a2)	Returns True if input arrays are shape consistent and all elements equal.

numpy.**allclose**(*a*, *b*, *rtol=1e-05*, *atol=1e-08*, *equal_nan=False*)

Returns True if two arrays are element-wise equal within a tolerance.

The tolerance values are positive, typically very small numbers. The relative difference (*rtol* * abs(*b*)) and the absolute difference *atol* are added together to compare against the absolute difference between *a* and *b*.

If either array contains one or more NaNs, False is returned. Infs are treated as equal if they are in the same place and of the same sign in both arrays.

Parameters **a, b** : array_like

Input arrays to compare.

rtol : float

The relative tolerance parameter (see Notes).

atol : float

The absolute tolerance parameter (see Notes).

equal_nan : bool

Whether to compare NaN's as equal. If True, NaN's in *a* will be considered equal to NaN's in *b* in the output array.

New in version 1.10.0.

Returns **allclose** : bool

Returns True if the two arrays are equal within the given tolerance; False otherwise.

See also:

isclose, *all*, *any*, *equal*

Notes

If the following equation is element-wise True, then allclose returns True.

absolute(*a* - *b*) <= (*atol* + *rtol* * absolute(*b*))

The above equation is not symmetric in *a* and *b*, so that `allclose(a, b)` might be different from `allclose(b, a)` in some rare cases.

The comparison of *a* and *b* uses standard broadcasting, which means that *a* and *b* need not have the same shape in order for `allclose(a, b)` to evaluate to True. The same is true for *equal* but not *array_equal*.

Examples

```
>>> np.allclose([1e10,1e-7], [1.00001e10,1e-8])
False
>>> np.allclose([1e10,1e-8], [1.00001e10,1e-9])
True
>>> np.allclose([1e10,1e-8], [1.0001e10,1e-9])
False
>>> np.allclose([1.0, np.nan], [1.0, np.nan])
False
>>> np.allclose([1.0, np.nan], [1.0, np.nan], equal_nan=True)
True
```

numpy.**isclose**(*a*, *b*, *rtol=1e-05*, *atol=1e-08*, *equal_nan=False*)

Returns a boolean array where two arrays are element-wise equal within a tolerance.

The tolerance values are positive, typically very small numbers. The relative difference (*rtol* * abs(*b*)) and the absolute difference *atol* are added together to compare against the absolute difference between *a* and *b*.

Parameters **a, b** : array_like

Input arrays to compare.

rtol : float

The relative tolerance parameter (see Notes).

atol : float

The absolute tolerance parameter (see Notes).

equal_nan : bool

Whether to compare NaN's as equal. If True, NaN's in *a* will be considered equal to NaN's in *b* in the output array.

Returns **y** : array_like

Returns a boolean array of where *a* and *b* are equal within the given tolerance. If both *a* and *b* are scalars, returns a single boolean value.

See also:

allclose

Notes

New in version 1.7.0.

For finite values, isclose uses the following equation to test whether two floating point values are equivalent.

absolute(*a* - *b*) <= (*atol* + *rtol* * absolute(*b*))

The above equation is not symmetric in *a* and *b*, so that *isclose(a, b)* might be different from *isclose(b, a)* in some rare cases.

Examples

```
>>> np.isclose([1e10,1e-7], [1.00001e10,1e-8])
array([True, False])
>>> np.isclose([1e10,1e-8], [1.00001e10,1e-9])
array([True, True])
>>> np.isclose([1e10,1e-8], [1.0001e10,1e-9])
array([False, True])
>>> np.isclose([1.0, np.nan], [1.0, np.nan])
array([True, False])
>>> np.isclose([1.0, np.nan], [1.0, np.nan], equal_nan=True)
array([True, True])
```

numpy.**array_equal**(*a1*, *a2*)

True if two arrays have the same shape and elements, False otherwise.

Parameters **a1, a2** : array_like

Input arrays.

Returns **b** : bool

Returns True if the arrays are equal.

See also:

allclose Returns True if two arrays are element-wise equal within a tolerance.

array_equiv Returns True if input arrays are shape consistent and all elements equal.

Examples

```
>>> np.array_equal([1, 2], [1, 2])
True
>>> np.array_equal(np.array([1, 2]), np.array([1, 2]))
True
>>> np.array_equal([1, 2], [1, 2, 3])
False
>>> np.array_equal([1, 2], [1, 4])
False
```

numpy.**array_equiv**(*a1*, *a2*)

Returns True if input arrays are shape consistent and all elements equal.

Shape consistent means they are either the same shape, or one input array can be broadcasted to create the same shape as the other one.

Parameters **a1, a2** : array_like

Input arrays.

Returns **out** : bool

True if equivalent, False otherwise.

Examples

```
>>> np.array_equiv([1, 2], [1, 2])
True
>>> np.array_equiv([1, 2], [1, 3])
False
```

Showing the shape equivalence:

```
>>> np.array_equiv([1, 2], [[1, 2], [1, 2]])
True
>>> np.array_equiv([1, 2], [[1, 2, 1, 2], [1, 2, 1, 2]])
False
```

```
>>> np.array_equiv([1, 2], [[1, 2], [1, 3]])
False
```

greater(x1, x2, /[, out, where, casting, ...])	Return the truth value of (x1 > x2) element-wise.
greater_equal(x1, x2, /[, out, where, ...])	Return the truth value of (x1 >= x2) element-wise.
less(x1, x2, /[, out, where, casting, ...])	Return the truth value of (x1 < x2) element-wise.
less_equal(x1, x2, /[, out, where, casting, ...])	Return the truth value of (x1 =< x2) element-wise.
equal(x1, x2, /[, out, where, casting, ...])	Return (x1 == x2) element-wise.
not_equal(x1, x2, /[, out, where, casting, ...])	Return (x1 != x2) element-wise.

numpy.**greater**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'greater'>**

Return the truth value of (x1 > x2) element-wise.

Parameters **x1, x2** : array_like

Input arrays. If `x1.shape != x2.shape`, they must be broadcastable to a common

shape (which may be the shape of one or the other).

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : bool or ndarray of bool

Array of bools, or a single bool if *x1* and *x2* are scalars.

See also:

`greater_equal`, `less`, `less_equal`, `equal`, `not_equal`

Examples

```
>>> np.greater([4,2],[2,2])
array([ True, False])
```

If the inputs are ndarrays, then np.greater is equivalent to '>'.

```
>>> a = np.array([4,2])
>>> b = np.array([2,2])
>>> a > b
array([ True, False])
```

numpy.**greater_equal**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'greater_equal'>**

Return the truth value of (x1 >= x2) element-wise.

Parameters **x1, x2** : array_like

Input arrays. If `x1.shape != x2.shape`, they must be broadcastable to a common shape (which may be the shape of one or the other).

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : bool or ndarray of bool

Array of bools, or a single bool if *x1* and *x2* are scalars.

See also:

greater, *less*, *less_equal*, *equal*, *not_equal*

Examples

```
>>> np.greater_equal([4, 2, 1], [2, 2, 2])
array([ True, True, False])
```

numpy.**less**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'less'>**

Return the truth value of (x1 < x2) element-wise.

Parameters **x1, x2** : array_like

Input arrays. If `x1.shape != x2.shape`, they must be broadcastable to a common shape (which may be the shape of one or the other).

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : bool or ndarray of bool

Array of bools, or a single bool if *x1* and *x2* are scalars.

See also:

greater, *less_equal*, *greater_equal*, *equal*, *not_equal*

Examples

```
>>> np.less([1, 2], [2, 2])
array([ True, False])
```

numpy.**less_equal**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'less_equal'>**

Return the truth value of (x1 =< x2) element-wise.

Parameters **x1, x2** : array_like

Input arrays. If `x1.shape != x2.shape`, they must be broadcastable to a common shape (which may be the shape of one or the other).

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : bool or ndarray of bool

Array of bools, or a single bool if *x1* and *x2* are scalars.

See also:

greater, *less*, *greater_equal*, *equal*, *not_equal*

Examples

```
>>> np.less_equal([4, 2, 1], [2, 2, 2])
array([False,  True,  True])
```

numpy.**equal**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'equal'>**

Return (x1 == x2) element-wise.

Parameters **x1, x2** : array_like

Input arrays of the same shape.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : ndarray or bool

Output array of bools, or a single bool if x1 and x2 are scalars.

See also:

not_equal, *greater_equal*, *less_equal*, *greater*, *less*

Examples

```
>>> np.equal([0, 1, 3], np.arange(3))
array([ True,  True, False])
```

What is compared are values, not types. So an int (1) and an array of length one can evaluate as True:

```
>>> np.equal(1, np.ones(1))
array([ True])
```

numpy.**not_equal**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'not_equal'>**

Return (x1 != x2) element-wise.

Parameters **x1, x2** : array_like

Input arrays.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **not_equal** : ndarray bool, scalar bool

For each element in *x1, x2*, return True if *x1* is not equal to *x2* and False otherwise.

See also:

equal, *greater*, *greater_equal*, *less*, *less_equal*

Examples

```
>>> np.not_equal([1.,2.], [1., 3.])
array([False,  True])
>>> np.not_equal([1, 2], [[1, 3],[1, 4]])
array([[False,  True],
       [False,  True]])
```

3.19 Mathematical functions

3.19.1 Trigonometric functions

sin(x, /[, out, where, casting, order, ...])	Trigonometric sine, element-wise.
cos(x, /[, out, where, casting, order, ...])	Cosine element-wise.
tan(x, /[, out, where, casting, order, ...])	Compute tangent element-wise.
arcsin(x, /[, out, where, casting, order, ...])	Inverse sine, element-wise.
arccos(x, /[, out, where, casting, order, ...])	Trigonometric inverse cosine, element-wise.
arctan(x, /[, out, where, casting, order, ...])	Trigonometric inverse tangent, element-wise.
hypot(x1, x2, /[, out, where, casting, ...])	Given the "legs" of a right triangle, return its hypotenuse.
arctan2(x1, x2, /[, out, where, casting, ...])	Element-wise arc tangent of `x1/x2` choosing the quadrant correctly.
degrees(x, /[, out, where, casting, order, ...])	Convert angles from radians to degrees.
radians(x, /[, out, where, casting, order, ...])	Convert angles from degrees to radians.
unwrap(p[, discont, axis])	Unwrap by changing deltas between values to 2*pi complement.
deg2rad(x, /[, out, where, casting, order, ...])	Convert angles from degrees to radians.
rad2deg(x, /[, out, where, casting, order, ...])	Convert angles from radians to degrees.

numpy.**sin**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'sin'>**

Trigonometric sine, element-wise.

Parameters **x** : array_like

Angle, in radians (2π rad equals 360 degrees).

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : array_like

The sine of each element of x.

See also:

arcsin, *sinh*, *cos*

Notes

The sine is one of the fundamental functions of trigonometry (the mathematical study of triangles). Consider a circle of radius 1 centered on the origin. A ray comes in from the $+x$ axis, makes an angle at the origin (measured counter-clockwise from that axis), and departs from the origin. The y coordinate of the outgoing ray's intersection with the unit circle is the sine of that angle. It ranges from -1 for $x = 3\pi/2$ to +1 for $\pi/2$. The function has zeroes where the angle is a multiple of π. Sines of angles between π and 2π are negative. The numerous properties of the sine and related functions are included in any standard trigonometry text.

Examples

Print sine of one angle:

```
>>> np.sin(np.pi/2.)
1.0
```

Print sines of an array of angles given in degrees:

```
>>> np.sin(np.array((0., 30., 45., 60., 90.)) * np.pi / 180. )
array([ 0.        ,  0.5       ,  0.70710678,  0.8660254 ,  1.        ])
```

Plot the sine function:

```
>>> import matplotlib.pylab as plt
>>> x = np.linspace(-np.pi, np.pi, 201)
>>> plt.plot(x, np.sin(x))
>>> plt.xlabel('Angle [rad]')
>>> plt.ylabel('sin(x)')
>>> plt.axis('tight')
>>> plt.show()
```

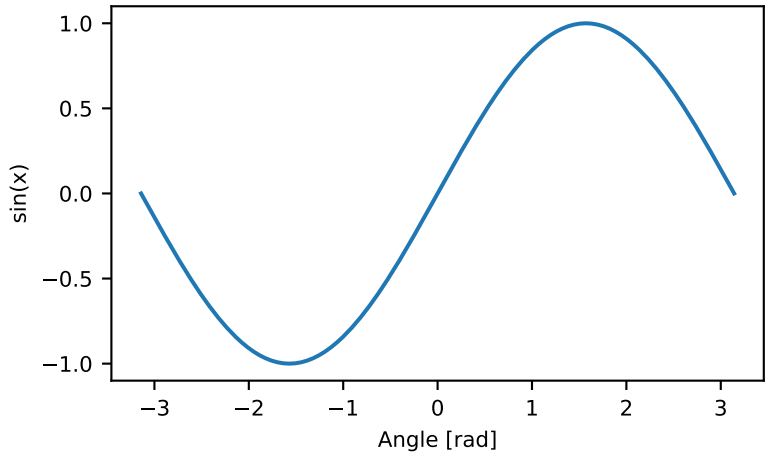

numpy.**cos**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'cos'>**

Cosine element-wise.

Parameters **x** : array_like

Input array in radians.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The corresponding cosine values.

Notes

If *out* is provided, the function writes the result into it, and returns a reference to *out*. (See Examples)

References

M. Abramowitz and I. A. Stegun, Handbook of Mathematical Functions. New York, NY: Dover, 1972.

Examples

```
>>> np.cos(np.array([0, np.pi/2, np.pi]))
array([  1.00000000e+00,   6.12303177e-17,  -1.00000000e+00])
>>>
>>> # Example of providing the optional output parameter
>>> out2 = np.cos([0.1], out1)
>>> out2 is out1
True
>>>
>>> # Example of ValueError due to provision of shape mis-matched `out`
>>> np.cos(np.zeros((3,3)),np.zeros((2,2)))
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: invalid return array shape
```

numpy.**tan**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'tan'>**

Compute tangent element-wise.

Equivalent to `np.sin(x)/np.cos(x)` element-wise.

Parameters **x** : array_like

Input array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The corresponding tangent values.

Notes

If *out* is provided, the function writes the result into it, and returns a reference to *out*. (See Examples)

References

M. Abramowitz and I. A. Stegun, Handbook of Mathematical Functions. New York, NY: Dover, 1972.

Examples

```
>>> from math import pi
>>> np.tan(np.array([-pi,pi/2,pi]))
array([  1.22460635e-16,   1.63317787e+16,  -1.22460635e-16])
>>>
>>> # Example of providing the optional output parameter illustrating
>>> # that what is returned is a reference to said parameter
>>> out2 = np.cos([0.1], out1)
>>> out2 is out1
True
>>>
>>> # Example of ValueError due to provision of shape mis-matched `out`
>>> np.cos(np.zeros((3,3)),np.zeros((2,2)))
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: invalid return array shape
```

numpy.**arcsin**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'arcsin'>**

Inverse sine, element-wise.

Parameters **x** : array_like

y-coordinate on the unit circle.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **angle** : ndarray

The inverse sine of each element in *x*, in radians and in the closed interval `[-pi/2, pi/2]`. If *x* is a scalar, a scalar is returned, otherwise an array.

See also:

sin, *cos*, *arccos*, *tan*, *arctan*, *arctan2*, `emath.arcsin`

Notes

arcsin is a multivalued function: for each *x* there are infinitely many numbers *z* such that $sin(z) = x$. The convention is to return the angle *z* whose real part lies in [-pi/2, pi/2].

For real-valued input data types, *arcsin* always returns real output. For each value that cannot be expressed as a real number or infinity, it yields `nan` and sets the *invalid* floating point error flag.

For complex-valued input, *arcsin* is a complex analytic function that has, by convention, the branch cuts [-inf, -1] and [1, inf] and is continuous from above on the former and from below on the latter.

The inverse sine is also known as *asin* or sin^{-1}.

References

Abramowitz, M. and Stegun, I. A., *Handbook of Mathematical Functions*, 10th printing, New York: Dover, 1964, pp. 79ff. http://www.math.sfu.ca/~cbm/aands/

Examples

```
>>> np.arcsin(1)     # pi/2
1.5707963267948966
>>> np.arcsin(-1)    # -pi/2
-1.5707963267948966
>>> np.arcsin(0)
0.0
```

numpy.**arccos**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'arccos'>**

Trigonometric inverse cosine, element-wise.

The inverse of *cos* so that, if `y = cos(x)`, then `x = arccos(y)`.

Parameters **x** : array_like

x-coordinate on the unit circle. For real arguments, the domain is [-1, 1].

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **angle** : ndarray

The angle of the ray intersecting the unit circle at the given *x*-coordinate in radians [0, pi]. If *x* is a scalar then a scalar is returned, otherwise an array of the same shape as *x* is returned.

See also:

cos, *arctan*, *arcsin*, `emath.arccos`

Notes

arccos is a multivalued function: for each *x* there are infinitely many numbers *z* such that *cos(z) = x*. The convention is to return the angle *z* whose real part lies in *[0, pi]*.

For real-valued input data types, *arccos* always returns real output. For each value that cannot be expressed as a real number or infinity, it yields `nan` and sets the *invalid* floating point error flag.

For complex-valued input, *arccos* is a complex analytic function that has branch cuts *[-inf, -1]* and *[1, inf]* and is continuous from above on the former and from below on the latter.

The inverse *cos* is also known as *acos* or cos^-1.

References

M. Abramowitz and I.A. Stegun, "Handbook of Mathematical Functions", 10th printing, 1964, pp. 79. http://www.math.sfu.ca/~cbm/aands/

Examples

We expect the arccos of 1 to be 0, and of -1 to be pi:

```
>>> np.arccos([1, -1])
array([ 0.        ,  3.14159265])
```

Plot arccos:

```
>>> import matplotlib.pyplot as plt
>>> x = np.linspace(-1, 1, num=100)
>>> plt.plot(x, np.arccos(x))
>>> plt.axis('tight')
>>> plt.show()
```

`numpy.`**`arctan`**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'arctan'>**

Trigonometric inverse tangent, element-wise.

The inverse of tan, so that if `y = tan(x)` then `x = arctan(y)`.

Parameters **x** : array_like

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A

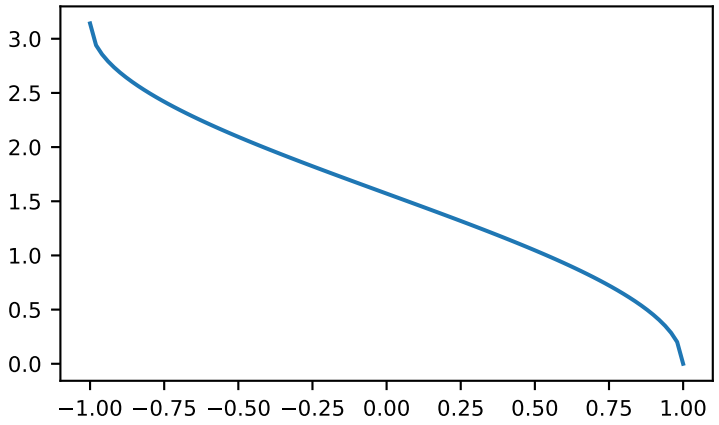

tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : ndarray

Out has the same shape as *x*. Its real part is in `[-pi/2, pi/2]` (`arctan(+/-inf)` returns `+/-pi/2`). It is a scalar if *x* is a scalar.

See also:

arctan2 The "four quadrant" arctan of the angle formed by (*x*, *y*) and the positive *x*-axis.

angle Argument of complex values.

Notes

arctan is a multi-valued function: for each *x* there are infinitely many numbers *z* such that tan(*z*) = *x*. The convention is to return the angle *z* whose real part lies in [-pi/2, pi/2].

For real-valued input data types, *arctan* always returns real output. For each value that cannot be expressed as a real number or infinity, it yields `nan` and sets the *invalid* floating point error flag.

For complex-valued input, *arctan* is a complex analytic function that has [*1j, infj*] and [*-1j, -infj*] as branch cuts, and is continuous from the left on the former and from the right on the latter.

The inverse tangent is also known as *atan* or tan^{-1}.

References

Abramowitz, M. and Stegun, I. A., *Handbook of Mathematical Functions*, 10th printing, New York: Dover, 1964, pp. 79. http://www.math.sfu.ca/~cbm/aands/

Examples

We expect the arctan of 0 to be 0, and of 1 to be pi/4:

```
>>> np.arctan([0, 1])
array([ 0.        ,  0.78539816])
```

```
>>> np.pi/4
0.7853981633974483
```

Plot arctan:

```
>>> import matplotlib.pyplot as plt
>>> x = np.linspace(-10, 10)
>>> plt.plot(x, np.arctan(x))
>>> plt.axis('tight')
>>> plt.show()
```

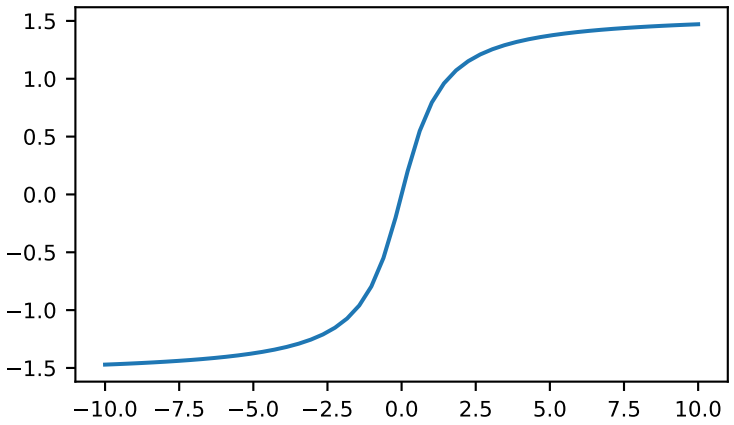

numpy.**hypot**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'hypot'>**

Given the "legs" of a right triangle, return its hypotenuse.

Equivalent to `sqrt(x1**2 + x2**2)`, element-wise. If *x1* or *x2* is scalar_like (i.e., unambiguously castable to a scalar type), it is broadcast for use with each element of the other argument. (See Examples)

Parameters **x1, x2** : array_like

Leg of the triangle(s).

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **z** : ndarray

The hypotenuse of the triangle(s).

Examples

```
>>> np.hypot(3*np.ones((3, 3)), 4*np.ones((3, 3)))
array([[ 5.,  5.,  5.],
       [ 5.,  5.,  5.],
       [ 5.,  5.,  5.]])
```

Example showing broadcast of scalar_like argument:

```
>>> np.hypot(3*np.ones((3, 3)), [4])
array([[ 5.,  5.,  5.],
       [ 5.,  5.,  5.],
       [ 5.,  5.,  5.]])
```

numpy.**arctan2**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'arctan2'>**

Element-wise arc tangent of `x1/x2` choosing the quadrant correctly.

The quadrant (i.e., branch) is chosen so that `arctan2(x1, x2)` is the signed angle in radians between the ray ending at the origin and passing through the point (1,0), and the ray ending at the origin and passing through the point (*x2*, *x1*). (Note the role reversal: the "*y*-coordinate" is the first function parameter, the "*x*-coordinate" is the second.) By IEEE convention, this function is defined for *x2* = +/-0 and for either or both of *x1* and *x2* = +/-inf (see Notes for specific values).

This function is not defined for complex-valued arguments; for the so-called argument of complex values, use *angle*.

Parameters **x1** : array_like, real-valued

y-coordinates.

x2 : array_like, real-valued

x-coordinates. *x2* must be broadcastable to match the shape of *x1* or vice versa.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **angle** : ndarray

Array of angles in radians, in the range `[-pi, pi]`.

See also:

arctan, *tan*, *angle*

Notes

arctan2 is identical to the *atan2* function of the underlying C library. The following special values are defined in the C standard: *[R6]*

x1	*x2*	*arctan2(x1,x2)*
+/- 0	+0	+/- 0
+/- 0	-0	+/- pi
> 0	+/-inf	+0 / +pi
< 0	+/-inf	-0 / -pi
+/-inf	+inf	+/- (pi/4)
+/-inf	-inf	+/- (3*pi/4)

Note that +0 and -0 are distinct floating point numbers, as are +inf and -inf.

References

[R6]

Examples

Consider four points in different quadrants:

```
>>> x = np.array([-1, +1, +1, -1])
>>> y = np.array([-1, -1, +1, +1])
>>> np.arctan2(y, x) * 180 / np.pi
array([-135.,  -45.,   45.,  135.])
```

Note the order of the parameters. *arctan2* is defined also when *x2* = 0 and at several other special points, obtaining values in the range `[-pi, pi]`:

```
>>> np.arctan2([1., -1.], [0., 0.])
array([ 1.57079633, -1.57079633])
>>> np.arctan2([0., 0., np.inf], [+0., -0., np.inf])
array([ 0.        ,  3.14159265,  0.78539816])
```

numpy.**degrees**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'degrees'>**

Convert angles from radians to degrees.

Parameters **x** : array_like

Input array in radians.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray of floats

The corresponding degree values; if *out* was supplied this is a reference to it.

See also:

rad2deg equivalent function

Examples

Convert a radian array to degrees

```
>>> rad = np.arange(12.)*np.pi/6
>>> np.degrees(rad)
array([   0.,   30.,   60.,   90.,  120.,  150.,  180.,  210.,  240.,
        270.,  300.,  330.])
```

```
>>> out = np.zeros((rad.shape))
>>> r = degrees(rad, out)
>>> np.all(r == out)
True
```

numpy.**radians**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'radians'>**

Convert angles from degrees to radians.

Parameters **x** : array_like

Input array in degrees.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The corresponding radian values.

See also:

deg2rad equivalent function

Examples

Convert a degree array to radians

```
>>> deg = np.arange(12.) * 30.
>>> np.radians(deg)
array([ 0.        ,  0.52359878,  1.04719755,  1.57079633,  2.0943951 ,
        2.61799388,  3.14159265,  3.66519143,  4.1887902 ,  4.71238898,
        5.23598776,  5.75958653])
```

```
>>> out = np.zeros((deg.shape))
>>> ret = np.radians(deg, out)
>>> ret is out
True
```

numpy.**unwrap**(*p*, *discont=3.141592653589793*, *axis=-1*)

Unwrap by changing deltas between values to 2*pi complement.

Unwrap radian phase *p* by changing absolute jumps greater than *discont* to their 2*pi complement along the given axis.

Parameters **p** : array_like

Input array.

discont : float, optional

Maximum discontinuity between values, default is `pi`.

axis : int, optional

Axis along which unwrap will operate, default is the last axis.

Returns **out** : ndarray

Output array.

See also:

rad2deg, *deg2rad*

Notes

If the discontinuity in *p* is smaller than `pi`, but larger than *discont*, no unwrapping is done because taking the 2*pi complement would only make the discontinuity larger.

Examples

```
>>> phase = np.linspace(0, np.pi, num=5)
>>> phase[3:] += np.pi
>>> phase
array([ 0.        ,  0.78539816,  1.57079633,  5.49778714,  6.28318531])
>>> np.unwrap(phase)
array([ 0.        ,  0.78539816,  1.57079633, -0.78539816,  0.        ])
```

numpy.**deg2rad**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'deg2rad'>**

Convert angles from degrees to radians.

Parameters **x** : array_like

Angles in degrees.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The corresponding angle in radians.

See also:

rad2deg Convert angles from radians to degrees.

unwrap Remove large jumps in angle by wrapping.

Notes

New in version 1.3.0.

`deg2rad(x)` is `x * pi / 180`.

Examples

```
>>> np.deg2rad(180)
3.1415926535897931
```

numpy.**rad2deg**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'rad2deg'>**

Convert angles from radians to degrees.

Parameters **x** : array_like

Angle in radians.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The corresponding angle in degrees.

See also:

deg2rad Convert angles from degrees to radians.

unwrap Remove large jumps in angle by wrapping.

Notes

New in version 1.3.0.

rad2deg(x) is `180 * x / pi`.

Examples

```
>>> np.rad2deg(np.pi/2)
90.0
```

3.19.2 Hyperbolic functions

sinh(x, /[, out, where, casting, order, ...])	Hyperbolic sine, element-wise.
cosh(x, /[, out, where, casting, order, ...])	Hyperbolic cosine, element-wise.
tanh(x, /[, out, where, casting, order, ...])	Compute hyperbolic tangent element-wise.
arcsinh(x, /[, out, where, casting, order, ...])	Inverse hyperbolic sine element-wise.
arccosh(x, /[, out, where, casting, order, ...])	Inverse hyperbolic cosine, element-wise.
arctanh(x, /[, out, where, casting, order, ...])	Inverse hyperbolic tangent element-wise.

numpy.**sinh**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'sinh'>**

Hyperbolic sine, element-wise.

Equivalent to `1/2 * (np.exp(x) - np.exp(-x))` or `-1j * np.sin(1j*x)`.

Parameters **x** : array_like

Input array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The corresponding hyperbolic sine values.

Notes

If *out* is provided, the function writes the result into it, and returns a reference to *out*. (See Examples)

References

M. Abramowitz and I. A. Stegun, Handbook of Mathematical Functions. New York, NY: Dover, 1972, pg. 83.

Examples

```
>>> np.sinh(0)
0.0
>>> np.sinh(np.pi*1j/2)
1j
>>> np.sinh(np.pi*1j) # (exact value is 0)
1.2246063538223773e-016j
>>> # Discrepancy due to vagaries of floating point arithmetic.
```

```
>>> # Example of providing the optional output parameter
>>> out2 = np.sinh([0.1], out1)
>>> out2 is out1
True
```

```
>>> # Example of ValueError due to provision of shape mis-matched `out`
>>> np.sinh(np.zeros((3,3)),np.zeros((2,2)))
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: invalid return array shape
```

numpy.**cosh**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'cosh'>**

Hyperbolic cosine, element-wise.

Equivalent to `1/2 * (np.exp(x) + np.exp(-x))` and `np.cos(1j*x)`.

Parameters **x** : array_like

Input array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : ndarray

Output array of same shape as *x*.

Examples

```
>>> np.cosh(0)
1.0
```

The hyperbolic cosine describes the shape of a hanging cable:

```
>>> import matplotlib.pyplot as plt
>>> x = np.linspace(-4, 4, 1000)
>>> plt.plot(x, np.cosh(x))
>>> plt.show()
```

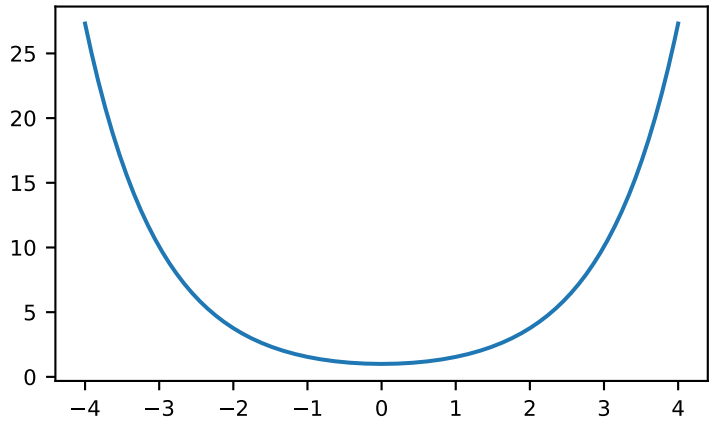

numpy.**tanh**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'tanh'>**

Compute hyperbolic tangent element-wise.

Equivalent to `np.sinh(x)/np.cosh(x)` or `-1j * np.tan(1j*x)`.

Parameters **x** : array_like

Input array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The corresponding hyperbolic tangent values.

Notes

If *out* is provided, the function writes the result into it, and returns a reference to *out*. (See Examples)

References

[R293], *[R294]*

Examples

```
>>> np.tanh((0, np.pi*1j, np.pi*1j/2))
array([ 0. +0.00000000e+00j,  0. -1.22460635e-16j,  0. +1.63317787e+16j])
```

```
>>> # Example of providing the optional output parameter illustrating
>>> # that what is returned is a reference to said parameter
>>> out2 = np.tanh([0.1], out1)
>>> out2 is out1
True
```

```
>>> # Example of ValueError due to provision of shape mis-matched `out`
>>> np.tanh(np.zeros((3,3)),np.zeros((2,2)))
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
ValueError: invalid return array shape
```

numpy.**arcsinh**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'arcsinh'>**

Inverse hyperbolic sine element-wise.

Parameters **x** : array_like

Input array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : ndarray

Array of of the same shape as *x*.

Notes

`arcsinh` is a multivalued function: for each *x* there are infinitely many numbers *z* such that *sinh(z) = x*. The convention is to return the *z* whose imaginary part lies in *[-pi/2, pi/2]*.

For real-valued input data types, `arcsinh` always returns real output. For each value that cannot be expressed as a real number or infinity, it returns `nan` and sets the *invalid* floating point error flag.

For complex-valued input, `arccos` is a complex analytical function that has branch cuts *[1j, infj]* and *[-1j, -infj]* and is continuous from the right on the former and from the left on the latter.

The inverse hyperbolic sine is also known as *asinh* or `sinh^-1`.

References

[R4], *[R5]*

Examples

```
>>> np.arcsinh(np.array([np.e, 10.0]))
array([ 1.72538256,  2.99822295])
```

numpy.**arccosh**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'arccosh'>**

Inverse hyperbolic cosine, element-wise.

Parameters **x** : array_like

Input array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **arccosh** : ndarray

Array of the same shape as *x*.

See also:

cosh, *arcsinh*, *sinh*, *arctanh*, *tanh*

Notes

arccosh is a multivalued function: for each *x* there are infinitely many numbers *z* such that *cosh(z) = x*. The convention is to return the *z* whose imaginary part lies in *[-pi, pi]* and the real part in `[0, inf]`.

For real-valued input data types, *arccosh* always returns real output. For each value that cannot be expressed as a real number or infinity, it yields `nan` and sets the *invalid* floating point error flag.

For complex-valued input, *arccosh* is a complex analytical function that has a branch cut *[-inf, 1]* and is continuous from above on it.

References

[R2], *[R3]*

Examples

```
>>> np.arccosh([np.e, 10.0])
array([ 1.65745445,  2.99322285])
>>> np.arccosh(1)
0.0
```

numpy.**arctanh**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'arctanh'>**

Inverse hyperbolic tangent element-wise.

Parameters **x** : array_like

Input array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : ndarray

Array of the same shape as *x*.

See also:

`emath.arctanh`

Notes

`arctanh` is a multivalued function: for each *x* there are infinitely many numbers *z* such that *tanh(z) = x*. The convention is to return the *z* whose imaginary part lies in *[-pi/2, pi/2]*.

For real-valued input data types, `arctanh` always returns real output. For each value that cannot be expressed as a real number or infinity, it yields `nan` and sets the *invalid* floating point error flag.

For complex-valued input, `arctanh` is a complex analytical function that has branch cuts *[-1, -inf]* and *[1, inf]* and is continuous from above on the former and from below on the latter.

The inverse hyperbolic tangent is also known as *atanh* or `tanh^-1`.

References

[R7], *[R8]*

Examples

```
>>> np.arctanh([0, -0.5])
array([ 0.        , -0.54930614])
```

3.19.3 Rounding

`around`(a[, decimals, out])	Evenly round to the given number of decimals.
`round_`(a[, decimals, out])	Round an array to the given number of decimals.
`rint`(x, /[, out, where, casting, order, ...])	Round elements of the array to the nearest integer.
`fix`(x[, out])	Round to nearest integer towards zero.
`floor`(x, /[, out, where, casting, order, ...])	Return the floor of the input, element-wise.
`ceil`(x, /[, out, where, casting, order, ...])	Return the ceiling of the input, element-wise.
`trunc`(x, /[, out, where, casting, order, ...])	Return the truncated value of the input, element-wise.

numpy.**around**(*a*, *decimals=0*, *out=None*)

Evenly round to the given number of decimals.

Parameters **a** : array_like

Input data.

decimals : int, optional

Number of decimal places to round to (default: 0). If decimals is negative, it specifies

the number of positions to the left of the decimal point.

out : ndarray, optional

Alternative output array in which to place the result. It must have the same shape as the expected output, but the type of the output values will be cast if necessary. See `doc.ufuncs` (Section "Output arguments") for details.

Returns **rounded_array** : ndarray

An array of the same type as *a*, containing the rounded values. Unless *out* was specified, a new array is created. A reference to the result is returned.

The real and imaginary parts of complex numbers are rounded separately. The result of rounding a float is a float.

See also:

ndarray.round equivalent method

ceil, *fix*, *floor*, *rint*, *trunc*

Notes

For values exactly halfway between rounded decimal values, NumPy rounds to the nearest even value. Thus 1.5 and 2.5 round to 2.0, -0.5 and 0.5 round to 0.0, etc. Results may also be surprising due to the inexact representation of decimal fractions in the IEEE floating point standard *[R9]* and errors introduced when scaling by powers of ten.

References

[R9], *[R10]*

Examples

```
>>> np.around([0.37, 1.64])
array([ 0.,  2.])
>>> np.around([0.37, 1.64], decimals=1)
array([ 0.4,  1.6])
>>> np.around([.5, 1.5, 2.5, 3.5, 4.5]) # rounds to nearest even value
array([ 0.,  2.,  2.,  4.,  4.])
>>> np.around([1,2,3,11], decimals=1) # ndarray of ints is returned
array([ 1,  2,  3, 11])
>>> np.around([1,2,3,11], decimals=-1)
array([ 0,  0,  0, 10])
```

numpy.**round_**(*a*, *decimals=0*, *out=None*)

Round an array to the given number of decimals.

Refer to *around* for full documentation.

See also:

around equivalent function

numpy.**rint**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'rint'>**

Round elements of the array to the nearest integer.

Parameters **x** : array_like

Input array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : ndarray or scalar

Output array is same shape and type as *x*.

See also:

ceil, *floor*, *trunc*

Examples

```
>>> a = np.array([-1.7, -1.5, -0.2, 0.2, 1.5, 1.7, 2.0])
>>> np.rint(a)
array([-2., -2., -0.,  0.,  2.,  2.,  2.])
```

numpy.**fix**(*x*, *out=None*)

Round to nearest integer towards zero.

Round an array of floats element-wise to nearest integer towards zero. The rounded values are returned as floats.

Parameters **x** : array_like

An array of floats to be rounded

y : ndarray, optional

Output array

Returns **out** : ndarray of floats

The array of rounded numbers

See also:

trunc, *floor*, *ceil*

around Round to given number of decimals

Examples

```
>>> np.fix(3.14)
3.0
>>> np.fix(3)
3.0
>>> np.fix([2.1, 2.9, -2.1, -2.9])
array([ 2.,  2., -2., -2.])
```

numpy.**floor**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'floor'>**

Return the floor of the input, element-wise.

The floor of the scalar *x* is the largest integer *i*, such that *i* <= *x*. It is often denoted as $\lfloor x \rfloor$.

Parameters **x** : array_like

Input data.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray or scalar

The floor of each element in *x*.

See also:

ceil, *trunc*, *rint*

Notes

Some spreadsheet programs calculate the "floor-towards-zero", in other words `floor(-2.5) == -2`. NumPy instead uses the definition of *floor* where *floor(-2.5) == -3*.

Examples

```
>>> a = np.array([-1.7, -1.5, -0.2, 0.2, 1.5, 1.7, 2.0])
>>> np.floor(a)
array([-2., -2., -1.,  0.,  1.,  1.,  2.])
```

numpy.**ceil**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'ceil'>**

Return the ceiling of the input, element-wise.

The ceil of the scalar *x* is the smallest integer *i*, such that *i* >= *x*. It is often denoted as $\lceil x \rceil$.

Parameters **x** : array_like

Input data.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray or scalar

The ceiling of each element in *x*, with `float` dtype.

See also:

floor, *trunc*, *rint*

Examples

```
>>> a = np.array([-1.7, -1.5, -0.2, 0.2, 1.5, 1.7, 2.0])
>>> np.ceil(a)
array([-1., -1., -0.,  1.,  2.,  2.,  2.])
```

numpy.**trunc**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'trunc'>**

Return the truncated value of the input, element-wise.

The truncated value of the scalar *x* is the nearest integer *i* which is closer to zero than *x* is. In short, the fractional part of the signed number *x* is discarded.

Parameters **x** : array_like

Input data.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray or scalar

The truncated value of each element in *x*.

See also:

ceil, *floor*, *rint*

Notes

New in version 1.3.0.

Examples

```
>>> a = np.array([-1.7, -1.5, -0.2, 0.2, 1.5, 1.7, 2.0])
>>> np.trunc(a)
array([-1., -1., -0.,  0.,  1.,  1.,  2.])
```

3.19.4 Sums, products, differences

prod(a[, axis, dtype, out, keepdims])	Return the product of array elements over a given axis.
sum(a[, axis, dtype, out, keepdims])	Sum of array elements over a given axis.
nanprod(a[, axis, dtype, out, keepdims])	Return the product of array elements over a given axis treating Not a Numbers (NaNs) as ones.
nansum(a[, axis, dtype, out, keepdims])	Return the sum of array elements over a given axis treating Not a Numbers (NaNs) as zero.
cumprod(a[, axis, dtype, out])	Return the cumulative product of elements along a given axis.
cumsum(a[, axis, dtype, out])	Return the cumulative sum of the elements along a given axis.
nancumprod(a[, axis, dtype, out])	Return the cumulative product of array elements over a given axis treating Not a Numbers (NaNs) as one.
nancumsum(a[, axis, dtype, out])	Return the cumulative sum of array elements over a given axis treating Not a Numbers (NaNs) as zero.
diff(a[, n, axis])	Calculate the n-th discrete difference along the given axis.
ediff1d(ary[, to_end, to_begin])	The differences between consecutive elements of an array.
gradient(f, *varargs, **kwargs)	Return the gradient of an N-dimensional array.
cross(a, b[, axisa, axisb, axisc, axis])	Return the cross product of two (arrays of) vectors.
trapz(y[, x, dx, axis])	Integrate along the given axis using the composite trapezoidal rule.

numpy.**prod**(*a*, *axis=None*, *dtype=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Return the product of array elements over a given axis.

Parameters **a** : array_like

Input data.

axis : None or int or tuple of ints, optional

Axis or axes along which a product is performed. The default, axis=None, will calculate the product of all the elements in the input array. If axis is negative it counts from the last to the first axis.

New in version 1.7.0.

If axis is a tuple of ints, a product is performed on all of the axes specified in the tuple instead of a single axis or all the axes as before.

dtype : dtype, optional

The type of the returned array, as well as of the accumulator in which the elements are multiplied. The dtype of *a* is used by default unless *a* has an integer dtype of less precision than the default platform integer. In that case, if *a* is signed then the platform integer is used while if *a* is unsigned then an unsigned integer of the same precision as the platform integer is used.

out : ndarray, optional

Alternative output array in which to place the result. It must have the same shape as the expected output, but the type of the output values will be cast if necessary.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the input array.

If the default value is passed, then *keepdims* will not be passed through to the *prod* method of sub-classes of *ndarray*, however any non-default value will be. If the sub-classes *sum* method does not implement *keepdims* any exceptions will be raised.

Returns **product_along_axis** : ndarray, see *dtype* parameter above.

An array shaped as *a* but with the specified axis removed. Returns a reference to *out* if specified.

See also:

ndarray.prod equivalent method

numpy.doc.ufuncs Section "Output arguments"

Notes

Arithmetic is modular when using integer types, and no error is raised on overflow. That means that, on a 32-bit platform:

```
>>> x = np.array([536870910, 536870910, 536870910, 536870910])
>>> np.prod(x)  # random
16
```

The product of an empty array is the neutral element 1:

```
>>> np.prod([])
1.0
```

Examples

By default, calculate the product of all elements:

```
>>> np.prod([1.,2.])
2.0
```

Even when the input array is two-dimensional:

```
>>> np.prod([[1.,2.],[3.,4.]])
24.0
```

But we can also specify the axis over which to multiply:

```
>>> np.prod([[1.,2.],[3.,4.]], axis=1)
array([  2.,  12.])
```

If the type of *x* is unsigned, then the output type is the unsigned platform integer:

```
>>> x = np.array([1, 2, 3], dtype=np.uint8)
>>> np.prod(x).dtype == np.uint
True
```

If *x* is of a signed integer type, then the output type is the default platform integer:

```
>>> x = np.array([1, 2, 3], dtype=np.int8)
>>> np.prod(x).dtype == int
True
```

numpy.**sum**(*a*, *axis=None*, *dtype=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Sum of array elements over a given axis.

Parameters **a** : array_like

Elements to sum.

axis : None or int or tuple of ints, optional

Axis or axes along which a sum is performed. The default, axis=None, will sum all of the elements of the input array. If axis is negative it counts from the last to the first axis.

New in version 1.7.0.

If axis is a tuple of ints, a sum is performed on all of the axes specified in the tuple instead of a single axis or all the axes as before.

dtype : dtype, optional

The type of the returned array and of the accumulator in which the elements are summed. The dtype of *a* is used by default unless *a* has an integer dtype of less precision than the default platform integer. In that case, if *a* is signed then the platform integer is used while if *a* is unsigned then an unsigned integer of the same precision as the platform integer is used.

out : ndarray, optional

Alternative output array in which to place the result. It must have the same shape as the expected output, but the type of the output values will be cast if necessary.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the input array.

If the default value is passed, then *keepdims* will not be passed through to the *sum* method of sub-classes of *ndarray*, however any non-default value will be. If the sub-classes *sum* method does not implement *keepdims* any exceptions will be raised.

Returns **sum_along_axis** : ndarray

An array with the same shape as *a*, with the specified axis removed. If *a* is a 0-d array, or if *axis* is None, a scalar is returned. If an output array is specified, a reference to *out* is returned.

See also:

ndarray.sum Equivalent method.

cumsum Cumulative sum of array elements.

trapz Integration of array values using the composite trapezoidal rule.

mean, *average*

Notes

Arithmetic is modular when using integer types, and no error is raised on overflow.

The sum of an empty array is the neutral element 0:

```
>>> np.sum([])
0.0
```

Examples

```
>>> np.sum([0.5, 1.5])
2.0
>>> np.sum([0.5, 0.7, 0.2, 1.5], dtype=np.int32)
1
>>> np.sum([[0, 1], [0, 5]])
6
>>> np.sum([[0, 1], [0, 5]], axis=0)
array([0, 6])
>>> np.sum([[0, 1], [0, 5]], axis=1)
array([1, 5])
```

If the accumulator is too small, overflow occurs:

```
>>> np.ones(128, dtype=np.int8).sum(dtype=np.int8)
-128
```

numpy.**nanprod**(*a*, *axis=None*, *dtype=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Return the product of array elements over a given axis treating Not a Numbers (NaNs) as ones.

One is returned for slices that are all-NaN or empty.

New in version 1.10.0.

Parameters **a** : array_like

Array containing numbers whose product is desired. If *a* is not an array, a conversion is attempted.

axis : int, optional

Axis along which the product is computed. The default is to compute the product of the flattened array.

dtype : data-type, optional

The type of the returned array and of the accumulator in which the elements are summed. By default, the dtype of *a* is used. An exception is when *a* has an integer type with less precision than the platform (u)intp. In that case, the default will be either (u)int32 or (u)int64 depending on whether the platform is 32 or 64 bits. For inexact inputs, dtype must be inexact.

out : ndarray, optional

Alternate output array in which to place the result. The default is `None`. If provided, it must have the same shape as the expected output, but the type will be cast if necessary. See `doc.ufuncs` for details. The casting of NaN to integer can yield unexpected results.

keepdims : bool, optional

If True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the original *arr*.

Returns **nanprod** : ndarray

A new array holding the result is returned unless *out* is specified, in which case it is returned.

See also:

numpy.prod Product across array propagating NaNs.

isnan Show which elements are NaN.

Examples

```
>>> np.nanprod(1)
1
>>> np.nanprod([1])
1
>>> np.nanprod([1, np.nan])
1.0
>>> a = np.array([[1, 2], [3, np.nan]])
>>> np.nanprod(a)
6.0
>>> np.nanprod(a, axis=0)
array([ 3.,  2.])
```

numpy.**nansum**(*a*, *axis=None*, *dtype=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Return the sum of array elements over a given axis treating Not a Numbers (NaNs) as zero.

In NumPy versions <= 1.8.0 Nan is returned for slices that are all-NaN or empty. In later versions zero is returned.

Parameters **a** : array_like

Array containing numbers whose sum is desired. If *a* is not an array, a conversion is attempted.

axis : int, optional

Axis along which the sum is computed. The default is to compute the sum of the flattened array.

dtype : data-type, optional

The type of the returned array and of the accumulator in which the elements are summed. By default, the dtype of *a* is used. An exception is when *a* has an integer type with less precision than the platform (u)intp. In that case, the default will be either (u)int32 or (u)int64 depending on whether the platform is 32 or 64 bits. For inexact inputs, dtype must be inexact.

New in version 1.8.0.

out : ndarray, optional

Alternate output array in which to place the result. The default is `None`. If provided, it must have the same shape as the expected output, but the type will be cast if necessary. See `doc.ufuncs` for details. The casting of NaN to integer can yield unexpected results.

New in version 1.8.0.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the original *a*.

If the value is anything but the default, then *keepdims* will be passed through to the *mean* or *sum* methods of sub-classes of *ndarray*. If the sub-classes methods does not implement *keepdims* any exceptions will be raised.

New in version 1.8.0.

Returns **nansum** : ndarray.

A new array holding the result is returned unless *out* is specified, in which it is returned. The result has the same size as *a*, and the same shape as *a* if *axis* is not None or *a* is a 1-d array.

See also:

numpy.sum Sum across array propagating NaNs.

isnan Show which elements are NaN.

isfinite Show which elements are not NaN or +/-inf.

Notes

If both positive and negative infinity are present, the sum will be Not A Number (NaN).

Examples

```
>>> np.nansum(1)
1
>>> np.nansum([1])
1
>>> np.nansum([1, np.nan])
1.0
>>> a = np.array([[1, 1], [1, np.nan]])
>>> np.nansum(a)
3.0
```

(continues on next page)

(continued from previous page)

```
>>> np.nansum(a, axis=0)
array([ 2.,  1.])
>>> np.nansum([1, np.nan, np.inf])
inf
>>> np.nansum([1, np.nan, np.NINF])
-inf
>>> np.nansum([1, np.nan, np.inf, -np.inf]) # both +/- infinity present
nan
```

numpy.**cumprod**(*a*, *axis=None*, *dtype=None*, *out=None*)

Return the cumulative product of elements along a given axis.

Parameters **a** : array_like

Input array.

axis : int, optional

Axis along which the cumulative product is computed. By default the input is flattened.

dtype : dtype, optional

Type of the returned array, as well as of the accumulator in which the elements are multiplied. If *dtype* is not specified, it defaults to the dtype of *a*, unless *a* has an integer dtype with a precision less than that of the default platform integer. In that case, the default platform integer is used instead.

out : ndarray, optional

Alternative output array in which to place the result. It must have the same shape and buffer length as the expected output but the type of the resulting values will be cast if necessary.

Returns **cumprod** : ndarray

A new array holding the result is returned unless *out* is specified, in which case a reference to out is returned.

See also:

numpy.doc.ufuncs Section "Output arguments"

Notes

Arithmetic is modular when using integer types, and no error is raised on overflow.

Examples

```
>>> a = np.array([1,2,3])
>>> np.cumprod(a) # intermediate results 1, 1*2
...               # total product 1*2*3 = 6
array([1, 2, 6])
>>> a = np.array([[1, 2, 3], [4, 5, 6]])
>>> np.cumprod(a, dtype=float) # specify type of output
array([   1.,    2.,    6.,   24.,  120.,  720.])
```

The cumulative product for each column (i.e., over the rows) of *a*:

```
>>> np.cumprod(a, axis=0)
array([[ 1,  2,  3],
       [ 4, 10, 18]])
```

The cumulative product for each row (i.e. over the columns) of *a*:

```
>>> np.cumprod(a,axis=1)
array([[  1,   2,   6],
       [  4,  20, 120]])
```

numpy.**cumsum**(*a*, *axis=None*, *dtype=None*, *out=None*)

Return the cumulative sum of the elements along a given axis.

Parameters **a** : array_like

Input array.

axis : int, optional

Axis along which the cumulative sum is computed. The default (None) is to compute the cumsum over the flattened array.

dtype : dtype, optional

Type of the returned array and of the accumulator in which the elements are summed. If *dtype* is not specified, it defaults to the dtype of *a*, unless *a* has an integer dtype with a precision less than that of the default platform integer. In that case, the default platform integer is used.

out : ndarray, optional

Alternative output array in which to place the result. It must have the same shape and buffer length as the expected output but the type will be cast if necessary. See doc.ufuncs (Section "Output arguments") for more details.

Returns **cumsum_along_axis** : ndarray.

A new array holding the result is returned unless *out* is specified, in which case a reference to *out* is returned. The result has the same size as *a*, and the same shape as *a* if *axis* is not None or *a* is a 1-d array.

See also:

sum Sum array elements.

trapz Integration of array values using the composite trapezoidal rule.

diff Calculate the n-th discrete difference along given axis.

Notes

Arithmetic is modular when using integer types, and no error is raised on overflow.

Examples

```
>>> a = np.array([[1,2,3], [4,5,6]])
>>> a
array([[1, 2, 3],
       [4, 5, 6]])
>>> np.cumsum(a)
array([ 1,  3,  6, 10, 15, 21])
>>> np.cumsum(a, dtype=float)     # specifies type of output value(s)
array([  1.,   3.,   6.,  10.,  15.,  21.])
```

```
>>> np.cumsum(a,axis=0)      # sum over rows for each of the 3 columns
array([[1, 2, 3],
       [5, 7, 9]])
>>> np.cumsum(a,axis=1)      # sum over columns for each of the 2 rows
array([[ 1,  3,  6],
       [ 4,  9, 15]])
```

numpy.**nancumprod**(*a*, *axis=None*, *dtype=None*, *out=None*)

Return the cumulative product of array elements over a given axis treating Not a Numbers (NaNs) as one. The cumulative product does not change when NaNs are encountered and leading NaNs are replaced by ones.

Ones are returned for slices that are all-NaN or empty.

New in version 1.12.0.

Parameters **a** : array_like

Input array.

axis : int, optional

Axis along which the cumulative product is computed. By default the input is flattened.

dtype : dtype, optional

Type of the returned array, as well as of the accumulator in which the elements are multiplied. If *dtype* is not specified, it defaults to the dtype of *a*, unless *a* has an integer dtype with a precision less than that of the default platform integer. In that case, the default platform integer is used instead.

out : ndarray, optional

Alternative output array in which to place the result. It must have the same shape and buffer length as the expected output but the type of the resulting values will be cast if necessary.

Returns **nancumprod** : ndarray

A new array holding the result is returned unless *out* is specified, in which case it is returned.

See also:

numpy.cumprod Cumulative product across array propagating NaNs.

isnan Show which elements are NaN.

Examples

```
>>> np.nancumprod(1)
array([1])
>>> np.nancumprod([1])
array([1])
>>> np.nancumprod([1, np.nan])
array([ 1.,  1.])
>>> a = np.array([[1, 2], [3, np.nan]])
>>> np.nancumprod(a)
array([ 1.,  2.,  6.,  6.])
>>> np.nancumprod(a, axis=0)
array([[ 1.,  2.],
       [ 3.,  2.]])
>>> np.nancumprod(a, axis=1)
array([[ 1.,  2.],
       [ 3.,  3.]])
```

numpy.**nancumsum**(*a*, *axis=None*, *dtype=None*, *out=None*)

Return the cumulative sum of array elements over a given axis treating Not a Numbers (NaNs) as zero. The cumulative sum does not change when NaNs are encountered and leading NaNs are replaced by zeros.

Zeros are returned for slices that are all-NaN or empty.

New in version 1.12.0.

Parameters **a** : array_like

Input array.

axis : int, optional

Axis along which the cumulative sum is computed. The default (None) is to compute the cumsum over the flattened array.

dtype : dtype, optional

Type of the returned array and of the accumulator in which the elements are summed. If *dtype* is not specified, it defaults to the dtype of *a*, unless *a* has an integer dtype with a precision less than that of the default platform integer. In that case, the default platform integer is used.

out : ndarray, optional

Alternative output array in which to place the result. It must have the same shape and buffer length as the expected output but the type will be cast if necessary. See `doc.ufuncs` (Section "Output arguments") for more details.

Returns **nancumsum** : ndarray.

A new array holding the result is returned unless *out* is specified, in which it is returned. The result has the same size as *a*, and the same shape as *a* if *axis* is not None or *a* is a 1-d array.

See also:

numpy.cumsum Cumulative sum across array propagating NaNs.

isnan Show which elements are NaN.

Examples

```
>>> np.nancumsum(1)
array([1])
>>> np.nancumsum([1])
array([1])
>>> np.nancumsum([1, np.nan])
array([ 1.,  1.])
>>> a = np.array([[1, 2], [3, np.nan]])
>>> np.nancumsum(a)
array([ 1.,  3.,  6.,  6.])
>>> np.nancumsum(a, axis=0)
array([[ 1.,  2.],
       [ 4.,  2.]])
>>> np.nancumsum(a, axis=1)
array([[ 1.,  3.],
       [ 3.,  3.]])
```

numpy.**diff**(*a*, *n=1*, *axis=-1*)

Calculate the n-th discrete difference along the given axis.

The first difference is given by `out[n] = a[n+1] - a[n]` along the given axis, higher differences are calculated by using *diff* recursively.

Parameters **a** : array_like

Input array

n : int, optional

The number of times values are differenced. If zero, the input is returned as-is.

axis : int, optional

The axis along which the difference is taken, default is the last axis.

Returns **diff** : ndarray

The n-th differences. The shape of the output is the same as *a* except along *axis* where the dimension is smaller by *n*. The type of the output is the same as the type of the difference between any two elements of *a*. This is the same as the type of *a* in most cases. A notable exception is `datetime64`, which results in a `timedelta64` output array.

See also:

gradient, *ediff1d*, *cumsum*

Notes

Type is preserved for boolean arrays, so the result will contain *False* when consecutive elements are the same and *True* when they differ.

For unsigned integer arrays, the results will also be unsigned. This should not be surprising, as the result is consistent with calculating the difference directly:

```
>>> u8_arr = np.array([1, 0], dtype=np.uint8)
>>> np.diff(u8_arr)
array([255], dtype=uint8)
```

(continues on next page)

(continued from previous page)

```
>>> u8_arr[1,...] - u8_arr[0,...]
array(255, np.uint8)
```

If this is not desirable, then the array should be cast to a larger integer type first:

```
>>> i16_arr = u8_arr.astype(np.int16)
>>> np.diff(i16_arr)
array([-1], dtype=int16)
```

Examples

```
>>> x = np.array([1, 2, 4, 7, 0])
>>> np.diff(x)
array([ 1,  2,  3, -7])
>>> np.diff(x, n=2)
array([  1,   1, -10])
```

```
>>> x = np.array([[1, 3, 6, 10], [0, 5, 6, 8]])
>>> np.diff(x)
array([[2, 3, 4],
       [5, 1, 2]])
>>> np.diff(x, axis=0)
array([[-1,  2,  0, -2]])
```

```
>>> x = np.arange('1066-10-13', '1066-10-16', dtype=np.datetime64)
>>> np.diff(x)
array([1, 1], dtype='timedelta64[D]')
```

numpy.**ediff1d**(*ary*, *to_end=None*, *to_begin=None*)

The differences between consecutive elements of an array.

Parameters **ary** : array_like

If necessary, will be flattened before the differences are taken.

to_end : array_like, optional

Number(s) to append at the end of the returned differences.

to_begin : array_like, optional

Number(s) to prepend at the beginning of the returned differences.

Returns **ediff1d** : ndarray

The differences. Loosely, this is `ary.flat[1:] - ary.flat[:-1]`.

See also:

diff, *gradient*

Notes

When applied to masked arrays, this function drops the mask information if the *to_begin* and/or *to_end* parameters are used.

Examples

```
>>> x = np.array([1, 2, 4, 7, 0])
>>> np.ediff1d(x)
array([ 1,  2,  3, -7])
```

```
>>> np.ediff1d(x, to_begin=-99, to_end=np.array([88, 99]))
array([-99,   1,   2,   3,  -7,  88,  99])
```

The returned array is always 1D.

```
>>> y = [[1, 2, 4], [1, 6, 24]]
>>> np.ediff1d(y)
array([ 1,  2, -3,  5, 18])
```

numpy.**gradient**(*f*, **varargs*, ***kwargs*)

Return the gradient of an N-dimensional array.

The gradient is computed using second order accurate central differences in the interior points and either first or second order accurate one-sides (forward or backwards) differences at the boundaries. The returned gradient hence has the same shape as the input array.

Parameters **f** : array_like

An N-dimensional array containing samples of a scalar function.

varargs : list of scalar or array, optional

Spacing between f values. Default unitary spacing for all dimensions. Spacing can be specified using:

1. single scalar to specify a sample distance for all dimensions.
2. N scalars to specify a constant sample distance for each dimension. i.e. *dx*, *dy*, *dz*, ...
3. N arrays to specify the coordinates of the values along each dimension of F. The length of the array must match the size of the corresponding dimension
4. Any combination of N scalars/arrays with the meaning of 2. and 3.

If *axis* is given, the number of varargs must equal the number of axes. Default: 1.

edge_order : {1, 2}, optional

Gradient is calculated using N-th order accurate differences at the boundaries. Default: 1.

New in version 1.9.1.

axis : None or int or tuple of ints, optional

Gradient is calculated only along the given axis or axes The default (axis = None) is to calculate the gradient for all the axes of the input array. axis may be negative, in which case it counts from the last to the first axis.

New in version 1.11.0.

Returns **gradient** : ndarray or list of ndarray

A set of ndarrays (or a single ndarray if there is only one dimension) corresponding to the derivatives of f with respect to each dimension. Each derivative has the same shape as f.

Notes

Assuming that $f \in C^3$ (i.e., f has at least 3 continuous derivatives) and let be h_* a non homogeneous stepsize, the spacing the finite difference coefficients are computed by minimising the consistency error η_i:

$$\eta_i = f_i^{(1)} - [\alpha f(x_i) + \beta f(x_i + h_d) + \gamma f(x_i - h_s)]$$

By substituting $f(x_i + h_d)$ and $f(x_i - h_s)$ with their Taylor series expansion, this translates into solving the following the linear system:

$$\begin{cases} \alpha + \beta + \gamma = 0 \\ -\beta h_d + \gamma h_s = 1 \\ \beta h_d^2 + \gamma h_s^2 = 0 \end{cases}$$

The resulting approximation of $f_i^{(1)}$ is the following:

$$\hat{f}_i^{(1)} = \frac{h_s^2 f(x_i + h_d) + (h_d^2 - h_s^2) f(x_i) - h_d^2 f(x_i - h_s)}{h_s h_d (h_d + h_s)} + \mathcal{O}\left(\frac{h_d h_s^2 + h_s h_d^2}{h_d + h_s}\right)$$

It is worth noting that if $h_s = h_d$ (i.e., data are evenly spaced) we find the standard second order approximation:

$$\hat{f}_i^{(1)} = \frac{f(x_{i+1}) - f(x_{i-1})}{2h} + \mathcal{O}(h^2)$$

With a similar procedure the forward/backward approximations used for boundaries can be derived.

References

[R23], *[R24]*, *[R25]*

Examples

```
>>> f = np.array([1, 2, 4, 7, 11, 16], dtype=float)
>>> np.gradient(f)
array([ 1. ,  1.5,  2.5,  3.5,  4.5,  5. ])
>>> np.gradient(f, 2)
array([ 0.5 ,  0.75,  1.25,  1.75,  2.25,  2.5 ])
```

Spacing can be also specified with an array that represents the coordinates of the values F along the dimensions. For instance a uniform spacing:

```
>>> x = np.arange(f.size)
>>> np.gradient(f, x)
array([ 1. ,  1.5,  2.5,  3.5,  4.5,  5. ])
```

Or a non uniform one:

```
>>> x = np.array([0., 1., 1.5, 3.5, 4., 6.], dtype=float)
>>> np.gradient(f, x)
array([ 1. ,  3. ,  3.5,  6.7,  6.9,  2.5])
```

For two dimensional arrays, the return will be two arrays ordered by axis. In this example the first array stands for the gradient in rows and the second one in columns direction:

```
>>> np.gradient(np.array([[1, 2, 6], [3, 4, 5]], dtype=float))
[array([[ 2.,  2., -1.],
        [ 2.,  2., -1.]]), array([[ 1. ,  2.5,  4. ],
        [ 1. ,  1. ,  1. ]])]
```

In this example the spacing is also specified: uniform for axis=0 and non uniform for axis=1

```
>>> dx = 2.
>>> y = [1., 1.5, 3.5]
>>> np.gradient(np.array([[1, 2, 6], [3, 4, 5]], dtype=float), dx, y)
[array([[ 1. ,  1. , -0.5],
        [ 1. ,  1. , -0.5]]), array([[ 2. ,  2. ,  2. ],
        [ 2. ,  1.7,  0.5]])]
```

It is possible to specify how boundaries are treated using *edge_order*

```
>>> x = np.array([0, 1, 2, 3, 4])
>>> f = x**2
>>> np.gradient(f, edge_order=1)
array([ 1.,  2.,  4.,  6.,  7.])
>>> np.gradient(f, edge_order=2)
array([-0.,  2.,  4.,  6.,  8.])
```

The *axis* keyword can be used to specify a subset of axes of which the gradient is calculated

```
>>> np.gradient(np.array([[1, 2, 6], [3, 4, 5]], dtype=float), axis=0)
array([[ 2.,  2., -1.],
       [ 2.,  2., -1.]])
```

numpy.**cross**(*a*, *b*, *axisa=-1*, *axisb=-1*, *axisc=-1*, *axis=None*)

Return the cross product of two (arrays of) vectors.

The cross product of *a* and *b* in R^3 is a vector perpendicular to both *a* and *b*. If *a* and *b* are arrays of vectors, the vectors are defined by the last axis of *a* and *b* by default, and these axes can have dimensions 2 or 3. Where the dimension of either *a* or *b* is 2, the third component of the input vector is assumed to be zero and the cross product calculated accordingly. In cases where both input vectors have dimension 2, the z-component of the cross product is returned.

Parameters **a** : array_like

Components of the first vector(s).

b : array_like

Components of the second vector(s).

axisa : int, optional

Axis of *a* that defines the vector(s). By default, the last axis.

axisb : int, optional

Axis of *b* that defines the vector(s). By default, the last axis.

axisc : int, optional

Axis of *c* containing the cross product vector(s). Ignored if both input vectors have dimension 2, as the return is scalar. By default, the last axis.

axis : int, optional

If defined, the axis of *a*, *b* and *c* that defines the vector(s) and cross product(s). Overrides *axisa*, *axisb* and *axisc*.

Returns **c** : ndarray

Vector cross product(s).

Raises **ValueError**

When the dimension of the vector(s) in *a* and/or *b* does not equal 2 or 3.

See also:

inner Inner product

outer Outer product.

ix_ Construct index arrays.

Notes

New in version 1.9.0.

Supports full broadcasting of the inputs.

Examples

Vector cross-product.

```
>>> x = [1, 2, 3]
>>> y = [4, 5, 6]
>>> np.cross(x, y)
array([-3,  6, -3])
```

One vector with dimension 2.

```
>>> x = [1, 2]
>>> y = [4, 5, 6]
>>> np.cross(x, y)
array([12, -6, -3])
```

Equivalently:

```
>>> x = [1, 2, 0]
>>> y = [4, 5, 6]
>>> np.cross(x, y)
array([12, -6, -3])
```

Both vectors with dimension 2.

```
>>> x = [1,2]
>>> y = [4,5]
>>> np.cross(x, y)
-3
```

Multiple vector cross-products. Note that the direction of the cross product vector is defined by the *right-hand rule*.

```
>>> x = np.array([[1,2,3], [4,5,6]])
>>> y = np.array([[4,5,6], [1,2,3]])
>>> np.cross(x, y)
array([[-3,  6, -3],
       [ 3, -6,  3]])
```

The orientation of *c* can be changed using the *axisc* keyword.

```
>>> np.cross(x, y, axisc=0)
array([[-3,  3],
       [ 6, -6],
       [-3,  3]])
```

Change the vector definition of *x* and *y* using *axisa* and *axisb*.

```
>>> x = np.array([[1,2,3], [4,5,6], [7, 8, 9]])
>>> y = np.array([[7, 8, 9], [4,5,6], [1,2,3]])
>>> np.cross(x, y)
array([[ -6,  12,  -6],
       [  0,   0,   0],
       [  6, -12,   6]])
>>> np.cross(x, y, axisa=0, axisb=0)
array([[-24,  48, -24],
       [-30,  60, -30],
       [-36,  72, -36]])
```

numpy.**trapz**(*y*, *x=None*, *dx=1.0*, *axis=-1*)

Integrate along the given axis using the composite trapezoidal rule.

Integrate *y* (*x*) along given axis.

Parameters **y** : array_like

Input array to integrate.

x : array_like, optional

The sample points corresponding to the *y* values. If *x* is None, the sample points are assumed to be evenly spaced *dx* apart. The default is None.

dx : scalar, optional

The spacing between sample points when *x* is None. The default is 1.

axis : int, optional

The axis along which to integrate.

Returns **trapz** : float

Definite integral as approximated by trapezoidal rule.

See also:

sum, *cumsum*

Notes

Image *[R296]* illustrates trapezoidal rule – y-axis locations of points will be taken from *y* array, by default x-axis distances between points will be 1.0, alternatively they can be provided with *x* array or with *dx* scalar. Return value will be equal to combined area under the red lines.

References

[R295], *[R296]*

Examples

```
>>> np.trapz([1,2,3])
4.0
>>> np.trapz([1,2,3], x=[4,6,8])
8.0
>>> np.trapz([1,2,3], dx=2)
8.0
>>> a = np.arange(6).reshape(2, 3)
>>> a
array([[0, 1, 2],
       [3, 4, 5]])
>>> np.trapz(a, axis=0)
array([ 1.5,  2.5,  3.5])
>>> np.trapz(a, axis=1)
array([ 2.,  8.])
```

3.19.5 Exponents and logarithms

exp(x, /[, out, where, casting, order, ...])	Calculate the exponential of all elements in the input array.
expm1(x, /[, out, where, casting, order, ...])	Calculate `exp(x) - 1` for all elements in the array.
exp2(x, /[, out, where, casting, order, ...])	Calculate *2**p* for all *p* in the input array.
log(x, /[, out, where, casting, order, ...])	Natural logarithm, element-wise.
log10(x, /[, out, where, casting, order, ...])	Return the base 10 logarithm of the input array, element-wise.
log2(x, /[, out, where, casting, order, ...])	Base-2 logarithm of *x*.
log1p(x, /[, out, where, casting, order, ...])	Return the natural logarithm of one plus the input array, element-wise.
logaddexp(x1, x2, /[, out, where, casting, ...])	Logarithm of the sum of exponentiations of the inputs.
logaddexp2(x1, x2, /[, out, where, casting, ...])	Logarithm of the sum of exponentiations of the inputs in base-2.

numpy.**exp**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'exp'>**

Calculate the exponential of all elements in the input array.

Parameters **x** : array_like

Input values.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : ndarray

Output array, element-wise exponential of *x*.

See also:

expm1 Calculate `exp(x) - 1` for all elements in the array.

exp2 Calculate `2**x` for all elements in the array.

Notes

The irrational number `e` is also known as Euler's number. It is approximately 2.718281, and is the base of the natural logarithm, `ln` (this means that, if $x = \ln y = \log_e y$, then $e^x = y$. For real input, `exp(x)` is always positive.

For complex arguments, `x = a + ib`, we can write $e^x = e^a e^{ib}$. The first term, e^a, is already known (it is the real argument, described above). The second term, e^{ib}, is $\cos b + i \sin b$, a function with magnitude 1 and a periodic phase.

References

[R18], *[R19]*

Examples

Plot the magnitude and phase of `exp(x)` in the complex plane:

```
>>> import matplotlib.pyplot as plt
```

```
>>> x = np.linspace(-2*np.pi, 2*np.pi, 100)
>>> xx = x + 1j * x[:, np.newaxis] # a + ib over complex plane
>>> out = np.exp(xx)
```

```
>>> plt.subplot(121)
>>> plt.imshow(np.abs(out),
...            extent=[-2*np.pi, 2*np.pi, -2*np.pi, 2*np.pi], cmap='gray')
>>> plt.title('Magnitude of exp(x)')
```

```
>>> plt.subplot(122)
>>> plt.imshow(np.angle(out),
...            extent=[-2*np.pi, 2*np.pi, -2*np.pi, 2*np.pi], cmap='hsv')
>>> plt.title('Phase (angle) of exp(x)')
>>> plt.show()
```

numpy.**expm1**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'expm1'>**

Calculate `exp(x) - 1` for all elements in the array.

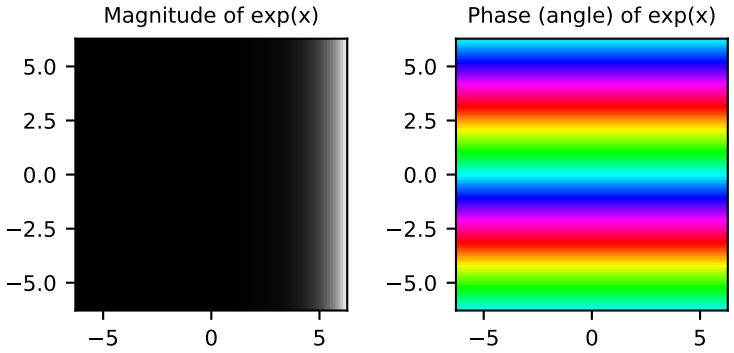

Parameters **x** : array_like

Input values.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : ndarray

Element-wise exponential minus one: `out = exp(x) - 1`.

See also:

log1p `log(1 + x)`, the inverse of expm1.

Notes

This function provides greater precision than `exp(x) - 1` for small values of `x`.

Examples

The true value of `exp(1e-10) - 1` is `1.00000000005e-10` to about 32 significant digits. This example shows the superiority of expm1 in this case.

```
>>> np.expm1(1e-10)
1.00000000005e-10
>>> np.exp(1e-10) - 1
1.000000082740371e-10
```

numpy.**exp2**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'exp2'>**

Calculate *2**p* for all *p* in the input array.

Parameters **x** : array_like

Input values.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : ndarray

Element-wise 2 to the power *x*.

See also:

power

Notes

New in version 1.3.0.

Examples

```
>>> np.exp2([2, 3])
array([ 4.,  8.])
```

numpy.**log**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'log'>**

Natural logarithm, element-wise.

The natural logarithm *log* is the inverse of the exponential function, so that *log(exp(x)) = x*. The natural logarithm is logarithm in base `e`.

Parameters **x** : array_like

Input value.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The natural logarithm of *x*, element-wise.

See also:

log10, *log2*, *log1p*, `emath.log`

Notes

Logarithm is a multivalued function: for each *x* there is an infinite number of *z* such that *exp(z) = x*. The convention is to return the *z* whose imaginary part lies in *[-pi, pi]*.

For real-valued input data types, *log* always returns real output. For each value that cannot be expressed as a real number or infinity, it yields `nan` and sets the *invalid* floating point error flag.

For complex-valued input, *log* is a complex analytical function that has a branch cut *[-inf, 0]* and is continuous from above on it. *log* handles the floating-point negative zero as an infinitesimal negative number, conforming to the C99 standard.

References

[R51], *[R52]*

Examples

```
>>> np.log([1, np.e, np.e**2, 0])
array([  0.,   1.,   2., -Inf])
```

numpy.**log10**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'log10'>**

Return the base 10 logarithm of the input array, element-wise.

Parameters **x** : array_like

Input values.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The logarithm to the base 10 of *x*, element-wise. NaNs are returned where x is negative.

See also:

`emath.log10`

Notes

Logarithm is a multivalued function: for each *x* there is an infinite number of *z* such that *10**z = x*. The convention is to return the *z* whose imaginary part lies in *[-pi, pi]*.

For real-valued input data types, *log10* always returns real output. For each value that cannot be expressed as a real number or infinity, it yields `nan` and sets the *invalid* floating point error flag.

For complex-valued input, *log10* is a complex analytical function that has a branch cut *[-inf, 0]* and is continuous from above on it. *log10* handles the floating-point negative zero as an infinitesimal negative number, conforming to the C99 standard.

References

[R53], *[R54]*

Examples

```
>>> np.log10([1e-15, -3.])
array([-15.,  NaN])
```

numpy.**log2**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'log2'>**

Base-2 logarithm of *x*.

Parameters **x** : array_like

Input values.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

Base-2 logarithm of *x*.

See also:

log, *log10*, *log1p*, `emath.log2`

Notes

New in version 1.3.0.

Logarithm is a multivalued function: for each *x* there is an infinite number of *z* such that *2**z = x*. The convention is to return the *z* whose imaginary part lies in *[-pi, pi]*.

For real-valued input data types, *log2* always returns real output. For each value that cannot be expressed as a real number or infinity, it yields `nan` and sets the *invalid* floating point error flag.

For complex-valued input, *log2* is a complex analytical function that has a branch cut *[-inf, 0]* and is continuous from above on it. *log2* handles the floating-point negative zero as an infinitesimal negative number, conforming to the C99 standard.

Examples

```
>>> x = np.array([0, 1, 2, 2**4])
>>> np.log2(x)
array([-Inf,   0.,   1.,   4.])
```

```
>>> xi = np.array([0+1.j, 1, 2+0.j, 4.j])
>>> np.log2(xi)
array([ 0.+2.26618007j,  0.+0.j        ,  1.+0.j        ,  2.+2.26618007j])
```

numpy.**log1p**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'log1p'>**

Return the natural logarithm of one plus the input array, element-wise.

Calculates `log(1 + x)`.

Parameters **x** : array_like

Input values.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

Natural logarithm of *1 + x*, element-wise.

See also:

expm1 `exp(x) - 1`, the inverse of *log1p*.

Notes

For real-valued input, *log1p* is accurate also for *x* so small that *1 + x == 1* in floating-point accuracy.

Logarithm is a multivalued function: for each *x* there is an infinite number of *z* such that *exp(z) = 1 + x*. The convention is to return the *z* whose imaginary part lies in *[-pi, pi]*.

For real-valued input data types, *log1p* always returns real output. For each value that cannot be expressed as a real number or infinity, it yields `nan` and sets the *invalid* floating point error flag.

For complex-valued input, *log1p* is a complex analytical function that has a branch cut *[-inf, -1]* and is continuous from above on it. *log1p* handles the floating-point negative zero as an infinitesimal negative number, conforming to the C99 standard.

References

[R55], *[R56]*

Examples

```
>>> np.log1p(1e-99)
1e-99
>>> np.log(1 + 1e-99)
0.0
```

numpy.**logaddexp**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'logaddexp'>**

Logarithm of the sum of exponentiations of the inputs.

Calculates `log(exp(x1) + exp(x2))`. This function is useful in statistics where the calculated probabilities of events may be so small as to exceed the range of normal floating point numbers. In such cases the logarithm of the calculated probability is stored. This function allows adding probabilities stored in such a fashion.

Parameters **x1, x2** : array_like

Input values.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **result** : ndarray

Logarithm of `exp(x1) + exp(x2)`.

See also:

logaddexp2 Logarithm of the sum of exponentiations of inputs in base 2.

Notes

New in version 1.3.0.

Examples

```
>>> prob1 = np.log(1e-50)
>>> prob2 = np.log(2.5e-50)
>>> prob12 = np.logaddexp(prob1, prob2)
>>> prob12
-113.87649168120691
>>> np.exp(prob12)
3.5000000000000057e-50
```

numpy.**logaddexp2**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'logaddexp2'>**

Logarithm of the sum of exponentiations of the inputs in base-2.

Calculates `log2(2**x1 + 2**x2)`. This function is useful in machine learning when the calculated probabilities of events may be so small as to exceed the range of normal floating point numbers. In such cases the base-2 logarithm of the calculated probability can be used instead. This function allows adding probabilities stored in such a fashion.

Parameters **x1, x2** : array_like

Input values.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **result** : ndarray

Base-2 logarithm of `2**x1 + 2**x2`.

See also:

logaddexp Logarithm of the sum of exponentiations of the inputs.

Notes

New in version 1.3.0.

Examples

```
>>> prob1 = np.log2(1e-50)
>>> prob2 = np.log2(2.5e-50)
>>> prob12 = np.logaddexp2(prob1, prob2)
>>> prob1, prob2, prob12
(-166.09640474436813, -164.77447664948076, -164.28904982231052)
>>> 2**prob12
3.4999999999999914e-50
```

3.19.6 Other special functions

i0(x)	Modified Bessel function of the first kind, order 0.
sinc(x)	Return the sinc function.

numpy.**i0**(*x*)

Modified Bessel function of the first kind, order 0.

Usually denoted I_0. This function does broadcast, but will *not* "up-cast" int dtype arguments unless accompanied by at least one float or complex dtype argument (see Raises below).

Parameters **x** : array_like, dtype float or complex

Argument of the Bessel function.

Returns **out** : ndarray, shape = x.shape, dtype = x.dtype

The modified Bessel function evaluated at each of the elements of *x*.

Raises **TypeError: array cannot be safely cast to required type**

If argument consists exclusively of int dtypes.

See also:

scipy.special.iv, scipy.special.ive

Notes

We use the algorithm published by Clenshaw *[R34]* and referenced by Abramowitz and Stegun *[R35]*, for which the function domain is partitioned into the two intervals [0,8] and (8,inf), and Chebyshev polynomial expansions are employed in each interval. Relative error on the domain [0,30] using IEEE arithmetic is documented *[R36]* as having a peak of 5.8e-16 with an rms of 1.4e-16 (n = 30000).

References

[R34], *[R35]*, *[R36]*

Examples

```
>>> np.i0([0.])
array(1.0)
>>> np.i0([0., 1. + 2j])
array([ 1.00000000+0.j        ,  0.18785373+0.64616944j])
```

numpy.**sinc**(*x*)

Return the sinc function.

The sinc function is $\sin(\pi x)/(\pi x)$.

Parameters **x** : ndarray

Array (possibly multi-dimensional) of values for which to to calculate `sinc(x)`.

Returns **out** : ndarray

`sinc(x)`, which has the same shape as the input.

Notes

`sinc(0)` is the limit value 1.

The name sinc is short for "sine cardinal" or "sinus cardinalis".

The sinc function is used in various signal processing applications, including in anti-aliasing, in the construction of a Lanczos resampling filter, and in interpolation.

For bandlimited interpolation of discrete-time signals, the ideal interpolation kernel is proportional to the sinc function.

References

[R291], *[R292]*

Examples

```
>>> x = np.linspace(-4, 4, 41)
>>> np.sinc(x)
array([ -3.89804309e-17,  -4.92362781e-02,  -8.40918587e-02,
        -8.90384387e-02,  -5.84680802e-02,   3.89804309e-17,
         6.68206631e-02,   1.16434881e-01,   1.26137788e-01,
         8.50444803e-02,  -3.89804309e-17,  -1.03943254e-01,
        -1.89206682e-01,  -2.16236208e-01,  -1.55914881e-01,
         3.89804309e-17,   2.33872321e-01,   5.04551152e-01,
         7.56826729e-01,   9.35489284e-01,   1.00000000e+00,
         9.35489284e-01,   7.56826729e-01,   5.04551152e-01,
         2.33872321e-01,   3.89804309e-17,  -1.55914881e-01,
        -2.16236208e-01,  -1.89206682e-01,  -1.03943254e-01,
```

(continues on next page)

(continued from previous page)

```
       -3.89804309e-17,   8.50444803e-02,   1.26137788e-01,
        1.16434881e-01,   6.68206631e-02,   3.89804309e-17,
       -5.84680802e-02,  -8.90384387e-02,  -8.40918587e-02,
       -4.92362781e-02,  -3.89804309e-17])
```

```
>>> plt.plot(x, np.sinc(x))
[<matplotlib.lines.Line2D object at 0x...>]
>>> plt.title("Sinc Function")
<matplotlib.text.Text object at 0x...>
>>> plt.ylabel("Amplitude")
<matplotlib.text.Text object at 0x...>
>>> plt.xlabel("X")
<matplotlib.text.Text object at 0x...>
>>> plt.show()
```

It works in 2-D as well:

```
>>> x = np.linspace(-4, 4, 401)
>>> xx = np.outer(x, x)
>>> plt.imshow(np.sinc(xx))
<matplotlib.image.AxesImage object at 0x...>
```

3.19.7 Floating point routines

signbit(x, /[, out, where, casting, order, ...])	Returns element-wise True where signbit is set (less than zero).
copysign(x1, x2, /[, out, where, casting, ...])	Change the sign of x1 to that of x2, element-wise.
frexp(x[, out1, out2], / [[, out, where, ...])	Decompose the elements of x into mantissa and twos exponent.
ldexp(x1, x2, /[, out, where, casting, ...])	Returns x1 * 2**x2, element-wise.
nextafter(x1, x2, /[, out, where, casting, ...])	Return the next floating-point value after x1 towards x2, element-wise.
spacing(x, /[, out, where, casting, order, ...])	Return the distance between x and the nearest adjacent number.

numpy.**signbit**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'signbit'>**

Returns element-wise True where signbit is set (less than zero).

Parameters **x** : array_like

The input value(s).

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **result** : ndarray of bool

Output array, or reference to *out* if that was supplied.

Examples

```
>>> np.signbit(-1.2)
True
>>> np.signbit(np.array([1, -2.3, 2.1]))
array([False,  True, False])
```

numpy.**copysign**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'copysign'>**

Change the sign of x1 to that of x2, element-wise.

If both arguments are arrays or sequences, they have to be of the same length. If *x2* is a scalar, its sign will be copied to all elements of *x1*.

Parameters **x1** : array_like

Values to change the sign of.

x2 : array_like

The sign of *x2* is copied to *x1*.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : array_like

The values of *x1* with the sign of *x2*.

Examples

```
>>> np.copysign(1.3, -1)
-1.3
>>> 1/np.copysign(0, 1)
inf
>>> 1/np.copysign(0, -1)
-inf
```

```
>>> np.copysign([-1, 0, 1], -1.1)
array([-1., -0., -1.])
>>> np.copysign([-1, 0, 1], np.arange(3)-1)
array([-1.,  0.,  1.])
```

numpy.**frexp**(*x*[, *out1*, *out2*], /[, *out=(None, None)*], *, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'frexp'>**

Decompose the elements of x into mantissa and twos exponent.

Returns (*mantissa*, *exponent*), where *x = mantissa * 2**exponent'*. The mantissa is lies in the open interval(-1, 1), while the twos exponent is a signed integer.

Parameters **x** : array_like

Array of numbers to be decomposed.

out1 : ndarray, optional

Output array for the mantissa. Must have the same shape as *x*.

out2 : ndarray, optional

Output array for the exponent. Must have the same shape as *x*.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **(mantissa, exponent)** : tuple of ndarrays, (float, int)

mantissa is a float array with values between -1 and 1. *exponent* is an int array which represents the exponent of 2.

See also:

ldexp Compute `y = x1 * 2**x2`, the inverse of *frexp*.

Notes

Complex dtypes are not supported, they will raise a TypeError.

Examples

```
>>> x = np.arange(9)
>>> y1, y2 = np.frexp(x)
>>> y1
array([ 0.   ,  0.5  ,  0.5  ,  0.75 ,  0.5  ,  0.625,  0.75 ,  0.875,
```

(continues on next page)

(continued from previous page)

```
        0.5  ])
>>> y2
array([0, 1, 2, 2, 3, 3, 3, 3, 4])
>>> y1 * 2**y2
array([ 0.,  1.,  2.,  3.,  4.,  5.,  6.,  7.,  8.])
```

numpy.**ldexp**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'ldexp'>**

Returns x1 * 2**x2, element-wise.

The mantissas *x1* and twos exponents *x2* are used to construct floating point numbers `x1 * 2**x2`.

Parameters **x1** : array_like

Array of multipliers.

x2 : array_like, int

Array of twos exponents.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray or scalar

The result of `x1 * 2**x2`.

See also:

frexp Return (y1, y2) from `x = y1 * 2**y2`, inverse to *ldexp*.

Notes

Complex dtypes are not supported, they will raise a TypeError.

ldexp is useful as the inverse of *frexp*, if used by itself it is more clear to simply use the expression `x1 * 2**x2`.

Examples

```
>>> np.ldexp(5, np.arange(4))
array([  5.,  10.,  20.,  40.], dtype=float32)
```

```
>>> x = np.arange(6)
>>> np.ldexp(*np.frexp(x))
array([ 0.,  1.,  2.,  3.,  4.,  5.])
```

numpy.**nextafter**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'nextafter'>**

Return the next floating-point value after x1 towards x2, element-wise.

Parameters **x1** : array_like

Values to find the next representable value of.

x2 : array_like

The direction where to look for the next representable value of *x1*.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : array_like

The next representable values of *x1* in the direction of *x2*.

Examples

```
>>> eps = np.finfo(np.float64).eps
>>> np.nextafter(1, 2) == eps + 1
True
>>> np.nextafter([1, 2], [2, 1]) == [eps + 1, 2 - eps]
array([ True,  True])
```

numpy.**spacing**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'spacing'>**

Return the distance between x and the nearest adjacent number.

Parameters **x** : array_like

Values to find the spacing of.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : array_like

The spacing of values of *x1*.

Notes

It can be considered as a generalization of EPS: `spacing(np.float64(1)) == np.finfo(np.float64).eps`, and there should not be any representable number between `x + spacing(x)` and x for any finite x.

Spacing of +- inf and NaN is NaN.

Examples

```
>>> np.spacing(1) == np.finfo(np.float64).eps
True
```

3.19.8 Arithmetic operations

add(x1, x2, /[, out, where, casting, order, ...])	Add arguments element-wise.
reciprocal(x, /[, out, where, casting, ...])	Return the reciprocal of the argument, element-wise.
positive(x, /[, out, where, casting, order, ...])	Numerical positive, element-wise.
negative(x, /[, out, where, casting, order, ...])	Numerical negative, element-wise.
multiply(x1, x2, /[, out, where, casting, ...])	Multiply arguments element-wise.
divide(x1, x2, /[, out, where, casting, ...])	Returns a true division of the inputs, element-wise.
power(x1, x2, /[, out, where, casting, ...])	First array elements raised to powers from second array, element-wise.
subtract(x1, x2, /[, out, where, casting, ...])	Subtract arguments, element-wise.
true_divide(x1, x2, /[, out, where, ...])	Returns a true division of the inputs, element-wise.
floor_divide(x1, x2, /[, out, where, ...])	Return the largest integer smaller or equal to the division of the inputs.
float_power(x1, x2, /[, out, where, ...])	First array elements raised to powers from second array, element-wise.
fmod(x1, x2, /[, out, where, casting, ...])	Return the element-wise remainder of division.
mod(x1, x2, /[, out, where, casting, order, ...])	Return element-wise remainder of division.
modf(x[, out1, out2], / [[, out, where, ...])	Return the fractional and integral parts of an array, element-wise.
remainder(x1, x2, /[, out, where, casting, ...])	Return element-wise remainder of division.
divmod(x1, x2[, out1, out2], / [[, out, ...])	Return element-wise quotient and remainder simultaneously.

numpy.**add**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'add'>**

Add arguments element-wise.

Parameters **x1, x2** : array_like

The arrays to be added. If `x1.shape != x2.shape`, they must be broadcastable to a common shape (which may be the shape of one or the other).

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **add** : ndarray or scalar

The sum of *x1* and *x2*, element-wise. Returns a scalar if both *x1* and *x2* are scalars.

Notes

Equivalent to *x1* + *x2* in terms of array broadcasting.

Examples

```
>>> np.add(1.0, 4.0)
5.0
>>> x1 = np.arange(9.0).reshape((3, 3))
>>> x2 = np.arange(3.0)
>>> np.add(x1, x2)
array([[  0.,   2.,   4.],
       [  3.,   5.,   7.],
       [  6.,   8.,  10.]])
```

numpy.**reciprocal**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'reciprocal'>**

Return the reciprocal of the argument, element-wise.

Calculates `1/x`.

Parameters **x** : array_like

Input array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

Return array.

Notes

Note: This function is not designed to work with integers.

For integer arguments with absolute value larger than 1 the result is always zero because of the way Python handles integer division. For integer zero the result is an overflow.

Examples

```
>>> np.reciprocal(2.)
0.5
>>> np.reciprocal([1, 2., 3.33])
array([ 1.       ,  0.5      ,  0.3003003])
```

numpy.**positive**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'positive'>**

Numerical positive, element-wise.

New in version 1.13.0.

Parameters **x** : array_like or scalar

Input array.

Returns **y** : ndarray or scalar

Returned array or scalar: $y = +x$.

Notes

Equivalent to *x.copy()*, but only defined for types that support arithmetic.

numpy.**negative**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'negative'>**

Numerical negative, element-wise.

Parameters **x** : array_like or scalar

Input array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray or scalar

Returned array or scalar: *y* = *-x*.

Examples

```
>>> np.negative([1.,-1.])
array([-1.,  1.])
```

numpy.**multiply**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'multiply'>**

Multiply arguments element-wise.

Parameters **x1, x2** : array_like

Input arrays to be multiplied.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The product of *x1* and *x2*, element-wise. Returns a scalar if both *x1* and *x2* are scalars.

Notes

Equivalent to *x1* * *x2* in terms of array broadcasting.

Examples

```
>>> np.multiply(2.0, 4.0)
8.0
```

```
>>> x1 = np.arange(9.0).reshape((3, 3))
>>> x2 = np.arange(3.0)
>>> np.multiply(x1, x2)
array([[  0.,   1.,   4.],
```

(continues on next page)

(continued from previous page)

```
       [  0.,   4.,  10.],
       [  0.,   7.,  16.]])
```

numpy.**divide**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'true_divide'>**

Returns a true division of the inputs, element-wise.

Instead of the Python traditional 'floor division', this returns a true division. True division adjusts the output type to present the best answer, regardless of input types.

Parameters **x1** : array_like

Dividend array.

x2 : array_like

Divisor array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : ndarray

Result is scalar if both inputs are scalar, ndarray otherwise.

Notes

The floor division operator `//` was added in Python 2.2 making `//` and `/` equivalent operators. The default floor division operation of `/` can be replaced by true division with `from __future__ import division`.

In Python 3.0, `//` is the floor division operator and `/` the true division operator. The `true_divide(x1, x2)` function is equivalent to true division in Python.

Examples

```
>>> x = np.arange(5)
>>> np.true_divide(x, 4)
array([ 0.  ,  0.25,  0.5 ,  0.75,  1.  ])
```

```
>>> x/4
array([0, 0, 0, 0, 1])
>>> x//4
array([0, 0, 0, 0, 1])
```

```
>>> from __future__ import division
>>> x/4
array([ 0.  ,  0.25,  0.5 ,  0.75,  1.  ])
>>> x//4
array([0, 0, 0, 0, 1])
```

numpy.**power**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'power'>**

First array elements raised to powers from second array, element-wise.

Raise each base in *x1* to the positionally-corresponding power in *x2*. *x1* and *x2* must be broadcastable to the same shape. Note that an integer type raised to a negative integer power will raise a ValueError.

Parameters **x1** : array_like

The bases.

x2 : array_like

The exponents.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The bases in *x1* raised to the exponents in *x2*.

See also:

float_power power function that promotes integers to float

Examples

Cube each element in a list.

```
>>> x1 = range(6)
>>> x1
[0, 1, 2, 3, 4, 5]
>>> np.power(x1, 3)
array([  0,   1,   8,  27,  64, 125])
```

Raise the bases to different exponents.

```
>>> x2 = [1.0, 2.0, 3.0, 3.0, 2.0, 1.0]
>>> np.power(x1, x2)
array([  0.,   1.,   8.,  27.,  16.,   5.])
```

The effect of broadcasting.

```
>>> x2 = np.array([[1, 2, 3, 3, 2, 1], [1, 2, 3, 3, 2, 1]])
>>> x2
array([[1, 2, 3, 3, 2, 1],
       [1, 2, 3, 3, 2, 1]])
>>> np.power(x1, x2)
array([[ 0,  1,  8, 27, 16,  5],
       [ 0,  1,  8, 27, 16,  5]])
```

numpy.**subtract**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'subtract'>**

Subtract arguments, element-wise.

Parameters **x1, x2** : array_like

The arrays to be subtracted from each other.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The difference of *x1* and *x2*, element-wise. Returns a scalar if both *x1* and *x2* are scalars.

Notes

Equivalent to `x1 - x2` in terms of array broadcasting.

Examples

```
>>> np.subtract(1.0, 4.0)
-3.0
```

```
>>> x1 = np.arange(9.0).reshape((3, 3))
>>> x2 = np.arange(3.0)
>>> np.subtract(x1, x2)
array([[ 0.,  0.,  0.],
       [ 3.,  3.,  3.],
       [ 6.,  6.,  6.]])
```

numpy.**true_divide**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'true_divide'>**

Returns a true division of the inputs, element-wise.

Instead of the Python traditional 'floor division', this returns a true division. True division adjusts the output type to present the best answer, regardless of input types.

Parameters **x1** : array_like

Dividend array.

x2 : array_like

Divisor array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : ndarray

Result is scalar if both inputs are scalar, ndarray otherwise.

Notes

The floor division operator `//` was added in Python 2.2 making `//` and `/` equivalent operators. The default floor division operation of `/` can be replaced by true division with `from __future__ import division`.

In Python 3.0, `//` is the floor division operator and `/` the true division operator. The `true_divide(x1, x2)` function is equivalent to true division in Python.

Examples

```
>>> x = np.arange(5)
>>> np.true_divide(x, 4)
array([ 0.  ,  0.25,  0.5 ,  0.75,  1.  ])
```

```
>>> x/4
array([0, 0, 0, 0, 1])
>>> x//4
array([0, 0, 0, 0, 1])
```

```
>>> from __future__ import division
>>> x/4
array([ 0.  ,  0.25,  0.5 ,  0.75,  1.  ])
>>> x//4
array([0, 0, 0, 0, 1])
```

numpy.**floor_divide**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'floor_divide'>**

Return the largest integer smaller or equal to the division of the inputs. It is equivalent to the Python `//` operator and pairs with the Python `%` (*remainder*), function so that `b = a % b + b * (a // b)` up to roundoff.

Parameters **x1** : array_like

Numerator.

x2 : array_like

Denominator.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

y = floor(*x1*/*x2*)

See also:

remainder Remainder complementary to floor_divide.

divmod Simultaneous floor division and remainder.

divide Standard division.

floor Round a number to the nearest integer toward minus infinity.

ceil Round a number to the nearest integer toward infinity.

Examples

```
>>> np.floor_divide(7,3)
2
>>> np.floor_divide([1., 2., 3., 4.], 2.5)
array([ 0.,  0.,  1.,  1.])
```

numpy.**float_power**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'float_power'>**

First array elements raised to powers from second array, element-wise.

Raise each base in *x1* to the positionally-corresponding power in *x2*. *x1* and *x2* must be broadcastable to the same shape. This differs from the power function in that integers, float16, and float32 are promoted to floats with a minimum precision of float64 so that the result is always inexact. The intent is that the function will return a usable result for negative powers and seldom overflow for positive powers.

New in version 1.12.0.

Parameters **x1** : array_like

The bases.

x2 : array_like

The exponents.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The bases in *x1* raised to the exponents in *x2*.

See also:

power power function that preserves type

Examples

Cube each element in a list.

```
>>> x1 = range(6)
>>> x1
[0, 1, 2, 3, 4, 5]
>>> np.float_power(x1, 3)
array([   0.,    1.,    8.,   27.,   64.,  125.])
```

Raise the bases to different exponents.

```
>>> x2 = [1.0, 2.0, 3.0, 3.0, 2.0, 1.0]
>>> np.float_power(x1, x2)
array([  0.,   1.,   8.,  27.,  16.,   5.])
```

The effect of broadcasting.

```
>>> x2 = np.array([[1, 2, 3, 3, 2, 1], [1, 2, 3, 3, 2, 1]])
>>> x2
array([[1, 2, 3, 3, 2, 1],
       [1, 2, 3, 3, 2, 1]])
>>> np.float_power(x1, x2)
array([[  0.,   1.,   8.,  27.,  16.,   5.],
       [  0.,   1.,   8.,  27.,  16.,   5.]])
```

numpy.**fmod**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'fmod'>**

Return the element-wise remainder of division.

This is the NumPy implementation of the C library function fmod, the remainder has the same sign as the dividend *x1*. It is equivalent to the Matlab(TM) `rem` function and should not be confused with the Python modulus operator `x1 % x2`.

Parameters **x1** : array_like

Dividend.

x2 : array_like

Divisor.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : array_like

The remainder of the division of *x1* by *x2*.

See also:

remainder Equivalent to the Python `%` operator.

divide

Notes

The result of the modulo operation for negative dividend and divisors is bound by conventions. For *fmod*, the sign of result is the sign of the dividend, while for *remainder* the sign of the result is the sign of the divisor. The *fmod* function is equivalent to the Matlab(TM) `rem` function.

Examples

```
>>> np.fmod([-3, -2, -1, 1, 2, 3], 2)
array([-1,  0, -1,  1,  0,  1])
>>> np.remainder([-3, -2, -1, 1, 2, 3], 2)
array([1, 0, 1, 1, 0, 1])
```

```
>>> np.fmod([5, 3], [2, 2.])
array([ 1.,  1.])
>>> a = np.arange(-3, 3).reshape(3, 2)
>>> a
array([[-3, -2],
       [-1,  0],
       [ 1,  2]])
```

(continues on next page)

(continued from previous page)

```
>>> np.fmod(a, [2,2])
array([[-1,  0],
       [-1,  0],
       [ 1,  0]])
```

numpy.**mod**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'remainder'>**

Return element-wise remainder of division.

Computes the remainder complementary to the *floor_divide* function. It is equivalent to the Python modulus operator``x1 % x2`` and has the same sign as the divisor *x2*. The MATLAB function equivalent to `np.remainder` is `mod`.

Warning: This should not be confused with:

- Python 3.7's *math.remainder* and C's `remainder`, which computes the IEEE remainder, which are the complement to `round(x1 / x2)`.
- The MATLAB `rem` function and or the C `%` operator which is the complement to `int(x1 / x2)`.

Parameters **x1** : array_like

Dividend array.

x2 : array_like

Divisor array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The element-wise remainder of the quotient `floor_divide(x1, x2)`. Returns a scalar if both *x1* and *x2* are scalars.

See also:

floor_divide Equivalent of Python `//` operator.

divmod Simultaneous floor division and remainder.

fmod Equivalent of the MATLAB `rem` function.

divide, *floor*

Notes

Returns 0 when *x2* is 0 and both *x1* and *x2* are (arrays of) integers.

Examples

```
>>> np.remainder([4, 7], [2, 3])
array([0, 1])
>>> np.remainder(np.arange(7), 5)
array([0, 1, 2, 3, 4, 0, 1])
```

numpy.**modf**(*x*[, *out1*, *out2*], /[, *out=(None, None)*], *, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'modf'>**

Return the fractional and integral parts of an array, element-wise.

The fractional and integral parts are negative if the given number is negative.

Parameters **x** : array_like

Input array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y1** : ndarray

Fractional part of *x*.

y2 : ndarray

Integral part of *x*.

See also:

divmod `divmod(x, 1)` is equivalent to `modf` with the return values switched, except it always has a positive remainder.

Notes

For integer input the return values are floats.

Examples

```
>>> np.modf([0, 3.5])
(array([ 0. ,  0.5]), array([ 0.,  3.]))
>>> np.modf(-0.5)
(-0.5, -0)
```

numpy.**remainder**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'remainder'>**

Return element-wise remainder of division.

Computes the remainder complementary to the *floor_divide* function. It is equivalent to the Python modulus operator``x1 % x2`` and has the same sign as the divisor *x2*. The MATLAB function equivalent to `np.remainder` is `mod`.

Warning: This should not be confused with:

- Python 3.7's *math.remainder* and C's `remainder`, which computes the IEEE remainder, which are the complement to `round(x1 / x2)`.
- The MATLAB `rem` function and or the C `%` operator which is the complement to `int(x1 / x2)`.

Parameters **x1** : array_like

Dividend array.

x2 : array_like

Divisor array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The element-wise remainder of the quotient `floor_divide(x1, x2)`. Returns a scalar if both *x1* and *x2* are scalars.

See also:

floor_divide Equivalent of Python `//` operator.

divmod Simultaneous floor division and remainder.

fmod Equivalent of the MATLAB `rem` function.

divide, *floor*

Notes

Returns 0 when *x2* is 0 and both *x1* and *x2* are (arrays of) integers.

Examples

```
>>> np.remainder([4, 7], [2, 3])
array([0, 1])
>>> np.remainder(np.arange(7), 5)
array([0, 1, 2, 3, 4, 0, 1])
```

numpy.**divmod**(*x1*, *x2*[, *out1*, *out2*], /[, *out=(None*, *None)*], *, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'divmod'>**

Return element-wise quotient and remainder simultaneously.

New in version 1.13.0.

`np.divmod(x, y)` is equivalent to `(x // y, x % y)`, but faster because it avoids redundant work. It is used to implement the Python built-in function `divmod` on NumPy arrays.

Parameters **x1** : array_like

Dividend array.

x2 : array_like

Divisor array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out1** : ndarray

Element-wise quotient resulting from floor division.

out2 : ndarray

Element-wise remainder from floor division.

See also:

floor_divide Equivalent to Python's `//` operator.

remainder Equivalent to Python's `%` operator.

modf Equivalent to `divmod(x, 1)` for positive `x` with the return values switched.

Examples

```
>>> np.divmod(np.arange(5), 3)
(array([0, 0, 0, 1, 1]), array([0, 1, 2, 0, 1]))
```

3.19.9 Handling complex numbers

angle(z[, deg])	Return the angle of the complex argument.
real(val)	Return the real part of the complex argument.
imag(val)	Return the imaginary part of the complex argument.
conj(x, /[, out, where, casting, order, ...])	Return the complex conjugate, element-wise.

numpy.**angle**(*z*, *deg=0*)

Return the angle of the complex argument.

Parameters **z** : array_like

A complex number or sequence of complex numbers.

deg : bool, optional

Return angle in degrees if True, radians if False (default).

Returns **angle** : ndarray or scalar

The counterclockwise angle from the positive real axis on the complex plane, with dtype as numpy.float64.

See also:

arctan2, *absolute*

Examples

```
>>> np.angle([1.0, 1.0j, 1+1j])               # in radians
array([ 0.        ,  1.57079633,  0.78539816])
>>> np.angle(1+1j, deg=True)                  # in degrees
45.0
```

numpy.**real**(*val*)

Return the real part of the complex argument.

Parameters **val** : array_like

Input array.

Returns **out** : ndarray or scalar

The real component of the complex argument. If *val* is real, the type of *val* is used for the output. If *val* has complex elements, the returned type is float.

See also:

real_if_close, *imag*, *angle*

Examples

```
>>> a = np.array([1+2j, 3+4j, 5+6j])
>>> a.real
array([ 1.,  3.,  5.])
>>> a.real = 9
>>> a
array([ 9.+2.j,  9.+4.j,  9.+6.j])
>>> a.real = np.array([9, 8, 7])
>>> a
array([ 9.+2.j,  8.+4.j,  7.+6.j])
>>> np.real(1 + 1j)
1.0
```

numpy.**imag**(*val*)

Return the imaginary part of the complex argument.

Parameters **val** : array_like

Input array.

Returns **out** : ndarray or scalar

The imaginary component of the complex argument. If *val* is real, the type of *val* is used for the output. If *val* has complex elements, the returned type is float.

See also:

real, *angle*, *real_if_close*

Examples

```
>>> a = np.array([1+2j, 3+4j, 5+6j])
>>> a.imag
array([ 2.,  4.,  6.])
>>> a.imag = np.array([8, 10, 12])
>>> a
array([ 1. +8.j,  3.+10.j,  5.+12.j])
>>> np.imag(1 + 1j)
1.0
```

numpy.**conj**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'conjugate'>**

Return the complex conjugate, element-wise.

The complex conjugate of a complex number is obtained by changing the sign of its imaginary part.

Parameters **x** : array_like

Input value.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The complex conjugate of *x*, with same dtype as *y*.

Examples

```
>>> np.conjugate(1+2j)
(1-2j)
```

```
>>> x = np.eye(2) + 1j * np.eye(2)
>>> np.conjugate(x)
array([[ 1.-1.j,  0.-0.j],
       [ 0.-0.j,  1.-1.j]])
```

3.19.10 Miscellaneous

convolve(a, v[, mode])	Returns the discrete, linear convolution of two one-dimensional sequences.
clip(a, a_min, a_max[, out])	Clip (limit) the values in an array.
sqrt(x, /[, out, where, casting, order, ...])	Return the positive square-root of an array, element-wise.
cbrt(x, /[, out, where, casting, order, ...])	Return the cube-root of an array, element-wise.
square(x, /[, out, where, casting, order, ...])	Return the element-wise square of the input.
absolute(x, /[, out, where, casting, order, ...])	Calculate the absolute value element-wise.
fabs(x, /[, out, where, casting, order, ...])	Compute the absolute values element-wise.
sign(x, /[, out, where, casting, order, ...])	Returns an element-wise indication of the sign of a number.
heaviside(x1, x2, /[, out, where, casting, ...])	Compute the Heaviside step function.
maximum(x1, x2, /[, out, where, casting, ...])	Element-wise maximum of array elements.
minimum(x1, x2, /[, out, where, casting, ...])	Element-wise minimum of array elements.
fmax(x1, x2, /[, out, where, casting, ...])	Element-wise maximum of array elements.
fmin(x1, x2, /[, out, where, casting, ...])	Element-wise minimum of array elements.
nan_to_num(x[, copy])	Replace nan with zero and inf with large finite numbers.
real_if_close(a[, tol])	If complex input returns a real array if complex parts are close to zero.
interp(x, xp, fp[, left, right, period])	One-dimensional linear interpolation.

numpy.**convolve**(*a*, *v*, *mode='full'*)

Returns the discrete, linear convolution of two one-dimensional sequences.

The convolution operator is often seen in signal processing, where it models the effect of a linear time-invariant system on a signal *[R17]*. In probability theory, the sum of two independent random variables is distributed according to the convolution of their individual distributions.

If *v* is longer than *a*, the arrays are swapped before computation.

Parameters **a** : (N,) array_like

First one-dimensional input array.

v : (M,) array_like

Second one-dimensional input array.

mode : {'full', 'valid', 'same'}, optional

'full': By default, mode is 'full'. This returns the convolution at each point of overlap, with an output shape of (N+M-1,). At the end-points of the convolution, the signals do not overlap completely, and boundary effects may be seen.

'same': Mode 'same' returns output of length `max(M, N)`. Boundary effects are still visible.

'valid': Mode 'valid' returns output of length `max(M, N) - min(M, N) + 1`. The convolution product is only given for points where the signals overlap completely. Values outside the signal boundary have no effect.

Returns **out** : ndarray

Discrete, linear convolution of *a* and *v*.

See also:

`scipy.signal.fftconvolve` Convolve two arrays using the Fast Fourier Transform.

`scipy.linalg.toeplitz` Used to construct the convolution operator.

`polymul` Polynomial multiplication. Same output as convolve, but also accepts poly1d objects as input.

Notes

The discrete convolution operation is defined as

$$(a * v)[n] = \sum_{m=-\infty}^{\infty} a[m]v[n-m]$$

It can be shown that a convolution $x(t) * y(t)$ in time/space is equivalent to the multiplication $X(f)Y(f)$ in the Fourier domain, after appropriate padding (padding is necessary to prevent circular convolution). Since multiplication is more efficient (faster) than convolution, the function `scipy.signal.fftconvolve` exploits the FFT to calculate the convolution of large data-sets.

References

[R17]

Examples

Note how the convolution operator flips the second array before "sliding" the two across one another:

```
>>> np.convolve([1, 2, 3], [0, 1, 0.5])
array([ 0. ,  1. ,  2.5,  4. ,  1.5])
```

Only return the middle values of the convolution. Contains boundary effects, where zeros are taken into account:

```
>>> np.convolve([1,2,3],[0,1,0.5], 'same')
array([ 1. ,  2.5,  4. ])
```

The two arrays are of the same length, so there is only one position where they completely overlap:

```
>>> np.convolve([1,2,3],[0,1,0.5], 'valid')
array([ 2.5])
```

numpy.**clip**(*a*, *a_min*, *a_max*, *out=None*)

Clip (limit) the values in an array.

Given an interval, values outside the interval are clipped to the interval edges. For example, if an interval of `[0, 1]` is specified, values smaller than 0 become 0, and values larger than 1 become 1.

Parameters **a** : array_like

Array containing elements to clip.

a_min : scalar or array_like or *None*

Minimum value. If *None*, clipping is not performed on lower interval edge. Not more than one of *a_min* and *a_max* may be *None*.

a_max : scalar or array_like or *None*

Maximum value. If *None*, clipping is not performed on upper interval edge. Not more than one of *a_min* and *a_max* may be *None*. If *a_min* or *a_max* are array_like, then the three arrays will be broadcasted to match their shapes.

out : ndarray, optional

The results will be placed in this array. It may be the input array for in-place clipping. *out* must be of the right shape to hold the output. Its type is preserved.

Returns **clipped_array** : ndarray

An array with the elements of *a*, but where values < *a_min* are replaced with *a_min*, and those > *a_max* with *a_max*.

See also:

numpy.doc.ufuncs Section “Output arguments”

Examples

```
>>> a = np.arange(10)
>>> np.clip(a, 1, 8)
array([1, 1, 2, 3, 4, 5, 6, 7, 8, 8])
>>> a
array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
>>> np.clip(a, 3, 6, out=a)
array([3, 3, 3, 3, 4, 5, 6, 6, 6, 6])
>>> a = np.arange(10)
>>> a
array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
>>> np.clip(a, [3, 4, 1, 1, 1, 4, 4, 4, 4, 4], 8)
array([3, 4, 2, 3, 4, 5, 6, 7, 8, 8])
```

numpy.**sqrt**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'sqrt'>**

Return the positive square-root of an array, element-wise.

Parameters **x** : array_like

The values whose square-roots are required.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

An array of the same shape as *x*, containing the positive square-root of each element in *x*. If any element in *x* is complex, a complex array is returned (and the square-roots of negative reals are calculated). If all of the elements in *x* are real, so is *y*, with negative elements returning `nan`. If *out* was provided, *y* is a reference to it.

See also:

`lib.scimath.sqrt` A version which returns complex numbers when given negative reals.

Notes

sqrt has–consistent with common convention–as its branch cut the real "interval" [-*inf*, 0), and is continuous from above on it. A branch cut is a curve in the complex plane across which a given complex function fails to be continuous.

Examples

```
>>> np.sqrt([1,4,9])
array([ 1.,  2.,  3.])
```

```
>>> np.sqrt([4, -1, -3+4J])
array([ 2.+0.j,  0.+1.j,  1.+2.j])
```

```
>>> np.sqrt([4, -1, numpy.inf])
array([  2.,  NaN,  Inf])
```

`numpy.`**`cbrt`**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'cbrt'>**

Return the cube-root of an array, element-wise.

New in version 1.10.0.

Parameters **x** : array_like

The values whose cube-roots are required.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

An array of the same shape as *x*, containing the cube cube-root of each element in *x*. If *out* was provided, *y* is a reference to it.

Examples

```
>>> np.cbrt([1,8,27])
array([ 1.,  2.,  3.])
```

numpy.**square**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'square'>**

Return the element-wise square of the input.

Parameters **x** : array_like

Input data.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : ndarray

Element-wise *x*x*, of the same shape and dtype as *x*. Returns scalar if *x* is a scalar.

See also:

numpy.linalg.matrix_power, *sqrt*, *power*

Examples

```
>>> np.square([-1j, 1])
array([-1.-0.j,  1.+0.j])
```

numpy.**absolute**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'absolute'>**

Calculate the absolute value element-wise.

Parameters **x** : array_like

Input array.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **absolute** : ndarray

An ndarray containing the absolute value of each element in *x*. For complex input, `a + ib`, the absolute value is $\sqrt{a^2 + b^2}$.

Examples

```
>>> x = np.array([-1.2, 1.2])
>>> np.absolute(x)
array([ 1.2,  1.2])
>>> np.absolute(1.2 + 1j)
1.5620499351813308
```

Plot the function over `[-10, 10]`:

```
>>> import matplotlib.pyplot as plt
```

```
>>> x = np.linspace(start=-10, stop=10, num=101)
>>> plt.plot(x, np.absolute(x))
>>> plt.show()
```

Plot the function over the complex plane:

```
>>> xx = x + 1j * x[:, np.newaxis]
>>> plt.imshow(np.abs(xx), extent=[-10, 10, -10, 10], cmap='gray')
>>> plt.show()
```

numpy.**fabs**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'fabs'>**

Compute the absolute values element-wise.

This function returns the absolute values (positive magnitude) of the data in *x*. Complex values are not handled, use *absolute* to find the absolute values of complex data.

Parameters **x** : array_like

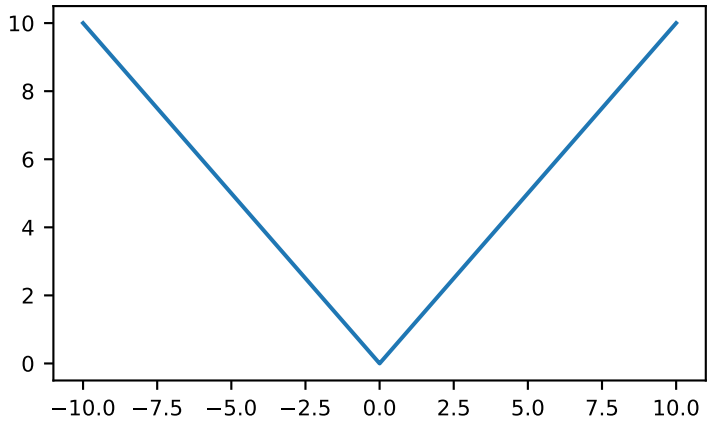
10
8
6
4
2
0
−10.0
−7.5
−5.0
−2.5
0.0
2.5
5.0
7.5
10.0

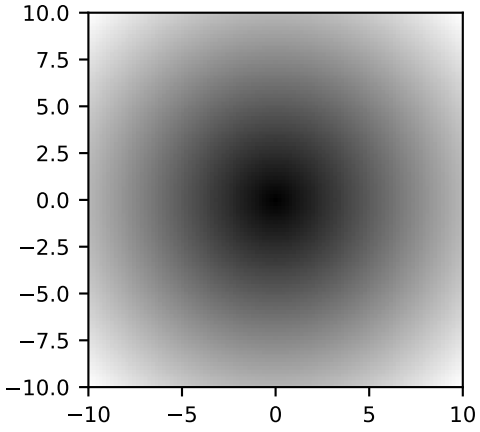
10.0
7.5
5.0
2.5
0.0
−2.5
−5.0
−7.5
−10.0
−10
−5
0
5
10

The array of numbers for which the absolute values are required. If *x* is a scalar, the result *y* will also be a scalar.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray or scalar

The absolute values of *x*, the returned values are always floats.

See also:

absolute Absolute values including `complex` types.

Examples

```
>>> np.fabs(-1)
1.0
>>> np.fabs([-1.2, 1.2])
array([ 1.2,  1.2])
```

numpy.**sign**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'sign'>**

Returns an element-wise indication of the sign of a number.

The *sign* function returns `-1 if x < 0, 0 if x==0, 1 if x > 0`. nan is returned for nan inputs.

For complex inputs, the *sign* function returns `sign(x.real) + 0j if x.real != 0 else sign(x.imag) + 0j`.

complex(nan, 0) is returned for complex nan inputs.

Parameters **x** : array_like

Input values.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray

The sign of *x*.

Notes

There is more than one definition of sign in common use for complex numbers. The definition used here is equivalent to $x/\sqrt{x*x}$ which is different from a common alternative, $x/|x|$.

Examples

```
>>> np.sign([-5., 4.5])
array([-1.,  1.])
>>> np.sign(0)
0
>>> np.sign(5-2j)
(1+0j)
```

numpy.**heaviside**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'heaviside'>**

Compute the Heaviside step function.

The Heaviside step function is defined as:

```
                      0   if x1 < 0
heaviside(x1, x2) =  x2   if x1 == 0
                      1   if x1 > 0
```

where *x2* is often taken to be 0.5, but 0 and 1 are also sometimes used.

Parameters **x1** : array_like

Input values.

x2 : array_like

The value of the function when x1 is 0.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **out** : ndarray

The output array, element-wise Heaviside step function of *x1*.

Notes

New in version 1.13.0.

References

Examples

```
>>> np.heaviside([-1.5, 0, 2.0], 0.5)
array([ 0. ,  0.5,  1. ])
>>> np.heaviside([-1.5, 0, 2.0], 1)
array([ 0.,  1.,  1.])
```

numpy.**maximum**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'maximum'>**

Element-wise maximum of array elements.

Compare two arrays and returns a new array containing the element-wise maxima. If one of the elements being compared is a NaN, then that element is returned. If both elements are NaNs then the first is returned. The latter distinction is important for complex NaNs, which are defined as at least one of the real or imaginary parts being a NaN. The net effect is that NaNs are propagated.

Parameters **x1, x2** : array_like

The arrays holding the elements to be compared. They must have the same shape, or shapes that can be broadcast to a single shape.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray or scalar

The maximum of *x1* and *x2*, element-wise. Returns scalar if both *x1* and *x2* are scalars.

See also:

minimum Element-wise minimum of two arrays, propagates NaNs.

fmax Element-wise maximum of two arrays, ignores NaNs.

amax The maximum value of an array along a given axis, propagates NaNs.

nanmax The maximum value of an array along a given axis, ignores NaNs.

fmin, *amin*, *nanmin*

Notes

The maximum is equivalent to `np.where(x1 >= x2, x1, x2)` when neither x1 nor x2 are nans, but it is faster and does proper broadcasting.

Examples

```
>>> np.maximum([2, 3, 4], [1, 5, 2])
array([2, 5, 4])
```

```
>>> np.maximum(np.eye(2), [0.5, 2]) # broadcasting
array([[ 1. ,  2. ],
       [ 0.5,  2. ]])
```

```
>>> np.maximum([np.nan, 0, np.nan], [0, np.nan, np.nan])
array([ NaN,  NaN,  NaN])
>>> np.maximum(np.Inf, 1)
inf
```

numpy.**minimum**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'minimum'>**

Element-wise minimum of array elements.

Compare two arrays and returns a new array containing the element-wise minima. If one of the elements being compared is a NaN, then that element is returned. If both elements are NaNs then the first is returned. The latter distinction is important for complex NaNs, which are defined as at least one of the real or imaginary parts being a NaN. The net effect is that NaNs are propagated.

Parameters **x1, x2** : array_like

The arrays holding the elements to be compared. They must have the same shape, or shapes that can be broadcast to a single shape.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray or scalar

The minimum of *x1* and *x2*, element-wise. Returns scalar if both *x1* and *x2* are scalars.

See also:

maximum Element-wise maximum of two arrays, propagates NaNs.

fmin Element-wise minimum of two arrays, ignores NaNs.

amin The minimum value of an array along a given axis, propagates NaNs.

nanmin The minimum value of an array along a given axis, ignores NaNs.

fmax, *amax*, *nanmax*

Notes

The minimum is equivalent to `np.where(x1 <= x2, x1, x2)` when neither x1 nor x2 are NaNs, but it is faster and does proper broadcasting.

Examples

```
>>> np.minimum([2, 3, 4], [1, 5, 2])
array([1, 3, 2])
```

```
>>> np.minimum(np.eye(2), [0.5, 2]) # broadcasting
array([[ 0.5,  0. ],
       [ 0. ,  1. ]])
```

```
>>> np.minimum([np.nan, 0, np.nan],[0, np.nan, np.nan])
array([ NaN,  NaN,  NaN])
>>> np.minimum(-np.Inf, 1)
-inf
```

numpy.**fmax**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'fmax'>**

Element-wise maximum of array elements.

Compare two arrays and returns a new array containing the element-wise maxima. If one of the elements being compared is a NaN, then the non-nan element is returned. If both elements are NaNs then the first is returned. The latter distinction is important for complex NaNs, which are defined as at least one of the real or imaginary parts being a NaN. The net effect is that NaNs are ignored when possible.

Parameters **x1, x2** : array_like

The arrays holding the elements to be compared. They must have the same shape.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray or scalar

The maximum of *x1* and *x2*, element-wise. Returns scalar if both *x1* and *x2* are scalars.

See also:

fmin Element-wise minimum of two arrays, ignores NaNs.

maximum Element-wise maximum of two arrays, propagates NaNs.

amax The maximum value of an array along a given axis, propagates NaNs.

nanmax The maximum value of an array along a given axis, ignores NaNs.

minimum, *amin*, *nanmin*

Notes

New in version 1.3.0.

The fmax is equivalent to `np.where(x1 >= x2, x1, x2)` when neither x1 nor x2 are NaNs, but it is faster and does proper broadcasting.

Examples

```
>>> np.fmax([2, 3, 4], [1, 5, 2])
array([ 2.,  5.,  4.])
```

```
>>> np.fmax(np.eye(2), [0.5, 2])
array([[ 1. ,  2. ],
       [ 0.5,  2. ]])
```

```
>>> np.fmax([np.nan, 0, np.nan],[0, np.nan, np.nan])
array([  0.,   0.,  NaN])
```

numpy.**fmin**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*[, *signature*, *extobj*]) **= <ufunc 'fmin'>**

Element-wise minimum of array elements.

Compare two arrays and returns a new array containing the element-wise minima. If one of the elements being compared is a NaN, then the non-nan element is returned. If both elements are NaNs then the first is returned. The latter distinction is important for complex NaNs, which are defined as at least one of the real or imaginary parts being a NaN. The net effect is that NaNs are ignored when possible.

Parameters **x1, x2** : array_like

The arrays holding the elements to be compared. They must have the same shape.

out : ndarray, None, or tuple of ndarray and None, optional

A location into which the result is stored. If provided, it must have a shape that the inputs broadcast to. If not provided or *None*, a freshly-allocated array is returned. A tuple (possible only as a keyword argument) must have length equal to the number of outputs.

where : array_like, optional

Values of True indicate to calculate the ufunc at that position, values of False indicate to leave the value in the output alone.

****kwargs**

For other keyword-only arguments, see the *ufunc docs*.

Returns **y** : ndarray or scalar

The minimum of *x1* and *x2*, element-wise. Returns scalar if both *x1* and *x2* are scalars.

See also:

fmax Element-wise maximum of two arrays, ignores NaNs.

minimum Element-wise minimum of two arrays, propagates NaNs.

amin The minimum value of an array along a given axis, propagates NaNs.

nanmin The minimum value of an array along a given axis, ignores NaNs.

maximum, *amax*, *nanmax*

Notes

New in version 1.3.0.

The fmin is equivalent to `np.where(x1 <= x2, x1, x2)` when neither x1 nor x2 are NaNs, but it is faster and does proper broadcasting.

Examples

```
>>> np.fmin([2, 3, 4], [1, 5, 2])
array([1, 3, 2])
```

```
>>> np.fmin(np.eye(2), [0.5, 2])
array([[ 0.5,  0. ],
       [ 0. ,  1. ]])
```

```
>>> np.fmin([np.nan, 0, np.nan],[0, np.nan, np.nan])
array([  0.,   0.,  NaN])
```

numpy.**nan_to_num**(*x*, *copy=True*)

Replace nan with zero and inf with large finite numbers.

If *x* is inexact, NaN is replaced by zero, and infinity and -infinity replaced by the respectively largest and most negative finite floating point values representable by `x.dtype`.

For complex dtypes, the above is applied to each of the real and imaginary components of *x* separately.

If *x* is not inexact, then no replacements are made.

Parameters **x** : array_like

Input data.

copy : bool, optional

Whether to create a copy of *x* (True) or to replace values in-place (False). The in-place operation only occurs if casting to an array does not require a copy. Default is True.

New in version 1.13.

Returns **out** : ndarray

x, with the non-finite values replaced. If *copy* is False, this may be *x* itself.

See also:

isinf Shows which elements are positive or negative infinity.

isneginf Shows which elements are negative infinity.

isposinf Shows which elements are positive infinity.

isnan Shows which elements are Not a Number (NaN).

isfinite Shows which elements are finite (not NaN, not infinity)

Notes

NumPy uses the IEEE Standard for Binary Floating-Point for Arithmetic (IEEE 754). This means that Not a Number is not equivalent to infinity.

Examples

```
>>> x = np.array([np.inf, -np.inf, np.nan, -128, 128])
>>> np.nan_to_num(x)
array([  1.79769313e+308,  -1.79769313e+308,   0.00000000e+000,
        -1.28000000e+002,   1.28000000e+002])
>>> y = np.array([complex(np.inf, np.nan), np.nan, complex(np.nan, np.inf)])
>>> np.nan_to_num(y)
array([  1.79769313e+308 +0.00000000e+000j,
         0.00000000e+000 +0.00000000e+000j,
         0.00000000e+000 +1.79769313e+308j])
```

numpy.**real_if_close**(*a*, *tol=100*)

If complex input returns a real array if complex parts are close to zero.

"Close to zero" is defined as *tol* * (machine epsilon of the type for *a*).

Parameters **a** : array_like

Input array.

tol : float

Tolerance in machine epsilons for the complex part of the elements in the array.

Returns **out** : ndarray

If *a* is real, the type of *a* is used for the output. If *a* has complex elements, the returned type is float.

See also:

real, *imag*, *angle*

Notes

Machine epsilon varies from machine to machine and between data types but Python floats on most platforms have a machine epsilon equal to 2.2204460492503131e-16. You can use 'np.finfo(float).eps' to print out the machine epsilon for floats.

Examples

```
>>> np.finfo(float).eps
2.2204460492503131e-16
```

```
>>> np.real_if_close([2.1 + 4e-14j], tol=1000)
array([ 2.1])
>>> np.real_if_close([2.1 + 4e-13j], tol=1000)
array([ 2.1 +4.00000000e-13j])
```

numpy.**interp**(*x*, *xp*, *fp*, *left=None*, *right=None*, *period=None*)

One-dimensional linear interpolation.

Returns the one-dimensional piecewise linear interpolant to a function with given values at discrete data-points.

Parameters **x** : array_like

The x-coordinates of the interpolated values.

xp : 1-D sequence of floats

The x-coordinates of the data points, must be increasing if argument *period* is not specified. Otherwise, *xp* is internally sorted after normalizing the periodic boundaries with `xp = xp % period`.

fp : 1-D sequence of float or complex

The y-coordinates of the data points, same length as *xp*.

left : optional float or complex corresponding to fp

Value to return for *x* < *xp[0]*, default is *fp[0]*.

right : optional float or complex corresponding to fp

Value to return for *x* > *xp[-1]*, default is *fp[-1]*.

period : None or float, optional

A period for the x-coordinates. This parameter allows the proper interpolation of angular x-coordinates. Parameters *left* and *right* are ignored if *period* is specified.

New in version 1.10.0.

Returns **y** : float or complex (corresponding to fp) or ndarray

The interpolated values, same shape as *x*.

Raises **ValueError**

If *xp* and *fp* have different length If *xp* or *fp* are not 1-D sequences If *period* == *0*

Notes

Does not check that the x-coordinate sequence *xp* is increasing. If *xp* is not increasing, the results are nonsense. A simple check for increasing is:

```
np.all(np.diff(xp) > 0)
```

Examples

```
>>> xp = [1, 2, 3]
>>> fp = [3, 2, 0]
>>> np.interp(2.5, xp, fp)
1.0
>>> np.interp([0, 1, 1.5, 2.72, 3.14], xp, fp)
array([ 3. ,  3. ,  2.5 ,  0.56,  0. ])
>>> UNDEF = -99.0
>>> np.interp(3.14, xp, fp, right=UNDEF)
-99.0
```

Plot an interpolant to the sine function:

```
>>> x = np.linspace(0, 2*np.pi, 10)
>>> y = np.sin(x)
>>> xvals = np.linspace(0, 2*np.pi, 50)
>>> yinterp = np.interp(xvals, x, y)
>>> import matplotlib.pyplot as plt
>>> plt.plot(x, y, 'o')
[<matplotlib.lines.Line2D object at 0x...>]
>>> plt.plot(xvals, yinterp, '-x')
[<matplotlib.lines.Line2D object at 0x...>]
>>> plt.show()
```

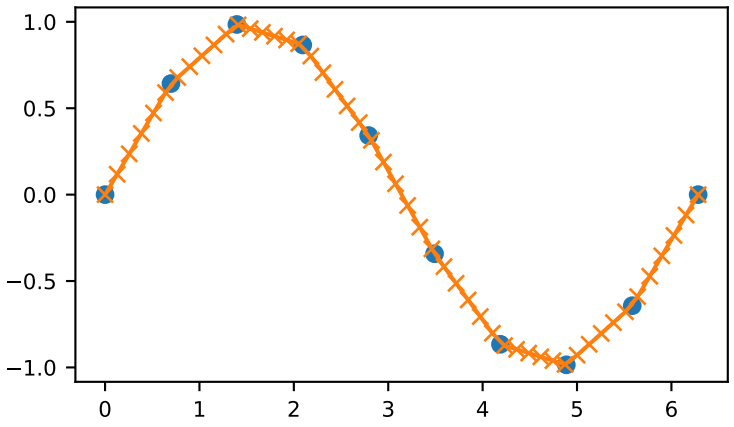

Interpolation with periodic x-coordinates:

```
>>> x = [-180, -170, -185, 185, -10, -5, 0, 365]
>>> xp = [190, -190, 350, -350]
>>> fp = [5, 10, 3, 4]
>>> np.interp(x, xp, fp, period=360)
array([7.5, 5., 8.75, 6.25, 3., 3.25, 3.5, 3.75])
```

Complex interpolation >>> x = [1.5, 4.0] >>> xp = [2,3,5] >>> fp = [1.0j, 0, 2+3j] >>> np.interp(x, xp, fp) array([0.+1.j , 1.+1.5j])

3.20 Matrix library (numpy.matlib)

This module contains all functions in the *numpy* namespace, with the following replacement functions that return *matrices* instead of *ndarrays*.

Functions that are also in the numpy namespace and return matrices

mat(data[, dtype])	Interpret the input as a matrix.
matrix(data[, dtype, copy])	Returns a matrix from an array-like object, or from a string of data.
asmatrix(data[, dtype])	Interpret the input as a matrix.
bmat(obj[, ldict, gdict])	Build a matrix object from a string, nested sequence, or array.

Replacement functions in `matlib`

empty(shape[, dtype, order])	Return a new matrix of given shape and type, without initializing entries.
zeros(shape[, dtype, order])	Return a matrix of given shape and type, filled with zeros.
ones(shape[, dtype, order])	Matrix of ones.
eye(n[, M, k, dtype, order])	Return a matrix with ones on the diagonal and zeros elsewhere.
identity(n[, dtype])	Returns the square identity matrix of given size.
repmat(a, m, n)	Repeat a 0-D to 2-D array or matrix MxN times.
rand(*args)	Return a matrix of random values with given shape.
randn(*args)	Return a random matrix with data from the "standard normal" distribution.

numpy.matlib.**empty**(*shape*, *dtype=None*, *order='C'*)

Return a new matrix of given shape and type, without initializing entries.

Parameters **shape** : int or tuple of int

Shape of the empty matrix.

dtype : data-type, optional

Desired output data-type.

order : {'C', 'F'}, optional

Whether to store multi-dimensional data in row-major (C-style) or column-major (Fortran-style) order in memory.

See also:

`empty_like`, *zeros*

Notes

empty, unlike *zeros*, does not set the matrix values to zero, and may therefore be marginally faster. On the other hand, it requires the user to manually set all the values in the array, and should be used with caution.

Examples

```
>>> import numpy.matlib
>>> np.matlib.empty((2, 2))    # filled with random data
matrix([[  6.76425276e-320,   9.79033856e-307],
        [  7.39337286e-309,   3.22135945e-309]])        #random
>>> np.matlib.empty((2, 2), dtype=int)
matrix([[ 6600475,        0],
        [ 6586976, 22740995]])                          #random
```

numpy.matlib.**zeros**(*shape*, *dtype=None*, *order='C'*)

Return a matrix of given shape and type, filled with zeros.

Parameters **shape** : int or sequence of ints

Shape of the matrix

dtype : data-type, optional

The desired data-type for the matrix, default is float.

order : {'C', 'F'}, optional

Whether to store the result in C- or Fortran-contiguous order, default is 'C'.

Returns **out** : matrix

Zero matrix of given shape, dtype, and order.

See also:

numpy.zeros Equivalent array function.

matlib.ones Return a matrix of ones.

Notes

If `shape` has length one i.e. `(N,)`, or is a scalar `N`, *out* becomes a single row matrix of shape `(1,N)`.

Examples

```
>>> import numpy.matlib
>>> np.matlib.zeros((2, 3))
matrix([[ 0.,  0.,  0.],
        [ 0.,  0.,  0.]])
```

```
>>> np.matlib.zeros(2)
matrix([[ 0.,  0.]])
```

numpy.matlib.**ones**(*shape*, *dtype=None*, *order='C'*)

Matrix of ones.

Return a matrix of given shape and type, filled with ones.

Parameters **shape** : {sequence of ints, int}

Shape of the matrix

dtype : data-type, optional

The desired data-type for the matrix, default is np.float64.

order : {'C', 'F'}, optional

Whether to store matrix in C- or Fortran-contiguous order, default is 'C'.

Returns **out** : matrix

Matrix of ones of given shape, dtype, and order.

See also:

ones Array of ones.

matlib.zeros Zero matrix.

Notes

If `shape` has length one i.e. `(N,)`, or is a scalar `N`, *out* becomes a single row matrix of shape `(1,N)`.

Examples

```
>>> np.matlib.ones((2,3))
matrix([[ 1.,  1.,  1.],
        [ 1.,  1.,  1.]])
```

```
>>> np.matlib.ones(2)
matrix([[ 1.,  1.]])
```

numpy.matlib.**eye**(*n*, *M=None*, *k=0*, *dtype=<class 'float'>*, *order='C'*)

Return a matrix with ones on the diagonal and zeros elsewhere.

Parameters **n** : int

Number of rows in the output.

M : int, optional

Number of columns in the output, defaults to *n*.

k : int, optional

Index of the diagonal: 0 refers to the main diagonal, a positive value refers to an upper diagonal, and a negative value to a lower diagonal.

dtype : dtype, optional

Data-type of the returned matrix.

order : {'C', 'F'}, optional

Whether the output should be stored in row-major (C-style) or column-major (Fortran-style) order in memory.

New in version 1.14.0.

Returns **I** : matrix

A *n* x *M* matrix where all elements are equal to zero, except for the *k*-th diagonal, whose values are equal to one.

See also:

numpy.eye Equivalent array function.

identity Square identity matrix.

Examples

```
>>> import numpy.matlib
>>> np.matlib.eye(3, k=1, dtype=float)
matrix([[ 0.,  1.,  0.],
        [ 0.,  0.,  1.],
        [ 0.,  0.,  0.]])
```

numpy.matlib.**identity**(*n*, *dtype=None*)

Returns the square identity matrix of given size.

Parameters **n** : int

Size of the returned identity matrix.

dtype : data-type, optional

Data-type of the output. Defaults to `float`.

Returns **out** : matrix

n x *n* matrix with its main diagonal set to one, and all other elements zero.

See also:

numpy.identity Equivalent array function.

matlib.eye More general matrix identity function.

Examples

```
>>> import numpy.matlib
>>> np.matlib.identity(3, dtype=int)
matrix([[1, 0, 0],
        [0, 1, 0],
        [0, 0, 1]])
```

numpy.matlib.**repmat**(*a*, *m*, *n*)

Repeat a 0-D to 2-D array or matrix MxN times.

Parameters **a** : array_like

The array or matrix to be repeated.

m, n : int

The number of times *a* is repeated along the first and second axes.

Returns **out** : ndarray

The result of repeating *a*.

Examples

```
>>> import numpy.matlib
>>> a0 = np.array(1)
>>> np.matlib.repmat(a0, 2, 3)
array([[1, 1, 1],
       [1, 1, 1]])
```

```
>>> a1 = np.arange(4)
>>> np.matlib.repmat(a1, 2, 2)
array([[0, 1, 2, 3, 0, 1, 2, 3],
       [0, 1, 2, 3, 0, 1, 2, 3]])
```

```
>>> a2 = np.asmatrix(np.arange(6).reshape(2, 3))
>>> np.matlib.repmat(a2, 2, 3)
matrix([[0, 1, 2, 0, 1, 2, 0, 1, 2],
        [3, 4, 5, 3, 4, 5, 3, 4, 5],
        [0, 1, 2, 0, 1, 2, 0, 1, 2],
        [3, 4, 5, 3, 4, 5, 3, 4, 5]])
```

numpy.matlib.**rand**(**args*)

Return a matrix of random values with given shape.

Create a matrix of the given shape and propagate it with random samples from a uniform distribution over `[0, 1)`.

Parameters ***args** : Arguments

Shape of the output. If given as N integers, each integer specifies the size of one dimension. If given as a tuple, this tuple gives the complete shape.

Returns **out** : ndarray

The matrix of random values with shape given by **args*.

See also:

randn, *numpy.random.rand*

Examples

```
>>> import numpy.matlib
>>> np.matlib.rand(2, 3)
matrix([[ 0.68340382,  0.67926887,  0.83271405],
        [ 0.00793551,  0.20468222,  0.95253525]])       #random
>>> np.matlib.rand((2, 3))
matrix([[ 0.84682055,  0.73626594,  0.11308016],
        [ 0.85429008,  0.3294825 ,  0.89139555]])       #random
```

If the first argument is a tuple, other arguments are ignored:

```
>>> np.matlib.rand((2, 3), 4)
matrix([[ 0.46898646,  0.15163588,  0.95188261],
        [ 0.59208621,  0.09561818,  0.00583606]])       #random
```

numpy.matlib.**randn**(**args*)

Return a random matrix with data from the “standard normal” distribution.

randn generates a matrix filled with random floats sampled from a univariate "normal" (Gaussian) distribution of mean 0 and variance 1.

Parameters ***args** : Arguments

Shape of the output. If given as N integers, each integer specifies the size of one dimension. If given as a tuple, this tuple gives the complete shape.

Returns **Z** : matrix of floats

A matrix of floating-point samples drawn from the standard normal distribution.

See also:

rand, `random.randn`

Notes

For random samples from $N(\mu, \sigma^2)$, use:

`sigma * np.matlib.randn(...) + mu`

Examples

```
>>> import numpy.matlib
>>> np.matlib.randn(1)
matrix([[-0.09542833]])                                  #random
>>> np.matlib.randn(1, 2, 3)
matrix([[ 0.16198284,  0.0194571 ,  0.18312985],
        [-0.7509172 ,  1.61055   ,  0.45298599]])       #random
```

Two-by-four matrix of samples from $N(3, 6.25)$:

```
>>> 2.5 * np.matlib.randn((2, 4)) + 3
matrix([[ 4.74085004,  8.89381862,  4.09042411,  4.83721922],
        [ 7.52373709,  5.07933944, -2.64043543,  0.45610557]])  #random
```

3.21 Miscellaneous routines

3.21.1 Buffer objects

`getbuffer`
`newbuffer`

3.21.2 Performance tuning

setbufsize(size)	Set the size of the buffer used in ufuncs.
getbufsize()	Return the size of the buffer used in ufuncs.

`numpy.getbufsize()`
Return the size of the buffer used in ufuncs.

Returns **getbufsize** : int

Size of ufunc buffer in bytes.

3.21.3 Memory ranges

shares_memory(a, b[, max_work])	Determine if two arrays share memory
may_share_memory(a, b[, max_work])	Determine if two arrays might share memory

numpy.**shares_memory**(*a*, *b*, *max_work=None*)

Determine if two arrays share memory

Parameters **a, b** : ndarray

Input arrays

max_work : int, optional

Effort to spend on solving the overlap problem (maximum number of candidate solutions to consider). The following special values are recognized:

max_work=MAY_SHARE_EXACT (default) The problem is solved exactly. In this case, the function returns True only if there is an element shared between the arrays.

max_work=MAY_SHARE_BOUNDS Only the memory bounds of a and b are checked.

Returns **out** : bool

Raises **numpy.TooHardError**

Exceeded max_work.

See also:

may_share_memory

Examples

```
>>> np.may_share_memory(np.array([1,2]), np.array([5,8,9]))
False
```

numpy.**may_share_memory**(*a*, *b*, *max_work=None*)

Determine if two arrays might share memory

A return of True does not necessarily mean that the two arrays share any element. It just means that they *might*.

Only the memory bounds of a and b are checked by default.

Parameters **a, b** : ndarray

Input arrays

max_work : int, optional

Effort to spend on solving the overlap problem. See *shares_memory* for details. Default for `may_share_memory` is to do a bounds check.

Returns **out** : bool

See also:

shares_memory

Examples

```
>>> np.may_share_memory(np.array([1,2]), np.array([5,8,9]))
False
>>> x = np.zeros([3, 4])
>>> np.may_share_memory(x[:,0], x[:,1])
True
```

3.21.4 Array mixins

lib.mixins.NDArrayOperatorsMixin	Mixin defining all operator special methods using __array_ufunc__.

class numpy.lib.mixins.**NDArrayOperatorsMixin**

Mixin defining all operator special methods using __array_ufunc__.

This class implements the special methods for almost all of Python's builtin operators defined in the `operator` module, including comparisons (==, >, etc.) and arithmetic (+, *, -, etc.), by deferring to the `__array_ufunc__` method, which subclasses must implement.

This class does not yet implement the special operators corresponding to `matmul` (`@`), because `np.matmul` is not yet a NumPy ufunc.

It is useful for writing classes that do not inherit from *numpy.ndarray*, but that should support arithmetic and numpy universal functions like arrays as described in A Mechanism for Overriding Ufuncs.

As an trivial example, consider this implementation of an `ArrayLike` class that simply wraps a NumPy array and ensures that the result of any arithmetic operation is also an `ArrayLike` object:

```
class ArrayLike(np.lib.mixins.NDArrayOperatorsMixin):
    def __init__(self, value):
        self.value = np.asarray(value)

    # One might also consider adding the built-in list type to this
    # list, to support operations like np.add(array_like, list)
    _HANDLED_TYPES = (np.ndarray, numbers.Number)

    def __array_ufunc__(self, ufunc, method, *inputs, **kwargs):
        out = kwargs.get('out', ())
        for x in inputs + out:
            # Only support operations with instances of _HANDLED_TYPES.
            # Use ArrayLike instead of type(self) for isinstance to
            # allow subclasses that don't override __array_ufunc__ to
            # handle ArrayLike objects.
            if not isinstance(x, self._HANDLED_TYPES + (ArrayLike,)):
                return NotImplemented

        # Defer to the implementation of the ufunc on unwrapped values.
        inputs = tuple(x.value if isinstance(x, ArrayLike) else x
                       for x in inputs)
```

(continues on next page)

(continued from previous page)

```
        if out:
            kwargs['out'] = tuple(
                x.value if isinstance(x, ArrayLike) else x
                for x in out)
        result = getattr(ufunc, method)(*inputs, **kwargs)

        if type(result) is tuple:
            # multiple return values
            return tuple(type(self)(x) for x in result)
        elif method == 'at':
            # no return value
            return None
        else:
            # one return value
            return type(self)(result)

    def __repr__(self):
        return '%s(%r)' % (type(self).__name__, self.value)
```

In interactions between `ArrayLike` objects and numbers or numpy arrays, the result is always another `ArrayLike`:

```
>>> x = ArrayLike([1, 2, 3])
>>> x - 1
ArrayLike(array([0, 1, 2]))
>>> 1 - x
ArrayLike(array([ 0, -1, -2]))
>>> np.arange(3) - x
ArrayLike(array([-1, -1, -1]))
>>> x - np.arange(3)
ArrayLike(array([1, 1, 1]))
```

Note that unlike `numpy.ndarray`, `ArrayLike` does not allow operations with arbitrary, unrecognized types. This ensures that interactions with ArrayLike preserve a well-defined casting hierarchy.

3.21.5 NumPy version comparison

lib.NumpyVersion(vstring)	Parse and compare numpy version strings.

class numpy.lib.**NumpyVersion**(*vstring*)

Parse and compare numpy version strings.

NumPy has the following versioning scheme (numbers given are examples; they can be > 9) in principle):

- Released version: '1.8.0', '1.8.1', etc.
- Alpha: '1.8.0a1', '1.8.0a2', etc.
- Beta: '1.8.0b1', '1.8.0b2', etc.
- Release candidates: '1.8.0rc1', '1.8.0rc2', etc.
- Development versions: '1.8.0.dev-f1234afa' (git commit hash appended)
- **Development versions after a1: '1.8.0a1.dev-f1234afa',** '1.8.0b2.dev-f1234afa', '1.8.1rc1.dev-f1234afa', etc.

- Development versions (no git hash available): '1.8.0.dev-Unknown'

Comparing needs to be done against a valid version string or other *NumpyVersion* instance. Note that all development versions of the same (pre-)release compare equal.

New in version 1.9.0.

Parameters **vstring** : str

NumPy version string (`np.__version__`).

Examples

```
>>> from numpy.lib import NumpyVersion
>>> if NumpyVersion(np.__version__) < '1.7.0':
...     print('skip')
skip
```

```
>>> NumpyVersion('1.7')  # raises ValueError, add ".0"
```

3.22 Padding Arrays

pad(array, pad_width, mode, **kwargs)	Pads an array.

numpy.**pad**(*array*, *pad_width*, *mode*, ***kwargs*)

Pads an array.

Parameters **array** : array_like of rank N

Input array

pad_width : {sequence, array_like, int}

Number of values padded to the edges of each axis. ((before_1, after_1), ... (before_N, after_N)) unique pad widths for each axis. ((before, after),) yields same before and after pad for each axis. (pad,) or int is a shortcut for before = after = pad width for all axes.

mode : str or function

One of the following string values or a user supplied function.

'constant' Pads with a constant value.

'edge' Pads with the edge values of array.

'linear_ramp' Pads with the linear ramp between end_value and the array edge value.

'maximum' Pads with the maximum value of all or part of the vector along each axis.

'mean' Pads with the mean value of all or part of the vector along each axis.

'median' Pads with the median value of all or part of the vector along each axis.

'minimum' Pads with the minimum value of all or part of the vector along each axis.

'reflect' Pads with the reflection of the vector mirrored on the first and last values of the vector along each axis.

'symmetric' Pads with the reflection of the vector mirrored along the edge of the array.

'wrap' Pads with the wrap of the vector along the axis. The first values are used to pad the end and the end values are used to pad the beginning.

<function> Padding function, see Notes.

stat_length : sequence or int, optional

Used in 'maximum', 'mean', 'median', and 'minimum'. Number of values at edge of each axis used to calculate the statistic value.

((before_1, after_1), … (before_N, after_N)) unique statistic lengths for each axis.

((before, after),) yields same before and after statistic lengths for each axis.

(stat_length,) or int is a shortcut for before = after = statistic length for all axes.

Default is `None`, to use the entire axis.

constant_values : sequence or int, optional

Used in 'constant'. The values to set the padded values for each axis.

((before_1, after_1), … (before_N, after_N)) unique pad constants for each axis.

((before, after),) yields same before and after constants for each axis.

(constant,) or int is a shortcut for before = after = constant for all axes.

Default is 0.

end_values : sequence or int, optional

Used in 'linear_ramp'. The values used for the ending value of the linear_ramp and that will form the edge of the padded array.

((before_1, after_1), … (before_N, after_N)) unique end values for each axis.

((before, after),) yields same before and after end values for each axis.

(constant,) or int is a shortcut for before = after = end value for all axes.

Default is 0.

reflect_type : {'even', 'odd'}, optional

Used in 'reflect', and 'symmetric'. The 'even' style is the default with an unaltered reflection around the edge value. For the 'odd' style, the extented part of the array is created by subtracting the reflected values from two times the edge value.

Returns **pad** : ndarray

Padded array of rank equal to *array* with shape increased according to *pad_width*.

Notes

New in version 1.7.0.

For an array with rank greater than 1, some of the padding of later axes is calculated from padding of previous axes. This is easiest to think about with a rank 2 array where the corners of the padded array are calculated by using padded values from the first axis.

The padding function, if used, should return a rank 1 array equal in length to the vector argument with padded values replaced. It has the following signature:

```
padding_func(vector, iaxis_pad_width, iaxis, kwargs)
```

where

vector [ndarray] A rank 1 array already padded with zeros. Padded values are vector[:pad_tuple[0]] and vector[-pad_tuple[1]:].

iaxis_pad_width [tuple] A 2-tuple of ints, iaxis_pad_width[0] represents the number of values padded at the beginning of vector where iaxis_pad_width[1] represents the number of values padded at the end of vector.

iaxis [int] The axis currently being calculated.

kwargs [dict] Any keyword arguments the function requires.

Examples

```
>>> a = [1, 2, 3, 4, 5]
>>> np.pad(a, (2,3), 'constant', constant_values=(4, 6))
array([4, 4, 1, 2, 3, 4, 5, 6, 6, 6])
```

```
>>> np.pad(a, (2, 3), 'edge')
array([1, 1, 1, 2, 3, 4, 5, 5, 5, 5])
```

```
>>> np.pad(a, (2, 3), 'linear_ramp', end_values=(5, -4))
array([ 5,  3,  1,  2,  3,  4,  5,  2, -1, -4])
```

```
>>> np.pad(a, (2,), 'maximum')
array([5, 5, 1, 2, 3, 4, 5, 5, 5])
```

```
>>> np.pad(a, (2,), 'mean')
array([3, 3, 1, 2, 3, 4, 5, 3, 3])
```

```
>>> np.pad(a, (2,), 'median')
array([3, 3, 1, 2, 3, 4, 5, 3, 3])
```

```
>>> a = [[1, 2], [3, 4]]
>>> np.pad(a, ((3, 2), (2, 3)), 'minimum')
array([[1, 1, 1, 2, 1, 1, 1],
       [1, 1, 1, 2, 1, 1, 1],
       [1, 1, 1, 2, 1, 1, 1],
       [1, 1, 1, 2, 1, 1, 1],
       [3, 3, 3, 4, 3, 3, 3],
       [1, 1, 1, 2, 1, 1, 1],
       [1, 1, 1, 2, 1, 1, 1]])
```

```
>>> a = [1, 2, 3, 4, 5]
>>> np.pad(a, (2, 3), 'reflect')
array([3, 2, 1, 2, 3, 4, 5, 4, 3, 2])
```

```
>>> np.pad(a, (2, 3), 'reflect', reflect_type='odd')
array([-1,  0,  1,  2,  3,  4,  5,  6,  7,  8])
```

```
>>> np.pad(a, (2, 3), 'symmetric')
array([2, 1, 1, 2, 3, 4, 5, 5, 4, 3])
```

```
>>> np.pad(a, (2, 3), 'symmetric', reflect_type='odd')
array([0, 1, 1, 2, 3, 4, 5, 5, 6, 7])
```

```
>>> np.pad(a, (2, 3), 'wrap')
array([4, 5, 1, 2, 3, 4, 5, 1, 2, 3])
```

```
>>> def pad_with(vector, pad_width, iaxis, kwargs):
...     pad_value = kwargs.get('padder', 10)
...     vector[:pad_width[0]] = pad_value
...     vector[-pad_width[1]:] = pad_value
...     return vector
>>> a = np.arange(6)
>>> a = a.reshape((2, 3))
>>> np.pad(a, 2, pad_with)
array([[10, 10, 10, 10, 10, 10, 10],
       [10, 10, 10, 10, 10, 10, 10],
       [10, 10,  0,  1,  2, 10, 10],
       [10, 10,  3,  4,  5, 10, 10],
       [10, 10, 10, 10, 10, 10, 10],
       [10, 10, 10, 10, 10, 10, 10]])
>>> np.pad(a, 2, pad_with, padder=100)
array([[100, 100, 100, 100, 100, 100, 100],
       [100, 100, 100, 100, 100, 100, 100],
       [100, 100,   0,   1,   2, 100, 100],
       [100, 100,   3,   4,   5, 100, 100],
       [100, 100, 100, 100, 100, 100, 100],
       [100, 100, 100, 100, 100, 100, 100]])
```

3.23 Polynomials

Polynomials in NumPy can be *created*, *manipulated*, and even *fitted* using the *Using the Convenience Classes* of the `numpy.polynomial` package, introduced in NumPy 1.4.

Prior to NumPy 1.4, *`numpy.poly1d`* was the class of choice and it is still available in order to maintain backward compatibility. However, the newer Polynomial package is more complete than *`numpy.poly1d`* and its convenience classes are better behaved in the numpy environment. Therefore Polynomial is recommended for new coding.

3.23.1 Transition notice

The various routines in the Polynomial package all deal with series whose coefficients go from degree zero upward, which is the *reverse order* of the Poly1d convention. The easy way to remember this is that indexes correspond to degree, i.e., coef[i] is the coefficient of the term of degree i.

Polynomial Package

New in version 1.4.0.

Using the Convenience Classes

The convenience classes provided by the polynomial package are:

Name	Provides
Polynomial	Power series
Chebyshev	Chebyshev series
Legendre	Legendre series
Laguerre	Laguerre series
Hermite	Hermite series
HermiteE	HermiteE series

The series in this context are finite sums of the corresponding polynomial basis functions multiplied by coefficients. For instance, a power series looks like

$$p(x) = 1 + 2x + 3x^2$$

and has coefficients $[1, 2, 3]$. The Chebyshev series with the same coefficients looks like

$$p(x) = 1T_0(x) + 2T_1(x) + 3T_2(x)$$

and more generally

$$p(x) = \sum_{i=0}^{n} c_i T_i(x)$$

where in this case the T_n are the Chebyshev functions of degree n, but could just as easily be the basis functions of any of the other classes. The convention for all the classes is that the coefficient $c[i]$ goes with the basis function of degree i.

All of the classes have the same methods, and especially they implement the Python numeric operators +, -, *, //, %, divmod, **, ==, and !=. The last two can be a bit problematic due to floating point roundoff errors. We now give a quick demonstration of the various operations using NumPy version 1.7.0.

Basics

First we need a polynomial class and a polynomial instance to play with. The classes can be imported directly from the polynomial package or from the module of the relevant type. Here we import from the package and use the conventional Polynomial class because of its familiarity:

```
>>> from numpy.polynomial import Polynomial as P
>>> p = P([1,2,3])
>>> p
Polynomial([ 1.,  2.,  3.], domain=[-1,  1], window=[-1,  1])
```

Note that there are three parts to the long version of the printout. The first is the coefficients, the second is the domain, and the third is the window:

```
>>> p.coef
array([ 1.,  2.,  3.])
>>> p.domain
array([-1.,  1.])
>>> p.window
array([-1.,  1.])
```

Printing a polynomial yields a shorter form without the domain and window:

```
>>> print p
poly([ 1.  2.  3.])
```

We will deal with the domain and window when we get to fitting, for the moment we ignore them and run through the basic algebraic and arithmetic operations.

Addition and Subtraction:

```
>>> p + p
Polynomial([ 2.,  4.,  6.], domain=[-1,  1], window=[-1,  1])
>>> p - p
Polynomial([ 0.], domain=[-1,  1], window=[-1,  1])
```

Multiplication:

```
>>> p * p
Polynomial([  1.,   4.,  10.,  12.,   9.], domain=[-1,  1], window=[-1,  1])
```

Powers:

```
>>> p**2
Polynomial([  1.,   4.,  10.,  12.,   9.], domain=[-1,  1], window=[-1,  1])
```

Division:

Floor division, '//', is the division operator for the polynomial classes, polynomials are treated like integers in this regard. For Python versions < 3.x the '/' operator maps to '//', as it does for Python, for later versions the '/' will only work for division by scalars. At some point it will be deprecated:

```
>>> p // P([-1, 1])
Polynomial([ 5.,  3.], domain=[-1,  1], window=[-1,  1])
```

Remainder:

```
>>> p % P([-1, 1])
Polynomial([ 6.], domain=[-1,  1], window=[-1,  1])
```

Divmod:

```
>>> quo, rem = divmod(p, P([-1, 1]))
>>> quo
Polynomial([ 5.,  3.], domain=[-1,  1], window=[-1,  1])
>>> rem
Polynomial([ 6.], domain=[-1,  1], window=[-1,  1])
```

Evaluation:

```
>>> x = np.arange(5)
>>> p(x)
array([  1.,   6.,  17.,  34.,  57.])
>>> x = np.arange(6).reshape(3,2)
>>> p(x)
array([[  1.,   6.],
       [ 17.,  34.],
       [ 57.,  86.]])
```

Substitution:

Substitute a polynomial for x and expand the result. Here we substitute p in itself leading to a new polynomial of degree 4 after expansion. If the polynomials are regarded as functions this is composition of functions:

```
>>> p(p)
Polynomial([  6.,  16.,  36.,  36.,  27.], domain=[-1,  1], window=[-1,  1])
```

Roots:

```
>>> p.roots()
array([-0.33333333-0.47140452j, -0.33333333+0.47140452j])
```

It isn't always convenient to explicitly use Polynomial instances, so tuples, lists, arrays, and scalars are automatically cast in the arithmetic operations:

```
>>> p + [1, 2, 3]
Polynomial([ 2.,  4.,  6.], domain=[-1,  1], window=[-1,  1])
>>> [1, 2, 3] * p
Polynomial([  1.,   4.,  10.,  12.,   9.], domain=[-1,  1], window=[-1,  1])
>>> p / 2
Polynomial([ 0.5,  1. ,  1.5], domain=[-1,  1], window=[-1,  1])
```

Polynomials that differ in domain, window, or class can't be mixed in arithmetic:

```
>>> from numpy.polynomial import Chebyshev as T
>>> p + P([1], domain=[0,1])
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
  File "<string>", line 213, in __add__
TypeError: Domains differ
>>> p + P([1], window=[0,1])
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
  File "<string>", line 215, in __add__
TypeError: Windows differ
>>> p + T([1])
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
  File "<string>", line 211, in __add__
TypeError: Polynomial types differ
```

But different types can be used for substitution. In fact, this is how conversion of Polynomial classes among themselves is done for type, domain, and window casting:

```
>>> p(T([0, 1]))
Chebyshev([ 2.5,  2. ,  1.5], domain=[-1,  1], window=[-1,  1])
```

Which gives the polynomial p in Chebyshev form. This works because $T_1(x) = x$ and substituting x for x doesn't change the original polynomial. However, all the multiplications and divisions will be done using Chebyshev series, hence the type of the result.

Calculus

Polynomial instances can be integrated and differentiated.:

```
>>> from numpy.polynomial import Polynomial as P
>>> p = P([2, 6])
```

(continues on next page)

(continued from previous page)

```
>>> p.integ()
Polynomial([ 0.,  2.,  3.], domain=[-1,  1], window=[-1,  1])
>>> p.integ(2)
Polynomial([ 0.,  0.,  1.,  1.], domain=[-1,  1], window=[-1,  1])
```

The first example integrates *p* once, the second example integrates it twice. By default, the lower bound of the integration and the integration constant are 0, but both can be specified.:

```
>>> p.integ(lbnd=-1)
Polynomial([-1.,  2.,  3.], domain=[-1,  1], window=[-1,  1])
>>> p.integ(lbnd=-1, k=1)
Polynomial([ 0.,  2.,  3.], domain=[-1,  1], window=[-1,  1])
```

In the first case the lower bound of the integration is set to -1 and the integration constant is 0. In the second the constant of integration is set to 1 as well. Differentiation is simpler since the only option is the number of times the polynomial is differentiated:

```
>>> p = P([1, 2, 3])
>>> p.deriv(1)
Polynomial([ 2.,  6.], domain=[-1,  1], window=[-1,  1])
>>> p.deriv(2)
Polynomial([ 6.], domain=[-1,  1], window=[-1,  1])
```

Other Polynomial Constructors

Constructing polynomials by specifying coefficients is just one way of obtaining a polynomial instance, they may also be created by specifying their roots, by conversion from other polynomial types, and by least squares fits. Fitting is discussed in its own section, the other methods are demonstrated below:

```
>>> from numpy.polynomial import Polynomial as P
>>> from numpy.polynomial import Chebyshev as T
>>> p = P.fromroots([1, 2, 3])
>>> p
Polynomial([ -6.,  11.,  -6.,   1.], domain=[-1,  1], window=[-1,  1])
>>> p.convert(kind=T)
Chebyshev([ -9.  ,  11.75,  -3.  ,   0.25], domain=[-1,  1], window=[-1,  1])
```

The convert method can also convert domain and window:

```
>>> p.convert(kind=T, domain=[0, 1])
Chebyshev([-2.4375 ,  2.96875, -0.5625 ,  0.03125], [ 0.,  1.], [-1.,  1.])
>>> p.convert(kind=P, domain=[0, 1])
Polynomial([-1.875,  2.875, -1.125,  0.125], [ 0.,  1.], [-1.,  1.])
```

In numpy versions >= 1.7.0 the *basis* and *cast* class methods are also available. The cast method works like the convert method while the basis method returns the basis polynomial of given degree:

```
>>> P.basis(3)
Polynomial([ 0.,  0.,  0.,  1.], domain=[-1,  1], window=[-1,  1])
>>> T.cast(p)
Chebyshev([ -9.  ,  11.75,  -3.  ,   0.25], domain=[-1,  1], window=[-1,  1])
```

Conversions between types can be useful, but it is *not* recommended for routine use. The loss of numerical precision in passing from a Chebyshev series of degree 50 to a Polynomial series of the same degree can make the results of numerical evaluation essentially random.

Fitting

Fitting is the reason that the *domain* and *window* attributes are part of the convenience classes. To illustrate the problem, the values of the Chebyshev polynomials up to degree 5 are plotted below.

```
>>> import matplotlib.pyplot as plt
>>> from numpy.polynomial import Chebyshev as T
>>> x = np.linspace(-1, 1, 100)
>>> for i in range(6): ax = plt.plot(x, T.basis(i)(x), lw=2, label="$T_%d$"%i)
...
>>> plt.legend(loc="upper left")
<matplotlib.legend.Legend object at 0x3b3ee10>
>>> plt.show()
```

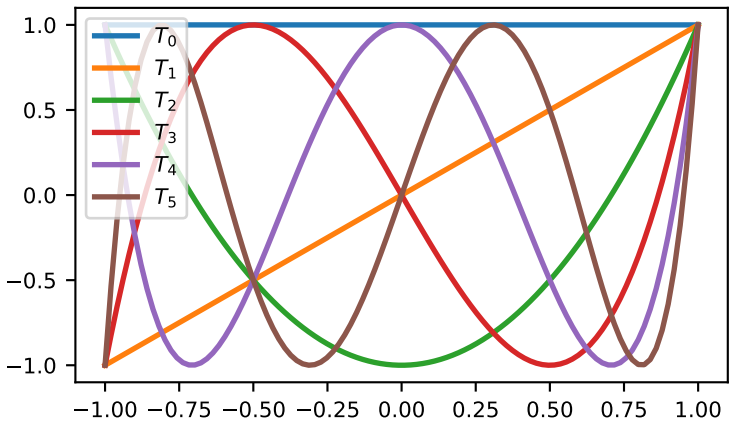

In the range -1 <= *x* <= 1 they are nice, equiripple functions lying between +/- 1. The same plots over the range -2 <= *x* <= 2 look very different:

```
>>> import matplotlib.pyplot as plt
>>> from numpy.polynomial import Chebyshev as T
>>> x = np.linspace(-2, 2, 100)
>>> for i in range(6): ax = plt.plot(x, T.basis(i)(x), lw=2, label="$T_%d$"%i)
...
>>> plt.legend(loc="lower right")
<matplotlib.legend.Legend object at 0x3b3ee10>
>>> plt.show()
```

As can be seen, the "good" parts have shrunk to insignificance. In using Chebyshev polynomials for fitting we want to use the region where *x* is between -1 and 1 and that is what the *window* specifies. However, it is unlikely that the data to be fit has all its data points in that interval, so we use *domain* to specify the interval where the data points lie. When the fit is done, the domain is first mapped to the window by a linear transformation and the usual least squares fit is done using the mapped data points. The window and domain of the fit are part of the returned series and are automatically used when computing values, derivatives, and such. If they aren't specified in the call the fitting routine will use the default window and the smallest domain that holds all the data points. This is illustrated below for a fit to a noisy sine curve.

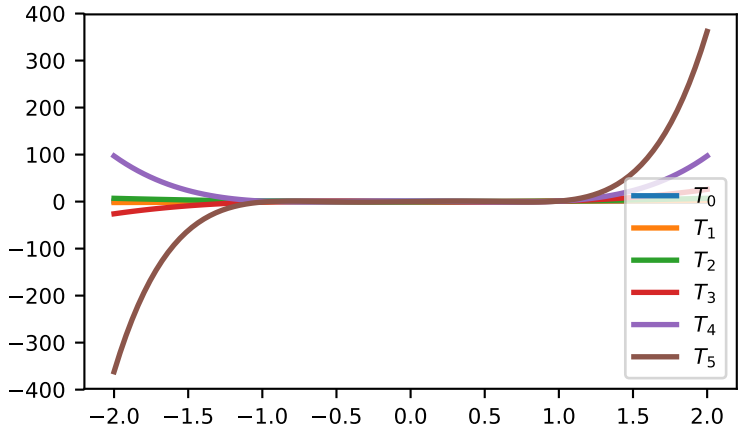


```
>>> import numpy as np
>>> import matplotlib.pyplot as plt
>>> from numpy.polynomial import Chebyshev as T
>>> np.random.seed(11)
>>> x = np.linspace(0, 2*np.pi, 20)
>>> y = np.sin(x) + np.random.normal(scale=.1, size=x.shape)
>>> p = T.fit(x, y, 5)
>>> plt.plot(x, y, 'o')
[<matplotlib.lines.Line2D object at 0x2136c10>]
>>> xx, yy = p.linspace()
>>> plt.plot(xx, yy, lw=2)
[<matplotlib.lines.Line2D object at 0x1cf2890>]
>>> p.domain
array([ 0.        ,  6.28318531])
>>> p.window
array([-1.,  1.])
>>> plt.show()
```

Polynomial Module (`numpy.polynomial.polynomial`)

New in version 1.4.0.

This module provides a number of objects (mostly functions) useful for dealing with Polynomial series, including a *Polynomial* class that encapsulates the usual arithmetic operations. (General information on how this module represents and works with such polynomials is in the docstring for its "parent" sub-package, `numpy.polynomial`).

Polynomial Class

Polynomial(coef[, domain, window])	A power series class.

class numpy.polynomial.polynomial.**Polynomial**(*coef*, *domain=None*, *window=None*)

A power series class.

The Polynomial class provides the standard Python numerical methods '+', '-', '*', '//', '%', 'divmod', '**', and '()' as well as the attributes and methods listed in the `ABCPolyBase` documentation.

Parameters **coef** : array_like

Polynomial coefficients in order of increasing degree, i.e., `(1, 2, 3)` give `1 + 2*x + 3*x**2`.

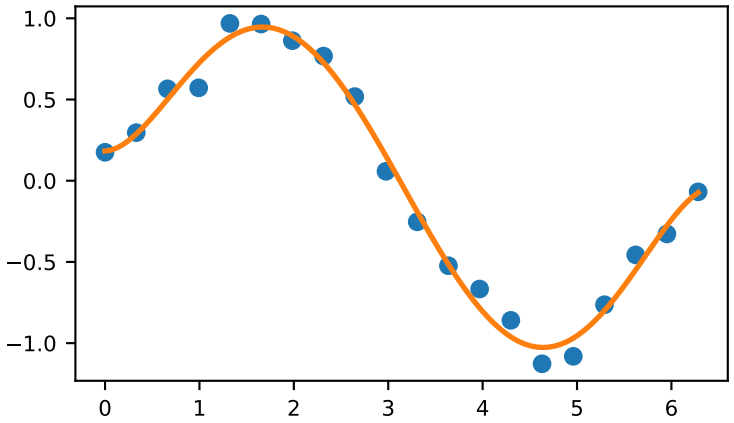

__call__(arg)	Call self as a function.
basis(deg[, domain, window])	Series basis polynomial of degree *deg*.
cast(series[, domain, window])	Convert series to series of this class.
convert([domain, kind, window])	Convert series to a different kind and/or domain and/or window.
copy()	Return a copy.
cutdeg(deg)	Truncate series to the given degree.
degree()	The degree of the series.
deriv([m])	Differentiate.
fit(x, y, deg[, domain, rcond, full, w, window])	Least squares fit to data.
fromroots(roots[, domain, window])	Return series instance that has the specified roots.
has_samecoef(other)	Check if coefficients match.
has_samedomain(other)	Check if domains match.
has_sametype(other)	Check if types match.
has_samewindow(other)	Check if windows match.
identity([domain, window])	Identity function.
integ([m, k, lbnd])	Integrate.
linspace([n, domain])	Return x, y values at equally spaced points in domain.
mapparms()	Return the mapping parameters.
roots()	Return the roots of the series polynomial.
trim([tol])	Remove trailing coefficients
truncate(size)	Truncate series to length *size*.

Polynomial.**__call__**(*arg*)
Call self as a function.

classmethod Polynomial.**basis**(*deg*, *domain=None*, *window=None*)
Series basis polynomial of degree *deg*.

Returns the series representing the basis polynomial of degree *deg*.

New in version 1.7.0.

Parameters **deg** : int

Degree of the basis polynomial for the series. Must be >= 0.

domain : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

New in version 1.7.0.

Parameters **series** : series

The series instance to be converted.

domain : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form `[beg, end]`, where `beg` and `end` are the endpoints of the window. If None is given then the class window is used. The default is None.

Returns **new_series** : series

A series of the same kind as the calling class and equal to *series* when evaluated.

See also:

convert similar instance method

`Polynomial.`**`convert`**(*domain=None*, *kind=None*, *window=None*)

Convert series to a different kind and/or domain and/or window.

Parameters **domain** : array_like, optional

The domain of the converted series. If the value is None, the default domain of *kind* is used.

kind : class, optional

The polynomial series type class to which the current instance should be converted. If kind is None, then the class of the current instance is used.

window : array_like, optional

The window of the converted series. If the value is None, the default window of *kind* is used.

Returns **new_series** : series

The returned class can be of different type than the current instance and/or have a different domain and/or different window.

Notes

Conversion between domains and class types can result in numerically ill defined series.

`Polynomial.`**`copy`**()

Return a copy.

Returns **new_series** : series

Copy of self.

`Polynomial.`**`cutdeg`**(*deg*)

Truncate series to the given degree.

Reduce the degree of the series to *deg* by discarding the high order terms. If *deg* is greater than the current degree a copy of the current series is returned. This can be useful in least squares where the coefficients of the high degree terms may be very small.

New in version 1.5.0.

Parameters **deg** : non-negative int

The series is reduced to degree *deg* by discarding the high order terms. The value of *deg* must be a non-negative integer.

Returns **new_series** : series

New instance of series with reduced degree.

`Polynomial.`**`degree`**`()`

The degree of the series.

New in version 1.5.0.

Returns **degree** : int

Degree of the series, one less than the number of coefficients.

`Polynomial.`**`deriv`**`(`*m=1*`)`

Differentiate.

Return a series instance of that is the derivative of the current series.

Parameters **m** : non-negative int

Find the derivative of order *m*.

Returns **new_series** : series

A new series representing the derivative. The domain is the same as the domain of the differentiated series.

`classmethod` `Polynomial.`**`fit`**`(`*x*, *y*, *deg*, *domain=None*, *rcond=None*, *full=False*, *w=None*, *window=None*`)`

Least squares fit to data.

Return a series instance that is the least squares fit to the data *y* sampled at *x*. The domain of the returned instance can be specified and this will often result in a superior fit with less chance of ill conditioning.

Parameters **x** : array_like, shape (M,)

x-coordinates of the M sample points `(x[i], y[i])`.

y : array_like, shape (M,) or (M, K)

y-coordinates of the sample points. Several data sets of sample points sharing the same x-coordinates can be fitted at once by passing in a 2D-array that contains one dataset per column.

deg : int or 1-D array_like

Degree(s) of the fitting polynomials. If *deg* is a single integer all terms up to and including the *deg*'th term are included in the fit. For NumPy versions >= 1.11.0 a list of integers specifying the degrees of the terms to include may be used instead.

domain : {None, [beg, end], []}, optional

Domain to use for the returned series. If `None`, then a minimal domain that covers the points *x* is chosen. If `[]` the class domain is used. The default value was the class domain in NumPy 1.4 and `None` in later versions. The `[]` option was added in numpy 1.5.0.

rcond : float, optional

Relative condition number of the fit. Singular values smaller than this relative to the largest singular value will be ignored. The default value is len(x)*eps, where eps is the relative precision of the float type, about 2e-16 in most cases.

full : bool, optional

Switch determining nature of return value. When it is False (the default) just the coefficients are returned, when True diagnostic information from the singular value decomposition is also returned.

w : array_like, shape (M,), optional

Weights. If not None the contribution of each point `(x[i],y[i])` to the fit is weighted by *w[i]*. Ideally the weights are chosen so that the errors of the products `w[i]*y[i]` all have the same variance. The default value is None.

New in version 1.5.0.

window : {[beg, end]}, optional

Window to use for the returned series. The default value is the default class domain

New in version 1.6.0.

Returns **new_series** : series

A series that represents the least squares fit to the data and has the domain specified in the call.

[resid, rank, sv, rcond] : list

These values are only returned if *full* = True

resid – sum of squared residuals of the least squares fit rank – the numerical rank of the scaled Vandermonde matrix sv – singular values of the scaled Vandermonde matrix rcond – value of *rcond*.

For more details, see *linalg.lstsq*.

classmethod Polynomial.**fromroots**(*roots*, *domain=[]*, *window=None*)

Return series instance that has the specified roots.

Returns a series representing the product `(x - r[0])*(x - r[1])*...*(x - r[n-1])`, where `r` is a list of roots.

Parameters **roots** : array_like

List of roots.

domain : {[], None, array_like}, optional

Domain for the resulting series. If None the domain is the interval from the smallest root to the largest. If [] the domain is the class domain. The default is [].

window : {None, array_like}, optional

Window for the returned series. If None the class window is used. The default is None.

Returns **new_series** : series

Series with the specified roots.

Polynomial.**has_samecoef**(*other*)

Check if coefficients match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `coef` attribute.

Returns **bool** : boolean

True if the coefficients are the same, False otherwise.

`Polynomial.`**`has_samedomain`**(*other*)
Check if domains match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `domain` attribute.

Returns **bool** : boolean

True if the domains are the same, False otherwise.

`Polynomial.`**`has_sametype`**(*other*)
Check if types match.

New in version 1.7.0.

Parameters **other** : object

Class instance.

Returns **bool** : boolean

True if other is same class as self

`Polynomial.`**`has_samewindow`**(*other*)
Check if windows match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `window` attribute.

Returns **bool** : boolean

True if the windows are the same, False otherwise.

`classmethod` `Polynomial.`**`identity`**(*domain=None*, *window=None*)
Identity function.

If `p` is the returned series, then `p(x) == x` for all values of x.

Parameters **domain** : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form `[beg, end]`, where `beg` and `end` are the endpoints of the window. If None is given then the class window is used. The default is None.

Returns **new_series** : series

Series of representing the identity.

Polynomial.**integ**(*m=1*, *k=[]*, *lbnd=None*)

Integrate.

Return a series instance that is the definite integral of the current series.

Parameters **m** : non-negative int

The number of integrations to perform.

k : array_like

Integration constants. The first constant is applied to the first integration, the second to the second, and so on. The list of values must less than or equal to *m* in length and any missing values are set to zero.

lbnd : Scalar

The lower bound of the definite integral.

Returns **new_series** : series

A new series representing the integral. The domain is the same as the domain of the integrated series.

Polynomial.**linspace**(*n=100*, *domain=None*)

Return x, y values at equally spaced points in domain.

Returns the x, y values at *n* linearly spaced points across the domain. Here y is the value of the polynomial at the points x. By default the domain is the same as that of the series instance. This method is intended mostly as a plotting aid.

New in version 1.5.0.

Parameters **n** : int, optional

Number of point pairs to return. The default value is 100.

domain : {None, array_like}, optional

If not None, the specified domain is used instead of that of the calling instance. It should be of the form `[beg,end]`. The default is None which case the class domain is used.

Returns **x, y** : ndarray

x is equal to linspace(self.domain[0], self.domain[1], n) and y is the series evaluated at element of x.

Polynomial.**mapparms**()

Return the mapping parameters.

The returned values define a linear map `off + scl*x` that is applied to the input arguments before the series is evaluated. The map depends on the `domain` and `window`; if the current `domain` is equal to the `window` the resulting map is the identity. If the coefficients of the series instance are to be used by themselves outside this class, then the linear function must be substituted for the `x` in the standard representation of the base polynomials.

Returns **off, scl** : float or complex

The mapping function is defined by `off + scl*x`.

Notes

If the current domain is the interval `[l1, r1]` and the window is `[l2, r2]`, then the linear mapping function `L` is defined by the equations:

```
L(l1) = l2
L(r1) = r2
```

Polynomial.**roots**()
Return the roots of the series polynomial.

Compute the roots for the series. Note that the accuracy of the roots decrease the further outside the domain they lie.

Returns **roots** : ndarray

Array containing the roots of the series.

Polynomial.**trim**(*tol=0*)
Remove trailing coefficients

Remove trailing coefficients until a coefficient is reached whose absolute value greater than *tol* or the beginning of the series is reached. If all the coefficients would be removed the series is set to `[0]`. A new series instance is returned with the new coefficients. The current instance remains unchanged.

Parameters **tol** : non-negative number.

All trailing coefficients less than *tol* will be removed.

Returns **new_series** : series

Contains the new set of coefficients.

Polynomial.**truncate**(*size*)
Truncate series to length *size*.

Reduce the series to length *size* by discarding the high degree terms. The value of *size* must be a positive integer. This can be useful in least squares where the coefficients of the high degree terms may be very small.

Parameters **size** : positive int

The series is reduced to length *size* by discarding the high degree terms. The value of *size* must be a positive integer.

Returns **new_series** : series

New instance of series with truncated coefficients.

Basics

polyval(x, c[, tensor])	Evaluate a polynomial at points x.
polyval2d(x, y, c)	Evaluate a 2-D polynomial at points (x, y).
polyval3d(x, y, z, c)	Evaluate a 3-D polynomial at points (x, y, z).
polygrid2d(x, y, c)	Evaluate a 2-D polynomial on the Cartesian product of x and y.
polygrid3d(x, y, z, c)	Evaluate a 3-D polynomial on the Cartesian product of x, y and z.
polyroots(c)	Compute the roots of a polynomial.
polyfromroots(roots)	Generate a monic polynomial with given roots.
polyvalfromroots(x, r[, tensor])	Evaluate a polynomial specified by its roots at points x.

numpy.polynomial.polynomial.**polyval**(*x*, *c*, *tensor=True*)
Evaluate a polynomial at points x.

If *c* is of length *n + 1*, this function returns the value

$$p(x) = c_0 + c_1 * x + ... + c_n * x^n$$

The parameter *x* is converted to an array only if it is a tuple or a list, otherwise it is treated as a scalar. In either case, either *x* or its elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* is a 1-D array, then *p(x)* will have the same shape as *x*. If *c* is multidimensional, then the shape of the result depends on the value of *tensor*. If *tensor* is true the shape will be c.shape[1:] + x.shape. If *tensor* is false the shape will be c.shape[1:]. Note that scalars have shape (,).

Trailing zeros in the coefficients will be used in the evaluation, so they should be avoided if efficiency is a concern.

Parameters **x** : array_like, compatible object

If *x* is a list or tuple, it is converted to an ndarray, otherwise it is left unchanged and treated as a scalar. In either case, *x* or its elements must support addition and multiplication with with themselves and with the elements of *c*.

c : array_like

Array of coefficients ordered so that the coefficients for terms of degree n are contained in c[n]. If *c* is multidimensional the remaining indices enumerate multiple polynomials. In the two dimensional case the coefficients may be thought of as stored in the columns of *c*.

tensor : boolean, optional

If True, the shape of the coefficient array is extended with ones on the right, one for each dimension of *x*. Scalars have dimension 0 for this action. The result is that every column of coefficients in *c* is evaluated for every element of *x*. If False, *x* is broadcast over the columns of *c* for the evaluation. This keyword is useful when *c* is multidimensional. The default value is True.

New in version 1.7.0.

Returns **values** : ndarray, compatible object

The shape of the returned array is described above.

See also:

polyval2d, *polygrid2d*, *polyval3d*, *polygrid3d*

Notes

The evaluation uses Horner's method.

Examples

```
>>> from numpy.polynomial.polynomial import polyval
>>> polyval(1, [1,2,3])
6.0
>>> a = np.arange(4).reshape(2,2)
>>> a
array([[0, 1],
```

(continues on next page)

(continued from previous page)

```
       [2, 3]])
>>> polyval(a, [1,2,3])
array([[  1.,   6.],
       [ 17.,  34.]])
>>> coef = np.arange(4).reshape(2,2) # multidimensional coefficients
>>> coef
array([[0, 1],
       [2, 3]])
>>> polyval([1,2], coef, tensor=True)
array([[ 2.,  4.],
       [ 4.,  7.]])
>>> polyval([1,2], coef, tensor=False)
array([ 2.,  7.])
```

numpy.polynomial.polynomial.**polyval2d**(*x*, *y*, *c*)

Evaluate a 2-D polynomial at points (x, y).

This function returns the value

$$p(x,y) = \sum_{i,j} c_{i,j} * x^i * y^j$$

The parameters *x* and *y* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars and they must have the same shape after conversion. In either case, either *x* and *y* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than two dimensions, ones are implicitly appended to its shape to make it 2-D. The shape of the result will be c.shape[2:] + x.shape.

Parameters **x, y** : array_like, compatible objects

The two dimensional series is evaluated at the points *(x, y)*, where *x* and *y* must have the same shape. If *x* or *y* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and, if it isn't an ndarray, it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficient of the term of multi-degree i,j is contained in *c[i,j]*. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional polynomial at points formed with pairs of corresponding values from *x* and *y*.

See also:

polyval, *polygrid2d*, *polyval3d*, *polygrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.polynomial.**polyval3d**(*x*, *y*, *z*, *c*)

Evaluate a 3-D polynomial at points (x, y, z).

This function returns the values:

$$p(x,y,z) = \sum_{i,j,k} c_{i,j,k} * x^i * y^j * z^k$$

The parameters *x*, *y*, and *z* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars and they must have the same shape after conversion. In either case, either *x*, *y*, and *z* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than 3 dimensions, ones are implicitly appended to its shape to make it 3-D. The shape of the result will be c.shape[3:] + x.shape.

Parameters **x, y, z** : array_like, compatible object

The three dimensional series is evaluated at the points *(x, y, z)*, where *x*, *y*, and *z* must have the same shape. If any of *x*, *y*, or *z* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and if it isn't an ndarray it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficient of the term of multi-degree i,j,k is contained in `c[i,j,k]`. If *c* has dimension greater than 3 the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the multidimensional polynomial on points formed with triples of corresponding values from *x*, *y*, and *z*.

See also:

polyval, *polyval2d*, *polygrid2d*, *polygrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.polynomial.**polygrid2d**(*x*, *y*, *c*)

Evaluate a 2-D polynomial on the Cartesian product of x and y.

This function returns the values:

$$p(a,b) = \sum_{i,j} c_{i,j} * a^i * b^j$$

where the points *(a, b)* consist of all pairs formed by taking *a* from *x* and *b* from *y*. The resulting points form a grid with *x* in the first dimension and *y* in the second.

The parameters *x* and *y* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars. In either case, either *x* and *y* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than two dimensions, ones are implicitly appended to its shape to make it 2-D. The shape of the result will be c.shape[2:] + x.shape + y.shape.

Parameters **x, y** : array_like, compatible objects

The two dimensional series is evaluated at the points in the Cartesian product of *x* and *y*. If *x* or *y* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and, if it isn't an ndarray, it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficients for terms of degree i,j are contained in `c[i,j]`. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional polynomial at points in the Cartesian product of x and y.

See also:

polyval, *polyval2d*, *polyval3d*, *polygrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.polynomial.**polygrid3d**(*x*, *y*, *z*, *c*)

Evaluate a 3-D polynomial on the Cartesian product of x, y and z.

This function returns the values:

$$p(a,b,c) = \sum_{i,j,k} c_{i,j,k} * a^i * b^j * c^k$$

where the points *(a, b, c)* consist of all triples formed by taking *a* from *x*, *b* from *y*, and *c* from *z*. The resulting points form a grid with *x* in the first dimension, *y* in the second, and *z* in the third.

The parameters *x*, *y*, and *z* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars. In either case, either *x*, *y*, and *z* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than three dimensions, ones are implicitly appended to its shape to make it 3-D. The shape of the result will be c.shape[3:] + x.shape + y.shape + z.shape.

Parameters **x, y, z** : array_like, compatible objects

The three dimensional series is evaluated at the points in the Cartesian product of *x*, *y*, and *z*. If *x*,'y', or *z* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and, if it isn't an ndarray, it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficients for terms of degree i,j are contained in `c[i,j]`. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional polynomial at points in the Cartesian product of *x* and *y*.

See also:

polyval, *polyval2d*, *polygrid2d*, *polyval3d*

Notes

New in version 1.7.0.

numpy.polynomial.polynomial.**polyroots**(*c*)

Compute the roots of a polynomial.

Return the roots (a.k.a. "zeros") of the polynomial

$$p(x) = \sum_i c[i] * x^i.$$

Parameters **c** : 1-D array_like

1-D array of polynomial coefficients.

Returns **out** : ndarray

Array of the roots of the polynomial. If all the roots are real, then *out* is also real, otherwise it is complex.

See also:

`chebroots`

Notes

The root estimates are obtained as the eigenvalues of the companion matrix, Roots far from the origin of the complex plane may have large errors due to the numerical instability of the power series for such values. Roots with multiplicity greater than 1 will also show larger errors as the value of the series near such points is relatively insensitive to errors in the roots. Isolated roots near the origin can be improved by a few iterations of Newton's method.

Examples

```
>>> import numpy.polynomial.polynomial as poly
>>> poly.polyroots(poly.polyfromroots((-1,0,1)))
array([-1.,  0.,  1.])
>>> poly.polyroots(poly.polyfromroots((-1,0,1))).dtype
dtype('float64')
>>> j = complex(0,1)
>>> poly.polyroots(poly.polyfromroots((-j,0,j)))
array([  0.00000000e+00+0.j,   0.00000000e+00+1.j,   2.77555756e-17-1.j])
```

`numpy.polynomial.polynomial.`**`polyfromroots`**(*roots*)

Generate a monic polynomial with given roots.

Return the coefficients of the polynomial

$$p(x) = (x - r_0) * (x - r_1) * ... * (x - r_n),$$

where the *r_n* are the roots specified in *roots*. If a zero has multiplicity n, then it must appear in *roots* n times. For instance, if 2 is a root of multiplicity three and 3 is a root of multiplicity 2, then *roots* looks something like [2, 2, 2, 3, 3]. The roots can appear in any order.

If the returned coefficients are *c*, then

$$p(x) = c_0 + c_1 * x + ... + x^n$$

The coefficient of the last term is 1 for monic polynomials in this form.

Parameters **roots** : array_like

Sequence containing the roots.

Returns **out** : ndarray

1-D array of the polynomial's coefficients If all the roots are real, then *out* is also real, otherwise it is complex. (see Examples below).

See also:

`chebfromroots`, `legfromroots`, `lagfromroots`, `hermfromroots`, `hermefromroots`

Notes

The coefficients are determined by multiplying together linear factors of the form *(x - r_i)*, i.e.

$$p(x) = (x - r_0)(x - r_1)...(x - r_n)$$

where `n == len(roots) - 1`; note that this implies that *1* is always returned for a_n.

Examples

```
>>> from numpy.polynomial import polynomial as P
>>> P.polyfromroots((-1,0,1)) # x(x - 1)(x + 1) = x^3 - x
array([ 0., -1.,  0.,  1.])
>>> j = complex(0,1)
>>> P.polyfromroots((-j,j)) # complex returned, though values are real
array([ 1.+0.j,  0.+0.j,  1.+0.j])
```

numpy.polynomial.polynomial.**polyvalfromroots**(*x*, *r*, *tensor=True*)

Evaluate a polynomial specified by its roots at points x.

If *r* is of length *N*, this function returns the value

$$p(x) = \prod_{n=1}^{N} (x - r_n)$$

The parameter *x* is converted to an array only if it is a tuple or a list, otherwise it is treated as a scalar. In either case, either *x* or its elements must support multiplication and addition both with themselves and with the elements of *r*.

If *r* is a 1-D array, then *p(x)* will have the same shape as *x*. If *r* is multidimensional, then the shape of the result depends on the value of *tensor*. If *tensor is ''True'* the shape will be r.shape[1:] + x.shape; that is, each polynomial is evaluated at every value of *x*. If *tensor* is `False`, the shape will be r.shape[1:]; that is, each polynomial is evaluated only for the corresponding broadcast value of *x*. Note that scalars have shape (,).

New in version 1.12.

Parameters **x** : array_like, compatible object

If *x* is a list or tuple, it is converted to an ndarray, otherwise it is left unchanged and treated as a scalar. In either case, *x* or its elements must support addition and multiplication with with themselves and with the elements of *r*.

r : array_like

Array of roots. If *r* is multidimensional the first index is the root index, while the remaining indices enumerate multiple polynomials. For instance, in the two dimensional case the roots of each polynomial may be thought of as stored in the columns of *r*.

tensor : boolean, optional

If True, the shape of the roots array is extended with ones on the right, one for each dimension of *x*. Scalars have dimension 0 for this action. The result is that every column of coefficients in *r* is evaluated for every element of *x*. If False, *x* is broadcast over the columns of *r* for the evaluation. This keyword is useful when *r* is multidimensional. The default value is True.

Returns **values** : ndarray, compatible object

The shape of the returned array is described above.

See also:

polyroots, *polyfromroots*, *polyval*

Examples

```
>>> from numpy.polynomial.polynomial import polyvalfromroots
>>> polyvalfromroots(1, [1,2,3])
0.0
>>> a = np.arange(4).reshape(2,2)
>>> a
array([[0, 1],
       [2, 3]])
>>> polyvalfromroots(a, [-1, 0, 1])
array([[ -0.,   0.],
       [  6.,  24.]])
>>> r = np.arange(-2, 2).reshape(2,2) # multidimensional coefficients
>>> r # each column of r defines one polynomial
array([[-2, -1],
       [ 0,  1]])
>>> b = [-2, 1]
>>> polyvalfromroots(b, r, tensor=True)
array([[-0.,  3.],
       [ 3., 0.]])
>>> polyvalfromroots(b, r, tensor=False)
array([-0.,  0.])
```

Fitting

polyfit(x, y, deg[, rcond, full, w])	Least-squares fit of a polynomial to data.
polyvander(x, deg)	Vandermonde matrix of given degree.
polyvander2d(x, y, deg)	Pseudo-Vandermonde matrix of given degrees.
polyvander3d(x, y, z, deg)	Pseudo-Vandermonde matrix of given degrees.

numpy.polynomial.polynomial.**polyfit**(*x*, *y*, *deg*, *rcond=None*, *full=False*, *w=None*)

Least-squares fit of a polynomial to data.

Return the coefficients of a polynomial of degree *deg* that is the least squares fit to the data values *y* given at points *x*. If *y* is 1-D the returned coefficients will also be 1-D. If *y* is 2-D multiple fits are done, one for each column of *y*, and the resulting coefficients are stored in the corresponding columns of a 2-D return. The fitted polynomial(s) are in the form

$$p(x) = c_0 + c_1 * x + ... + c_n * x^n,$$

where *n* is *deg*.

Parameters **x** : array_like, shape (*M*,)

x-coordinates of the *M* sample (data) points `(x[i], y[i])`.

y : array_like, shape (*M*,) or (*M*, *K*)

y-coordinates of the sample points. Several sets of sample points sharing the same x-coordinates can be (independently) fit with one call to *polyfit* by passing in for *y* a 2-D array that contains one data set per column.

deg : int or 1-D array_like

Degree(s) of the fitting polynomials. If *deg* is a single integer all terms up to and including the *deg*'th term are included in the fit. For NumPy versions >= 1.11.0 a list of integers specifying the degrees of the terms to include may be used instead.

rcond : float, optional

Relative condition number of the fit. Singular values smaller than *rcond*, relative to the largest singular value, will be ignored. The default value is `len(x)*eps`, where *eps* is the relative precision of the platform's float type, about 2e-16 in most cases.

full : bool, optional

Switch determining the nature of the return value. When `False` (the default) just the coefficients are returned; when `True`, diagnostic information from the singular value decomposition (used to solve the fit's matrix equation) is also returned.

w : array_like, shape (*M*,), optional

Weights. If not None, the contribution of each point `(x[i],y[i])` to the fit is weighted by *w[i]*. Ideally the weights are chosen so that the errors of the products `w[i]*y[i]` all have the same variance. The default value is None.

New in version 1.5.0.

Returns **coef** : ndarray, shape (*deg* + 1,) or (*deg* + 1, *K*)

Polynomial coefficients ordered from low to high. If *y* was 2-D, the coefficients in column *k* of *coef* represent the polynomial fit to the data in *y*'s *k*-th column.

[residuals, rank, singular_values, rcond] : list

These values are only returned if *full* = True

resid – sum of squared residuals of the least squares fit rank – the numerical rank of the scaled Vandermonde matrix sv – singular values of the scaled Vandermonde matrix rcond – value of *rcond*.

For more details, see *linalg.lstsq*.

Raises **RankWarning**

Raised if the matrix in the least-squares fit is rank deficient. The warning is only raised if *full* == False. The warnings can be turned off by:

```
>>> import warnings
>>> warnings.simplefilter('ignore', RankWarning)
```

See also:

`chebfit`, `legfit`, `lagfit`, `hermfit`, `hermefit`

polyval Evaluates a polynomial.

polyvander Vandermonde matrix for powers.

`linalg.lstsq` Computes a least-squares fit from the matrix.

`scipy.interpolate.UnivariateSpline` Computes spline fits.

Notes

The solution is the coefficients of the polynomial *p* that minimizes the sum of the weighted squared errors

$$E = \sum_j w_j^2 * |y_j - p(x_j)|^2,$$

where the w_j are the weights. This problem is solved by setting up the (typically) over-determined matrix equation:

$$V(x) * c = w * y,$$

where *V* is the weighted pseudo Vandermonde matrix of *x*, *c* are the coefficients to be solved for, *w* are the weights, and *y* are the observed values. This equation is then solved using the singular value decomposition of *V*.

If some of the singular values of *V* are so small that they are neglected (and *full* == `False`), a *RankWarning* will be raised. This means that the coefficient values may be poorly determined. Fitting to a lower order polynomial will usually get rid of the warning (but may not be what you want, of course; if you have independent reason(s) for choosing the degree which isn't working, you may have to: a) reconsider those reasons, and/or b) reconsider the quality of your data). The *rcond* parameter can also be set to a value smaller than its default, but the resulting fit may be spurious and have large contributions from roundoff error.

Polynomial fits using double precision tend to "fail" at about (polynomial) degree 20. Fits using Chebyshev or Legendre series are generally better conditioned, but much can still depend on the distribution of the sample points and the smoothness of the data. If the quality of the fit is inadequate, splines may be a good alternative.

Examples

```
>>> from numpy.polynomial import polynomial as P
>>> x = np.linspace(-1,1,51) # x "data": [-1, -0.96, ..., 0.96, 1]
>>> y = x**3 - x + np.random.randn(len(x)) # x^3 - x + N(0,1) "noise"
>>> c, stats = P.polyfit(x,y,3,full=True)
>>> c # c[0], c[2] should be approx. 0, c[1] approx. -1, c[3] approx. 1
array([ 0.01909725, -1.30598256, -0.00577963,  1.02644286])
>>> stats # note the large SSR, explaining the rather poor results
[array([ 38.06116253]), 4, array([ 1.38446749,  1.32119158,  0.50443316,
0.28853036]), 1.1324274851176597e-014]
```

Same thing without the added noise

```
>>> y = x**3 - x
>>> c, stats = P.polyfit(x,y,3,full=True)
>>> c # c[0], c[2] should be "very close to 0", c[1] ~= -1, c[3] ~= 1
array([ -1.73362882e-17,  -1.00000000e+00,  -2.67471909e-16,
         1.00000000e+00])
>>> stats # note the minuscule SSR
[array([  7.46346754e-31]), 4, array([ 1.38446749,  1.32119158,
0.50443316,  0.28853036]), 1.1324274851176597e-014]
```

`numpy.polynomial.polynomial.`**`polyvander`**(*x*, *deg*)

Vandermonde matrix of given degree.

Returns the Vandermonde matrix of degree *deg* and sample points *x*. The Vandermonde matrix is defined by

$$V[..., i] = x^i,$$

where *0 <= i <= deg*. The leading indices of *V* index the elements of *x* and the last index is the power of *x*.

If *c* is a 1-D array of coefficients of length *n + 1* and *V* is the matrix `V = polyvander(x, n)`, then `np.dot(V, c)` and `polyval(x, c)` are the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of polynomials of the same degree and sample points.

Parameters **x** : array_like

Array of points. The dtype is converted to float64 or complex128 depending on whether any of the elements are complex. If *x* is scalar it is converted to a 1-D array.

deg : int

Degree of the resulting matrix.

Returns **vander** : ndarray.

The Vandermonde matrix. The shape of the returned matrix is `x.shape + (deg + 1,)`, where the last index is the power of *x*. The dtype will be the same as the converted *x*.

See also:

polyvander2d, *polyvander3d*

numpy.polynomial.polynomial.**polyvander2d**(*x*, *y*, *deg*)

Pseudo-Vandermonde matrix of given degrees.

Returns the pseudo-Vandermonde matrix of degrees *deg* and sample points *(x, y)*. The pseudo-Vandermonde matrix is defined by

$$V[..., (deg[1] + 1) * i + j] = x^i * y^j,$$

where *0 <= i <= deg[0]* and *0 <= j <= deg[1]*. The leading indices of *V* index the points *(x, y)* and the last index encodes the powers of *x* and *y*.

If `V = polyvander2d(x, y, [xdeg, ydeg])`, then the columns of *V* correspond to the elements of a 2-D coefficient array *c* of shape (xdeg + 1, ydeg + 1) in the order

$$c_{00}, c_{01}, c_{02}..., c_{10}, c_{11}, c_{12}...$$

and `np.dot(V, c.flat)` and `polyval2d(x, y, c)` will be the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of 2-D polynomials of the same degrees and sample points.

Parameters **x, y** : array_like

Arrays of point coordinates, all of the same shape. The dtypes will be converted to either float64 or complex128 depending on whether any of the elements are complex. Scalars are converted to 1-D arrays.

deg : list of ints

List of maximum degrees of the form [x_deg, y_deg].

Returns **vander2d** : ndarray

The shape of the returned matrix is `x.shape + (order,)`, where $order = (deg[0] + 1) * (deg([1] + 1)$. The dtype will be the same as the converted *x* and *y*.

See also:

polyvander, `polyvander3d.`, *polyval3d*

numpy.polynomial.polynomial.**polyvander3d**(*x*, *y*, *z*, *deg*)

Pseudo-Vandermonde matrix of given degrees.

Returns the pseudo-Vandermonde matrix of degrees *deg* and sample points *(x, y, z)*. If *l, m, n* are the given degrees in *x, y, z*, then The pseudo-Vandermonde matrix is defined by

$$V[..., (m+1)(n+1)i + (n+1)j + k] = x^i * y^j * z^k,$$

where *0 <= i <= l*, *0 <= j <= m*, and *0 <= j <= n*. The leading indices of *V* index the points *(x, y, z)* and the last index encodes the powers of *x*, *y*, and *z*.

If `V = polyvander3d(x, y, z, [xdeg, ydeg, zdeg])`, then the columns of *V* correspond to the elements of a 3-D coefficient array *c* of shape (xdeg + 1, ydeg + 1, zdeg + 1) in the order

$$c_{000}, c_{001}, c_{002}, ..., c_{010}, c_{011}, c_{012}, ...$$

and `np.dot(V, c.flat)` and `polyval3d(x, y, z, c)` will be the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of 3-D polynomials of the same degrees and sample points.

Parameters **x, y, z** : array_like

Arrays of point coordinates, all of the same shape. The dtypes will be converted to either float64 or complex128 depending on whether any of the elements are complex. Scalars are converted to 1-D arrays.

deg : list of ints

List of maximum degrees of the form [x_deg, y_deg, z_deg].

Returns **vander3d** : ndarray

The shape of the returned matrix is `x.shape + (order,)`, where $order = (deg[0]+1)*(deg([1]+1)*(deg[2]+1)$. The dtype will be the same as the converted *x*, *y*, and *z*.

See also:

polyvander, `polyvander3d.`, *polyval3d*

Notes

New in version 1.7.0.

Calculus

polyder(c[, m, scl, axis])	Differentiate a polynomial.
polyint(c[, m, k, lbnd, scl, axis])	Integrate a polynomial.

numpy.polynomial.polynomial.**polyder**(*c*, *m=1*, *scl=1*, *axis=0*)

Differentiate a polynomial.

Returns the polynomial coefficients *c* differentiated *m* times along *axis*. At each iteration the result is multiplied by *scl* (the scaling factor is for use in a linear change of variable). The argument *c* is an array of coefficients from low to high degree along each axis, e.g., [1,2,3] represents the polynomial `1 + 2*x + 3*x**2` while [[1,2],[1,2]] represents `1 + 1*x + 2*y + 2*x*y` if axis=0 is `x` and axis=1 is `y`.

Parameters **c** : array_like

Array of polynomial coefficients. If c is multidimensional the different axis correspond to different variables with the degree in each axis given by the corresponding index.

m : int, optional

Number of derivatives taken, must be non-negative. (Default: 1)

scl : scalar, optional

Each differentiation is multiplied by *scl*. The end result is multiplication by `scl**m`. This is for use in a linear change of variable. (Default: 1)

axis : int, optional

Axis over which the derivative is taken. (Default: 0).

New in version 1.7.0.

Returns **der** : ndarray

Polynomial coefficients of the derivative.

See also:

polyint

Examples

```
>>> from numpy.polynomial import polynomial as P
>>> c = (1,2,3,4) # 1 + 2x + 3x**2 + 4x**3
>>> P.polyder(c) # (d/dx)(c) = 2 + 6x + 12x**2
array([  2.,   6.,  12.])
>>> P.polyder(c,3) # (d**3/dx**3)(c) = 24
array([ 24.])
>>> P.polyder(c,scl=-1) # (d/d(-x))(c) = -2 - 6x - 12x**2
array([ -2.,  -6., -12.])
>>> P.polyder(c,2,-1) # (d**2/d(-x)**2)(c) = 6 + 24x
array([  6.,  24.])
```

numpy.polynomial.polynomial.**polyint**(*c*, *m=1*, *k=[]*, *lbnd=0*, *scl=1*, *axis=0*)

Integrate a polynomial.

Returns the polynomial coefficients *c* integrated *m* times from *lbnd* along *axis*. At each iteration the resulting series is **multiplied** by *scl* and an integration constant, *k*, is added. The scaling factor is for use in a linear change of variable. ("Buyer beware": note that, depending on what one is doing, one may want *scl* to be the reciprocal of what one might expect; for more information, see the Notes section below.) The argument *c* is an array of coefficients, from low to high degree along each axis, e.g., [1,2,3] represents the polynomial `1 + 2*x + 3*x**2` while [[1,2],[1,2]] represents `1 + 1*x + 2*y + 2*x*y` if axis=0 is `x` and axis=1 is `y`.

Parameters **c** : array_like

1-D array of polynomial coefficients, ordered from low to high.

m : int, optional

Order of integration, must be positive. (Default: 1)

k : {[], list, scalar}, optional

Integration constant(s). The value of the first integral at zero is the first value in the list, the value of the second integral at zero is the second value, etc. If `k == []` (the default), all constants are set to zero. If `m == 1`, a single scalar can be given instead of a list.

lbnd : scalar, optional

The lower bound of the integral. (Default: 0)

scl : scalar, optional

Following each integration the result is *multiplied* by *scl* before the integration constant is added. (Default: 1)

axis : int, optional

Axis over which the integral is taken. (Default: 0).

New in version 1.7.0.

Returns **S** : ndarray

Coefficient array of the integral.

Raises **ValueError**

If `m < 1`, `len(k) > m`, `np.ndim(lbnd) != 0`, or `np.ndim(scl) != 0`.

See also:

polyder

Notes

Note that the result of each integration is *multiplied* by *scl*. Why is this important to note? Say one is making a linear change of variable $u = ax + b$ in an integral relative to x. Then $dx = du/a$, so one will need to set *scl* equal to $1/a$ - perhaps not what one would have first thought.

Examples

```
>>> from numpy.polynomial import polynomial as P
>>> c = (1,2,3)
>>> P.polyint(c) # should return array([0, 1, 1, 1])
array([ 0.,  1.,  1.,  1.])
>>> P.polyint(c,3) # should return array([0, 0, 0, 1/6, 1/12, 1/20])
array([ 0.        ,  0.        ,  0.        ,  0.16666667,  0.08333333,
        0.05      ])
>>> P.polyint(c,k=3) # should return array([3, 1, 1, 1])
array([ 3.,  1.,  1.,  1.])
>>> P.polyint(c,lbnd=-2) # should return array([6, 1, 1, 1])
array([ 6.,  1.,  1.,  1.])
>>> P.polyint(c,scl=-2) # should return array([0, -2, -2, -2])
array([ 0., -2., -2., -2.])
```

Algebra

polyadd(c1, c2)	Add one polynomial to another.
polysub(c1, c2)	Subtract one polynomial from another.
polymul(c1, c2)	Multiply one polynomial by another.
polymulx(c)	Multiply a polynomial by x.
polydiv(c1, c2)	Divide one polynomial by another.
polypow(c, pow[, maxpower])	Raise a polynomial to a power.

numpy.polynomial.polynomial.**polyadd**(*c1*, *c2*)

Add one polynomial to another.

Returns the sum of two polynomials *c1* + *c2*. The arguments are sequences of coefficients from lowest order term to highest, i.e., [1,2,3] represents the polynomial `1 + 2*x + 3*x**2`.

Parameters **c1, c2** : array_like

1-D arrays of polynomial coefficients ordered from low to high.

Returns **out** : ndarray

The coefficient array representing their sum.

See also:

polysub, *polymul*, *polydiv*, *polypow*

Examples

```
>>> from numpy.polynomial import polynomial as P
>>> c1 = (1,2,3)
>>> c2 = (3,2,1)
>>> sum = P.polyadd(c1,c2); sum
array([ 4.,  4.,  4.])
>>> P.polyval(2, sum) # 4 + 4(2) + 4(2**2)
28.0
```

numpy.polynomial.polynomial.**polysub**(*c1*, *c2*)

Subtract one polynomial from another.

Returns the difference of two polynomials *c1* - *c2*. The arguments are sequences of coefficients from lowest order term to highest, i.e., [1,2,3] represents the polynomial `1 + 2*x + 3*x**2`.

Parameters **c1, c2** : array_like

1-D arrays of polynomial coefficients ordered from low to high.

Returns **out** : ndarray

Of coefficients representing their difference.

See also:

polyadd, *polymul*, *polydiv*, *polypow*

Examples

```
>>> from numpy.polynomial import polynomial as P
>>> c1 = (1,2,3)
>>> c2 = (3,2,1)
>>> P.polysub(c1,c2)
array([-2.,  0.,  2.])
>>> P.polysub(c2,c1) # -P.polysub(c1,c2)
array([ 2.,  0., -2.])
```

numpy.polynomial.polynomial.**polymul**(*c1*, *c2*)
Multiply one polynomial by another.

Returns the product of two polynomials *c1* * *c2*. The arguments are sequences of coefficients, from lowest order term to highest, e.g., [1,2,3] represents the polynomial `1 + 2*x + 3*x**2`.

Parameters **c1, c2** : array_like

1-D arrays of coefficients representing a polynomial, relative to the "standard" basis, and ordered from lowest order term to highest.

Returns **out** : ndarray

Of the coefficients of their product.

See also:

polyadd, *polysub*, *polydiv*, *polypow*

Examples

```
>>> from numpy.polynomial import polynomial as P
>>> c1 = (1,2,3)
>>> c2 = (3,2,1)
>>> P.polymul(c1,c2)
array([  3.,   8.,  14.,   8.,   3.])
```

numpy.polynomial.polynomial.**polymulx**(*c*)
Multiply a polynomial by x.

Multiply the polynomial *c* by x, where x is the independent variable.

Parameters **c** : array_like

1-D array of polynomial coefficients ordered from low to high.

Returns **out** : ndarray

Array representing the result of the multiplication.

Notes

New in version 1.5.0.

numpy.polynomial.polynomial.**polydiv**(*c1*, *c2*)
Divide one polynomial by another.

Returns the quotient-with-remainder of two polynomials *c1* / *c2*. The arguments are sequences of coefficients, from lowest order term to highest, e.g., [1,2,3] represents `1 + 2*x + 3*x**2`.

Parameters **c1, c2** : array_like

1-D arrays of polynomial coefficients ordered from low to high.

Returns **[quo, rem]** : ndarrays

Of coefficient series representing the quotient and remainder.

See also:

polyadd, *polysub*, *polymul*, *polypow*

Examples

```
>>> from numpy.polynomial import polynomial as P
>>> c1 = (1,2,3)
>>> c2 = (3,2,1)
>>> P.polydiv(c1,c2)
(array([ 3.]), array([-8., -4.]))
>>> P.polydiv(c2,c1)
(array([ 0.33333333]), array([ 2.66666667,  1.33333333]))
```

numpy.polynomial.polynomial.**polypow**(*c*, *pow*, *maxpower=None*)

Raise a polynomial to a power.

Returns the polynomial *c* raised to the power *pow*. The argument *c* is a sequence of coefficients ordered from low to high. i.e., [1,2,3] is the series `1 + 2*x + 3*x**2.`

Parameters **c** : array_like

1-D array of array of series coefficients ordered from low to high degree.

pow : integer

Power to which the series will be raised

maxpower : integer, optional

Maximum power allowed. This is mainly to limit growth of the series to unmanageable size. Default is 16

Returns **coef** : ndarray

Power series of power.

See also:

polyadd, *polysub*, *polymul*, *polydiv*

Miscellaneous

polycompanion(c)	Return the companion matrix of c.
polydomain	
polyzero	
polyone	
polyx	
polytrim(c[, tol])	Remove “small” “trailing” coefficients from a polynomial.
polyline(off, scl)	Returns an array representing a linear polynomial.

numpy.polynomial.polynomial.**polycompanion**(*c*)
Return the companion matrix of c.

The companion matrix for power series cannot be made symmetric by scaling the basis, so this function differs from those for the orthogonal polynomials.

Parameters **c** : array_like

1-D array of polynomial coefficients ordered from low to high degree.

Returns **mat** : ndarray

Companion matrix of dimensions (deg, deg).

Notes

New in version 1.7.0.

numpy.polynomial.polynomial.**polydomain = array([-1, 1])**

numpy.polynomial.polynomial.**polyzero = array([0])**

numpy.polynomial.polynomial.**polyone = array([1])**

numpy.polynomial.polynomial.**polyx = array([0, 1])**

numpy.polynomial.polynomial.**polytrim**(*c*, *tol=0*)
Remove "small" "trailing" coefficients from a polynomial.

"Small" means "small in absolute value" and is controlled by the parameter *tol*; "trailing" means highest order coefficient(s), e.g., in `[0, 1, 1, 0, 0]` (which represents `0 + x + x**2 + 0*x**3 + 0*x**4`) both the 3-rd and 4-th order coefficients would be "trimmed."

Parameters **c** : array_like

1-d array of coefficients, ordered from lowest order to highest.

tol : number, optional

Trailing (i.e., highest order) elements with absolute value less than or equal to *tol* (default value is zero) are removed.

Returns **trimmed** : ndarray

1-d array with trailing zeros removed. If the resulting series would be empty, a series containing a single zero is returned.

Raises **ValueError**

If *tol* < 0

See also:

`trimseq`

Examples

```
>>> from numpy.polynomial import polyutils as pu
>>> pu.trimcoef((0,0,3,0,5,0,0))
array([ 0.,  0.,  3.,  0.,  5.])
>>> pu.trimcoef((0,0,1e-3,0,1e-5,0,0),1e-3) # item == tol is trimmed
array([ 0.])
```

(continues on next page)

(continued from previous page)

```
>>> i = complex(0,1) # works for complex
>>> pu.trimcoef((3e-4,1e-3*(1-i),5e-4,2e-5*(1+i)), 1e-3)
array([ 0.0003+0.j   ,  0.0010-0.001j])
```

numpy.polynomial.polynomial.**polyline**(*off*, *scl*)

Returns an array representing a linear polynomial.

Parameters **off, scl** : scalars

The "y-intercept" and "slope" of the line, respectively.

Returns **y** : ndarray

This module's representation of the linear polynomial `off + scl*x`.

See also:

`chebline`

Examples

```
>>> from numpy.polynomial import polynomial as P
>>> P.polyline(1,-1)
array([ 1, -1])
>>> P.polyval(1, P.polyline(1,-1)) # should be 0
0.0
```

Chebyshev Module (`numpy.polynomial.chebyshev`)

New in version 1.4.0.

This module provides a number of objects (mostly functions) useful for dealing with Chebyshev series, including a *Chebyshev* class that encapsulates the usual arithmetic operations. (General information on how this module represents and works with such polynomials is in the docstring for its "parent" sub-package, `numpy.polynomial`).

Chebyshev Class

Chebyshev(coef[, domain, window])	A Chebyshev series class.

class numpy.polynomial.chebyshev.**Chebyshev**(*coef*, *domain=None*, *window=None*)

A Chebyshev series class.

The Chebyshev class provides the standard Python numerical methods '+', '-', '*', '//', '%', 'divmod', '**', and '()' as well as the methods listed below.

Parameters **coef** : array_like

Chebyshev coefficients in order of increasing degree, i.e., `(1, 2, 3)` gives `1*T_0(x) + 2*T_1(x) + 3*T_2(x)`.

domain : (2,) array_like, optional

Domain to use. The interval `[domain[0], domain[1]]` is mapped to the interval `[window[0], window[1]]` by shifting and scaling. The default value is [-1, 1].

window : (2,) array_like, optional

Window, see `domain` for its use. The default value is [-1, 1].

New in version 1.6.0.

Methods

__call__(arg)	Call self as a function.
basis(deg[, domain, window])	Series basis polynomial of degree *deg*.
cast(series[, domain, window])	Convert series to series of this class.
convert([domain, kind, window])	Convert series to a different kind and/or domain and/or window.
copy()	Return a copy.
cutdeg(deg)	Truncate series to the given degree.
degree()	The degree of the series.
deriv([m])	Differentiate.
fit(x, y, deg[, domain, rcond, full, w, window])	Least squares fit to data.
fromroots(roots[, domain, window])	Return series instance that has the specified roots.
has_samecoef(other)	Check if coefficients match.
has_samedomain(other)	Check if domains match.
has_sametype(other)	Check if types match.
has_samewindow(other)	Check if windows match.
identity([domain, window])	Identity function.
integ([m, k, lbnd])	Integrate.
interpolate(func, deg[, domain, args])	Interpolate a function at the Chebyshev points of the first kind.
linspace([n, domain])	Return x, y values at equally spaced points in domain.
mapparms()	Return the mapping parameters.
roots()	Return the roots of the series polynomial.
trim([tol])	Remove trailing coefficients
truncate(size)	Truncate series to length *size*.

Chebyshev.**__call__**(*arg*)
Call self as a function.

classmethod Chebyshev.**basis**(*deg*, *domain=None*, *window=None*)
Series basis polynomial of degree *deg*.

Returns the series representing the basis polynomial of degree *deg*.

New in version 1.7.0.

Parameters **deg** : int

Degree of the basis polynomial for the series. Must be >= 0.

domain : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form `[beg, end]`, where `beg` and `end` are the endpoints of the window. If None is given then the class window is used. The

default is None.

Returns **new_series** : series

A series with the coefficient of the *deg* term set to one and all others zero.

classmethod Chebyshev.**cast**(*series*, *domain=None*, *window=None*)
Convert series to series of this class.

The *series* is expected to be an instance of some polynomial series of one of the types supported by by the numpy.polynomial module, but could be some other class that supports the convert method.

New in version 1.7.0.

Parameters **series** : series

The series instance to be converted.

domain : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form `[beg, end]`, where `beg` and `end` are the endpoints of the window. If None is given then the class window is used. The default is None.

Returns **new_series** : series

A series of the same kind as the calling class and equal to *series* when evaluated.

See also:

convert similar instance method

Chebyshev.**convert**(*domain=None*, *kind=None*, *window=None*)
Convert series to a different kind and/or domain and/or window.

Parameters **domain** : array_like, optional

The domain of the converted series. If the value is None, the default domain of *kind* is used.

kind : class, optional

The polynomial series type class to which the current instance should be converted. If kind is None, then the class of the current instance is used.

window : array_like, optional

The window of the converted series. If the value is None, the default window of *kind* is used.

Returns **new_series** : series

The returned class can be of different type than the current instance and/or have a different domain and/or different window.

Notes

Conversion between domains and class types can result in numerically ill defined series.

Chebyshev.**copy**()
Return a copy.

Returns **new_series** : series

Copy of self.

Chebyshev.**cutdeg**(*deg*)
Truncate series to the given degree.

Reduce the degree of the series to *deg* by discarding the high order terms. If *deg* is greater than the current degree a copy of the current series is returned. This can be useful in least squares where the coefficients of the high degree terms may be very small.

New in version 1.5.0.

Parameters **deg** : non-negative int

The series is reduced to degree *deg* by discarding the high order terms. The value of *deg* must be a non-negative integer.

Returns **new_series** : series

New instance of series with reduced degree.

Chebyshev.**degree**()
The degree of the series.

New in version 1.5.0.

Returns **degree** : int

Degree of the series, one less than the number of coefficients.

Chebyshev.**deriv**(*m=1*)
Differentiate.

Return a series instance of that is the derivative of the current series.

Parameters **m** : non-negative int

Find the derivative of order *m*.

Returns **new_series** : series

A new series representing the derivative. The domain is the same as the domain of the differentiated series.

classmethod Chebyshev.**fit**(*x*, *y*, *deg*, *domain=None*, *rcond=None*, *full=False*, *w=None*, *window=None*)
Least squares fit to data.

Return a series instance that is the least squares fit to the data *y* sampled at *x*. The domain of the returned instance can be specified and this will often result in a superior fit with less chance of ill conditioning.

Parameters **x** : array_like, shape (M,)

x-coordinates of the M sample points `(x[i], y[i])`.

y : array_like, shape (M,) or (M, K)

y-coordinates of the sample points. Several data sets of sample points sharing the same x-coordinates can be fitted at once by passing in a 2D-array that contains one dataset per column.

deg : int or 1-D array_like

Degree(s) of the fitting polynomials. If *deg* is a single integer all terms up to and including the *deg*'th term are included in the fit. For NumPy versions >= 1.11.0 a list of integers specifying the degrees of the terms to include may be used instead.

domain : {None, [beg, end], []}, optional

Domain to use for the returned series. If `None`, then a minimal domain that covers the points *x* is chosen. If `[]` the class domain is used. The default value was the class domain in NumPy 1.4 and `None` in later versions. The `[]` option was added in numpy 1.5.0.

rcond : float, optional

Relative condition number of the fit. Singular values smaller than this relative to the largest singular value will be ignored. The default value is len(x)*eps, where eps is the relative precision of the float type, about 2e-16 in most cases.

full : bool, optional

Switch determining nature of return value. When it is False (the default) just the coefficients are returned, when True diagnostic information from the singular value decomposition is also returned.

w : array_like, shape (M,), optional

Weights. If not None the contribution of each point `(x[i],y[i])` to the fit is weighted by *w[i]*. Ideally the weights are chosen so that the errors of the products `w[i]*y[i]` all have the same variance. The default value is None.

New in version 1.5.0.

window : {[beg, end]}, optional

Window to use for the returned series. The default value is the default class domain

New in version 1.6.0.

Returns **new_series** : series

A series that represents the least squares fit to the data and has the domain specified in the call.

[resid, rank, sv, rcond] : list

These values are only returned if *full* = True

resid – sum of squared residuals of the least squares fit rank – the numerical rank of the scaled Vandermonde matrix sv – singular values of the scaled Vandermonde matrix rcond – value of *rcond*.

For more details, see *linalg.lstsq*.

classmethod Chebyshev.**fromroots**(*roots*, *domain=[]*, *window=None*)

Return series instance that has the specified roots.

Returns a series representing the product `(x - r[0])*(x - r[1])*...*(x - r[n-1])`, where `r` is a list of roots.

Parameters **roots** : array_like

List of roots.

domain : {[], None, array_like}, optional

Domain for the resulting series. If None the domain is the interval from the smallest root to the largest. If [] the domain is the class domain. The default is [].

window : {None, array_like}, optional

Window for the returned series. If None the class window is used. The default is None.

Returns **new_series** : series

Series with the specified roots.

Chebyshev.**has_samecoef**(*other*)

Check if coefficients match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `coef` attribute.

Returns **bool** : boolean

True if the coefficients are the same, False otherwise.

Chebyshev.**has_samedomain**(*other*)

Check if domains match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `domain` attribute.

Returns **bool** : boolean

True if the domains are the same, False otherwise.

Chebyshev.**has_sametype**(*other*)

Check if types match.

New in version 1.7.0.

Parameters **other** : object

Class instance.

Returns **bool** : boolean

True if other is same class as self

Chebyshev.**has_samewindow**(*other*)

Check if windows match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `window` attribute.

Returns **bool** : boolean

True if the windows are the same, False otherwise.

classmethod Chebyshev.**identity**(*domain=None*, *window=None*)
Identity function.

If p is the returned series, then p(x) == x for all values of x.

Parameters **domain** : {None, array_like}, optional

If given, the array must be of the form [beg, end], where beg and end are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form [beg, end], where beg and end are the endpoints of the window. If None is given then the class window is used. The default is None.

Returns **new_series** : series

Series of representing the identity.

Chebyshev.**integ**(*m=1*, *k=[]*, *lbnd=None*)
Integrate.

Return a series instance that is the definite integral of the current series.

Parameters **m** : non-negative int

The number of integrations to perform.

k : array_like

Integration constants. The first constant is applied to the first integration, the second to the second, and so on. The list of values must less than or equal to *m* in length and any missing values are set to zero.

lbnd : Scalar

The lower bound of the definite integral.

Returns **new_series** : series

A new series representing the integral. The domain is the same as the domain of the integrated series.

classmethod Chebyshev.**interpolate**(*func*, *deg*, *domain=None*, *args=()*)
Interpolate a function at the Chebyshev points of the first kind.

Returns the series that interpolates *func* at the Chebyshev points of the first kind scaled and shifted to the domain. The resulting series tends to a minmax approximation of *func* when the function is continuous in the domain.

New in version 1.14.0.

Parameters **func** : function

The function to be interpolated. It must be a function of a single variable of the form f(x, a, b, c...), where a, b, c... are extra arguments passed in the *args* parameter.

deg : int

Degree of the interpolating polynomial.

domain : {None, [beg, end]}, optional

Domain over which *func* is interpolated. The default is None, in which case the domain is [-1, 1].

args : tuple, optional

Extra arguments to be used in the function call. Default is no extra arguments.

Returns **polynomial** : Chebyshev instance

Interpolating Chebyshev instance.

Notes

See *numpy.polynomial.chebfromfunction* for more details.

`Chebyshev.`**`linspace`**`(`*n=100*, *domain=None*`)`

Return x, y values at equally spaced points in domain.

Returns the x, y values at *n* linearly spaced points across the domain. Here y is the value of the polynomial at the points x. By default the domain is the same as that of the series instance. This method is intended mostly as a plotting aid.

New in version 1.5.0.

Parameters **n** : int, optional

Number of point pairs to return. The default value is 100.

domain : {None, array_like}, optional

If not None, the specified domain is used instead of that of the calling instance. It should be of the form `[beg,end]`. The default is None which case the class domain is used.

Returns **x, y** : ndarray

x is equal to linspace(self.domain[0], self.domain[1], n) and y is the series evaluated at element of x.

`Chebyshev.`**`mapparms`**`()`

Return the mapping parameters.

The returned values define a linear map `off + scl*x` that is applied to the input arguments before the series is evaluated. The map depends on the `domain` and `window`; if the current `domain` is equal to the `window` the resulting map is the identity. If the coefficients of the series instance are to be used by themselves outside this class, then the linear function must be substituted for the `x` in the standard representation of the base polynomials.

Returns **off, scl** : float or complex

The mapping function is defined by `off + scl*x`.

Notes

If the current domain is the interval `[l1, r1]` and the window is `[l2, r2]`, then the linear mapping function `L` is defined by the equations:

```
L(l1) = l2
L(r1) = r2
```

Chebyshev.**roots**()
Return the roots of the series polynomial.

Compute the roots for the series. Note that the accuracy of the roots decrease the further outside the domain they lie.

Returns **roots** : ndarray

Array containing the roots of the series.

Chebyshev.**trim**(*tol=0*)
Remove trailing coefficients

Remove trailing coefficients until a coefficient is reached whose absolute value greater than *tol* or the beginning of the series is reached. If all the coefficients would be removed the series is set to `[0]`. A new series instance is returned with the new coefficients. The current instance remains unchanged.

Parameters **tol** : non-negative number.

All trailing coefficients less than *tol* will be removed.

Returns **new_series** : series

Contains the new set of coefficients.

Chebyshev.**truncate**(*size*)
Truncate series to length *size*.

Reduce the series to length *size* by discarding the high degree terms. The value of *size* must be a positive integer. This can be useful in least squares where the coefficients of the high degree terms may be very small.

Parameters **size** : positive int

The series is reduced to length *size* by discarding the high degree terms. The value of *size* must be a positive integer.

Returns **new_series** : series

New instance of series with truncated coefficients.

Basics

chebval(x, c[, tensor])	Evaluate a Chebyshev series at points x.
chebval2d(x, y, c)	Evaluate a 2-D Chebyshev series at points (x, y).
chebval3d(x, y, z, c)	Evaluate a 3-D Chebyshev series at points (x, y, z).
chebgrid2d(x, y, c)	Evaluate a 2-D Chebyshev series on the Cartesian product of x and y.
chebgrid3d(x, y, z, c)	Evaluate a 3-D Chebyshev series on the Cartesian product of x, y, and z.
chebroots(c)	Compute the roots of a Chebyshev series.
chebfromroots(roots)	Generate a Chebyshev series with given roots.

numpy.polynomial.chebyshev.**chebval**(*x*, *c*, *tensor=True*)
Evaluate a Chebyshev series at points x.

If *c* is of length *n + 1*, this function returns the value:

$$p(x) = c_0 * T_0(x) + c_1 * T_1(x) + ... + c_n * T_n(x)$$

The parameter *x* is converted to an array only if it is a tuple or a list, otherwise it is treated as a scalar. In either case, either *x* or its elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* is a 1-D array, then *p(x)* will have the same shape as *x*. If *c* is multidimensional, then the shape of the result depends on the value of *tensor*. If *tensor* is true the shape will be c.shape[1:] + x.shape. If *tensor* is false the shape will be c.shape[1:]. Note that scalars have shape (,).

Trailing zeros in the coefficients will be used in the evaluation, so they should be avoided if efficiency is a concern.

Parameters **x** : array_like, compatible object

If *x* is a list or tuple, it is converted to an ndarray, otherwise it is left unchanged and treated as a scalar. In either case, *x* or its elements must support addition and multiplication with with themselves and with the elements of *c*.

c : array_like

Array of coefficients ordered so that the coefficients for terms of degree n are contained in c[n]. If *c* is multidimensional the remaining indices enumerate multiple polynomials. In the two dimensional case the coefficients may be thought of as stored in the columns of *c*.

tensor : boolean, optional

If True, the shape of the coefficient array is extended with ones on the right, one for each dimension of *x*. Scalars have dimension 0 for this action. The result is that every column of coefficients in *c* is evaluated for every element of *x*. If False, *x* is broadcast over the columns of *c* for the evaluation. This keyword is useful when *c* is multidimensional. The default value is True.

New in version 1.7.0.

Returns **values** : ndarray, algebra_like

The shape of the return value is described above.

See also:

chebval2d, *chebgrid2d*, *chebval3d*, *chebgrid3d*

Notes

The evaluation uses Clenshaw recursion, aka synthetic division.

numpy.polynomial.chebyshev.**chebval2d**(*x*, *y*, *c*)

Evaluate a 2-D Chebyshev series at points (x, y).

This function returns the values:

$$p(x,y) = \sum_{i,j} c_{i,j} * T_i(x) * T_j(y)$$

The parameters *x* and *y* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars and they must have the same shape after conversion. In either case, either *x* and *y* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* is a 1-D array a one is implicitly appended to its shape to make it 2-D. The shape of the result will be c.shape[2:] + x.shape.

Parameters **x, y** : array_like, compatible objects

The two dimensional series is evaluated at the points *(x, y)*, where *x* and *y* must have the same shape. If *x* or *y* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and if it isn't an ndarray it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficient of the term of multi-degree i,j is contained in `c[i,j]`. If *c* has dimension greater than 2 the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional Chebyshev series at points formed from pairs of corresponding values from *x* and *y*.

See also:

chebval, *chebgrid2d*, *chebval3d*, *chebgrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.chebyshev.**chebval3d**(*x*, *y*, *z*, *c*)

Evaluate a 3-D Chebyshev series at points (x, y, z).

This function returns the values:

$$p(x,y,z) = \sum_{i,j,k} c_{i,j,k} * T_i(x) * T_j(y) * T_k(z)$$

The parameters *x*, *y*, and *z* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars and they must have the same shape after conversion. In either case, either *x*, *y*, and *z* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than 3 dimensions, ones are implicitly appended to its shape to make it 3-D. The shape of the result will be c.shape[3:] + x.shape.

Parameters **x, y, z** : array_like, compatible object

The three dimensional series is evaluated at the points *(x, y, z)*, where *x*, *y*, and *z* must have the same shape. If any of *x*, *y*, or *z* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and if it isn't an ndarray it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficient of the term of multi-degree i,j,k is contained in `c[i,j,k]`. If *c* has dimension greater than 3 the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the multidimensional polynomial on points formed with triples of corresponding values from *x*, *y*, and *z*.

See also:

chebval, *chebval2d*, *chebgrid2d*, *chebgrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.chebyshev.**chebgrid2d**(*x*, *y*, *c*)

Evaluate a 2-D Chebyshev series on the Cartesian product of x and y.

This function returns the values:

$$p(a,b) = \sum_{i,j} c_{i,j} * T_i(a) * T_j(b),$$

where the points *(a, b)* consist of all pairs formed by taking *a* from *x* and *b* from *y*. The resulting points form a grid with *x* in the first dimension and *y* in the second.

The parameters *x* and *y* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars. In either case, either *x* and *y* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than two dimensions, ones are implicitly appended to its shape to make it 2-D. The shape of the result will be c.shape[2:] + x.shape + y.shape.

Parameters **x, y** : array_like, compatible objects

The two dimensional series is evaluated at the points in the Cartesian product of *x* and *y*. If *x* or *y* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and, if it isn't an ndarray, it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficient of the term of multi-degree i,j is contained in *c[i,j]*. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional Chebyshev series at points in the Cartesian product of *x* and *y*.

See also:

chebval, *chebval2d*, *chebval3d*, *chebgrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.chebyshev.**chebgrid3d**(*x*, *y*, *z*, *c*)

Evaluate a 3-D Chebyshev series on the Cartesian product of x, y, and z.

This function returns the values:

$$p(a,b,c) = \sum_{i,j,k} c_{i,j,k} * T_i(a) * T_j(b) * T_k(c)$$

where the points *(a, b, c)* consist of all triples formed by taking *a* from *x*, *b* from *y*, and *c* from *z*. The resulting points form a grid with *x* in the first dimension, *y* in the second, and *z* in the third.

The parameters *x*, *y*, and *z* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars. In either case, either *x*, *y*, and *z* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than three dimensions, ones are implicitly appended to its shape to make it 3-D. The shape of the result will be c.shape[3:] + x.shape + y.shape + z.shape.

Parameters **x, y, z** : array_like, compatible objects

The three dimensional series is evaluated at the points in the Cartesian product of *x*, *y*, and *z*. If *x*,'y', or *z* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and, if it isn't an ndarray, it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficients for terms of degree i,j are contained in `c[i,j]`. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional polynomial at points in the Cartesian product of *x* and *y*.

See also:

chebval, *chebval2d*, *chebgrid2d*, *chebval3d*

Notes

New in version 1.7.0.

numpy.polynomial.chebyshev.**chebroots**(*c*)

Compute the roots of a Chebyshev series.

Return the roots (a.k.a. "zeros") of the polynomial

$$p(x) = \sum_i c[i] * T_i(x).$$

Parameters **c** : 1-D array_like

1-D array of coefficients.

Returns **out** : ndarray

Array of the roots of the series. If all the roots are real, then *out* is also real, otherwise it is complex.

See also:

`polyroots`, `legroots`, `lagroots`, `hermroots`, `hermeroots`

Notes

The root estimates are obtained as the eigenvalues of the companion matrix, Roots far from the origin of the complex plane may have large errors due to the numerical instability of the series for such values. Roots with multiplicity greater than 1 will also show larger errors as the value of the series near such points is relatively insensitive to errors in the roots. Isolated roots near the origin can be improved by a few iterations of Newton's method.

The Chebyshev series basis polynomials aren't powers of *x* so the results of this function may seem unintuitive.

Examples

```
>>> import numpy.polynomial.chebyshev as cheb
>>> cheb.chebroots((-1, 1,-1, 1)) # T3 - T2 + T1 - T0 has real roots
array([ -5.00000000e-01,   2.60860684e-17,   1.00000000e+00])
```

numpy.polynomial.chebyshev.**chebfromroots**(*roots*)

Generate a Chebyshev series with given roots.

The function returns the coefficients of the polynomial

$$p(x) = (x - r_0) * (x - r_1) * ... * (x - r_n),$$

in Chebyshev form, where the *r_n* are the roots specified in *roots*. If a zero has multiplicity n, then it must appear in *roots* n times. For instance, if 2 is a root of multiplicity three and 3 is a root of multiplicity 2, then *roots* looks something like [2, 2, 2, 3, 3]. The roots can appear in any order.

If the returned coefficients are c, then

$$p(x) = c_0 + c_1 * T_1(x) + ... + c_n * T_n(x)$$

The coefficient of the last term is not generally 1 for monic polynomials in Chebyshev form.

Parameters **roots** : array_like

Sequence containing the roots.

Returns **out** : ndarray

1-D array of coefficients. If all roots are real then *out* is a real array, if some of the roots are complex, then *out* is complex even if all the coefficients in the result are real (see Examples below).

See also:

`polyfromroots`, `legfromroots`, `lagfromroots`, `hermfromroots`, `hermefromroots`.

Examples

```
>>> import numpy.polynomial.chebyshev as C
>>> C.chebfromroots((-1,0,1)) # x^3 - x relative to the standard basis
array([ 0.  , -0.25,  0.  ,  0.25])
>>> j = complex(0,1)
>>> C.chebfromroots((-j,j)) # x^2 + 1 relative to the standard basis
array([ 1.5+0.j,  0.0+0.j,  0.5+0.j])
```

Fitting

chebfit(x, y, deg[, rcond, full, w])	Least squares fit of Chebyshev series to data.
chebvander(x, deg)	Pseudo-Vandermonde matrix of given degree.
chebvander2d(x, y, deg)	Pseudo-Vandermonde matrix of given degrees.
chebvander3d(x, y, z, deg)	Pseudo-Vandermonde matrix of given degrees.

numpy.polynomial.chebyshev.**chebfit**(*x*, *y*, *deg*, *rcond=None*, *full=False*, *w=None*)

Least squares fit of Chebyshev series to data.

Return the coefficients of a Chebyshev series of degree *deg* that is the least squares fit to the data values *y* given at points *x*. If *y* is 1-D the returned coefficients will also be 1-D. If *y* is 2-D multiple fits are done, one for each column of *y*, and the resulting coefficients are stored in the corresponding columns of a 2-D return. The fitted polynomial(s) are in the form

$$p(x) = c_0 + c_1 * T_1(x) + ... + c_n * T_n(x),$$

where *n* is *deg*.

Parameters **x** : array_like, shape (M,)

x-coordinates of the M sample points `(x[i], y[i])`.

y : array_like, shape (M,) or (M, K)

y-coordinates of the sample points. Several data sets of sample points sharing the same x-coordinates can be fitted at once by passing in a 2D-array that contains one dataset per column.

deg : int or 1-D array_like

Degree(s) of the fitting polynomials. If *deg* is a single integer, all terms up to and including the *deg*'th term are included in the fit. For NumPy versions >= 1.11.0 a list of integers specifying the degrees of the terms to include may be used instead.

rcond : float, optional

Relative condition number of the fit. Singular values smaller than this relative to the largest singular value will be ignored. The default value is len(x)*eps, where eps is the relative precision of the float type, about 2e-16 in most cases.

full : bool, optional

Switch determining nature of return value. When it is False (the default) just the coefficients are returned, when True diagnostic information from the singular value decomposition is also returned.

w : array_like, shape (*M*,), optional

Weights. If not None, the contribution of each point `(x[i],y[i])` to the fit is weighted by *w[i]*. Ideally the weights are chosen so that the errors of the products `w[i]*y[i]` all have the same variance. The default value is None.

New in version 1.5.0.

Returns **coef** : ndarray, shape (M,) or (M, K)

Chebyshev coefficients ordered from low to high. If *y* was 2-D, the coefficients for the data in column k of *y* are in column *k*.

[residuals, rank, singular_values, rcond] : list

These values are only returned if *full* = True

resid – sum of squared residuals of the least squares fit rank – the numerical rank of the scaled Vandermonde matrix sv – singular values of the scaled Vandermonde matrix rcond – value of *rcond*.

For more details, see *linalg.lstsq*.

Warns **RankWarning**

The rank of the coefficient matrix in the least-squares fit is deficient. The warning is only raised if *full* = False. The warnings can be turned off by

```
>>> import warnings
>>> warnings.simplefilter('ignore', RankWarning)
```

See also:

`polyfit`, `legfit`, `lagfit`, `hermfit`, `hermefit`

chebval Evaluates a Chebyshev series.

chebvander Vandermonde matrix of Chebyshev series.

chebweight Chebyshev weight function.

linalg.lstsq Computes a least-squares fit from the matrix.

scipy.interpolate.UnivariateSpline Computes spline fits.

Notes

The solution is the coefficients of the Chebyshev series *p* that minimizes the sum of the weighted squared errors

$$E = \sum_j w_j^2 * |y_j - p(x_j)|^2,$$

where w_j are the weights. This problem is solved by setting up as the (typically) overdetermined matrix equation

$$V(x) * c = w * y,$$

where *V* is the weighted pseudo Vandermonde matrix of *x*, *c* are the coefficients to be solved for, *w* are the weights, and *y* are the observed values. This equation is then solved using the singular value decomposition of *V*.

If some of the singular values of *V* are so small that they are neglected, then a *RankWarning* will be issued. This means that the coefficient values may be poorly determined. Using a lower order fit will usually get rid of the warning. The *rcond* parameter can also be set to a value smaller than its default, but the resulting fit may be spurious and have large contributions from roundoff error.

Fits using Chebyshev series are usually better conditioned than fits using power series, but much can depend on the distribution of the sample points and the smoothness of the data. If the quality of the fit is inadequate splines may be a good alternative.

References

[R68]

numpy.polynomial.chebyshev.**chebvander**(*x*, *deg*)
Pseudo-Vandermonde matrix of given degree.

Returns the pseudo-Vandermonde matrix of degree *deg* and sample points *x*. The pseudo-Vandermonde matrix is defined by

$$V[..., i] = T_i(x),$$

where *0 <= i <= deg*. The leading indices of *V* index the elements of *x* and the last index is the degree of the Chebyshev polynomial.

If *c* is a 1-D array of coefficients of length *n + 1* and *V* is the matrix `V = chebvander(x, n)`, then `np.dot(V, c)` and `chebval(x, c)` are the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of Chebyshev series of the same degree and sample points.

Parameters **x** : array_like

Array of points. The dtype is converted to float64 or complex128 depending on whether any of the elements are complex. If *x* is scalar it is converted to a 1-D array.

deg : int

Degree of the resulting matrix.

Returns **vander** : ndarray

The pseudo Vandermonde matrix. The shape of the returned matrix is `x.shape + (deg + 1,)`, where The last index is the degree of the corresponding Chebyshev polynomial. The dtype will be the same as the converted *x*.

numpy.polynomial.chebyshev.**chebvander2d**(*x*, *y*, *deg*)

Pseudo-Vandermonde matrix of given degrees.

Returns the pseudo-Vandermonde matrix of degrees *deg* and sample points *(x, y)*. The pseudo-Vandermonde matrix is defined by

$$V[..., (deg[1] + 1) * i + j] = T_i(x) * T_j(y),$$

where *0 <= i <= deg[0]* and *0 <= j <= deg[1]*. The leading indices of *V* index the points *(x, y)* and the last index encodes the degrees of the Chebyshev polynomials.

If `V = chebvander2d(x, y, [xdeg, ydeg])`, then the columns of *V* correspond to the elements of a 2-D coefficient array *c* of shape (xdeg + 1, ydeg + 1) in the order

$$c_{00}, c_{01}, c_{02}..., c_{10}, c_{11}, c_{12}...$$

and `np.dot(V, c.flat)` and `chebval2d(x, y, c)` will be the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of 2-D Chebyshev series of the same degrees and sample points.

Parameters **x, y** : array_like

Arrays of point coordinates, all of the same shape. The dtypes will be converted to either float64 or complex128 depending on whether any of the elements are complex. Scalars are converted to 1-D arrays.

deg : list of ints

List of maximum degrees of the form [x_deg, y_deg].

Returns **vander2d** : ndarray

The shape of the returned matrix is `x.shape + (order,)`, where $order = (deg[0] + 1) * (deg([1] + 1)$. The dtype will be the same as the converted *x* and *y*.

See also:

chebvander, chebvander3d., *chebval3d*

Notes

New in version 1.7.0.

numpy.polynomial.chebyshev.**chebvander3d**(*x*, *y*, *z*, *deg*)

Pseudo-Vandermonde matrix of given degrees.

Returns the pseudo-Vandermonde matrix of degrees *deg* and sample points *(x, y, z)*. If *l, m, n* are the given degrees in *x, y, z*, then The pseudo-Vandermonde matrix is defined by

$$V[..., (m+1)(n+1)i + (n+1)j + k] = T_i(x) * T_j(y) * T_k(z),$$

where *0 <= i <= l*, *0 <= j <= m*, and *0 <= j <= n*. The leading indices of *V* index the points *(x, y, z)* and the last index encodes the degrees of the Chebyshev polynomials.

If `V = chebvander3d(x, y, z, [xdeg, ydeg, zdeg])`, then the columns of *V* correspond to the elements of a 3-D coefficient array *c* of shape (xdeg + 1, ydeg + 1, zdeg + 1) in the order

$$c_{000}, c_{001}, c_{002}, ..., c_{010}, c_{011}, c_{012}, ...$$

and `np.dot(V, c.flat)` and `chebval3d(x, y, z, c)` will be the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of 3-D Chebyshev series of the same degrees and sample points.

Parameters **x, y, z** : array_like

Arrays of point coordinates, all of the same shape. The dtypes will be converted to either float64 or complex128 depending on whether any of the elements are complex. Scalars are converted to 1-D arrays.

deg : list of ints

List of maximum degrees of the form [x_deg, y_deg, z_deg].

Returns **vander3d** : ndarray

The shape of the returned matrix is `x.shape + (order,)`, where $order = (deg[0]+1) * (deg([1]+1) * (deg[2]+1)$. The dtype will be the same as the converted *x*, *y*, and *z*.

See also:

chebvander, chebvander3d., *chebval3d*

Notes

New in version 1.7.0.

Calculus

chebder(c[, m, scl, axis])	Differentiate a Chebyshev series.
chebint(c[, m, k, lbnd, scl, axis])	Integrate a Chebyshev series.

numpy.polynomial.chebyshev.**chebder**(*c*, *m=1*, *scl=1*, *axis=0*)

Differentiate a Chebyshev series.

Returns the Chebyshev series coefficients *c* differentiated *m* times along *axis*. At each iteration the result is multiplied by *scl* (the scaling factor is for use in a linear change of variable). The argument *c* is an array of coefficients from low to high degree along each axis, e.g., [1,2,3] represents the series `1*T_0 + 2*T_1 + 3*T_2` while [[1,2],[1,2]] represents `1*T_0(x)*T_0(y) + 1*T_1(x)*T_0(y)`

`+ 2*T_0(x)*T_1(y) + 2*T_1(x)*T_1(y)` if axis=0 is `x` and axis=1 is `y`.

Parameters **c** : array_like

Array of Chebyshev series coefficients. If c is multidimensional the different axis correspond to different variables with the degree in each axis given by the corresponding index.

m : int, optional

Number of derivatives taken, must be non-negative. (Default: 1)

scl : scalar, optional

Each differentiation is multiplied by *scl*. The end result is multiplication by `scl**m`. This is for use in a linear change of variable. (Default: 1)

axis : int, optional

Axis over which the derivative is taken. (Default: 0).

New in version 1.7.0.

Returns **der** : ndarray

Chebyshev series of the derivative.

See also:

chebint

Notes

In general, the result of differentiating a C-series needs to be "reprojected" onto the C-series basis set. Thus, typically, the result of this function is "unintuitive," albeit correct; see Examples section below.

Examples

```
>>> from numpy.polynomial import chebyshev as C
>>> c = (1,2,3,4)
>>> C.chebder(c)
array([ 14.,  12.,  24.])
>>> C.chebder(c,3)
array([ 96.])
>>> C.chebder(c,scl=-1)
array([-14., -12., -24.])
>>> C.chebder(c,2,-1)
array([ 12.,  96.])
```

`numpy.polynomial.chebyshev.`**`chebint`**(*c*, *m=1*, *k=[]*, *lbnd=0*, *scl=1*, *axis=0*)

Integrate a Chebyshev series.

Returns the Chebyshev series coefficients *c* integrated *m* times from *lbnd* along *axis*. At each iteration the resulting series is **multiplied** by *scl* and an integration constant, *k*, is added. The scaling factor is for use in a linear change of variable. ("Buyer beware": note that, depending on what one is doing, one may want *scl* to be the reciprocal of what one might expect; for more information, see the Notes section below.) The argument *c* is an array of coefficients from low to high degree along each axis, e.g., [1,2,3] represents the series `T_0 + 2*T_1 + 3*T_2` while [[1,2],[1,2]] represents `1*T_0(x)*T_0(y) + 1*T_1(x)*T_0(y) + 2*T_0(x)*T_1(y) + 2*T_1(x)*T_1(y)` if axis=0 is `x` and axis=1 is `y`.

Parameters **c** : array_like

Array of Chebyshev series coefficients. If c is multidimensional the different axis correspond to different variables with the degree in each axis given by the corresponding index.

m : int, optional

Order of integration, must be positive. (Default: 1)

k : {[], list, scalar}, optional

Integration constant(s). The value of the first integral at zero is the first value in the list, the value of the second integral at zero is the second value, etc. If `k == []` (the default), all constants are set to zero. If `m == 1`, a single scalar can be given instead of a list.

lbnd : scalar, optional

The lower bound of the integral. (Default: 0)

scl : scalar, optional

Following each integration the result is *multiplied* by *scl* before the integration constant is added. (Default: 1)

axis : int, optional

Axis over which the integral is taken. (Default: 0).

New in version 1.7.0.

Returns **S** : ndarray

C-series coefficients of the integral.

Raises **ValueError**

If `m < 1`, `len(k) > m`, `np.ndim(lbnd) != 0`, or `np.ndim(scl) != 0`.

See also:

chebder

Notes

Note that the result of each integration is *multiplied* by *scl*. Why is this important to note? Say one is making a linear change of variable $u = ax + b$ in an integral relative to x. Then $dx = du/a$, so one will need to set *scl* equal to $1/a$- perhaps not what one would have first thought.

Also note that, in general, the result of integrating a C-series needs to be "reprojected" onto the C-series basis set. Thus, typically, the result of this function is "unintuitive," albeit correct; see Examples section below.

Examples

```
>>> from numpy.polynomial import chebyshev as C
>>> c = (1,2,3)
>>> C.chebint(c)
array([ 0.5, -0.5,  0.5,  0.5])
>>> C.chebint(c,3)
array([ 0.03125   , -0.1875    ,  0.04166667, -0.05208333,  0.01041667,
```

(continues on next page)

(continued from previous page)

```
        0.00625   ])
>>> C.chebint(c, k=3)
array([ 3.5, -0.5,  0.5,  0.5])
>>> C.chebint(c,lbnd=-2)
array([ 8.5, -0.5,  0.5,  0.5])
>>> C.chebint(c,scl=-2)
array([-1.,  1., -1., -1.])
```

Algebra

chebadd(c1, c2)	Add one Chebyshev series to another.
chebsub(c1, c2)	Subtract one Chebyshev series from another.
chebmul(c1, c2)	Multiply one Chebyshev series by another.
chebmulx(c)	Multiply a Chebyshev series by x.
chebdiv(c1, c2)	Divide one Chebyshev series by another.
chebpow(c, pow[, maxpower])	Raise a Chebyshev series to a power.

numpy.polynomial.chebyshev.**chebadd**(*c1*, *c2*)

Add one Chebyshev series to another.

Returns the sum of two Chebyshev series *c1* + *c2*. The arguments are sequences of coefficients ordered from lowest order term to highest, i.e., [1,2,3] represents the series `T_0 + 2*T_1 + 3*T_2`.

Parameters **c1, c2** : array_like

1-D arrays of Chebyshev series coefficients ordered from low to high.

Returns **out** : ndarray

Array representing the Chebyshev series of their sum.

See also:

chebsub, *chebmul*, *chebdiv*, *chebpow*

Notes

Unlike multiplication, division, etc., the sum of two Chebyshev series is a Chebyshev series (without having to "reproject" the result onto the basis set) so addition, just like that of "standard" polynomials, is simply "component-wise."

Examples

```
>>> from numpy.polynomial import chebyshev as C
>>> c1 = (1,2,3)
>>> c2 = (3,2,1)
>>> C.chebadd(c1,c2)
array([ 4.,  4.,  4.])
```

numpy.polynomial.chebyshev.**chebsub**(*c1*, *c2*)

Subtract one Chebyshev series from another.

Returns the difference of two Chebyshev series *c1* - *c2*. The sequences of coefficients are from lowest order term to highest, i.e., [1,2,3] represents the series `T_0 + 2*T_1 + 3*T_2`.

Parameters **c1, c2** : array_like

1-D arrays of Chebyshev series coefficients ordered from low to high.

Returns **out** : ndarray

Of Chebyshev series coefficients representing their difference.

See also:

chebadd, *chebmul*, *chebdiv*, *chebpow*

Notes

Unlike multiplication, division, etc., the difference of two Chebyshev series is a Chebyshev series (without having to "reproject" the result onto the basis set) so subtraction, just like that of "standard" polynomials, is simply "component-wise."

Examples

```
>>> from numpy.polynomial import chebyshev as C
>>> c1 = (1,2,3)
>>> c2 = (3,2,1)
>>> C.chebsub(c1,c2)
array([-2.,  0.,  2.])
>>> C.chebsub(c2,c1) # -C.chebsub(c1,c2)
array([ 2.,  0., -2.])
```

numpy.polynomial.chebyshev.**chebmul**(*c1*, *c2*)

Multiply one Chebyshev series by another.

Returns the product of two Chebyshev series *c1* * *c2*. The arguments are sequences of coefficients, from lowest order "term" to highest, e.g., [1,2,3] represents the series `T_0 + 2*T_1 + 3*T_2`.

Parameters **c1, c2** : array_like

1-D arrays of Chebyshev series coefficients ordered from low to high.

Returns **out** : ndarray

Of Chebyshev series coefficients representing their product.

See also:

chebadd, *chebsub*, *chebdiv*, *chebpow*

Notes

In general, the (polynomial) product of two C-series results in terms that are not in the Chebyshev polynomial basis set. Thus, to express the product as a C-series, it is typically necessary to "reproject" the product onto said basis set, which typically produces "unintuitive live" (but correct) results; see Examples section below.

Examples

```
>>> from numpy.polynomial import chebyshev as C
>>> c1 = (1,2,3)
>>> c2 = (3,2,1)
>>> C.chebmul(c1,c2) # multiplication requires "reprojection"
array([  6.5,  12. ,  12. ,   4. ,   1.5])
```

numpy.polynomial.chebyshev.**chebmulx**(*c*)

Multiply a Chebyshev series by x.

Multiply the polynomial *c* by x, where x is the independent variable.

Parameters **c** : array_like

1-D array of Chebyshev series coefficients ordered from low to high.

Returns **out** : ndarray

Array representing the result of the multiplication.

Notes

New in version 1.5.0.

numpy.polynomial.chebyshev.**chebdiv**(*c1*, *c2*)

Divide one Chebyshev series by another.

Returns the quotient-with-remainder of two Chebyshev series *c1* / *c2*. The arguments are sequences of coefficients from lowest order "term" to highest, e.g., [1,2,3] represents the series `T_0 + 2*T_1 + 3*T_2`.

Parameters **c1, c2** : array_like

1-D arrays of Chebyshev series coefficients ordered from low to high.

Returns **[quo, rem]** : ndarrays

Of Chebyshev series coefficients representing the quotient and remainder.

See also:

chebadd, *chebsub*, *chebmul*, *chebpow*

Notes

In general, the (polynomial) division of one C-series by another results in quotient and remainder terms that are not in the Chebyshev polynomial basis set. Thus, to express these results as C-series, it is typically necessary to "reproject" the results onto said basis set, which typically produces "unintuitive" (but correct) results; see Examples section below.

Examples

```
>>> from numpy.polynomial import chebyshev as C
>>> c1 = (1,2,3)
>>> c2 = (3,2,1)
>>> C.chebdiv(c1,c2) # quotient "intuitive," remainder not
```

(continues on next page)

(continued from previous page)

```
(array([ 3.]), array([-8., -4.]))
>>> c2 = (0,1,2,3)
>>> C.chebdiv(c2,c1) # neither "intuitive"
(array([ 0.,  2.]), array([-2., -4.]))
```

numpy.polynomial.chebyshev.**chebpow**(*c*, *pow*, *maxpower=16*)

Raise a Chebyshev series to a power.

Returns the Chebyshev series *c* raised to the power *pow*. The argument *c* is a sequence of coefficients ordered from low to high. i.e., [1,2,3] is the series `T_0 + 2*T_1 + 3*T_2.`

Parameters **c** : array_like

1-D array of Chebyshev series coefficients ordered from low to high.

pow : integer

Power to which the series will be raised

maxpower : integer, optional

Maximum power allowed. This is mainly to limit growth of the series to unmanageable size. Default is 16

Returns **coef** : ndarray

Chebyshev series of power.

See also:

chebadd, *chebsub*, *chebmul*, *chebdiv*

Quadrature

chebgauss(deg)	Gauss-Chebyshev quadrature.
chebweight(x)	The weight function of the Chebyshev polynomials.

numpy.polynomial.chebyshev.**chebgauss**(*deg*)

Gauss-Chebyshev quadrature.

Computes the sample points and weights for Gauss-Chebyshev quadrature. These sample points and weights will correctly integrate polynomials of degree $2*deg-1$ or less over the interval $[-1, 1]$ with the weight function $f(x) = 1/\sqrt{1-x^2}$.

Parameters **deg** : int

Number of sample points and weights. It must be >= 1.

Returns **x** : ndarray

1-D ndarray containing the sample points.

y : ndarray

1-D ndarray containing the weights.

Notes

New in version 1.7.0.

The results have only been tested up to degree 100, higher degrees may be problematic. For Gauss-Chebyshev there are closed form solutions for the sample points and weights. If n = *deg*, then

$$x_i = \cos(\pi(2i - 1)/(2n))$$

$$w_i = \pi/n$$

numpy.polynomial.chebyshev.**chebweight**(*x*)

The weight function of the Chebyshev polynomials.

The weight function is $1/\sqrt{1 - x^2}$ and the interval of integration is $[-1, 1]$. The Chebyshev polynomials are orthogonal, but not normalized, with respect to this weight function.

Parameters **x** : array_like

Values at which the weight function will be computed.

Returns **w** : ndarray

The weight function at *x*.

Notes

New in version 1.7.0.

Miscellaneous

chebcompanion(c)	Return the scaled companion matrix of c.
chebdomain	
chebzero	
chebone	
chebx	
chebtrim(c[, tol])	Remove “small” “trailing” coefficients from a polynomial.
chebline(off, scl)	Chebyshev series whose graph is a straight line.
cheb2poly(c)	Convert a Chebyshev series to a polynomial.
poly2cheb(pol)	Convert a polynomial to a Chebyshev series.

numpy.polynomial.chebyshev.**chebcompanion**(*c*)

Return the scaled companion matrix of c.

The basis polynomials are scaled so that the companion matrix is symmetric when *c* is a Chebyshev basis polynomial. This provides better eigenvalue estimates than the unscaled case and for basis polynomials the eigenvalues are guaranteed to be real if *numpy.linalg.eigvalsh* is used to obtain them.

Parameters **c** : array_like

1-D array of Chebyshev series coefficients ordered from low to high degree.

Returns **mat** : ndarray

Scaled companion matrix of dimensions (deg, deg).

Notes

New in version 1.7.0.

numpy.polynomial.chebyshev.**chebdomain = array([-1, 1])**

numpy.polynomial.chebyshev.**chebzero = array([0])**

numpy.polynomial.chebyshev.**chebone = array([1])**

numpy.polynomial.chebyshev.**chebx = array([0, 1])**

numpy.polynomial.chebyshev.**chebtrim**(*c*, *tol=0*)

Remove "small" "trailing" coefficients from a polynomial.

"Small" means "small in absolute value" and is controlled by the parameter *tol*; "trailing" means highest order coefficient(s), e.g., in `[0, 1, 1, 0, 0]` (which represents `0 + x + x**2 + 0*x**3 + 0*x**4`) both the 3-rd and 4-th order coefficients would be "trimmed."

Parameters **c** : array_like

1-d array of coefficients, ordered from lowest order to highest.

tol : number, optional

Trailing (i.e., highest order) elements with absolute value less than or equal to *tol* (default value is zero) are removed.

Returns **trimmed** : ndarray

1-d array with trailing zeros removed. If the resulting series would be empty, a series containing a single zero is returned.

Raises **ValueError**

If *tol* < 0

See also:

`trimseq`

Examples

```
>>> from numpy.polynomial import polyutils as pu
>>> pu.trimcoef((0,0,3,0,5,0,0))
array([ 0.,  0.,  3.,  0.,  5.])
>>> pu.trimcoef((0,0,1e-3,0,1e-5,0,0),1e-3) # item == tol is trimmed
array([ 0.])
>>> i = complex(0,1) # works for complex
>>> pu.trimcoef((3e-4,1e-3*(1-i),5e-4,2e-5*(1+i)), 1e-3)
array([ 0.0003+0.j   ,  0.0010-0.001j])
```

numpy.polynomial.chebyshev.**chebline**(*off*, *scl*)

Chebyshev series whose graph is a straight line.

Parameters **off, scl** : scalars

The specified line is given by `off + scl*x`.

Returns **y** : ndarray

This module's representation of the Chebyshev series for `off + scl*x`.

See also:

`polyline`

Examples

```
>>> import numpy.polynomial.chebyshev as C
>>> C.chebline(3,2)
array([3, 2])
>>> C.chebval(-3, C.chebline(3,2)) # should be -3
-3.0
```

numpy.polynomial.chebyshev.**cheb2poly**(*c*)

Convert a Chebyshev series to a polynomial.

Convert an array representing the coefficients of a Chebyshev series, ordered from lowest degree to highest, to an array of the coefficients of the equivalent polynomial (relative to the "standard" basis) ordered from lowest to highest degree.

Parameters **c** : array_like

1-D array containing the Chebyshev series coefficients, ordered from lowest order term to highest.

Returns **pol** : ndarray

1-D array containing the coefficients of the equivalent polynomial (relative to the "standard" basis) ordered from lowest order term to highest.

See also:

poly2cheb

Notes

The easy way to do conversions between polynomial basis sets is to use the convert method of a class instance.

Examples

```
>>> from numpy import polynomial as P
>>> c = P.Chebyshev(range(4))
>>> c
Chebyshev([ 0.,  1.,  2.,  3.], [-1.,  1.])
>>> p = c.convert(kind=P.Polynomial)
>>> p
Polynomial([ -2.,  -8.,   4.,  12.], [-1.,  1.])
>>> P.cheb2poly(range(4))
array([ -2.,  -8.,   4.,  12.])
```

numpy.polynomial.chebyshev.**poly2cheb**(*pol*)

Convert a polynomial to a Chebyshev series.

Convert an array representing the coefficients of a polynomial (relative to the "standard" basis) ordered from lowest degree to highest, to an array of the coefficients of the equivalent Chebyshev series, ordered from lowest to highest degree.

Parameters **pol** : array_like

1-D array containing the polynomial coefficients

Returns **c** : ndarray

1-D array containing the coefficients of the equivalent Chebyshev series.

See also:

cheb2poly

Notes

The easy way to do conversions between polynomial basis sets is to use the convert method of a class instance.

Examples

```
>>> from numpy import polynomial as P
>>> p = P.Polynomial(range(4))
>>> p
Polynomial([ 0.,  1.,  2.,  3.], domain=[-1,  1], window=[-1,  1])
>>> c = p.convert(kind=P.Chebyshev)
>>> c
Chebyshev([ 1.  ,  3.25,  1.  ,  0.75], domain=[-1,  1], window=[-1,  1])
>>> P.poly2cheb(range(4))
array([ 1.  ,  3.25,  1.  ,  0.75])
```

Legendre Module (`numpy.polynomial.legendre`)

New in version 1.6.0.

This module provides a number of objects (mostly functions) useful for dealing with Legendre series, including a *Legendre* class that encapsulates the usual arithmetic operations. (General information on how this module represents and works with such polynomials is in the docstring for its "parent" sub-package, `numpy.polynomial`).

Legendre Class

Legendre(coef[, domain, window])	A Legendre series class.

class numpy.polynomial.legendre.**Legendre**(*coef*, *domain=None*, *window=None*)

A Legendre series class.

The Legendre class provides the standard Python numerical methods '+', '-', '*', '//', '%', 'divmod', '**', and '()' as well as the attributes and methods listed in the `ABCPolyBase` documentation.

Parameters **coef** : array_like

Legendre coefficients in order of increasing degree, i.e., `(1, 2, 3)` gives `1*P_0(x) + 2*P_1(x) + 3*P_2(x)`.

domain : (2,) array_like, optional

Domain to use. The interval `[domain[0], domain[1]]` is mapped to the interval `[window[0], window[1]]` by shifting and scaling. The default value is [-1, 1].

window : (2,) array_like, optional

Window, see `domain` for its use. The default value is [-1, 1].

New in version 1.6.0.

Methods

`__call__`(arg)	Call self as a function.
`basis`(deg[, domain, window])	Series basis polynomial of degree *deg*.
`cast`(series[, domain, window])	Convert series to series of this class.
`convert`([domain, kind, window])	Convert series to a different kind and/or domain and/or window.
`copy`()	Return a copy.
`cutdeg`(deg)	Truncate series to the given degree.
`degree`()	The degree of the series.
`deriv`([m])	Differentiate.
`fit`(x, y, deg[, domain, rcond, full, w, window])	Least squares fit to data.
`fromroots`(roots[, domain, window])	Return series instance that has the specified roots.
`has_samecoef`(other)	Check if coefficients match.
`has_samedomain`(other)	Check if domains match.
`has_sametype`(other)	Check if types match.
`has_samewindow`(other)	Check if windows match.
`identity`([domain, window])	Identity function.
`integ`([m, k, lbnd])	Integrate.
`linspace`([n, domain])	Return x, y values at equally spaced points in domain.
`mapparms`()	Return the mapping parameters.
`roots`()	Return the roots of the series polynomial.
`trim`([tol])	Remove trailing coefficients
`truncate`(size)	Truncate series to length *size*.

Legendre.**__call__**(*arg*)
Call self as a function.

classmethod Legendre.**basis**(*deg*, *domain=None*, *window=None*)
Series basis polynomial of degree *deg*.

Returns the series representing the basis polynomial of degree *deg*.

New in version 1.7.0.

Parameters **deg** : int

Degree of the basis polynomial for the series. Must be >= 0.

domain : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form `[beg, end]`, where `beg` and `end` are the endpoints of the window. If None is given then the class window is used. The default is None.

Returns **new_series** : series

A series with the coefficient of the *deg* term set to one and all others zero.

classmethod Legendre.**cast**(*series*, *domain=None*, *window=None*)
Convert series to series of this class.

The *series* is expected to be an instance of some polynomial series of one of the types supported by by the numpy.polynomial module, but could be some other class that supports the convert method.

New in version 1.7.0.

Parameters **series** : series

The series instance to be converted.

domain : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form `[beg, end]`, where `beg` and `end` are the endpoints of the window. If None is given then the class window is used. The default is None.

Returns **new_series** : series

A series of the same kind as the calling class and equal to *series* when evaluated.

See also:

convert similar instance method

Legendre.**convert**(*domain=None*, *kind=None*, *window=None*)
Convert series to a different kind and/or domain and/or window.

Parameters **domain** : array_like, optional

The domain of the converted series. If the value is None, the default domain of *kind* is used.

kind : class, optional

The polynomial series type class to which the current instance should be converted. If kind is None, then the class of the current instance is used.

window : array_like, optional

The window of the converted series. If the value is None, the default window of *kind* is used.

Returns **new_series** : series

The returned class can be of different type than the current instance and/or have a different domain and/or different window.

Notes

Conversion between domains and class types can result in numerically ill defined series.

Legendre.**copy**()
Return a copy.

Returns **new_series** : series

Copy of self.

Legendre.**cutdeg**(*deg*)
Truncate series to the given degree.

Reduce the degree of the series to *deg* by discarding the high order terms. If *deg* is greater than the current degree a copy of the current series is returned. This can be useful in least squares where the coefficients of the high degree terms may be very small.

New in version 1.5.0.

Parameters **deg** : non-negative int

The series is reduced to degree *deg* by discarding the high order terms. The value of *deg* must be a non-negative integer.

Returns **new_series** : series

New instance of series with reduced degree.

Legendre.**degree**()
The degree of the series.

New in version 1.5.0.

Returns **degree** : int

Degree of the series, one less than the number of coefficients.

Legendre.**deriv**(*m=1*)
Differentiate.

Return a series instance of that is the derivative of the current series.

Parameters **m** : non-negative int

Find the derivative of order *m*.

Returns **new_series** : series

A new series representing the derivative. The domain is the same as the domain of the differentiated series.

classmethod Legendre.**fit**(*x*, *y*, *deg*, *domain=None*, *rcond=None*, *full=False*, *w=None*, *window=None*)
Least squares fit to data.

Return a series instance that is the least squares fit to the data *y* sampled at *x*. The domain of the returned instance can be specified and this will often result in a superior fit with less chance of ill conditioning.

Parameters **x** : array_like, shape (M,)

x-coordinates of the M sample points `(x[i], y[i])`.

y : array_like, shape (M,) or (M, K)

y-coordinates of the sample points. Several data sets of sample points sharing the same x-coordinates can be fitted at once by passing in a 2D-array that contains one dataset per column.

deg : int or 1-D array_like

Degree(s) of the fitting polynomials. If *deg* is a single integer all terms up to and including the *deg*'th term are included in the fit. For NumPy versions >= 1.11.0 a list of integers specifying the degrees of the terms to include may be used instead.

domain : {None, [beg, end], []}, optional

Domain to use for the returned series. If `None`, then a minimal domain that covers the points *x* is chosen. If `[]` the class domain is used. The default value was the class domain in NumPy 1.4 and `None` in later versions. The `[]` option was added in numpy 1.5.0.

rcond : float, optional

Relative condition number of the fit. Singular values smaller than this relative to the largest singular value will be ignored. The default value is len(x)*eps, where eps is the relative precision of the float type, about 2e-16 in most cases.

full : bool, optional

Switch determining nature of return value. When it is False (the default) just the coefficients are returned, when True diagnostic information from the singular value decomposition is also returned.

w : array_like, shape (M,), optional

Weights. If not None the contribution of each point `(x[i],y[i])` to the fit is weighted by *w[i]*. Ideally the weights are chosen so that the errors of the products `w[i]*y[i]` all have the same variance. The default value is None.

New in version 1.5.0.

window : {[beg, end]}, optional

Window to use for the returned series. The default value is the default class domain

New in version 1.6.0.

Returns **new_series** : series

A series that represents the least squares fit to the data and has the domain specified in the call.

[resid, rank, sv, rcond] : list

These values are only returned if *full* = True

resid – sum of squared residuals of the least squares fit rank – the numerical rank of the scaled Vandermonde matrix sv – singular values of the scaled Vandermonde matrix rcond – value of *rcond*.

For more details, see *linalg.lstsq*.

classmethod `Legendre.`**fromroots**(*roots*, *domain=[]*, *window=None*)

Return series instance that has the specified roots.

Returns a series representing the product `(x - r[0])*(x - r[1])*...*(x - r[n-1])`, where `r` is a list of roots.

Parameters **roots** : array_like

List of roots.

domain : {[], None, array_like}, optional

Domain for the resulting series. If None the domain is the interval from the smallest root to the largest. If [] the domain is the class domain. The default is [].

window : {None, array_like}, optional

Window for the returned series. If None the class window is used. The default is None.

Returns **new_series** : series

Series with the specified roots.

Legendre.**has_samecoef**(*other*)
Check if coefficients match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `coef` attribute.

Returns **bool** : boolean

True if the coefficients are the same, False otherwise.

Legendre.**has_samedomain**(*other*)
Check if domains match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `domain` attribute.

Returns **bool** : boolean

True if the domains are the same, False otherwise.

Legendre.**has_sametype**(*other*)
Check if types match.

New in version 1.7.0.

Parameters **other** : object

Class instance.

Returns **bool** : boolean

True if other is same class as self

Legendre.**has_samewindow**(*other*)
Check if windows match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `window` attribute.

Returns **bool** : boolean

True if the windows are the same, False otherwise.

classmethod Legendre.**identity**(*domain=None*, *window=None*)
Identity function.

If `p` is the returned series, then `p(x) == x` for all values of x.

Parameters **domain** : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form `[beg, end]`, where `beg` and `end` are the endpoints of the window. If None is given then the class window is used. The default is None.

Returns **new_series** : series

Series of representing the identity.

`Legendre.`**`integ`**(*m=1*, *k=[]*, *lbnd=None*)

Integrate.

Return a series instance that is the definite integral of the current series.

Parameters **m** : non-negative int

The number of integrations to perform.

k : array_like

Integration constants. The first constant is applied to the first integration, the second to the second, and so on. The list of values must less than or equal to *m* in length and any missing values are set to zero.

lbnd : Scalar

The lower bound of the definite integral.

Returns **new_series** : series

A new series representing the integral. The domain is the same as the domain of the integrated series.

`Legendre.`**`linspace`**(*n=100*, *domain=None*)

Return x, y values at equally spaced points in domain.

Returns the x, y values at *n* linearly spaced points across the domain. Here y is the value of the polynomial at the points x. By default the domain is the same as that of the series instance. This method is intended mostly as a plotting aid.

New in version 1.5.0.

Parameters **n** : int, optional

Number of point pairs to return. The default value is 100.

domain : {None, array_like}, optional

If not None, the specified domain is used instead of that of the calling instance. It should be of the form `[beg,end]`. The default is None which case the class domain is used.

Returns **x, y** : ndarray

x is equal to linspace(self.domain[0], self.domain[1], n) and y is the series evaluated at element of x.

`Legendre.`**`mapparms`**()

Return the mapping parameters.

The returned values define a linear map `off + scl*x` that is applied to the input arguments before the series is evaluated. The map depends on the `domain` and `window`; if the current `domain` is equal to the `window` the resulting map is the identity. If the coefficients of the series instance are to be used by themselves outside this class, then the linear function must be substituted for the `x` in the standard representation of the base polynomials.

Returns **off, scl** : float or complex

The mapping function is defined by `off + scl*x`.

Notes

If the current domain is the interval `[l1, r1]` and the window is `[l2, r2]`, then the linear mapping function `L` is defined by the equations:

```
L(l1) = l2
L(r1) = r2
```

`Legendre.`**`roots`**`()`
Return the roots of the series polynomial.

Compute the roots for the series. Note that the accuracy of the roots decrease the further outside the domain they lie.

Returns **roots** : ndarray

Array containing the roots of the series.

`Legendre.`**`trim`**`(`*`tol=0`*`)`
Remove trailing coefficients

Remove trailing coefficients until a coefficient is reached whose absolute value greater than *tol* or the beginning of the series is reached. If all the coefficients would be removed the series is set to `[0]`. A new series instance is returned with the new coefficients. The current instance remains unchanged.

Parameters **tol** : non-negative number.

All trailing coefficients less than *tol* will be removed.

Returns **new_series** : series

Contains the new set of coefficients.

`Legendre.`**`truncate`**`(`*`size`*`)`
Truncate series to length *size*.

Reduce the series to length *size* by discarding the high degree terms. The value of *size* must be a positive integer. This can be useful in least squares where the coefficients of the high degree terms may be very small.

Parameters **size** : positive int

The series is reduced to length *size* by discarding the high degree terms. The value of *size* must be a positive integer.

Returns **new_series** : series

New instance of series with truncated coefficients.

Basics

legval(x, c[, tensor])	Evaluate a Legendre series at points x.
legval2d(x, y, c)	Evaluate a 2-D Legendre series at points (x, y).
legval3d(x, y, z, c)	Evaluate a 3-D Legendre series at points (x, y, z).
leggrid2d(x, y, c)	Evaluate a 2-D Legendre series on the Cartesian product of x and y.

Continued on next page

Table 115 – continued from previous page

leggrid3d(x, y, z, c)	Evaluate a 3-D Legendre series on the Cartesian product of x, y, and z.
legroots(c)	Compute the roots of a Legendre series.
legfromroots(roots)	Generate a Legendre series with given roots.

numpy.polynomial.legendre.**legval**(*x*, *c*, *tensor=True*)

Evaluate a Legendre series at points x.

If *c* is of length *n + 1*, this function returns the value:

$$p(x) = c_0 * L_0(x) + c_1 * L_1(x) + ... + c_n * L_n(x)$$

The parameter *x* is converted to an array only if it is a tuple or a list, otherwise it is treated as a scalar. In either case, either *x* or its elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* is a 1-D array, then *p(x)* will have the same shape as *x*. If *c* is multidimensional, then the shape of the result depends on the value of *tensor*. If *tensor* is true the shape will be c.shape[1:] + x.shape. If *tensor* is false the shape will be c.shape[1:]. Note that scalars have shape (,).

Trailing zeros in the coefficients will be used in the evaluation, so they should be avoided if efficiency is a concern.

Parameters **x** : array_like, compatible object

If *x* is a list or tuple, it is converted to an ndarray, otherwise it is left unchanged and treated as a scalar. In either case, *x* or its elements must support addition and multiplication with with themselves and with the elements of *c*.

c : array_like

Array of coefficients ordered so that the coefficients for terms of degree n are contained in c[n]. If *c* is multidimensional the remaining indices enumerate multiple polynomials. In the two dimensional case the coefficients may be thought of as stored in the columns of *c*.

tensor : boolean, optional

If True, the shape of the coefficient array is extended with ones on the right, one for each dimension of *x*. Scalars have dimension 0 for this action. The result is that every column of coefficients in *c* is evaluated for every element of *x*. If False, *x* is broadcast over the columns of *c* for the evaluation. This keyword is useful when *c* is multidimensional. The default value is True.

New in version 1.7.0.

Returns **values** : ndarray, algebra_like

The shape of the return value is described above.

See also:

legval2d, *leggrid2d*, *legval3d*, *leggrid3d*

Notes

The evaluation uses Clenshaw recursion, aka synthetic division.

numpy.polynomial.legendre.**legval2d**(*x*, *y*, *c*)
Evaluate a 2-D Legendre series at points (x, y).

This function returns the values:

$$p(x,y) = \sum_{i,j} c_{i,j} * L_i(x) * L_j(y)$$

The parameters *x* and *y* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars and they must have the same shape after conversion. In either case, either *x* and *y* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* is a 1-D array a one is implicitly appended to its shape to make it 2-D. The shape of the result will be c.shape[2:] + x.shape.

Parameters **x, y** : array_like, compatible objects

The two dimensional series is evaluated at the points *(x, y)*, where *x* and *y* must have the same shape. If *x* or *y* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and if it isn't an ndarray it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficient of the term of multi-degree i,j is contained in `c[i,j]`. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional Legendre series at points formed from pairs of corresponding values from *x* and *y*.

See also:

legval, *leggrid2d*, *legval3d*, *leggrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.legendre.**legval3d**(*x*, *y*, *z*, *c*)
Evaluate a 3-D Legendre series at points (x, y, z).

This function returns the values:

$$p(x,y,z) = \sum_{i,j,k} c_{i,j,k} * L_i(x) * L_j(y) * L_k(z)$$

The parameters *x*, *y*, and *z* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars and they must have the same shape after conversion. In either case, either *x*, *y*, and *z* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than 3 dimensions, ones are implicitly appended to its shape to make it 3-D. The shape of the result will be c.shape[3:] + x.shape.

Parameters **x, y, z** : array_like, compatible object

The three dimensional series is evaluated at the points *(x, y, z)*, where *x*, *y*, and *z* must have the same shape. If any of *x*, *y*, or *z* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and if it isn't an ndarray it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficient of the term of multi-degree i,j,k is contained in `c[i,j,k]`. If *c* has dimension greater than 3 the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the multidimensional polynomial on points formed with triples of corresponding values from *x*, *y*, and *z*.

See also:

legval, *legval2d*, *leggrid2d*, *leggrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.legendre.**leggrid2d**(*x*, *y*, *c*)

Evaluate a 2-D Legendre series on the Cartesian product of x and y.

This function returns the values:

$$p(a,b) = \sum_{i,j} c_{i,j} * L_i(a) * L_j(b)$$

where the points *(a, b)* consist of all pairs formed by taking *a* from *x* and *b* from *y*. The resulting points form a grid with *x* in the first dimension and *y* in the second.

The parameters *x* and *y* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars. In either case, either *x* and *y* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than two dimensions, ones are implicitly appended to its shape to make it 2-D. The shape of the result will be c.shape[2:] + x.shape + y.shape.

Parameters **x, y** : array_like, compatible objects

The two dimensional series is evaluated at the points in the Cartesian product of *x* and *y*. If *x* or *y* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and, if it isn't an ndarray, it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficient of the term of multi-degree i,j is contained in *c[i,j]*. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional Chebyshev series at points in the Cartesian product of *x* and *y*.

See also:

legval, *legval2d*, *legval3d*, *leggrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.legendre.**leggrid3d**(*x*, *y*, *z*, *c*)

Evaluate a 3-D Legendre series on the Cartesian product of x, y, and z.

This function returns the values:

$$p(a,b,c) = \sum_{i,j,k} c_{i,j,k} * L_i(a) * L_j(b) * L_k(c)$$

where the points *(a, b, c)* consist of all triples formed by taking *a* from *x*, *b* from *y*, and *c* from *z*. The resulting points form a grid with *x* in the first dimension, *y* in the second, and *z* in the third.

The parameters *x*, *y*, and *z* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars. In either case, either *x*, *y*, and *z* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than three dimensions, ones are implicitly appended to its shape to make it 3-D. The shape of the result will be c.shape[3:] + x.shape + y.shape + z.shape.

Parameters **x, y, z** : array_like, compatible objects

The three dimensional series is evaluated at the points in the Cartesian product of *x*, *y*, and *z*. If *x*,'y', or *z* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and, if it isn't an ndarray, it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficients for terms of degree i,j are contained in `c[i,j]`. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional polynomial at points in the Cartesian product of *x* and *y*.

See also:

legval, *legval2d*, *leggrid2d*, *legval3d*

Notes

New in version 1.7.0.

numpy.polynomial.legendre.**legroots**(*c*)

Compute the roots of a Legendre series.

Return the roots (a.k.a. "zeros") of the polynomial

$$p(x) = \sum_i c[i] * L_i(x).$$

Parameters **c** : 1-D array_like

1-D array of coefficients.

Returns **out** : ndarray

Array of the roots of the series. If all the roots are real, then *out* is also real, otherwise it is complex.

See also:

`polyroots`, `chebroots`, `lagroots`, `hermroots`, `hermeroots`

Notes

The root estimates are obtained as the eigenvalues of the companion matrix, Roots far from the origin of the complex plane may have large errors due to the numerical instability of the series for such values. Roots with multiplicity greater than 1 will also show larger errors as the value of the series near such points is relatively insensitive to errors in the roots. Isolated roots near the origin can be improved by a few iterations of Newton's method.

The Legendre series basis polynomials aren't powers of `x` so the results of this function may seem unintuitive.

Examples

```
>>> import numpy.polynomial.legendre as leg
>>> leg.legroots((1, 2, 3, 4)) # 4L_3 + 3L_2 + 2L_1 + 1L_0, all real roots
array([-0.85099543, -0.11407192,  0.51506735])
```

numpy.polynomial.legendre.**legfromroots**(*roots*)

Generate a Legendre series with given roots.

The function returns the coefficients of the polynomial

$$p(x) = (x - r_0) * (x - r_1) * ... * (x - r_n),$$

in Legendre form, where the *r_n* are the roots specified in *roots*. If a zero has multiplicity n, then it must appear in *roots* n times. For instance, if 2 is a root of multiplicity three and 3 is a root of multiplicity 2, then *roots* looks something like [2, 2, 2, 3, 3]. The roots can appear in any order.

If the returned coefficients are c, then

$$p(x) = c_0 + c_1 * L_1(x) + ... + c_n * L_n(x)$$

The coefficient of the last term is not generally 1 for monic polynomials in Legendre form.

Parameters **roots** : array_like

Sequence containing the roots.

Returns **out** : ndarray

1-D array of coefficients. If all roots are real then *out* is a real array, if some of the roots are complex, then *out* is complex even if all the coefficients in the result are real (see Examples below).

See also:

`polyfromroots`, `chebfromroots`, `lagfromroots`, `hermfromroots`, `hermefromroots`.

Examples

```
>>> import numpy.polynomial.legendre as L
>>> L.legfromroots((-1,0,1)) # x^3 - x relative to the standard basis
array([ 0. , -0.4,  0. ,  0.4])
>>> j = complex(0,1)
>>> L.legfromroots((-j,j)) # x^2 + 1 relative to the standard basis
array([ 1.33333333+0.j,  0.00000000+0.j,  0.66666667+0.j])
```

Fitting

legfit(x, y, deg[, rcond, full, w])	Least squares fit of Legendre series to data.
legvander(x, deg)	Pseudo-Vandermonde matrix of given degree.
legvander2d(x, y, deg)	Pseudo-Vandermonde matrix of given degrees.
legvander3d(x, y, z, deg)	Pseudo-Vandermonde matrix of given degrees.

numpy.polynomial.legendre.**legfit**(*x*, *y*, *deg*, *rcond=None*, *full=False*, *w=None*)

Least squares fit of Legendre series to data.

Return the coefficients of a Legendre series of degree *deg* that is the least squares fit to the data values *y* given at points *x*. If *y* is 1-D the returned coefficients will also be 1-D. If *y* is 2-D multiple fits are done, one for each column of *y*, and the resulting coefficients are stored in the corresponding columns of a 2-D return. The fitted polynomial(s) are in the form

$$p(x) = c_0 + c_1 * L_1(x) + ... + c_n * L_n(x),$$

where *n* is *deg*.

Parameters **x** : array_like, shape (M,)

x-coordinates of the M sample points `(x[i], y[i])`.

y : array_like, shape (M,) or (M, K)

y-coordinates of the sample points. Several data sets of sample points sharing the same x-coordinates can be fitted at once by passing in a 2D-array that contains one dataset per column.

deg : int or 1-D array_like

Degree(s) of the fitting polynomials. If *deg* is a single integer all terms up to and including the *deg*'th term are included in the fit. For NumPy versions >= 1.11.0 a list of integers specifying the degrees of the terms to include may be used instead.

rcond : float, optional

Relative condition number of the fit. Singular values smaller than this relative to the largest singular value will be ignored. The default value is len(x)*eps, where eps is the relative precision of the float type, about 2e-16 in most cases.

full : bool, optional

Switch determining nature of return value. When it is False (the default) just the coefficients are returned, when True diagnostic information from the singular value decomposition is also returned.

w : array_like, shape (*M*,), optional

Weights. If not None, the contribution of each point `(x[i],y[i])` to the fit is weighted by *w[i]*. Ideally the weights are chosen so that the errors of the products `w[i]*y[i]` all have the same variance. The default value is None.

New in version 1.5.0.

Returns **coef** : ndarray, shape (M,) or (M, K)

Legendre coefficients ordered from low to high. If *y* was 2-D, the coefficients for the data in column k of *y* are in column *k*. If *deg* is specified as a list, coefficients for terms not included in the fit are set equal to zero in the returned *coef*.

[residuals, rank, singular_values, rcond] : list

These values are only returned if *full* = True

resid – sum of squared residuals of the least squares fit rank – the numerical rank of the scaled Vandermonde matrix sv – singular values of the scaled Vandermonde matrix rcond – value of *rcond*.

For more details, see *linalg.lstsq*.

Warns **RankWarning**

The rank of the coefficient matrix in the least-squares fit is deficient. The warning is only raised if *full* = False. The warnings can be turned off by

```
>>> import warnings
>>> warnings.simplefilter('ignore', RankWarning)
```

See also:

`chebfit`, `polyfit`, `lagfit`, `hermfit`, `hermefit`

legval Evaluates a Legendre series.

legvander Vandermonde matrix of Legendre series.

legweight Legendre weight function (= 1).

`linalg.lstsq` Computes a least-squares fit from the matrix.

`scipy.interpolate.UnivariateSpline` Computes spline fits.

Notes

The solution is the coefficients of the Legendre series *p* that minimizes the sum of the weighted squared errors

$$E = \sum_j w_j^2 * |y_j - p(x_j)|^2,$$

where w_j are the weights. This problem is solved by setting up as the (typically) overdetermined matrix equation

$$V(x) * c = w * y,$$

where *V* is the weighted pseudo Vandermonde matrix of *x*, *c* are the coefficients to be solved for, *w* are the weights, and *y* are the observed values. This equation is then solved using the singular value decomposition of *V*.

If some of the singular values of *V* are so small that they are neglected, then a *RankWarning* will be issued. This means that the coefficient values may be poorly determined. Using a lower order fit will usually get rid of the warning. The *rcond* parameter can also be set to a value smaller than its default, but the resulting fit may be spurious and have large contributions from roundoff error.

Fits using Legendre series are usually better conditioned than fits using power series, but much can depend on the distribution of the sample points and the smoothness of the data. If the quality of the fit is inadequate splines may be a good alternative.

References

[R72]

numpy.polynomial.legendre.**legvander**(*x*, *deg*)

Pseudo-Vandermonde matrix of given degree.

Returns the pseudo-Vandermonde matrix of degree *deg* and sample points *x*. The pseudo-Vandermonde matrix is defined by

$$V[..., i] = L_i(x)$$

where *0 <= i <= deg*. The leading indices of *V* index the elements of *x* and the last index is the degree of the Legendre polynomial.

If *c* is a 1-D array of coefficients of length *n + 1* and *V* is the array `V = legvander(x, n)`, then `np.dot(V, c)` and `legval(x, c)` are the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of Legendre series of the same degree and sample points.

Parameters **x** : array_like

Array of points. The dtype is converted to float64 or complex128 depending on whether any of the elements are complex. If *x* is scalar it is converted to a 1-D array.

deg : int

Degree of the resulting matrix.

Returns **vander** : ndarray

The pseudo-Vandermonde matrix. The shape of the returned matrix is `x.shape + (deg + 1,)`, where The last index is the degree of the corresponding Legendre polynomial. The dtype will be the same as the converted *x*.

numpy.polynomial.legendre.**legvander2d**(*x*, *y*, *deg*)

Pseudo-Vandermonde matrix of given degrees.

Returns the pseudo-Vandermonde matrix of degrees *deg* and sample points *(x, y)*. The pseudo-Vandermonde matrix is defined by

$$V[..., (deg[1] + 1) * i + j] = L_i(x) * L_j(y),$$

where *0 <= i <= deg[0]* and *0 <= j <= deg[1]*. The leading indices of *V* index the points *(x, y)* and the last index encodes the degrees of the Legendre polynomials.

If `V = legvander2d(x, y, [xdeg, ydeg])`, then the columns of *V* correspond to the elements of a 2-D coefficient array *c* of shape (xdeg + 1, ydeg + 1) in the order

$$c_{00}, c_{01}, c_{02}..., c_{10}, c_{11}, c_{12}...$$

and `np.dot(V, c.flat)` and `legval2d(x, y, c)` will be the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of 2-D Legendre series of the same degrees and sample points.

Parameters **x, y** : array_like

Arrays of point coordinates, all of the same shape. The dtypes will be converted to either float64 or complex128 depending on whether any of the elements are complex. Scalars are converted to 1-D arrays.

deg : list of ints

List of maximum degrees of the form [x_deg, y_deg].

Returns **vander2d** : ndarray

The shape of the returned matrix is `x.shape + (order,)`, where $order = (deg[0] + 1) * (deg([1] + 1)$. The dtype will be the same as the converted *x* and *y*.

See also:

legvander, legvander3d., *legval3d*

Notes

New in version 1.7.0.

numpy.polynomial.legendre.**legvander3d**(*x*, *y*, *z*, *deg*)
Pseudo-Vandermonde matrix of given degrees.

Returns the pseudo-Vandermonde matrix of degrees *deg* and sample points *(x, y, z)*. If *l, m, n* are the given degrees in *x, y, z*, then The pseudo-Vandermonde matrix is defined by

$$V[..., (m+1)(n+1)i + (n+1)j + k] = L_i(x) * L_j(y) * L_k(z),$$

where *0 <= i <= l*, *0 <= j <= m*, and *0 <= j <= n*. The leading indices of *V* index the points *(x, y, z)* and the last index encodes the degrees of the Legendre polynomials.

If `V = legvander3d(x, y, z, [xdeg, ydeg, zdeg])`, then the columns of *V* correspond to the elements of a 3-D coefficient array *c* of shape (xdeg + 1, ydeg + 1, zdeg + 1) in the order

$$c_{000}, c_{001}, c_{002}, ..., c_{010}, c_{011}, c_{012}, ...$$

and `np.dot(V, c.flat)` and `legval3d(x, y, z, c)` will be the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of 3-D Legendre series of the same degrees and sample points.

Parameters **x, y, z** : array_like

Arrays of point coordinates, all of the same shape. The dtypes will be converted to either float64 or complex128 depending on whether any of the elements are complex. Scalars are converted to 1-D arrays.

deg : list of ints

List of maximum degrees of the form [x_deg, y_deg, z_deg].

Returns **vander3d** : ndarray

The shape of the returned matrix is `x.shape + (order,)`, where $order = (deg[0] + 1) * (deg([1] + 1) * (deg[2] + 1)$. The dtype will be the same as the converted *x*, *y*, and *z*.

See also:

legvander, legvander3d., *legval3d*

Notes

New in version 1.7.0.

Calculus

legder(c[, m, scl, axis])	Differentiate a Legendre series.
legint(c[, m, k, lbnd, scl, axis])	Integrate a Legendre series.

numpy.polynomial.legendre.**legder**(*c*, *m=1*, *scl=1*, *axis=0*)

Differentiate a Legendre series.

Returns the Legendre series coefficients *c* differentiated *m* times along *axis*. At each iteration the result is multiplied by *scl* (the scaling factor is for use in a linear change of variable). The argument *c* is an array of coefficients from low to high degree along each axis, e.g., [1,2,3] represents the series `1*L_0 + 2*L_1 + 3*L_2` while [[1,2],[1,2]] represents `1*L_0(x)*L_0(y) + 1*L_1(x)*L_0(y) + 2*L_0(x)*L_1(y) + 2*L_1(x)*L_1(y)` if axis=0 is `x` and axis=1 is `y`.

Parameters **c** : array_like

Array of Legendre series coefficients. If c is multidimensional the different axis correspond to different variables with the degree in each axis given by the corresponding index.

m : int, optional

Number of derivatives taken, must be non-negative. (Default: 1)

scl : scalar, optional

Each differentiation is multiplied by *scl*. The end result is multiplication by `scl**m`. This is for use in a linear change of variable. (Default: 1)

axis : int, optional

Axis over which the derivative is taken. (Default: 0).

New in version 1.7.0.

Returns **der** : ndarray

Legendre series of the derivative.

See also:

legint

Notes

In general, the result of differentiating a Legendre series does not resemble the same operation on a power series. Thus the result of this function may be "unintuitive," albeit correct; see Examples section below.

Examples

```
>>> from numpy.polynomial import legendre as L
>>> c = (1,2,3,4)
>>> L.legder(c)
array([  6.,   9.,  20.])
>>> L.legder(c, 3)
array([ 60.])
>>> L.legder(c, scl=-1)
array([ -6.,  -9., -20.])
>>> L.legder(c, 2,-1)
array([  9.,  60.])
```

numpy.polynomial.legendre.**legint**(*c*, *m=1*, *k=[]*, *lbnd=0*, *scl=1*, *axis=0*)

Integrate a Legendre series.

Returns the Legendre series coefficients *c* integrated *m* times from *lbnd* along *axis*. At each iteration the resulting series is **multiplied** by *scl* and an integration constant, *k*, is added. The scaling factor is for use in a linear change of variable. ("Buyer beware": note that, depending on what one is doing, one may want *scl* to be the reciprocal of what one might expect; for more information, see the Notes section below.) The argument *c* is an array of coefficients from low to high degree along each axis, e.g., [1,2,3] represents the series `L_0 + 2*L_1 + 3*L_2` while [[1,2],[1,2]] represents `1*L_0(x)*L_0(y) + 1*L_1(x)*L_0(y) + 2*L_0(x)*L_1(y) + 2*L_1(x)*L_1(y)` if axis=0 is `x` and axis=1 is `y`.

Parameters **c** : array_like

Array of Legendre series coefficients. If c is multidimensional the different axis correspond to different variables with the degree in each axis given by the corresponding index.

m : int, optional

Order of integration, must be positive. (Default: 1)

k : {[], list, scalar}, optional

Integration constant(s). The value of the first integral at `lbnd` is the first value in the list, the value of the second integral at `lbnd` is the second value, etc. If `k == []` (the default), all constants are set to zero. If `m == 1`, a single scalar can be given instead of a list.

lbnd : scalar, optional

The lower bound of the integral. (Default: 0)

scl : scalar, optional

Following each integration the result is *multiplied* by *scl* before the integration constant is added. (Default: 1)

axis : int, optional

Axis over which the integral is taken. (Default: 0).

New in version 1.7.0.

Returns **S** : ndarray

Legendre series coefficient array of the integral.

Raises **ValueError**

If `m < 0`, `len(k) > m`, `np.ndim(lbnd) != 0`, or `np.ndim(scl) != 0`.

See also:

legder

Notes

Note that the result of each integration is *multiplied* by *scl*. Why is this important to note? Say one is making a linear change of variable $u = ax + b$ in an integral relative to x. Then $dx = du/a$, so one will need to set *scl* equal to $1/a$ - perhaps not what one would have first thought.

Also note that, in general, the result of integrating a C-series needs to be "reprojected" onto the C-series basis set. Thus, typically, the result of this function is "unintuitive," albeit correct; see Examples section below.

Examples

```
>>> from numpy.polynomial import legendre as L
>>> c = (1,2,3)
>>> L.legint(c)
array([ 0.33333333,  0.4       ,  0.66666667,  0.6       ])
>>> L.legint(c, 3)
array([  1.66666667e-02,  -1.78571429e-02,   4.76190476e-02,
        -1.73472348e-18,   1.90476190e-02,   9.52380952e-03])
>>> L.legint(c, k=3)
array([ 3.33333333,  0.4       ,  0.66666667,  0.6       ])
>>> L.legint(c, lbnd=-2)
array([ 7.33333333,  0.4       ,  0.66666667,  0.6       ])
>>> L.legint(c, scl=2)
array([ 0.66666667,  0.8       ,  1.33333333,  1.2       ])
```

Algebra

legadd(c1, c2)	Add one Legendre series to another.
legsub(c1, c2)	Subtract one Legendre series from another.
legmul(c1, c2)	Multiply one Legendre series by another.
legmulx(c)	Multiply a Legendre series by x.
legdiv(c1, c2)	Divide one Legendre series by another.
legpow(c, pow[, maxpower])	Raise a Legendre series to a power.

numpy.polynomial.legendre.**legadd**(*c1*, *c2*)

Add one Legendre series to another.

Returns the sum of two Legendre series *c1* + *c2*. The arguments are sequences of coefficients ordered from lowest order term to highest, i.e., [1,2,3] represents the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c1, c2** : array_like

1-D arrays of Legendre series coefficients ordered from low to high.

Returns **out** : ndarray

Array representing the Legendre series of their sum.

See also:

legsub, *legmul*, *legdiv*, *legpow*

Notes

Unlike multiplication, division, etc., the sum of two Legendre series is a Legendre series (without having to "re-project" the result onto the basis set) so addition, just like that of "standard" polynomials, is simply "component-wise."

Examples

```
>>> from numpy.polynomial import legendre as L
>>> c1 = (1,2,3)
>>> c2 = (3,2,1)
>>> L.legadd(c1,c2)
array([ 4.,  4.,  4.])
```

numpy.polynomial.legendre.**legsub**(*c1*, *c2*)

Subtract one Legendre series from another.

Returns the difference of two Legendre series *c1* - *c2*. The sequences of coefficients are from lowest order term to highest, i.e., [1,2,3] represents the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c1, c2** : array_like

1-D arrays of Legendre series coefficients ordered from low to high.

Returns **out** : ndarray

Of Legendre series coefficients representing their difference.

See also:

legadd, *legmul*, *legdiv*, *legpow*

Notes

Unlike multiplication, division, etc., the difference of two Legendre series is a Legendre series (without having to "reproject" the result onto the basis set) so subtraction, just like that of "standard" polynomials, is simply "component-wise."

Examples

```
>>> from numpy.polynomial import legendre as L
>>> c1 = (1,2,3)
>>> c2 = (3,2,1)
>>> L.legsub(c1,c2)
array([-2.,  0.,  2.])
>>> L.legsub(c2,c1) # -C.legsub(c1,c2)
array([ 2.,  0., -2.])
```

numpy.polynomial.legendre.**legmul**(*c1*, *c2*)

Multiply one Legendre series by another.

Returns the product of two Legendre series *c1* * *c2*. The arguments are sequences of coefficients, from lowest order "term" to highest, e.g., [1,2,3] represents the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c1, c2** : array_like

1-D arrays of Legendre series coefficients ordered from low to high.

Returns **out** : ndarray

Of Legendre series coefficients representing their product.

See also:

legadd, *legsub*, *legdiv*, *legpow*

Notes

In general, the (polynomial) product of two C-series results in terms that are not in the Legendre polynomial basis set. Thus, to express the product as a Legendre series, it is necessary to "reproject" the product onto said basis set, which may produce "unintuitive" (but correct) results; see Examples section below.

Examples

```
>>> from numpy.polynomial import legendre as L
>>> c1 = (1,2,3)
>>> c2 = (3,2)
>>> P.legmul(c1,c2) # multiplication requires "reprojection"
array([  4.33333333,  10.4       ,  11.66666667,   3.6       ])
```

numpy.polynomial.legendre.**legmulx**(*c*)

Multiply a Legendre series by x.

Multiply the Legendre series *c* by x, where x is the independent variable.

Parameters **c** : array_like

1-D array of Legendre series coefficients ordered from low to high.

Returns **out** : ndarray

Array representing the result of the multiplication.

Notes

The multiplication uses the recursion relationship for Legendre polynomials in the form

$$xP_i(x) = ((i+1)*P_{i+1}(x) + i*P_{i-1}(x))/(2i+1)$$

numpy.polynomial.legendre.**legdiv**(*c1*, *c2*)

Divide one Legendre series by another.

Returns the quotient-with-remainder of two Legendre series *c1* / *c2*. The arguments are sequences of coefficients from lowest order "term" to highest, e.g., [1,2,3] represents the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c1, c2** : array_like

1-D arrays of Legendre series coefficients ordered from low to high.

Returns **quo, rem** : ndarrays

Of Legendre series coefficients representing the quotient and remainder.

See also:

legadd, *legsub*, *legmul*, *legpow*

Notes

In general, the (polynomial) division of one Legendre series by another results in quotient and remainder terms that are not in the Legendre polynomial basis set. Thus, to express these results as a Legendre series, it is necessary to "reproject" the results onto the Legendre basis set, which may produce "unintuitive" (but correct) results; see Examples section below.

Examples

```
>>> from numpy.polynomial import legendre as L
>>> c1 = (1,2,3)
>>> c2 = (3,2,1)
>>> L.legdiv(c1,c2) # quotient "intuitive," remainder not
(array([ 3.]), array([-8., -4.]))
>>> c2 = (0,1,2,3)
>>> L.legdiv(c2,c1) # neither "intuitive"
(array([-0.07407407,  1.66666667]), array([-1.03703704, -2.51851852]))
```

numpy.polynomial.legendre.**legpow**(*c*, *pow*, *maxpower=16*)

Raise a Legendre series to a power.

Returns the Legendre series *c* raised to the power *pow*. The argument *c* is a sequence of coefficients ordered from low to high. i.e., [1,2,3] is the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c** : array_like

1-D array of Legendre series coefficients ordered from low to high.

pow : integer

Power to which the series will be raised

maxpower : integer, optional

Maximum power allowed. This is mainly to limit growth of the series to unmanageable size. Default is 16

Returns **coef** : ndarray

Legendre series of power.

See also:

legadd, *legsub*, *legmul*, *legdiv*

Quadrature

leggauss(deg)	Gauss-Legendre quadrature.
legweight(x)	Weight function of the Legendre polynomials.

numpy.polynomial.legendre.**leggauss**(*deg*)

Gauss-Legendre quadrature.

Computes the sample points and weights for Gauss-Legendre quadrature. These sample points and weights will correctly integrate polynomials of degree $2 * deg - 1$ or less over the interval $[-1, 1]$ with the weight function $f(x) = 1$.

Parameters **deg** : int

Number of sample points and weights. It must be >= 1.

Returns **x** : ndarray

1-D ndarray containing the sample points.

y : ndarray

1-D ndarray containing the weights.

Notes

New in version 1.7.0.

The results have only been tested up to degree 100, higher degrees may be problematic. The weights are determined by using the fact that

$$w_k = c/(L'_n(x_k) * L_{n-1}(x_k))$$

where c is a constant independent of k and x_k is the k'th root of L_n, and then scaling the results to get the right value when integrating 1.

numpy.polynomial.legendre.**legweight**(*x*)
Weight function of the Legendre polynomials.

The weight function is 1 and the interval of integration is $[-1, 1]$. The Legendre polynomials are orthogonal, but not normalized, with respect to this weight function.

Parameters **x** : array_like

Values at which the weight function will be computed.

Returns **w** : ndarray

The weight function at *x*.

Notes

New in version 1.7.0.

Miscellaneous

legcompanion(c)	Return the scaled companion matrix of c.
legdomain	
legzero	
legone	
legx	
legtrim(c[, tol])	Remove "small" "trailing" coefficients from a polynomial.
legline(off, scl)	Legendre series whose graph is a straight line.
leg2poly(c)	Convert a Legendre series to a polynomial.
poly2leg(pol)	Convert a polynomial to a Legendre series.

numpy.polynomial.legendre.**legcompanion**(*c*)
Return the scaled companion matrix of c.

The basis polynomials are scaled so that the companion matrix is symmetric when c is an Legendre basis polynomial. This provides better eigenvalue estimates than the unscaled case and for basis polynomials the eigenvalues are guaranteed to be real if *numpy.linalg.eigvalsh* is used to obtain them.

Parameters **c** : array_like

1-D array of Legendre series coefficients ordered from low to high degree.

Returns **mat** : ndarray

Scaled companion matrix of dimensions (deg, deg).

Notes

New in version 1.7.0.

numpy.polynomial.legendre.**legdomain = array([-1, 1])**

numpy.polynomial.legendre.**legzero = array([0])**

numpy.polynomial.legendre.**legone = array([1])**

numpy.polynomial.legendre.**legx = array([0, 1])**

numpy.polynomial.legendre.**legtrim**(*c*, *tol=0*)

Remove "small" "trailing" coefficients from a polynomial.

"Small" means "small in absolute value" and is controlled by the parameter *tol*; "trailing" means highest order coefficient(s), e.g., in `[0, 1, 1, 0, 0]` (which represents `0 + x + x**2 + 0*x**3 + 0*x**4`) both the 3-rd and 4-th order coefficients would be "trimmed."

Parameters **c** : array_like

1-d array of coefficients, ordered from lowest order to highest.

tol : number, optional

Trailing (i.e., highest order) elements with absolute value less than or equal to *tol* (default value is zero) are removed.

Returns **trimmed** : ndarray

1-d array with trailing zeros removed. If the resulting series would be empty, a series containing a single zero is returned.

Raises **ValueError**

If *tol* < 0

See also:

`trimseq`

Examples

```
>>> from numpy.polynomial import polyutils as pu
>>> pu.trimcoef((0,0,3,0,5,0,0))
array([ 0.,  0.,  3.,  0.,  5.])
>>> pu.trimcoef((0,0,1e-3,0,1e-5,0,0),1e-3) # item == tol is trimmed
array([ 0.])
>>> i = complex(0,1) # works for complex
>>> pu.trimcoef((3e-4,1e-3*(1-i),5e-4,2e-5*(1+i)), 1e-3)
array([ 0.0003+0.j   ,  0.0010-0.001j])
```

numpy.polynomial.legendre.**legline**(*off*, *scl*)

Legendre series whose graph is a straight line.

Parameters **off, scl** : scalars

The specified line is given by `off + scl*x`.

Returns **y** : ndarray

This module's representation of the Legendre series for `off + scl*x`.

See also:

`polyline`, `chebline`

Examples

```
>>> import numpy.polynomial.legendre as L
>>> L.legline(3,2)
array([3, 2])
>>> L.legval(-3, L.legline(3,2)) # should be -3
-3.0
```

numpy.polynomial.legendre.**leg2poly**(*c*)

Convert a Legendre series to a polynomial.

Convert an array representing the coefficients of a Legendre series, ordered from lowest degree to highest, to an array of the coefficients of the equivalent polynomial (relative to the "standard" basis) ordered from lowest to highest degree.

Parameters **c** : array_like

1-D array containing the Legendre series coefficients, ordered from lowest order term to highest.

Returns **pol** : ndarray

1-D array containing the coefficients of the equivalent polynomial (relative to the "standard" basis) ordered from lowest order term to highest.

See also:

poly2leg

Notes

The easy way to do conversions between polynomial basis sets is to use the convert method of a class instance.

Examples

```
>>> c = P.Legendre(range(4))
>>> c
Legendre([ 0.,  1.,  2.,  3.], [-1.,  1.])
>>> p = c.convert(kind=P.Polynomial)
>>> p
Polynomial([-1. , -3.5,  3. ,  7.5], [-1.,  1.])
>>> P.leg2poly(range(4))
array([-1. , -3.5,  3. ,  7.5])
```

numpy.polynomial.legendre.**poly2leg**(*pol*)

Convert a polynomial to a Legendre series.

Convert an array representing the coefficients of a polynomial (relative to the "standard" basis) ordered from lowest degree to highest, to an array of the coefficients of the equivalent Legendre series, ordered from lowest to highest degree.

Parameters **pol** : array_like

1-D array containing the polynomial coefficients

Returns **c** : ndarray

1-D array containing the coefficients of the equivalent Legendre series.

See also:

leg2poly

Notes

The easy way to do conversions between polynomial basis sets is to use the convert method of a class instance.

Examples

```
>>> from numpy import polynomial as P
>>> p = P.Polynomial(np.arange(4))
>>> p
Polynomial([ 0.,  1.,  2.,  3.], domain=[-1,  1], window=[-1,  1])
>>> c = P.Legendre(P.legendre.poly2leg(p.coef))
>>> c
Legendre([ 1.  ,  3.25,  1.  ,  0.75], domain=[-1,  1], window=[-1,  1])
```

Laguerre Module (`numpy.polynomial.laguerre`)

New in version 1.6.0.

This module provides a number of objects (mostly functions) useful for dealing with Laguerre series, including a *Laguerre* class that encapsulates the usual arithmetic operations. (General information on how this module represents and works with such polynomials is in the docstring for its "parent" sub-package, `numpy.polynomial`).

Laguerre Class

Laguerre(coef[, domain, window])	A Laguerre series class.

class numpy.polynomial.laguerre.**Laguerre**(*coef*, *domain=None*, *window=None*)

A Laguerre series class.

The Laguerre class provides the standard Python numerical methods '+', '-', '*', '//', '%', 'divmod', '**', and '()' as well as the attributes and methods listed in the `ABCPolyBase` documentation.

Parameters **coef** : array_like

Laguerre coefficients in order of increasing degree, i.e, `(1, 2, 3)` gives `1*L_0(x) + 2*L_1(X) + 3*L_2(x)`.

domain : (2,) array_like, optional

Domain to use. The interval `[domain[0], domain[1]]` is mapped to the interval `[window[0], window[1]]` by shifting and scaling. The default value is [0, 1].

window : (2,) array_like, optional

Window, see `domain` for its use. The default value is [0, 1].

New in version 1.6.0.

Methods

`__call__`(arg)	Call self as a function.
`basis`(deg[, domain, window])	Series basis polynomial of degree *deg*.
`cast`(series[, domain, window])	Convert series to series of this class.
`convert`([domain, kind, window])	Convert series to a different kind and/or domain and/or window.
`copy`()	Return a copy.
`cutdeg`(deg)	Truncate series to the given degree.
`degree`()	The degree of the series.
`deriv`([m])	Differentiate.
`fit`(x, y, deg[, domain, rcond, full, w, window])	Least squares fit to data.
`fromroots`(roots[, domain, window])	Return series instance that has the specified roots.
`has_samecoef`(other)	Check if coefficients match.
`has_samedomain`(other)	Check if domains match.
`has_sametype`(other)	Check if types match.
`has_samewindow`(other)	Check if windows match.
`identity`([domain, window])	Identity function.
`integ`([m, k, lbnd])	Integrate.
`linspace`([n, domain])	Return x, y values at equally spaced points in domain.
`mapparms`()	Return the mapping parameters.
`roots`()	Return the roots of the series polynomial.
`trim`([tol])	Remove trailing coefficients
`truncate`(size)	Truncate series to length *size*.

Laguerre.**__call__**(*arg*)
Call self as a function.

classmethod Laguerre.**basis**(*deg*, *domain=None*, *window=None*)
Series basis polynomial of degree *deg*.

Returns the series representing the basis polynomial of degree *deg*.

New in version 1.7.0.

Parameters **deg** : int

Degree of the basis polynomial for the series. Must be >= 0.

domain : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form `[beg, end]`, where `beg` and `end` are the endpoints of the window. If None is given then the class window is used. The default is None.

Returns **new_series** : series

A series with the coefficient of the *deg* term set to one and all others zero.

classmethod Laguerre.**cast**(*series*, *domain=None*, *window=None*)
Convert series to series of this class.

The *series* is expected to be an instance of some polynomial series of one of the types supported by by the numpy.polynomial module, but could be some other class that supports the convert method.

New in version 1.7.0.

Parameters **series** : series

The series instance to be converted.

domain : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form `[beg, end]`, where `beg` and `end` are the endpoints of the window. If None is given then the class window is used. The default is None.

Returns **new_series** : series

A series of the same kind as the calling class and equal to *series* when evaluated.

See also:

convert similar instance method

Laguerre.**convert**(*domain=None*, *kind=None*, *window=None*)
Convert series to a different kind and/or domain and/or window.

Parameters **domain** : array_like, optional

The domain of the converted series. If the value is None, the default domain of *kind* is used.

kind : class, optional

The polynomial series type class to which the current instance should be converted. If kind is None, then the class of the current instance is used.

window : array_like, optional

The window of the converted series. If the value is None, the default window of *kind* is used.

Returns **new_series** : series

The returned class can be of different type than the current instance and/or have a different domain and/or different window.

Notes

Conversion between domains and class types can result in numerically ill defined series.

Laguerre.**copy**()
Return a copy.

Returns **new_series** : series

Copy of self.

Laguerre.**cutdeg**(*deg*)
Truncate series to the given degree.

Reduce the degree of the series to *deg* by discarding the high order terms. If *deg* is greater than the current degree a copy of the current series is returned. This can be useful in least squares where the coefficients of the high degree terms may be very small.

New in version 1.5.0.

Parameters **deg** : non-negative int

The series is reduced to degree *deg* by discarding the high order terms. The value of *deg* must be a non-negative integer.

Returns **new_series** : series

New instance of series with reduced degree.

Laguerre.**degree**()
The degree of the series.

New in version 1.5.0.

Returns **degree** : int

Degree of the series, one less than the number of coefficients.

Laguerre.**deriv**(*m=1*)
Differentiate.

Return a series instance of that is the derivative of the current series.

Parameters **m** : non-negative int

Find the derivative of order *m*.

Returns **new_series** : series

A new series representing the derivative. The domain is the same as the domain of the differentiated series.

classmethod Laguerre.**fit**(*x*, *y*, *deg*, *domain=None*, *rcond=None*, *full=False*, *w=None*, *window=None*)
Least squares fit to data.

Return a series instance that is the least squares fit to the data *y* sampled at *x*. The domain of the returned instance can be specified and this will often result in a superior fit with less chance of ill conditioning.

Parameters **x** : array_like, shape (M,)

x-coordinates of the M sample points `(x[i], y[i])`.

y : array_like, shape (M,) or (M, K)

y-coordinates of the sample points. Several data sets of sample points sharing the same x-coordinates can be fitted at once by passing in a 2D-array that contains one dataset per column.

deg : int or 1-D array_like

Degree(s) of the fitting polynomials. If *deg* is a single integer all terms up to and including the *deg*'th term are included in the fit. For NumPy versions >= 1.11.0 a list of integers specifying the degrees of the terms to include may be used instead.

domain : {None, [beg, end], []}, optional

Domain to use for the returned series. If `None`, then a minimal domain that covers the points *x* is chosen. If `[]` the class domain is used. The default value was the class domain in NumPy 1.4 and `None` in later versions. The `[]` option was added in numpy 1.5.0.

rcond : float, optional

Relative condition number of the fit. Singular values smaller than this relative to the largest singular value will be ignored. The default value is len(x)*eps, where eps is the relative precision of the float type, about 2e-16 in most cases.

full : bool, optional

Switch determining nature of return value. When it is False (the default) just the coefficients are returned, when True diagnostic information from the singular value decomposition is also returned.

w : array_like, shape (M,), optional

Weights. If not None the contribution of each point `(x[i],y[i])` to the fit is weighted by *w[i]*. Ideally the weights are chosen so that the errors of the products `w[i]*y[i]` all have the same variance. The default value is None.

New in version 1.5.0.

window : {[beg, end]}, optional

Window to use for the returned series. The default value is the default class domain

New in version 1.6.0.

Returns **new_series** : series

A series that represents the least squares fit to the data and has the domain specified in the call.

[resid, rank, sv, rcond] : list

These values are only returned if *full* = True

resid – sum of squared residuals of the least squares fit rank – the numerical rank of the scaled Vandermonde matrix sv – singular values of the scaled Vandermonde matrix rcond – value of *rcond*.

For more details, see *linalg.lstsq*.

classmethod `Laguerre.`**fromroots**(*roots*, *domain=[]*, *window=None*)

Return series instance that has the specified roots.

Returns a series representing the product `(x - r[0])*(x - r[1])*...*(x - r[n-1])`, where `r` is a list of roots.

Parameters **roots** : array_like

List of roots.

domain : {[], None, array_like}, optional

Domain for the resulting series. If None the domain is the interval from the smallest root to the largest. If [] the domain is the class domain. The default is [].

window : {None, array_like}, optional

Window for the returned series. If None the class window is used. The default is None.

Returns **new_series** : series

Series with the specified roots.

Laguerre.**has_samecoef**(*other*)
Check if coefficients match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `coef` attribute.

Returns **bool** : boolean

True if the coefficients are the same, False otherwise.

Laguerre.**has_samedomain**(*other*)
Check if domains match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `domain` attribute.

Returns **bool** : boolean

True if the domains are the same, False otherwise.

Laguerre.**has_sametype**(*other*)
Check if types match.

New in version 1.7.0.

Parameters **other** : object

Class instance.

Returns **bool** : boolean

True if other is same class as self

Laguerre.**has_samewindow**(*other*)
Check if windows match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `window` attribute.

Returns **bool** : boolean

True if the windows are the same, False otherwise.

classmethod Laguerre.**identity**(*domain=None*, *window=None*)
Identity function.

If `p` is the returned series, then `p(x) == x` for all values of x.

Parameters **domain** : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form `[beg, end]`, where `beg` and `end` are the endpoints of the window. If None is given then the class window is used. The default is None.

Returns **new_series** : series

Series of representing the identity.

`Laguerre.`**`integ`**(*m=1*, *k=[]*, *lbnd=None*)

Integrate.

Return a series instance that is the definite integral of the current series.

Parameters **m** : non-negative int

The number of integrations to perform.

k : array_like

Integration constants. The first constant is applied to the first integration, the second to the second, and so on. The list of values must less than or equal to *m* in length and any missing values are set to zero.

lbnd : Scalar

The lower bound of the definite integral.

Returns **new_series** : series

A new series representing the integral. The domain is the same as the domain of the integrated series.

`Laguerre.`**`linspace`**(*n=100*, *domain=None*)

Return x, y values at equally spaced points in domain.

Returns the x, y values at *n* linearly spaced points across the domain. Here y is the value of the polynomial at the points x. By default the domain is the same as that of the series instance. This method is intended mostly as a plotting aid.

New in version 1.5.0.

Parameters **n** : int, optional

Number of point pairs to return. The default value is 100.

domain : {None, array_like}, optional

If not None, the specified domain is used instead of that of the calling instance. It should be of the form `[beg,end]`. The default is None which case the class domain is used.

Returns **x, y** : ndarray

x is equal to linspace(self.domain[0], self.domain[1], n) and y is the series evaluated at element of x.

`Laguerre.`**`mapparms`**()

Return the mapping parameters.

The returned values define a linear map `off + scl*x` that is applied to the input arguments before the series is evaluated. The map depends on the `domain` and `window`; if the current `domain` is equal to the `window` the resulting map is the identity. If the coefficients of the series instance are to be used by themselves outside this class, then the linear function must be substituted for the `x` in the standard representation of the base polynomials.

Returns **off, scl** : float or complex

The mapping function is defined by `off + scl*x`.

Notes

If the current domain is the interval `[l1, r1]` and the window is `[l2, r2]`, then the linear mapping function `L` is defined by the equations:

```
L(l1) = l2
L(r1) = r2
```

Laguerre.**roots**()
Return the roots of the series polynomial.

Compute the roots for the series. Note that the accuracy of the roots decrease the further outside the domain they lie.

Returns **roots** : ndarray

Array containing the roots of the series.

Laguerre.**trim**(*tol=0*)
Remove trailing coefficients

Remove trailing coefficients until a coefficient is reached whose absolute value greater than *tol* or the beginning of the series is reached. If all the coefficients would be removed the series is set to `[0]`. A new series instance is returned with the new coefficients. The current instance remains unchanged.

Parameters **tol** : non-negative number.

All trailing coefficients less than *tol* will be removed.

Returns **new_series** : series

Contains the new set of coefficients.

Laguerre.**truncate**(*size*)
Truncate series to length *size*.

Reduce the series to length *size* by discarding the high degree terms. The value of *size* must be a positive integer. This can be useful in least squares where the coefficients of the high degree terms may be very small.

Parameters **size** : positive int

The series is reduced to length *size* by discarding the high degree terms. The value of *size* must be a positive integer.

Returns **new_series** : series

New instance of series with truncated coefficients.

Basics

lagval(x, c[, tensor])	Evaluate a Laguerre series at points x.
lagval2d(x, y, c)	Evaluate a 2-D Laguerre series at points (x, y).
lagval3d(x, y, z, c)	Evaluate a 3-D Laguerre series at points (x, y, z).
laggrid2d(x, y, c)	Evaluate a 2-D Laguerre series on the Cartesian product of x and y.

Continued on next page

Table 123 – continued from previous page

laggrid3d(x, y, z, c)	Evaluate a 3-D Laguerre series on the Cartesian product of x, y, and z.
lagroots(c)	Compute the roots of a Laguerre series.
lagfromroots(roots)	Generate a Laguerre series with given roots.

numpy.polynomial.laguerre.**lagval**(*x*, *c*, *tensor=True*)

Evaluate a Laguerre series at points x.

If *c* is of length *n + 1*, this function returns the value:

$$p(x) = c_0 * L_0(x) + c_1 * L_1(x) + ... + c_n * L_n(x)$$

The parameter *x* is converted to an array only if it is a tuple or a list, otherwise it is treated as a scalar. In either case, either *x* or its elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* is a 1-D array, then *p(x)* will have the same shape as *x*. If *c* is multidimensional, then the shape of the result depends on the value of *tensor*. If *tensor* is true the shape will be c.shape[1:] + x.shape. If *tensor* is false the shape will be c.shape[1:]. Note that scalars have shape (,).

Trailing zeros in the coefficients will be used in the evaluation, so they should be avoided if efficiency is a concern.

Parameters **x** : array_like, compatible object

If *x* is a list or tuple, it is converted to an ndarray, otherwise it is left unchanged and treated as a scalar. In either case, *x* or its elements must support addition and multiplication with with themselves and with the elements of *c*.

c : array_like

Array of coefficients ordered so that the coefficients for terms of degree n are contained in c[n]. If *c* is multidimensional the remaining indices enumerate multiple polynomials. In the two dimensional case the coefficients may be thought of as stored in the columns of *c*.

tensor : boolean, optional

If True, the shape of the coefficient array is extended with ones on the right, one for each dimension of *x*. Scalars have dimension 0 for this action. The result is that every column of coefficients in *c* is evaluated for every element of *x*. If False, *x* is broadcast over the columns of *c* for the evaluation. This keyword is useful when *c* is multidimensional. The default value is True.

New in version 1.7.0.

Returns **values** : ndarray, algebra_like

The shape of the return value is described above.

See also:

lagval2d, *laggrid2d*, *lagval3d*, *laggrid3d*

Notes

The evaluation uses Clenshaw recursion, aka synthetic division.

Examples

```
>>> from numpy.polynomial.laguerre import lagval
>>> coef = [1,2,3]
>>> lagval(1, coef)
-0.5
>>> lagval([[1,2],[3,4]], coef)
array([[-0.5, -4. ],
       [-4.5, -2. ]])
```

numpy.polynomial.laguerre.**lagval2d**(*x*, *y*, *c*)

Evaluate a 2-D Laguerre series at points (x, y).

This function returns the values:

$$p(x,y) = \sum_{i,j} c_{i,j} * L_i(x) * L_j(y)$$

The parameters *x* and *y* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars and they must have the same shape after conversion. In either case, either *x* and *y* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* is a 1-D array a one is implicitly appended to its shape to make it 2-D. The shape of the result will be c.shape[2:] + x.shape.

Parameters **x, y** : array_like, compatible objects

The two dimensional series is evaluated at the points *(x, y)*, where *x* and *y* must have the same shape. If *x* or *y* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and if it isn't an ndarray it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficient of the term of multi-degree i,j is contained in `c[i, j]`. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional polynomial at points formed with pairs of corresponding values from *x* and *y*.

See also:

lagval, *laggrid2d*, *lagval3d*, *laggrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.laguerre.**lagval3d**(*x*, *y*, *z*, *c*)

Evaluate a 3-D Laguerre series at points (x, y, z).

This function returns the values:

$$p(x,y,z) = \sum_{i,j,k} c_{i,j,k} * L_i(x) * L_j(y) * L_k(z)$$

The parameters *x*, *y*, and *z* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars and they must have the same shape after conversion. In either case, either *x*, *y*, and *z* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than 3 dimensions, ones are implicitly appended to its shape to make it 3-D. The shape of the result will be c.shape[3:] + x.shape.

Parameters **x, y, z** : array_like, compatible object

The three dimensional series is evaluated at the points *(x, y, z)*, where *x*, *y*, and *z* must have the same shape. If any of *x*, *y*, or *z* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and if it isn't an ndarray it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficient of the term of multi-degree i,j,k is contained in `c[i,j,k]`. If *c* has dimension greater than 3 the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the multidimension polynomial on points formed with triples of corresponding values from *x*, *y*, and *z*.

See also:

lagval, *lagval2d*, *laggrid2d*, *laggrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.laguerre.**laggrid2d**(*x*, *y*, *c*)

Evaluate a 2-D Laguerre series on the Cartesian product of x and y.

This function returns the values:

$$p(a,b) = \sum_{i,j} c_{i,j} * L_i(a) * L_j(b)$$

where the points *(a, b)* consist of all pairs formed by taking *a* from *x* and *b* from *y*. The resulting points form a grid with *x* in the first dimension and *y* in the second.

The parameters *x* and *y* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars. In either case, either *x* and *y* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than two dimensions, ones are implicitly appended to its shape to make it 2-D. The shape of the result will be c.shape[2:] + x.shape + y.shape.

Parameters **x, y** : array_like, compatible objects

The two dimensional series is evaluated at the points in the Cartesian product of *x* and *y*. If *x* or *y* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and, if it isn't an ndarray, it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficient of the term of multi-degree i,j is contained in *c[i,j]*. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional Chebyshev series at points in the Cartesian product of *x* and *y*.

See also:

lagval, *lagval2d*, *lagval3d*, *laggrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.laguerre.**laggrid3d**(*x*, *y*, *z*, *c*)

Evaluate a 3-D Laguerre series on the Cartesian product of x, y, and z.

This function returns the values:

$$p(a, b, c) = \sum_{i,j,k} c_{i,j,k} * L_i(a) * L_j(b) * L_k(c)$$

where the points *(a, b, c)* consist of all triples formed by taking *a* from *x*, *b* from *y*, and *c* from *z*. The resulting points form a grid with *x* in the first dimension, *y* in the second, and *z* in the third.

The parameters *x*, *y*, and *z* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars. In either case, either *x*, *y*, and *z* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than three dimensions, ones are implicitly appended to its shape to make it 3-D. The shape of the result will be c.shape[3:] + x.shape + y.shape + z.shape.

Parameters **x, y, z** : array_like, compatible objects

The three dimensional series is evaluated at the points in the Cartesian product of *x*, *y*, and *z*. If *x*,'y', or *z* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and, if it isn't an ndarray, it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficients for terms of degree i,j are contained in `c[i,j]`. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional polynomial at points in the Cartesian product of *x* and *y*.

See also:

lagval, *lagval2d*, *laggrid2d*, *lagval3d*

Notes

New in version 1.7.0.

numpy.polynomial.laguerre.**lagroots**(*c*)

Compute the roots of a Laguerre series.

Return the roots (a.k.a. "zeros") of the polynomial

$$p(x) = \sum_i c[i] * L_i(x).$$

Parameters **c** : 1-D array_like

1-D array of coefficients.

Returns **out** : ndarray

Array of the roots of the series. If all the roots are real, then *out* is also real, otherwise it is complex.

See also:

`polyroots`, `legroots`, `chebroots`, `hermroots`, `hermeroots`

Notes

The root estimates are obtained as the eigenvalues of the companion matrix, Roots far from the origin of the complex plane may have large errors due to the numerical instability of the series for such values. Roots with multiplicity greater than 1 will also show larger errors as the value of the series near such points is relatively insensitive to errors in the roots. Isolated roots near the origin can be improved by a few iterations of Newton's method.

The Laguerre series basis polynomials aren't powers of *x* so the results of this function may seem unintuitive.

Examples

```
>>> from numpy.polynomial.laguerre import lagroots, lagfromroots
>>> coef = lagfromroots([0, 1, 2])
>>> coef
array([  2.,  -8.,  12.,  -6.])
>>> lagroots(coef)
array([ -4.44089210e-16,   1.00000000e+00,   2.00000000e+00])
```

numpy.polynomial.laguerre.**lagfromroots**(*roots*)

Generate a Laguerre series with given roots.

The function returns the coefficients of the polynomial

$$p(x) = (x - r_0) * (x - r_1) * ... * (x - r_n),$$

in Laguerre form, where the *r_n* are the roots specified in *roots*. If a zero has multiplicity n, then it must appear in *roots* n times. For instance, if 2 is a root of multiplicity three and 3 is a root of multiplicity 2, then *roots* looks something like [2, 2, 2, 3, 3]. The roots can appear in any order.

If the returned coefficients are *c*, then

$$p(x) = c_0 + c_1 * L_1(x) + ... + c_n * L_n(x)$$

The coefficient of the last term is not generally 1 for monic polynomials in Laguerre form.

Parameters **roots** : array_like

Sequence containing the roots.

Returns **out** : ndarray

1-D array of coefficients. If all roots are real then *out* is a real array, if some of the roots are complex, then *out* is complex even if all the coefficients in the result are real (see Examples below).

See also:

`polyfromroots`, `legfromroots`, `chebfromroots`, `hermfromroots`, `hermefromroots`.

Examples

```
>>> from numpy.polynomial.laguerre import lagfromroots, lagval
>>> coef = lagfromroots((-1, 0, 1))
>>> lagval((-1, 0, 1), coef)
array([ 0.,  0.,  0.])
>>> coef = lagfromroots((-1j, 1j))
>>> lagval((-1j, 1j), coef)
array([ 0.+0.j,  0.+0.j])
```

Fitting

lagfit(x, y, deg[, rcond, full, w])	Least squares fit of Laguerre series to data.
lagvander(x, deg)	Pseudo-Vandermonde matrix of given degree.
lagvander2d(x, y, deg)	Pseudo-Vandermonde matrix of given degrees.
lagvander3d(x, y, z, deg)	Pseudo-Vandermonde matrix of given degrees.

numpy.polynomial.laguerre.**lagfit**(*x*, *y*, *deg*, *rcond=None*, *full=False*, *w=None*)

Least squares fit of Laguerre series to data.

Return the coefficients of a Laguerre series of degree *deg* that is the least squares fit to the data values *y* given at points *x*. If *y* is 1-D the returned coefficients will also be 1-D. If *y* is 2-D multiple fits are done, one for each column of *y*, and the resulting coefficients are stored in the corresponding columns of a 2-D return. The fitted polynomial(s) are in the form

$$p(x) = c_0 + c_1 * L_1(x) + ... + c_n * L_n(x),$$

where *n* is *deg*.

Parameters **x** : array_like, shape (M,)

x-coordinates of the M sample points `(x[i], y[i])`.

y : array_like, shape (M,) or (M, K)

y-coordinates of the sample points. Several data sets of sample points sharing the same x-coordinates can be fitted at once by passing in a 2D-array that contains one dataset per column.

deg : int or 1-D array_like

Degree(s) of the fitting polynomials. If *deg* is a single integer all terms up to and including the *deg*'th term are included in the fit. For NumPy versions >= 1.11.0 a list of integers specifying the degrees of the terms to include may be used instead.

rcond : float, optional

Relative condition number of the fit. Singular values smaller than this relative to the largest singular value will be ignored. The default value is len(x)*eps, where eps is the relative precision of the float type, about 2e-16 in most cases.

full : bool, optional

Switch determining nature of return value. When it is False (the default) just the coefficients are returned, when True diagnostic information from the singular value decomposition is also returned.

w : array_like, shape (*M*,), optional

Weights. If not None, the contribution of each point `(x[i],y[i])` to the fit is weighted by *w[i]*. Ideally the weights are chosen so that the errors of the products `w[i]*y[i]` all have the same variance. The default value is None.

Returns **coef** : ndarray, shape (M,) or (M, K)

Laguerre coefficients ordered from low to high. If *y* was 2-D, the coefficients for the data in column k of *y* are in column *k*.

[residuals, rank, singular_values, rcond] : list

These values are only returned if *full* = True

resid – sum of squared residuals of the least squares fit rank – the numerical rank of the scaled Vandermonde matrix sv – singular values of the scaled Vandermonde matrix rcond – value of *rcond*.

For more details, see *linalg.lstsq*.

Warns **RankWarning**

The rank of the coefficient matrix in the least-squares fit is deficient. The warning is only raised if *full* = False. The warnings can be turned off by

```
>>> import warnings
>>> warnings.simplefilter('ignore', RankWarning)
```

See also:

`chebfit`, `legfit`, `polyfit`, `hermfit`, `hermefit`

lagval Evaluates a Laguerre series.

lagvander pseudo Vandermonde matrix of Laguerre series.

lagweight Laguerre weight function.

`linalg.lstsq` Computes a least-squares fit from the matrix.

`scipy.interpolate.UnivariateSpline` Computes spline fits.

Notes

The solution is the coefficients of the Laguerre series *p* that minimizes the sum of the weighted squared errors

$$E = \sum_j w_j^2 * |y_j - p(x_j)|^2,$$

where the w_j are the weights. This problem is solved by setting up as the (typically) overdetermined matrix equation

$$V(x) * c = w * y,$$

where *V* is the weighted pseudo Vandermonde matrix of *x*, *c* are the coefficients to be solved for, *w* are the weights, and *y* are the observed values. This equation is then solved using the singular value decomposition of *V*.

If some of the singular values of *V* are so small that they are neglected, then a *RankWarning* will be issued. This means that the coefficient values may be poorly determined. Using a lower order fit will usually get rid of the

warning. The *rcond* parameter can also be set to a value smaller than its default, but the resulting fit may be spurious and have large contributions from roundoff error.

Fits using Laguerre series are probably most useful when the data can be approximated by `sqrt(w(x)) * p(x)`, where *w(x)* is the Laguerre weight. In that case the weight `sqrt(w(x[i])` should be used together with data values `y[i]/sqrt(w(x[i]))`. The weight function is available as *lagweight*.

References

[R71]

Examples

```
>>> from numpy.polynomial.laguerre import lagfit, lagval
>>> x = np.linspace(0, 10)
>>> err = np.random.randn(len(x))/10
>>> y = lagval(x, [1, 2, 3]) + err
>>> lagfit(x, y, 2)
array([ 0.96971004,  2.00193749,  3.00288744])
```

numpy.polynomial.laguerre.**lagvander**(*x*, *deg*)

Pseudo-Vandermonde matrix of given degree.

Returns the pseudo-Vandermonde matrix of degree *deg* and sample points *x*. The pseudo-Vandermonde matrix is defined by

$$V[..., i] = L_i(x)$$

where *0 <= i <= deg*. The leading indices of *V* index the elements of *x* and the last index is the degree of the Laguerre polynomial.

If *c* is a 1-D array of coefficients of length *n + 1* and *V* is the array `V = lagvander(x, n)`, then `np.dot(V, c)` and `lagval(x, c)` are the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of Laguerre series of the same degree and sample points.

Parameters **x** : array_like

Array of points. The dtype is converted to float64 or complex128 depending on whether any of the elements are complex. If *x* is scalar it is converted to a 1-D array.

deg : int

Degree of the resulting matrix.

Returns **vander** : ndarray

The pseudo-Vandermonde matrix. The shape of the returned matrix is `x.shape + (deg + 1,)`, where The last index is the degree of the corresponding Laguerre polynomial. The dtype will be the same as the converted *x*.

Examples

```
>>> from numpy.polynomial.laguerre import lagvander
>>> x = np.array([0, 1, 2])
>>> lagvander(x, 3)
```

(continues on next page)

(continued from previous page)

```
array([[ 1.        ,  1.        ,  1.        ,  1.        ],
       [ 1.        ,  0.        , -0.5       , -0.66666667],
       [ 1.        , -1.        , -1.        , -0.33333333]])
```

numpy.polynomial.laguerre.**lagvander2d**(*x*, *y*, *deg*)

Pseudo-Vandermonde matrix of given degrees.

Returns the pseudo-Vandermonde matrix of degrees *deg* and sample points *(x, y)*. The pseudo-Vandermonde matrix is defined by

$$V[..., (deg[1] + 1) * i + j] = L_i(x) * L_j(y),$$

where *0 <= i <= deg[0]* and *0 <= j <= deg[1]*. The leading indices of *V* index the points *(x, y)* and the last index encodes the degrees of the Laguerre polynomials.

If `V = lagvander2d(x, y, [xdeg, ydeg])`, then the columns of *V* correspond to the elements of a 2-D coefficient array *c* of shape (xdeg + 1, ydeg + 1) in the order

$$c_{00}, c_{01}, c_{02}..., c_{10}, c_{11}, c_{12}...$$

and `np.dot(V, c.flat)` and `lagval2d(x, y, c)` will be the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of 2-D Laguerre series of the same degrees and sample points.

Parameters **x, y** : array_like

Arrays of point coordinates, all of the same shape. The dtypes will be converted to either float64 or complex128 depending on whether any of the elements are complex. Scalars are converted to 1-D arrays.

deg : list of ints

List of maximum degrees of the form [x_deg, y_deg].

Returns **vander2d** : ndarray

The shape of the returned matrix is `x.shape + (order,)`, where $order = (deg[0] + 1) * (deg([1] + 1)$. The dtype will be the same as the converted *x* and *y*.

See also:

lagvander, lagvander3d., *lagval3d*

Notes

New in version 1.7.0.

numpy.polynomial.laguerre.**lagvander3d**(*x*, *y*, *z*, *deg*)

Pseudo-Vandermonde matrix of given degrees.

Returns the pseudo-Vandermonde matrix of degrees *deg* and sample points *(x, y, z)*. If *l, m, n* are the given degrees in *x, y, z*, then The pseudo-Vandermonde matrix is defined by

$$V[..., (m + 1)(n + 1)i + (n + 1)j + k] = L_i(x) * L_j(y) * L_k(z),$$

where *0 <= i <= l*, *0 <= j <= m*, and *0 <= j <= n*. The leading indices of *V* index the points *(x, y, z)* and the last index encodes the degrees of the Laguerre polynomials.

If `V = lagvander3d(x, y, z, [xdeg, ydeg, zdeg])`, then the columns of *V* correspond to the elements of a 3-D coefficient array *c* of shape (xdeg + 1, ydeg + 1, zdeg + 1) in the order

$$c_{000}, c_{001}, c_{002}, ..., c_{010}, c_{011}, c_{012}, ...$$

and `np.dot(V, c.flat)` and `lagval3d(x, y, z, c)` will be the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of 3-D Laguerre series of the same degrees and sample points.

Parameters **x, y, z** : array_like

Arrays of point coordinates, all of the same shape. The dtypes will be converted to either float64 or complex128 depending on whether any of the elements are complex. Scalars are converted to 1-D arrays.

deg : list of ints

List of maximum degrees of the form [x_deg, y_deg, z_deg].

Returns **vander3d** : ndarray

The shape of the returned matrix is `x.shape + (order,)`, where $order = (deg[0] + 1) * (deg([1] + 1) * (deg[2] + 1)$. The dtype will be the same as the converted *x*, *y*, and *z*.

See also:

lagvander, `lagvander3d.`, *lagval3d*

Notes

New in version 1.7.0.

Calculus

lagder(c[, m, scl, axis])	Differentiate a Laguerre series.
lagint(c[, m, k, lbnd, scl, axis])	Integrate a Laguerre series.

`numpy.polynomial.laguerre.`**`lagder`**(*c*, *m=1*, *scl=1*, *axis=0*)

Differentiate a Laguerre series.

Returns the Laguerre series coefficients *c* differentiated *m* times along *axis*. At each iteration the result is multiplied by *scl* (the scaling factor is for use in a linear change of variable). The argument *c* is an array of coefficients from low to high degree along each axis, e.g., [1,2,3] represents the series `1*L_0 + 2*L_1 + 3*L_2` while [[1,2],[1,2]] represents `1*L_0(x)*L_0(y) + 1*L_1(x)*L_0(y) + 2*L_0(x)*L_1(y) + 2*L_1(x)*L_1(y)` if axis=0 is `x` and axis=1 is `y`.

Parameters **c** : array_like

Array of Laguerre series coefficients. If *c* is multidimensional the different axis correspond to different variables with the degree in each axis given by the corresponding index.

m : int, optional

Number of derivatives taken, must be non-negative. (Default: 1)

scl : scalar, optional

Each differentiation is multiplied by *scl*. The end result is multiplication by `scl**m`. This is for use in a linear change of variable. (Default: 1)

axis : int, optional

Axis over which the derivative is taken. (Default: 0).

New in version 1.7.0.

Returns **der** : ndarray

Laguerre series of the derivative.

See also:

lagint

Notes

In general, the result of differentiating a Laguerre series does not resemble the same operation on a power series. Thus the result of this function may be "unintuitive," albeit correct; see Examples section below.

Examples

```
>>> from numpy.polynomial.laguerre import lagder
>>> lagder([ 1.,  1.,  1., -3.])
array([ 1.,  2.,  3.])
>>> lagder([ 1.,  0.,  0., -4.,  3.], m=2)
array([ 1.,  2.,  3.])
```

numpy.polynomial.laguerre.**lagint**(*c*, *m=1*, *k=[]*, *lbnd=0*, *scl=1*, *axis=0*)

Integrate a Laguerre series.

Returns the Laguerre series coefficients *c* integrated *m* times from *lbnd* along *axis*. At each iteration the resulting series is **multiplied** by *scl* and an integration constant, *k*, is added. The scaling factor is for use in a linear change of variable. ("Buyer beware": note that, depending on what one is doing, one may want *scl* to be the reciprocal of what one might expect; for more information, see the Notes section below.) The argument *c* is an array of coefficients from low to high degree along each axis, e.g., [1,2,3] represents the series `L_0 + 2*L_1 + 3*L_2` while [[1,2],[1,2]] represents `1*L_0(x)*L_0(y) + 1*L_1(x)*L_0(y) + 2*L_0(x)*L_1(y) + 2*L_1(x)*L_1(y)` if axis=0 is `x` and axis=1 is `y`.

Parameters **c** : array_like

Array of Laguerre series coefficients. If *c* is multidimensional the different axis correspond to different variables with the degree in each axis given by the corresponding index.

m : int, optional

Order of integration, must be positive. (Default: 1)

k : {[], list, scalar}, optional

Integration constant(s). The value of the first integral at `lbnd` is the first value in the list, the value of the second integral at `lbnd` is the second value, etc. If `k == []` (the default), all constants are set to zero. If `m == 1`, a single scalar can be given instead of a list.

lbnd : scalar, optional

The lower bound of the integral. (Default: 0)

scl : scalar, optional

Following each integration the result is *multiplied* by *scl* before the integration constant is added. (Default: 1)

axis : int, optional

Axis over which the integral is taken. (Default: 0).

New in version 1.7.0.

Returns **S** : ndarray

Laguerre series coefficients of the integral.

Raises **ValueError**

If `m < 0`, `len(k) > m`, `np.ndim(lbnd) != 0`, or `np.ndim(scl) != 0`.

See also:

lagder

Notes

Note that the result of each integration is *multiplied* by *scl*. Why is this important to note? Say one is making a linear change of variable $u = ax + b$ in an integral relative to x. Then $dx = du/a$, so one will need to set *scl* equal to $1/a$ - perhaps not what one would have first thought.

Also note that, in general, the result of integrating a C-series needs to be "reprojected" onto the C-series basis set. Thus, typically, the result of this function is "unintuitive," albeit correct; see Examples section below.

Examples

```
>>> from numpy.polynomial.laguerre import lagint
>>> lagint([1,2,3])
array([ 1.,  1.,  1., -3.])
>>> lagint([1,2,3], m=2)
array([ 1.,  0.,  0., -4.,  3.])
>>> lagint([1,2,3], k=1)
array([ 2.,  1.,  1., -3.])
>>> lagint([1,2,3], lbnd=-1)
array([ 11.5,   1. ,   1. ,  -3. ])
>>> lagint([1,2], m=2, k=[1,2], lbnd=-1)
array([ 11.16666667,  -5.        ,  -3.        ,   2.        ])
```

Algebra

lagadd(c1, c2)	Add one Laguerre series to another.
lagsub(c1, c2)	Subtract one Laguerre series from another.
lagmul(c1, c2)	Multiply one Laguerre series by another.
lagmulx(c)	Multiply a Laguerre series by x.
lagdiv(c1, c2)	Divide one Laguerre series by another.

Continued on next page

Table 126 – continued from previous page

lagpow(c, pow[, maxpower])	Raise a Laguerre series to a power.

numpy.polynomial.laguerre.**lagadd**(*c1*, *c2*)

Add one Laguerre series to another.

Returns the sum of two Laguerre series *c1* + *c2*. The arguments are sequences of coefficients ordered from lowest order term to highest, i.e., [1,2,3] represents the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c1, c2** : array_like

1-D arrays of Laguerre series coefficients ordered from low to high.

Returns **out** : ndarray

Array representing the Laguerre series of their sum.

See also:

lagsub, *lagmul*, *lagdiv*, *lagpow*

Notes

Unlike multiplication, division, etc., the sum of two Laguerre series is a Laguerre series (without having to "re-project" the result onto the basis set) so addition, just like that of "standard" polynomials, is simply "component-wise."

Examples

```
>>> from numpy.polynomial.laguerre import lagadd
>>> lagadd([1, 2, 3], [1, 2, 3, 4])
array([ 2.,  4.,  6.,  4.])
```

numpy.polynomial.laguerre.**lagsub**(*c1*, *c2*)

Subtract one Laguerre series from another.

Returns the difference of two Laguerre series *c1* - *c2*. The sequences of coefficients are from lowest order term to highest, i.e., [1,2,3] represents the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c1, c2** : array_like

1-D arrays of Laguerre series coefficients ordered from low to high.

Returns **out** : ndarray

Of Laguerre series coefficients representing their difference.

See also:

lagadd, *lagmul*, *lagdiv*, *lagpow*

Notes

Unlike multiplication, division, etc., the difference of two Laguerre series is a Laguerre series (without having to "reproject" the result onto the basis set) so subtraction, just like that of "standard" polynomials, is simply "component-wise."

Examples

```
>>> from numpy.polynomial.laguerre import lagsub
>>> lagsub([1, 2, 3, 4], [1, 2, 3])
array([ 0.,  0.,  0.,  4.])
```

numpy.polynomial.laguerre.**lagmul**(*c1*, *c2*)

Multiply one Laguerre series by another.

Returns the product of two Laguerre series *c1 * c2*. The arguments are sequences of coefficients, from lowest order "term" to highest, e.g., [1,2,3] represents the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c1, c2** : array_like

1-D arrays of Laguerre series coefficients ordered from low to high.

Returns **out** : ndarray

Of Laguerre series coefficients representing their product.

See also:

lagadd, *lagsub*, *lagdiv*, *lagpow*

Notes

In general, the (polynomial) product of two C-series results in terms that are not in the Laguerre polynomial basis set. Thus, to express the product as a Laguerre series, it is necessary to "reproject" the product onto said basis set, which may produce "unintuitive" (but correct) results; see Examples section below.

Examples

```
>>> from numpy.polynomial.laguerre import lagmul
>>> lagmul([1, 2, 3], [0, 1, 2])
array([  8., -13.,  38., -51.,  36.])
```

numpy.polynomial.laguerre.**lagmulx**(*c*)

Multiply a Laguerre series by x.

Multiply the Laguerre series *c* by x, where x is the independent variable.

Parameters **c** : array_like

1-D array of Laguerre series coefficients ordered from low to high.

Returns **out** : ndarray

Array representing the result of the multiplication.

Notes

The multiplication uses the recursion relationship for Laguerre polynomials in the form

xP_i(x) = (-(i + 1)*P_{i + 1}(x) + (2i + 1)P_{i}(x) - iP_{i - 1}(x))

Examples

```
>>> from numpy.polynomial.laguerre import lagmulx
>>> lagmulx([1, 2, 3])
array([ -1.,  -1.,  11.,  -9.])
```

numpy.polynomial.laguerre.**lagdiv**(*c1*, *c2*)

Divide one Laguerre series by another.

Returns the quotient-with-remainder of two Laguerre series *c1* / *c2*. The arguments are sequences of coefficients from lowest order "term" to highest, e.g., [1,2,3] represents the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c1, c2** : array_like

1-D arrays of Laguerre series coefficients ordered from low to high.

Returns **[quo, rem]** : ndarrays

Of Laguerre series coefficients representing the quotient and remainder.

See also:

lagadd, *lagsub*, *lagmul*, *lagpow*

Notes

In general, the (polynomial) division of one Laguerre series by another results in quotient and remainder terms that are not in the Laguerre polynomial basis set. Thus, to express these results as a Laguerre series, it is necessary to "reproject" the results onto the Laguerre basis set, which may produce "unintuitive" (but correct) results; see Examples section below.

Examples

```
>>> from numpy.polynomial.laguerre import lagdiv
>>> lagdiv([  8., -13.,  38., -51.,  36.], [0, 1, 2])
(array([ 1.,  2.,  3.]), array([ 0.]))
>>> lagdiv([  9., -12.,  38., -51.,  36.], [0, 1, 2])
(array([ 1.,  2.,  3.]), array([ 1.,  1.]))
```

numpy.polynomial.laguerre.**lagpow**(*c*, *pow*, *maxpower=16*)

Raise a Laguerre series to a power.

Returns the Laguerre series *c* raised to the power *pow*. The argument *c* is a sequence of coefficients ordered from low to high. i.e., [1,2,3] is the series `P_0 + 2*P_1 + 3*P_2.`

Parameters **c** : array_like

1-D array of Laguerre series coefficients ordered from low to high.

pow : integer

Power to which the series will be raised

maxpower : integer, optional

Maximum power allowed. This is mainly to limit growth of the series to unmanageable size. Default is 16

Returns **coef** : ndarray

Laguerre series of power.

See also:

lagadd, *lagsub*, *lagmul*, *lagdiv*

Examples

```
>>> from numpy.polynomial.laguerre import lagpow
>>> lagpow([1, 2, 3], 2)
array([ 14., -16.,  56., -72.,  54.])
```

Quadrature

laggauss(deg)	Gauss-Laguerre quadrature.
lagweight(x)	Weight function of the Laguerre polynomials.

numpy.polynomial.laguerre.**laggauss**(*deg*)

Gauss-Laguerre quadrature.

Computes the sample points and weights for Gauss-Laguerre quadrature. These sample points and weights will correctly integrate polynomials of degree $2 * deg - 1$ or less over the interval $[0, \inf]$ with the weight function $f(x) = \exp(-x)$.

Parameters **deg** : int

Number of sample points and weights. It must be >= 1.

Returns **x** : ndarray

1-D ndarray containing the sample points.

y : ndarray

1-D ndarray containing the weights.

Notes

New in version 1.7.0.

The results have only been tested up to degree 100 higher degrees may be problematic. The weights are determined by using the fact that

$$w_k = c/(L'_n(x_k) * L_{n-1}(x_k))$$

where c is a constant independent of k and x_k is the k'th root of L_n, and then scaling the results to get the right value when integrating 1.

numpy.polynomial.laguerre.**lagweight**(*x*)

Weight function of the Laguerre polynomials.

The weight function is $exp(-x)$ and the interval of integration is $[0, \inf]$. The Laguerre polynomials are orthogonal, but not normalized, with respect to this weight function.

Parameters **x** : array_like

Values at which the weight function will be computed.

Returns **w** : ndarray

The weight function at *x*.

Notes

New in version 1.7.0.

Miscellaneous

lagcompanion(c)	Return the companion matrix of c.
lagdomain	
lagzero	
lagone	
lagx	
lagtrim(c[, tol])	Remove "small" "trailing" coefficients from a polynomial.
lagline(off, scl)	Laguerre series whose graph is a straight line.
lag2poly(c)	Convert a Laguerre series to a polynomial.
poly2lag(pol)	Convert a polynomial to a Laguerre series.

numpy.polynomial.laguerre.**lagcompanion**(*c*)

Return the companion matrix of c.

The usual companion matrix of the Laguerre polynomials is already symmetric when *c* is a basis Laguerre polynomial, so no scaling is applied.

Parameters **c** : array_like

1-D array of Laguerre series coefficients ordered from low to high degree.

Returns **mat** : ndarray

Companion matrix of dimensions (deg, deg).

Notes

New in version 1.7.0.

numpy.polynomial.laguerre.**lagdomain = array([0, 1])**

numpy.polynomial.laguerre.**lagzero = array([0])**

numpy.polynomial.laguerre.**lagone = array([1])**

numpy.polynomial.laguerre.**lagx = array([1, -1])**

numpy.polynomial.laguerre.**lagtrim**(*c*, *tol=0*)

Remove "small" "trailing" coefficients from a polynomial.

"Small" means "small in absolute value" and is controlled by the parameter *tol*; "trailing" means highest order coefficient(s), e.g., in `[0, 1, 1, 0, 0]` (which represents `0 + x + x**2 + 0*x**3 + 0*x**4`) both the 3-rd and 4-th order coefficients would be "trimmed."

Parameters **c** : array_like

1-d array of coefficients, ordered from lowest order to highest.

tol : number, optional

Trailing (i.e., highest order) elements with absolute value less than or equal to *tol* (default value is zero) are removed.

Returns **trimmed** : ndarray

1-d array with trailing zeros removed. If the resulting series would be empty, a series containing a single zero is returned.

Raises **ValueError**

If *tol* < 0

See also:

`trimseq`

Examples

```
>>> from numpy.polynomial import polyutils as pu
>>> pu.trimcoef((0,0,3,0,5,0,0))
array([ 0.,  0.,  3.,  0.,  5.])
>>> pu.trimcoef((0,0,1e-3,0,1e-5,0,0),1e-3) # item == tol is trimmed
array([ 0.])
>>> i = complex(0,1) # works for complex
>>> pu.trimcoef((3e-4,1e-3*(1-i),5e-4,2e-5*(1+i)), 1e-3)
array([ 0.0003+0.j   ,  0.0010-0.001j])
```

`numpy.polynomial.laguerre.`**`lagline`**(*off*, *scl*)

Laguerre series whose graph is a straight line.

Parameters **off, scl** : scalars

The specified line is given by `off + scl*x`.

Returns **y** : ndarray

This module's representation of the Laguerre series for `off + scl*x`.

See also:

`polyline`, `chebline`

Examples

```
>>> from numpy.polynomial.laguerre import lagline, lagval
>>> lagval(0,lagline(3, 2))
3.0
>>> lagval(1,lagline(3, 2))
5.0
```

`numpy.polynomial.laguerre.`**`lag2poly`**(*c*)

Convert a Laguerre series to a polynomial.

Convert an array representing the coefficients of a Laguerre series, ordered from lowest degree to highest, to an array of the coefficients of the equivalent polynomial (relative to the "standard" basis) ordered from lowest to highest degree.

Parameters **c** : array_like

1-D array containing the Laguerre series coefficients, ordered from lowest order term to highest.

Returns **pol** : ndarray

1-D array containing the coefficients of the equivalent polynomial (relative to the "standard" basis) ordered from lowest order term to highest.

See also:

poly2lag

Notes

The easy way to do conversions between polynomial basis sets is to use the convert method of a class instance.

Examples

```
>>> from numpy.polynomial.laguerre import lag2poly
>>> lag2poly([ 23., -63.,  58., -18.])
array([ 0.,  1.,  2.,  3.])
```

numpy.polynomial.laguerre.**poly2lag**(*pol*)

Convert a polynomial to a Laguerre series.

Convert an array representing the coefficients of a polynomial (relative to the "standard" basis) ordered from lowest degree to highest, to an array of the coefficients of the equivalent Laguerre series, ordered from lowest to highest degree.

Parameters **pol** : array_like

1-D array containing the polynomial coefficients

Returns **c** : ndarray

1-D array containing the coefficients of the equivalent Laguerre series.

See also:

lag2poly

Notes

The easy way to do conversions between polynomial basis sets is to use the convert method of a class instance.

Examples

```
>>> from numpy.polynomial.laguerre import poly2lag
>>> poly2lag(np.arange(4))
array([ 23., -63.,  58., -18.])
```

Hermite Module, "Physicists'" (`numpy.polynomial.hermite`)

New in version 1.6.0.

This module provides a number of objects (mostly functions) useful for dealing with Hermite series, including a *Hermite* class that encapsulates the usual arithmetic operations. (General information on how this module represents and works with such polynomials is in the docstring for its "parent" sub-package, `numpy.polynomial`).

Hermite Class

Hermite(coef[, domain, window])	An Hermite series class.

class numpy.polynomial.hermite.**Hermite**(*coef*, *domain=None*, *window=None*)

An Hermite series class.

The Hermite class provides the standard Python numerical methods '+', '-', '*', '//', '%', 'divmod', '**', and '()' as well as the attributes and methods listed in the `ABCPolyBase` documentation.

Parameters **coef** : array_like

Hermite coefficients in order of increasing degree, i.e, `(1, 2, 3)` gives `1*H_0(x) + 2*H_1(X) + 3*H_2(x)`.

domain : (2,) array_like, optional

Domain to use. The interval `[domain[0], domain[1]]` is mapped to the interval `[window[0], window[1]]` by shifting and scaling. The default value is [-1, 1].

window : (2,) array_like, optional

Window, see `domain` for its use. The default value is [-1, 1].

New in version 1.6.0.

Methods

__call__(arg)	Call self as a function.
basis(deg[, domain, window])	Series basis polynomial of degree *deg*.
cast(series[, domain, window])	Convert series to series of this class.
convert([domain, kind, window])	Convert series to a different kind and/or domain and/or window.
copy()	Return a copy.
cutdeg(deg)	Truncate series to the given degree.
degree()	The degree of the series.
deriv([m])	Differentiate.
fit(x, y, deg[, domain, rcond, full, w, window])	Least squares fit to data.
fromroots(roots[, domain, window])	Return series instance that has the specified roots.
has_samecoef(other)	Check if coefficients match.
has_samedomain(other)	Check if domains match.
has_sametype(other)	Check if types match.
has_samewindow(other)	Check if windows match.
identity([domain, window])	Identity function.
integ([m, k, lbnd])	Integrate.

Continued on next page

Table 130 – continued from previous page

linspace([n, domain])	Return x, y values at equally spaced points in domain.
mapparms()	Return the mapping parameters.
roots()	Return the roots of the series polynomial.
trim([tol])	Remove trailing coefficients
truncate(size)	Truncate series to length *size*.

Hermite.**__call__**(*arg*)
Call self as a function.

classmethod Hermite.**basis**(*deg*, *domain=None*, *window=None*)
Series basis polynomial of degree *deg*.

Returns the series representing the basis polynomial of degree *deg*.

New in version 1.7.0.

Parameters **deg** : int

Degree of the basis polynomial for the series. Must be >= 0.

domain : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form `[beg, end]`, where `beg` and `end` are the endpoints of the window. If None is given then the class window is used. The default is None.

Returns **new_series** : series

A series with the coefficient of the *deg* term set to one and all others zero.

classmethod Hermite.**cast**(*series*, *domain=None*, *window=None*)
Convert series to series of this class.

The *series* is expected to be an instance of some polynomial series of one of the types supported by by the numpy.polynomial module, but could be some other class that supports the convert method.

New in version 1.7.0.

Parameters **series** : series

The series instance to be converted.

domain : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form `[beg, end]`, where `beg` and `end` are the endpoints of the window. If None is given then the class window is used. The default is None.

Returns **new_series** : series

A series of the same kind as the calling class and equal to *series* when evaluated.

See also:

convert similar instance method

Hermite.**convert**(*domain=None*, *kind=None*, *window=None*)
Convert series to a different kind and/or domain and/or window.

Parameters **domain** : array_like, optional

The domain of the converted series. If the value is None, the default domain of *kind* is used.

kind : class, optional

The polynomial series type class to which the current instance should be converted. If kind is None, then the class of the current instance is used.

window : array_like, optional

The window of the converted series. If the value is None, the default window of *kind* is used.

Returns **new_series** : series

The returned class can be of different type than the current instance and/or have a different domain and/or different window.

Notes

Conversion between domains and class types can result in numerically ill defined series.

Hermite.**copy**()
Return a copy.

Returns **new_series** : series

Copy of self.

Hermite.**cutdeg**(*deg*)
Truncate series to the given degree.

Reduce the degree of the series to *deg* by discarding the high order terms. If *deg* is greater than the current degree a copy of the current series is returned. This can be useful in least squares where the coefficients of the high degree terms may be very small.

New in version 1.5.0.

Parameters **deg** : non-negative int

The series is reduced to degree *deg* by discarding the high order terms. The value of *deg* must be a non-negative integer.

Returns **new_series** : series

New instance of series with reduced degree.

Hermite.**degree**()
The degree of the series.

New in version 1.5.0.

Returns **degree** : int

Degree of the series, one less than the number of coefficients.

Hermite.**deriv**(*m=1*)

Differentiate.

Return a series instance of that is the derivative of the current series.

Parameters **m** : non-negative int

Find the derivative of order *m*.

Returns **new_series** : series

A new series representing the derivative. The domain is the same as the domain of the differentiated series.

classmethod Hermite.**fit**(*x*, *y*, *deg*, *domain=None*, *rcond=None*, *full=False*, *w=None*, *window=None*)

Least squares fit to data.

Return a series instance that is the least squares fit to the data *y* sampled at *x*. The domain of the returned instance can be specified and this will often result in a superior fit with less chance of ill conditioning.

Parameters **x** : array_like, shape (M,)

x-coordinates of the M sample points `(x[i], y[i])`.

y : array_like, shape (M,) or (M, K)

y-coordinates of the sample points. Several data sets of sample points sharing the same x-coordinates can be fitted at once by passing in a 2D-array that contains one dataset per column.

deg : int or 1-D array_like

Degree(s) of the fitting polynomials. If *deg* is a single integer all terms up to and including the *deg*'th term are included in the fit. For NumPy versions >= 1.11.0 a list of integers specifying the degrees of the terms to include may be used instead.

domain : {None, [beg, end], []}, optional

Domain to use for the returned series. If `None`, then a minimal domain that covers the points *x* is chosen. If `[]` the class domain is used. The default value was the class domain in NumPy 1.4 and `None` in later versions. The `[]` option was added in numpy 1.5.0.

rcond : float, optional

Relative condition number of the fit. Singular values smaller than this relative to the largest singular value will be ignored. The default value is len(x)*eps, where eps is the relative precision of the float type, about 2e-16 in most cases.

full : bool, optional

Switch determining nature of return value. When it is False (the default) just the coefficients are returned, when True diagnostic information from the singular value decomposition is also returned.

w : array_like, shape (M,), optional

Weights. If not None the contribution of each point `(x[i],y[i])` to the fit is weighted by *w[i]*. Ideally the weights are chosen so that the errors of the products `w[i]*y[i]` all have the same variance. The default value is None.

New in version 1.5.0.

window : {[beg, end]}, optional

Window to use for the returned series. The default value is the default class domain

New in version 1.6.0.

Returns **new_series** : series

A series that represents the least squares fit to the data and has the domain specified in the call.

[resid, rank, sv, rcond] : list

These values are only returned if *full* = True

resid – sum of squared residuals of the least squares fit rank – the numerical rank of the scaled Vandermonde matrix sv – singular values of the scaled Vandermonde matrix rcond – value of *rcond*.

For more details, see *linalg.lstsq*.

classmethod Hermite.**fromroots**(*roots*, *domain=[]*, *window=None*)

Return series instance that has the specified roots.

Returns a series representing the product `(x - r[0])*(x - r[1])*...*(x - r[n-1])`, where `r` is a list of roots.

Parameters **roots** : array_like

List of roots.

domain : {[], None, array_like}, optional

Domain for the resulting series. If None the domain is the interval from the smallest root to the largest. If [] the domain is the class domain. The default is [].

window : {None, array_like}, optional

Window for the returned series. If None the class window is used. The default is None.

Returns **new_series** : series

Series with the specified roots.

Hermite.**has_samecoef**(*other*)

Check if coefficients match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `coef` attribute.

Returns **bool** : boolean

True if the coefficients are the same, False otherwise.

Hermite.**has_samedomain**(*other*)

Check if domains match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `domain` attribute.

Returns **bool** : boolean

True if the domains are the same, False otherwise.

Hermite.**has_sametype**(*other*)
Check if types match.

New in version 1.7.0.

Parameters **other** : object

Class instance.

Returns **bool** : boolean

True if other is same class as self

Hermite.**has_samewindow**(*other*)
Check if windows match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `window` attribute.

Returns **bool** : boolean

True if the windows are the same, False otherwise.

classmethod Hermite.**identity**(*domain=None*, *window=None*)
Identity function.

If `p` is the returned series, then `p(x) == x` for all values of x.

Parameters **domain** : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form `[beg, end]`, where `beg` and `end` are the endpoints of the window. If None is given then the class window is used. The default is None.

Returns **new_series** : series

Series of representing the identity.

Hermite.**integ**(*m=1*, *k=[]*, *lbnd=None*)
Integrate.

Return a series instance that is the definite integral of the current series.

Parameters **m** : non-negative int

The number of integrations to perform.

k : array_like

Integration constants. The first constant is applied to the first integration, the second to the second, and so on. The list of values must less than or equal to *m* in length and any missing values are set to zero.

lbnd : Scalar

The lower bound of the definite integral.

Returns **new_series** : series

A new series representing the integral. The domain is the same as the domain of the integrated series.

Hermite.**linspace**(*n=100*, *domain=None*)

Return x, y values at equally spaced points in domain.

Returns the x, y values at *n* linearly spaced points across the domain. Here y is the value of the polynomial at the points x. By default the domain is the same as that of the series instance. This method is intended mostly as a plotting aid.

New in version 1.5.0.

Parameters **n** : int, optional

Number of point pairs to return. The default value is 100.

domain : {None, array_like}, optional

If not None, the specified domain is used instead of that of the calling instance. It should be of the form `[beg,end]`. The default is None which case the class domain is used.

Returns **x, y** : ndarray

x is equal to linspace(self.domain[0], self.domain[1], n) and y is the series evaluated at element of x.

Hermite.**mapparms**()

Return the mapping parameters.

The returned values define a linear map `off + scl*x` that is applied to the input arguments before the series is evaluated. The map depends on the `domain` and `window`; if the current `domain` is equal to the `window` the resulting map is the identity. If the coefficients of the series instance are to be used by themselves outside this class, then the linear function must be substituted for the `x` in the standard representation of the base polynomials.

Returns **off, scl** : float or complex

The mapping function is defined by `off + scl*x`.

Notes

If the current domain is the interval `[l1, r1]` and the window is `[l2, r2]`, then the linear mapping function `L` is defined by the equations:

```
L(l1) = l2
L(r1) = r2
```

Hermite.**roots**()

Return the roots of the series polynomial.

Compute the roots for the series. Note that the accuracy of the roots decrease the further outside the domain they lie.

Returns **roots** : ndarray

Array containing the roots of the series.

Hermite.**trim**(*tol=0*)

Remove trailing coefficients

Remove trailing coefficients until a coefficient is reached whose absolute value greater than *tol* or the beginning of the series is reached. If all the coefficients would be removed the series is set to `[0]`. A new series instance is returned with the new coefficients. The current instance remains unchanged.

Parameters **tol** : non-negative number.

All trailing coefficients less than *tol* will be removed.

Returns **new_series** : series

Contains the new set of coefficients.

`Hermite.`**`truncate`**(*size*)

Truncate series to length *size*.

Reduce the series to length *size* by discarding the high degree terms. The value of *size* must be a positive integer. This can be useful in least squares where the coefficients of the high degree terms may be very small.

Parameters **size** : positive int

The series is reduced to length *size* by discarding the high degree terms. The value of *size* must be a positive integer.

Returns **new_series** : series

New instance of series with truncated coefficients.

Basics

hermval(x, c[, tensor])	Evaluate an Hermite series at points x.
hermval2d(x, y, c)	Evaluate a 2-D Hermite series at points (x, y).
hermval3d(x, y, z, c)	Evaluate a 3-D Hermite series at points (x, y, z).
hermgrid2d(x, y, c)	Evaluate a 2-D Hermite series on the Cartesian product of x and y.
hermgrid3d(x, y, z, c)	Evaluate a 3-D Hermite series on the Cartesian product of x, y, and z.
hermroots(c)	Compute the roots of a Hermite series.
hermfromroots(roots)	Generate a Hermite series with given roots.

`numpy.polynomial.hermite.`**`hermval`**(*x*, *c*, *tensor=True*)

Evaluate an Hermite series at points x.

If *c* is of length *n + 1*, this function returns the value:

$$p(x) = c_0 * H_0(x) + c_1 * H_1(x) + ... + c_n * H_n(x)$$

The parameter *x* is converted to an array only if it is a tuple or a list, otherwise it is treated as a scalar. In either case, either *x* or its elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* is a 1-D array, then *p(x)* will have the same shape as *x*. If *c* is multidimensional, then the shape of the result depends on the value of *tensor*. If *tensor* is true the shape will be c.shape[1:] + x.shape. If *tensor* is false the shape will be c.shape[1:]. Note that scalars have shape (,).

Trailing zeros in the coefficients will be used in the evaluation, so they should be avoided if efficiency is a concern.

Parameters **x** : array_like, compatible object

If *x* is a list or tuple, it is converted to an ndarray, otherwise it is left unchanged and treated as a scalar. In either case, *x* or its elements must support addition and multiplication with with themselves and with the elements of *c*.

c : array_like

Array of coefficients ordered so that the coefficients for terms of degree n are contained in c[n]. If *c* is multidimensional the remaining indices enumerate multiple polynomials. In the two dimensional case the coefficients may be thought of as stored in the columns of *c*.

tensor : boolean, optional

If True, the shape of the coefficient array is extended with ones on the right, one for each dimension of *x*. Scalars have dimension 0 for this action. The result is that every column of coefficients in *c* is evaluated for every element of *x*. If False, *x* is broadcast over the columns of *c* for the evaluation. This keyword is useful when *c* is multidimensional. The default value is True.

New in version 1.7.0.

Returns **values** : ndarray, algebra_like

The shape of the return value is described above.

See also:

hermval2d, *hermgrid2d*, *hermval3d*, *hermgrid3d*

Notes

The evaluation uses Clenshaw recursion, aka synthetic division.

Examples

```
>>> from numpy.polynomial.hermite import hermval
>>> coef = [1,2,3]
>>> hermval(1, coef)
11.0
>>> hermval([[1,2],[3,4]], coef)
array([[  11.,   51.],
       [ 115.,  203.]])
```

numpy.polynomial.hermite.**hermval2d**(*x*, *y*, *c*)

Evaluate a 2-D Hermite series at points (x, y).

This function returns the values:

$$p(x,y) = \sum_{i,j} c_{i,j} * H_i(x) * H_j(y)$$

The parameters *x* and *y* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars and they must have the same shape after conversion. In either case, either *x* and *y* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* is a 1-D array a one is implicitly appended to its shape to make it 2-D. The shape of the result will be c.shape[2:] + x.shape.

Parameters **x, y** : array_like, compatible objects

The two dimensional series is evaluated at the points *(x, y)*, where *x* and *y* must have the same shape. If *x* or *y* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and if it isn't an ndarray it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficient of the term of multi-degree i,j is contained in `c[i,j]`. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional polynomial at points formed with pairs of corresponding values from *x* and *y*.

See also:

hermval, *hermgrid2d*, *hermval3d*, *hermgrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.hermite.**hermval3d**(*x*, *y*, *z*, *c*)

Evaluate a 3-D Hermite series at points (x, y, z).

This function returns the values:

$$p(x,y,z) = \sum_{i,j,k} c_{i,j,k} * H_i(x) * H_j(y) * H_k(z)$$

The parameters *x*, *y*, and *z* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars and they must have the same shape after conversion. In either case, either *x*, *y*, and *z* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than 3 dimensions, ones are implicitly appended to its shape to make it 3-D. The shape of the result will be c.shape[3:] + x.shape.

Parameters **x, y, z** : array_like, compatible object

The three dimensional series is evaluated at the points *(x, y, z)*, where *x*, *y*, and *z* must have the same shape. If any of *x*, *y*, or *z* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and if it isn't an ndarray it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficient of the term of multi-degree i,j,k is contained in `c[i,j,k]`. If *c* has dimension greater than 3 the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the multidimensional polynomial on points formed with triples of corresponding values from *x*, *y*, and *z*.

See also:

hermval, *hermval2d*, *hermgrid2d*, *hermgrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.hermite.**hermgrid2d**(*x*, *y*, *c*)

Evaluate a 2-D Hermite series on the Cartesian product of x and y.

This function returns the values:

$$p(a,b) = \sum_{i,j} c_{i,j} * H_i(a) * H_j(b)$$

where the points *(a, b)* consist of all pairs formed by taking *a* from *x* and *b* from *y*. The resulting points form a grid with *x* in the first dimension and *y* in the second.

The parameters *x* and *y* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars. In either case, either *x* and *y* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than two dimensions, ones are implicitly appended to its shape to make it 2-D. The shape of the result will be c.shape[2:] + x.shape.

Parameters **x, y** : array_like, compatible objects

The two dimensional series is evaluated at the points in the Cartesian product of *x* and *y*. If *x* or *y* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and, if it isn't an ndarray, it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficients for terms of degree i,j are contained in `c[i,j]`. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional polynomial at points in the Cartesian product of *x* and *y*.

See also:

hermval, *hermval2d*, *hermval3d*, *hermgrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.hermite.**hermgrid3d**(*x*, *y*, *z*, *c*)

Evaluate a 3-D Hermite series on the Cartesian product of x, y, and z.

This function returns the values:

$$p(a,b,c) = \sum_{i,j,k} c_{i,j,k} * H_i(a) * H_j(b) * H_k(c)$$

where the points *(a, b, c)* consist of all triples formed by taking *a* from *x*, *b* from *y*, and *c* from *z*. The resulting points form a grid with *x* in the first dimension, *y* in the second, and *z* in the third.

The parameters *x*, *y*, and *z* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars. In either case, either *x*, *y*, and *z* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than three dimensions, ones are implicitly appended to its shape to make it 3-D. The shape of the result will be c.shape[3:] + x.shape + y.shape + z.shape.

Parameters **x, y, z** : array_like, compatible objects

The three dimensional series is evaluated at the points in the Cartesian product of *x*, *y*, and *z*. If *x*,'y', or *z* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and, if it isn't an ndarray, it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficients for terms of degree i,j are contained in `c[i,j]`. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional polynomial at points in the Cartesian product of *x* and *y*.

See also:

hermval, *hermval2d*, *hermgrid2d*, *hermval3d*

Notes

New in version 1.7.0.

numpy.polynomial.hermite.**hermroots**(*c*)

Compute the roots of a Hermite series.

Return the roots (a.k.a. "zeros") of the polynomial

$$p(x) = \sum_i c[i] * H_i(x).$$

Parameters **c** : 1-D array_like

1-D array of coefficients.

Returns **out** : ndarray

Array of the roots of the series. If all the roots are real, then *out* is also real, otherwise it is complex.

See also:

`polyroots`, `legroots`, `lagroots`, `chebroots`, `hermeroots`

Notes

The root estimates are obtained as the eigenvalues of the companion matrix, Roots far from the origin of the complex plane may have large errors due to the numerical instability of the series for such values. Roots with multiplicity greater than 1 will also show larger errors as the value of the series near such points is relatively insensitive to errors in the roots. Isolated roots near the origin can be improved by a few iterations of Newton's method.

The Hermite series basis polynomials aren't powers of *x* so the results of this function may seem unintuitive.

Examples

```
>>> from numpy.polynomial.hermite import hermroots, hermfromroots
>>> coef = hermfromroots([-1, 0, 1])
>>> coef
array([ 0.   ,  0.25 ,  0.   ,  0.125])
>>> hermroots(coef)
array([ -1.00000000e+00,  -1.38777878e-17,   1.00000000e+00])
```

numpy.polynomial.hermite.**hermfromroots**(*roots*)

Generate a Hermite series with given roots.

The function returns the coefficients of the polynomial

$$p(x) = (x - r_0) * (x - r_1) * ... * (x - r_n),$$

in Hermite form, where the *r_n* are the roots specified in *roots*. If a zero has multiplicity n, then it must appear in *roots* n times. For instance, if 2 is a root of multiplicity three and 3 is a root of multiplicity 2, then *roots* looks something like [2, 2, 2, 3, 3]. The roots can appear in any order.

If the returned coefficients are *c*, then

$$p(x) = c_0 + c_1 * H_1(x) + ... + c_n * H_n(x)$$

The coefficient of the last term is not generally 1 for monic polynomials in Hermite form.

Parameters **roots** : array_like

Sequence containing the roots.

Returns **out** : ndarray

1-D array of coefficients. If all roots are real then *out* is a real array, if some of the roots are complex, then *out* is complex even if all the coefficients in the result are real (see Examples below).

See also:

`polyfromroots`, `legfromroots`, `lagfromroots`, `chebfromroots`, `hermefromroots`.

Examples

```
>>> from numpy.polynomial.hermite import hermfromroots, hermval
>>> coef = hermfromroots((-1, 0, 1))
>>> hermval((-1, 0, 1), coef)
array([ 0.,  0.,  0.])
>>> coef = hermfromroots((-1j, 1j))
>>> hermval((-1j, 1j), coef)
array([ 0.+0.j,  0.+0.j])
```

Fitting

hermfit(x, y, deg[, rcond, full, w])	Least squares fit of Hermite series to data.
hermvander(x, deg)	Pseudo-Vandermonde matrix of given degree.
hermvander2d(x, y, deg)	Pseudo-Vandermonde matrix of given degrees.
hermvander3d(x, y, z, deg)	Pseudo-Vandermonde matrix of given degrees.

numpy.polynomial.hermite.**hermfit**(*x*, *y*, *deg*, *rcond=None*, *full=False*, *w=None*)

Least squares fit of Hermite series to data.

Return the coefficients of a Hermite series of degree *deg* that is the least squares fit to the data values *y* given at points *x*. If *y* is 1-D the returned coefficients will also be 1-D. If *y* is 2-D multiple fits are done, one for each column of *y*, and the resulting coefficients are stored in the corresponding columns of a 2-D return. The fitted polynomial(s) are in the form

$$p(x) = c_0 + c_1 * H_1(x) + ... + c_n * H_n(x),$$

where *n* is *deg*.

Parameters **x** : array_like, shape (M,)

x-coordinates of the M sample points `(x[i], y[i])`.

y : array_like, shape (M,) or (M, K)

y-coordinates of the sample points. Several data sets of sample points sharing the same x-coordinates can be fitted at once by passing in a 2D-array that contains one dataset per column.

deg : int or 1-D array_like

Degree(s) of the fitting polynomials. If *deg* is a single integer all terms up to and including the *deg*'th term are included in the fit. For NumPy versions >= 1.11.0 a list of integers specifying the degrees of the terms to include may be used instead.

rcond : float, optional

Relative condition number of the fit. Singular values smaller than this relative to the largest singular value will be ignored. The default value is len(x)*eps, where eps is the relative precision of the float type, about 2e-16 in most cases.

full : bool, optional

Switch determining nature of return value. When it is False (the default) just the coefficients are returned, when True diagnostic information from the singular value decomposition is also returned.

w : array_like, shape (*M*,), optional

Weights. If not None, the contribution of each point `(x[i],y[i])` to the fit is weighted by *w[i]*. Ideally the weights are chosen so that the errors of the products `w[i]*y[i]` all have the same variance. The default value is None.

Returns **coef** : ndarray, shape (M,) or (M, K)

Hermite coefficients ordered from low to high. If *y* was 2-D, the coefficients for the data in column k of *y* are in column *k*.

[residuals, rank, singular_values, rcond] : list

These values are only returned if *full* = True

resid – sum of squared residuals of the least squares fit rank – the numerical rank of the scaled Vandermonde matrix sv – singular values of the scaled Vandermonde matrix rcond – value of *rcond*.

For more details, see *linalg.lstsq*.

Warns **RankWarning**

The rank of the coefficient matrix in the least-squares fit is deficient. The warning is only raised if *full* = False. The warnings can be turned off by

```
>>> import warnings
>>> warnings.simplefilter('ignore', RankWarning)
```

See also:

`chebfit`, `legfit`, `lagfit`, `polyfit`, `hermefit`

hermval Evaluates a Hermite series.

hermvander Vandermonde matrix of Hermite series.

hermweight Hermite weight function

`linalg.lstsq` Computes a least-squares fit from the matrix.

`scipy.interpolate.UnivariateSpline` Computes spline fits.

Notes

The solution is the coefficients of the Hermite series *p* that minimizes the sum of the weighted squared errors

$$E = \sum_j w_j^2 * |y_j - p(x_j)|^2,$$

where the w_j are the weights. This problem is solved by setting up the (typically) overdetermined matrix equation

$$V(x) * c = w * y,$$

where *V* is the weighted pseudo Vandermonde matrix of *x*, *c* are the coefficients to be solved for, *w* are the weights, *y* are the observed values. This equation is then solved using the singular value decomposition of *V*.

If some of the singular values of *V* are so small that they are neglected, then a *RankWarning* will be issued. This means that the coefficient values may be poorly determined. Using a lower order fit will usually get rid of the warning. The *rcond* parameter can also be set to a value smaller than its default, but the resulting fit may be spurious and have large contributions from roundoff error.

Fits using Hermite series are probably most useful when the data can be approximated by `sqrt(w(x)) * p(x)`, where *w(x)* is the Hermite weight. In that case the weight `sqrt(w(x[i])` should be used together with data values `y[i]/sqrt(w(x[i]))`. The weight function is available as *hermweight*.

References

[R69]

Examples

```
>>> from numpy.polynomial.hermite import hermfit, hermval
>>> x = np.linspace(-10, 10)
>>> err = np.random.randn(len(x))/10
>>> y = hermval(x, [1, 2, 3]) + err
>>> hermfit(x, y, 2)
array([ 0.97902637,  1.99849131,  3.00006   ])
```

numpy.polynomial.hermite.**hermvander**(*x*, *deg*)

Pseudo-Vandermonde matrix of given degree.

Returns the pseudo-Vandermonde matrix of degree *deg* and sample points *x*. The pseudo-Vandermonde matrix is defined by

$$V[..., i] = H_i(x),$$

where *0 <= i <= deg*. The leading indices of *V* index the elements of *x* and the last index is the degree of the Hermite polynomial.

If *c* is a 1-D array of coefficients of length *n + 1* and *V* is the array `V = hermvander(x, n)`, then `np.dot(V, c)` and `hermval(x, c)` are the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of Hermite series of the same degree and sample points.

Parameters **x** : array_like

Array of points. The dtype is converted to float64 or complex128 depending on whether any of the elements are complex. If *x* is scalar it is converted to a 1-D array.

deg : int

Degree of the resulting matrix.

Returns **vander** : ndarray

The pseudo-Vandermonde matrix. The shape of the returned matrix is `x.shape + (deg + 1,)`, where The last index is the degree of the corresponding Hermite polynomial. The dtype will be the same as the converted *x*.

Examples

```
>>> from numpy.polynomial.hermite import hermvander
>>> x = np.array([-1, 0, 1])
>>> hermvander(x, 3)
array([[ 1., -2.,  2.,  4.],
       [ 1.,  0., -2., -0.],
       [ 1.,  2.,  2., -4.]])
```

numpy.polynomial.hermite.**hermvander2d**(*x*, *y*, *deg*)

Pseudo-Vandermonde matrix of given degrees.

Returns the pseudo-Vandermonde matrix of degrees *deg* and sample points *(x, y)*. The pseudo-Vandermonde matrix is defined by

$$V[..., (deg[1] + 1) * i + j] = H_i(x) * H_j(y),$$

where *0 <= i <= deg[0]* and *0 <= j <= deg[1]*. The leading indices of *V* index the points *(x, y)* and the last index encodes the degrees of the Hermite polynomials.

If `V = hermvander2d(x, y, [xdeg, ydeg])`, then the columns of *V* correspond to the elements of a 2-D coefficient array *c* of shape (xdeg + 1, ydeg + 1) in the order

$$c_{00}, c_{01}, c_{02} ..., c_{10}, c_{11}, c_{12} ...$$

and `np.dot(V, c.flat)` and `hermval2d(x, y, c)` will be the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of 2-D Hermite series of the same degrees and sample points.

Parameters **x, y** : array_like

Arrays of point coordinates, all of the same shape. The dtypes will be converted to either float64 or complex128 depending on whether any of the elements are complex. Scalars are converted to 1-D arrays.

deg : list of ints

List of maximum degrees of the form [x_deg, y_deg].

Returns **vander2d** : ndarray

The shape of the returned matrix is `x.shape + (order,)`, where $order = (deg[0]+1)*(deg([1]+1)$. The dtype will be the same as the converted *x* and *y*.

See also:

hermvander, `hermvander3d.`, *hermval3d*

Notes

New in version 1.7.0.

`numpy.polynomial.hermite.`**`hermvander3d`**(*x*, *y*, *z*, *deg*)

Pseudo-Vandermonde matrix of given degrees.

Returns the pseudo-Vandermonde matrix of degrees *deg* and sample points *(x, y, z)*. If *l, m, n* are the given degrees in *x, y, z*, then The pseudo-Vandermonde matrix is defined by

$$V[..., (m+1)(n+1)i + (n+1)j + k] = H_i(x) * H_j(y) * H_k(z),$$

where *0 <= i <= l*, *0 <= j <= m*, and *0 <= j <= n*. The leading indices of *V* index the points *(x, y, z)* and the last index encodes the degrees of the Hermite polynomials.

If `V = hermvander3d(x, y, z, [xdeg, ydeg, zdeg])`, then the columns of *V* correspond to the elements of a 3-D coefficient array *c* of shape (xdeg + 1, ydeg + 1, zdeg + 1) in the order

$$c_{000}, c_{001}, c_{002}, ..., c_{010}, c_{011}, c_{012}, ...$$

and `np.dot(V, c.flat)` and `hermval3d(x, y, z, c)` will be the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of 3-D Hermite series of the same degrees and sample points.

Parameters **x, y, z** : array_like

Arrays of point coordinates, all of the same shape. The dtypes will be converted to either float64 or complex128 depending on whether any of the elements are complex. Scalars are converted to 1-D arrays.

deg : list of ints

List of maximum degrees of the form [x_deg, y_deg, z_deg].

Returns **vander3d** : ndarray

The shape of the returned matrix is `x.shape + (order,)`, where $order = (deg[0]+1)*(deg([1]+1)*(deg[2]+1)$. The dtype will be the same as the converted *x*, *y*, and *z*.

See also:

hermvander, `hermvander3d.`, *hermval3d*

Notes

New in version 1.7.0.

Calculus

hermder(c[, m, scl, axis])	Differentiate a Hermite series.
hermint(c[, m, k, lbnd, scl, axis])	Integrate a Hermite series.

numpy.polynomial.hermite.**hermder**(*c*, *m=1*, *scl=1*, *axis=0*)

Differentiate a Hermite series.

Returns the Hermite series coefficients *c* differentiated *m* times along *axis*. At each iteration the result is multiplied by *scl* (the scaling factor is for use in a linear change of variable). The argument *c* is an array of coefficients from low to high degree along each axis, e.g., [1,2,3] represents the series `1*H_0 + 2*H_1 + 3*H_2` while [[1,2],[1,2]] represents `1*H_0(x)*H_0(y) + 1*H_1(x)*H_0(y) + 2*H_0(x)*H_1(y) + 2*H_1(x)*H_1(y)` if axis=0 is `x` and axis=1 is `y`.

Parameters **c** : array_like

Array of Hermite series coefficients. If *c* is multidimensional the different axis correspond to different variables with the degree in each axis given by the corresponding index.

m : int, optional

Number of derivatives taken, must be non-negative. (Default: 1)

scl : scalar, optional

Each differentiation is multiplied by *scl*. The end result is multiplication by `scl**m`. This is for use in a linear change of variable. (Default: 1)

axis : int, optional

Axis over which the derivative is taken. (Default: 0).

New in version 1.7.0.

Returns **der** : ndarray

Hermite series of the derivative.

See also:

hermint

Notes

In general, the result of differentiating a Hermite series does not resemble the same operation on a power series. Thus the result of this function may be "unintuitive," albeit correct; see Examples section below.

Examples

```
>>> from numpy.polynomial.hermite import hermder
>>> hermder([ 1. ,  0.5,  0.5,  0.5])
array([ 1.,  2.,  3.])
>>> hermder([-0.5,  1./2.,  1./8.,  1./12.,  1./16.], m=2)
array([ 1.,  2.,  3.])
```

numpy.polynomial.hermite.**hermint**(*c*, *m=1*, *k=[]*, *lbnd=0*, *scl=1*, *axis=0*)

Integrate a Hermite series.

Returns the Hermite series coefficients *c* integrated *m* times from *lbnd* along *axis*. At each iteration the resulting series is **multiplied** by *scl* and an integration constant, *k*, is added. The scaling factor is for use in a linear change of variable. ("Buyer beware": note that, depending on what one is doing, one may want *scl* to be the reciprocal of what one might expect; for more information, see the Notes section below.) The argument *c* is an array of coefficients from low to high degree along each axis, e.g., [1,2,3] represents the series `H_0 + 2*H_1 + 3*H_2` while [[1,2],[1,2]] represents `1*H_0(x)*H_0(y) + 1*H_1(x)*H_0(y) + 2*H_0(x)*H_1(y) + 2*H_1(x)*H_1(y)` if axis=0 is `x` and axis=1 is `y`.

Parameters **c** : array_like

Array of Hermite series coefficients. If c is multidimensional the different axis correspond to different variables with the degree in each axis given by the corresponding index.

m : int, optional

Order of integration, must be positive. (Default: 1)

k : {[], list, scalar}, optional

Integration constant(s). The value of the first integral at `lbnd` is the first value in the list, the value of the second integral at `lbnd` is the second value, etc. If `k == []` (the default), all constants are set to zero. If `m == 1`, a single scalar can be given instead of a list.

lbnd : scalar, optional

The lower bound of the integral. (Default: 0)

scl : scalar, optional

Following each integration the result is *multiplied* by *scl* before the integration constant is added. (Default: 1)

axis : int, optional

Axis over which the integral is taken. (Default: 0).

New in version 1.7.0.

Returns **S** : ndarray

Hermite series coefficients of the integral.

Raises **ValueError**

If `m < 0`, `len(k) > m`, `np.ndim(lbnd) != 0`, or `np.ndim(scl) != 0`.

See also:

hermder

Notes

Note that the result of each integration is *multiplied* by *scl*. Why is this important to note? Say one is making a linear change of variable $u = ax + b$ in an integral relative to x. Then $dx = du/a$, so one will need to set *scl* equal to $1/a$ - perhaps not what one would have first thought.

Also note that, in general, the result of integrating a C-series needs to be "reprojected" onto the C-series basis set. Thus, typically, the result of this function is "unintuitive," albeit correct; see Examples section below.

Examples

```
>>> from numpy.polynomial.hermite import hermint
>>> hermint([1,2,3]) # integrate once, value 0 at 0.
array([ 1. ,  0.5,  0.5,  0.5])
>>> hermint([1,2,3], m=2) # integrate twice, value & deriv 0 at 0
array([-0.5       ,  0.5       ,  0.125     ,  0.08333333,  0.0625    ])
>>> hermint([1,2,3], k=1) # integrate once, value 1 at 0.
array([ 2. ,  0.5,  0.5,  0.5])
>>> hermint([1,2,3], lbnd=-1) # integrate once, value 0 at -1
array([-2. ,  0.5,  0.5,  0.5])
>>> hermint([1,2,3], m=2, k=[1,2], lbnd=-1)
array([ 1.66666667, -0.5       ,  0.125     ,  0.08333333,  0.0625    ])
```

Algebra

hermadd(c1, c2)	Add one Hermite series to another.
hermsub(c1, c2)	Subtract one Hermite series from another.
hermmul(c1, c2)	Multiply one Hermite series by another.
hermmulx(c)	Multiply a Hermite series by x.
hermdiv(c1, c2)	Divide one Hermite series by another.
hermpow(c, pow[, maxpower])	Raise a Hermite series to a power.

numpy.polynomial.hermite.**hermadd**(*c1*, *c2*)

Add one Hermite series to another.

Returns the sum of two Hermite series *c1* + *c2*. The arguments are sequences of coefficients ordered from lowest order term to highest, i.e., [1,2,3] represents the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c1, c2** : array_like

1-D arrays of Hermite series coefficients ordered from low to high.

Returns **out** : ndarray

Array representing the Hermite series of their sum.

See also:

hermsub, *hermmul*, *hermdiv*, *hermpow*

Notes

Unlike multiplication, division, etc., the sum of two Hermite series is a Hermite series (without having to "reproject" the result onto the basis set) so addition, just like that of "standard" polynomials, is simply "componentwise."

Examples

```
>>> from numpy.polynomial.hermite import hermadd
>>> hermadd([1, 2, 3], [1, 2, 3, 4])
array([ 2.,  4.,  6.,  4.])
```

numpy.polynomial.hermite.**hermsub**(*c1*, *c2*)
Subtract one Hermite series from another.

Returns the difference of two Hermite series *c1* - *c2*. The sequences of coefficients are from lowest order term to highest, i.e., [1,2,3] represents the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c1, c2** : array_like

1-D arrays of Hermite series coefficients ordered from low to high.

Returns **out** : ndarray

Of Hermite series coefficients representing their difference.

See also:

hermadd, *hermmul*, *hermdiv*, *hermpow*

Notes

Unlike multiplication, division, etc., the difference of two Hermite series is a Hermite series (without having to "reproject" the result onto the basis set) so subtraction, just like that of "standard" polynomials, is simply "component-wise."

Examples

```
>>> from numpy.polynomial.hermite import hermsub
>>> hermsub([1, 2, 3, 4], [1, 2, 3])
array([ 0.,  0.,  0.,  4.])
```

numpy.polynomial.hermite.**hermmul**(*c1*, *c2*)
Multiply one Hermite series by another.

Returns the product of two Hermite series *c1* * *c2*. The arguments are sequences of coefficients, from lowest order "term" to highest, e.g., [1,2,3] represents the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c1, c2** : array_like

1-D arrays of Hermite series coefficients ordered from low to high.

Returns **out** : ndarray

Of Hermite series coefficients representing their product.

See also:

hermadd, *hermsub*, *hermdiv*, *hermpow*

Notes

In general, the (polynomial) product of two C-series results in terms that are not in the Hermite polynomial basis set. Thus, to express the product as a Hermite series, it is necessary to "reproject" the product onto said basis set, which may produce "unintuitive" (but correct) results; see Examples section below.

Examples

```
>>> from numpy.polynomial.hermite import hermmul
>>> hermmul([1, 2, 3], [0, 1, 2])
array([ 52.,  29.,  52.,   7.,   6.])
```

numpy.polynomial.hermite.**hermmulx**(*c*)

Multiply a Hermite series by x.

Multiply the Hermite series *c* by x, where x is the independent variable.

Parameters **c** : array_like

1-D array of Hermite series coefficients ordered from low to high.

Returns **out** : ndarray

Array representing the result of the multiplication.

Notes

The multiplication uses the recursion relationship for Hermite polynomials in the form

xP_i(x) = (P_{i + 1}(x)/2 + i*P_{i - 1}(x))

Examples

```
>>> from numpy.polynomial.hermite import hermmulx
>>> hermmulx([1, 2, 3])
array([ 2. ,  6.5,  1. ,  1.5])
```

numpy.polynomial.hermite.**hermdiv**(*c1*, *c2*)

Divide one Hermite series by another.

Returns the quotient-with-remainder of two Hermite series *c1* / *c2*. The arguments are sequences of coefficients from lowest order "term" to highest, e.g., [1,2,3] represents the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c1, c2** : array_like

1-D arrays of Hermite series coefficients ordered from low to high.

Returns **[quo, rem]** : ndarrays

Of Hermite series coefficients representing the quotient and remainder.

See also:

hermadd, *hermsub*, *hermmul*, *hermpow*

Notes

In general, the (polynomial) division of one Hermite series by another results in quotient and remainder terms that are not in the Hermite polynomial basis set. Thus, to express these results as a Hermite series, it is necessary to "reproject" the results onto the Hermite basis set, which may produce "unintuitive" (but correct) results; see Examples section below.

Examples

```
>>> from numpy.polynomial.hermite import hermdiv
>>> hermdiv([ 52.,  29.,  52.,   7.,   6.], [0, 1, 2])
(array([ 1.,  2.,  3.]), array([ 0.]))
>>> hermdiv([ 54.,  31.,  52.,   7.,   6.], [0, 1, 2])
(array([ 1.,  2.,  3.]), array([ 2.,  2.]))
>>> hermdiv([ 53.,  30.,  52.,   7.,   6.], [0, 1, 2])
(array([ 1.,  2.,  3.]), array([ 1.,  1.]))
```

numpy.polynomial.hermite.**hermpow**(*c*, *pow*, *maxpower=16*)

Raise a Hermite series to a power.

Returns the Hermite series *c* raised to the power *pow*. The argument *c* is a sequence of coefficients ordered from low to high. i.e., [1,2,3] is the series `P_0 + 2*P_1 + 3*P_2.`

Parameters **c** : array_like

1-D array of Hermite series coefficients ordered from low to high.

pow : integer

Power to which the series will be raised

maxpower : integer, optional

Maximum power allowed. This is mainly to limit growth of the series to unmanageable size. Default is 16

Returns **coef** : ndarray

Hermite series of power.

See also:

hermadd, *hermsub*, *hermmul*, *hermdiv*

Examples

```
>>> from numpy.polynomial.hermite import hermpow
>>> hermpow([1, 2, 3], 2)
array([ 81.,  52.,  82.,  12.,   9.])
```

Quadrature

hermgauss(deg)	Gauss-Hermite quadrature.
hermweight(x)	Weight function of the Hermite polynomials.

numpy.polynomial.hermite.**hermgauss**(*deg*)

Gauss-Hermite quadrature.

Computes the sample points and weights for Gauss-Hermite quadrature. These sample points and weights will correctly integrate polynomials of degree $2*deg-1$ or less over the interval $[-\inf, \inf]$ with the weight function $f(x) = \exp(-x^2)$.

Parameters **deg** : int

Number of sample points and weights. It must be >= 1.

Returns **x** : ndarray

1-D ndarray containing the sample points.

y : ndarray

1-D ndarray containing the weights.

Notes

New in version 1.7.0.

The results have only been tested up to degree 100, higher degrees may be problematic. The weights are determined by using the fact that

$$w_k = c/(H'_n(x_k) * H_{n-1}(x_k))$$

where c is a constant independent of k and x_k is the k'th root of H_n, and then scaling the results to get the right value when integrating 1.

numpy.polynomial.hermite.**hermweight**(*x*)

Weight function of the Hermite polynomials.

The weight function is $\exp(-x^2)$ and the interval of integration is $[-\inf, \inf]$. the Hermite polynomials are orthogonal, but not normalized, with respect to this weight function.

Parameters **x** : array_like

Values at which the weight function will be computed.

Returns **w** : ndarray

The weight function at *x*.

Notes

New in version 1.7.0.

Miscellaneous

hermcompanion(c)	Return the scaled companion matrix of c.
hermdomain	
hermzero	
hermone	
hermx	
hermtrim(c[, tol])	Remove “small” “trailing” coefficients from a polynomial.
hermline(off, scl)	Hermite series whose graph is a straight line.
herm2poly(c)	Convert a Hermite series to a polynomial.
poly2herm(pol)	Convert a polynomial to a Hermite series.

numpy.polynomial.hermite.**hermcompanion**(*c*)

Return the scaled companion matrix of c.

The basis polynomials are scaled so that the companion matrix is symmetric when *c* is an Hermite basis polynomial. This provides better eigenvalue estimates than the unscaled case and for basis polynomials the eigenvalues are guaranteed to be real if *numpy.linalg.eigvalsh* is used to obtain them.

Parameters **c** : array_like

1-D array of Hermite series coefficients ordered from low to high degree.

Returns **mat** : ndarray

Scaled companion matrix of dimensions (deg, deg).

Notes

New in version 1.7.0.

numpy.polynomial.hermite.**hermdomain = array([-1, 1])**

numpy.polynomial.hermite.**hermzero = array([0])**

numpy.polynomial.hermite.**hermone = array([1])**

numpy.polynomial.hermite.**hermx = array([0. , 0.5])**

numpy.polynomial.hermite.**hermtrim**(*c*, *tol=0*)

Remove “small” “trailing” coefficients from a polynomial.

“Small” means “small in absolute value” and is controlled by the parameter *tol*; “trailing” means highest order coefficient(s), e.g., in `[0, 1, 1, 0, 0]` (which represents `0 + x + x**2 + 0*x**3 + 0*x**4`) both the 3-rd and 4-th order coefficients would be “trimmed.”

Parameters **c** : array_like

1-d array of coefficients, ordered from lowest order to highest.

tol : number, optional

Trailing (i.e., highest order) elements with absolute value less than or equal to *tol* (default value is zero) are removed.

Returns **trimmed** : ndarray

1-d array with trailing zeros removed. If the resulting series would be empty, a series containing a single zero is returned.

Raises **ValueError**

If *tol* < 0

See also:

`trimseq`

Examples

```
>>> from numpy.polynomial import polyutils as pu
>>> pu.trimcoef((0,0,3,0,5,0,0))
array([ 0.,  0.,  3.,  0.,  5.])
>>> pu.trimcoef((0,0,1e-3,0,1e-5,0,0),1e-3) # item == tol is trimmed
array([ 0.])
>>> i = complex(0,1) # works for complex
>>> pu.trimcoef((3e-4,1e-3*(1-i),5e-4,2e-5*(1+i)), 1e-3)
array([ 0.0003+0.j   ,  0.0010-0.001j])
```

numpy.polynomial.hermite.**hermline**(*off*, *scl*)

Hermite series whose graph is a straight line.

Parameters **off, scl** : scalars

The specified line is given by `off + scl*x`.

Returns **y** : ndarray

This module's representation of the Hermite series for `off + scl*x`.

See also:

`polyline`, `chebline`

Examples

```
>>> from numpy.polynomial.hermite import hermline, hermval
>>> hermval(0,hermline(3, 2))
3.0
>>> hermval(1,hermline(3, 2))
5.0
```

numpy.polynomial.hermite.**herm2poly**(*c*)

Convert a Hermite series to a polynomial.

Convert an array representing the coefficients of a Hermite series, ordered from lowest degree to highest, to an array of the coefficients of the equivalent polynomial (relative to the "standard" basis) ordered from lowest to highest degree.

Parameters **c** : array_like

1-D array containing the Hermite series coefficients, ordered from lowest order term to highest.

Returns **pol** : ndarray

1-D array containing the coefficients of the equivalent polynomial (relative to the "standard" basis) ordered from lowest order term to highest.

See also:

poly2herm

Notes

The easy way to do conversions between polynomial basis sets is to use the convert method of a class instance.

Examples

```
>>> from numpy.polynomial.hermite import herm2poly
>>> herm2poly([ 1.   ,  2.75 ,  0.5  ,  0.375])
array([ 0.,  1.,  2.,  3.])
```

numpy.polynomial.hermite.**poly2herm**(*pol*)

Convert a polynomial to a Hermite series.

Convert an array representing the coefficients of a polynomial (relative to the "standard" basis) ordered from lowest degree to highest, to an array of the coefficients of the equivalent Hermite series, ordered from lowest to highest degree.

Parameters **pol** : array_like

1-D array containing the polynomial coefficients

Returns **c** : ndarray

1-D array containing the coefficients of the equivalent Hermite series.

See also:

herm2poly

Notes

The easy way to do conversions between polynomial basis sets is to use the convert method of a class instance.

Examples

```
>>> from numpy.polynomial.hermite import poly2herm
>>> poly2herm(np.arange(4))
array([ 1.   ,  2.75 ,  0.5  ,  0.375])
```

HermiteE Module, "Probabilists'" (numpy.polynomial.hermite_e)

New in version 1.6.0.

This module provides a number of objects (mostly functions) useful for dealing with HermiteE series, including a *HermiteE* class that encapsulates the usual arithmetic operations. (General information on how this module represents and works with such polynomials is in the docstring for its "parent" sub-package, numpy.polynomial).

HermiteE Class

HermiteE(coef[, domain, window])	An HermiteE series class.

class numpy.polynomial.hermite_e.**HermiteE**(*coef*, *domain=None*, *window=None*)

An HermiteE series class.

The HermiteE class provides the standard Python numerical methods '+', '-', '*', '//', '%', 'divmod', '**', and '()' as well as the attributes and methods listed in the `ABCPolyBase` documentation.

Parameters **coef** : array_like

HermiteE coefficients in order of increasing degree, i.e, `(1, 2, 3)` gives `1*He_0(x) + 2*He_1(X) + 3*He_2(x)`.

domain : (2,) array_like, optional

Domain to use. The interval `[domain[0], domain[1]]` is mapped to the interval `[window[0], window[1]]` by shifting and scaling. The default value is [-1, 1].

window : (2,) array_like, optional

Window, see `domain` for its use. The default value is [-1, 1].

New in version 1.6.0.

Methods

__call__(arg)	Call self as a function.
basis(deg[, domain, window])	Series basis polynomial of degree *deg*.
cast(series[, domain, window])	Convert series to series of this class.
convert([domain, kind, window])	Convert series to a different kind and/or domain and/or window.
copy()	Return a copy.
cutdeg(deg)	Truncate series to the given degree.
degree()	The degree of the series.
deriv([m])	Differentiate.
fit(x, y, deg[, domain, rcond, full, w, window])	Least squares fit to data.
fromroots(roots[, domain, window])	Return series instance that has the specified roots.
has_samecoef(other)	Check if coefficients match.
has_samedomain(other)	Check if domains match.
has_sametype(other)	Check if types match.
has_samewindow(other)	Check if windows match.
identity([domain, window])	Identity function.
integ([m, k, lbnd])	Integrate.
linspace([n, domain])	Return x, y values at equally spaced points in domain.
mapparms()	Return the mapping parameters.
roots()	Return the roots of the series polynomial.
trim([tol])	Remove trailing coefficients
truncate(size)	Truncate series to length *size*.

HermiteE.**__call__**(*arg*)

Call self as a function.

classmethod HermiteE.**basis**(*deg*, *domain=None*, *window=None*)

Series basis polynomial of degree *deg*.

Returns the series representing the basis polynomial of degree *deg*.

New in version 1.7.0.

Parameters **deg** : int

Degree of the basis polynomial for the series. Must be >= 0.

domain : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form `[beg, end]`, where `beg` and `end` are the endpoints of the window. If None is given then the class window is used. The default is None.

Returns **new_series** : series

A series with the coefficient of the *deg* term set to one and all others zero.

classmethod HermiteE.**cast**(*series*, *domain=None*, *window=None*)

Convert series to series of this class.

The *series* is expected to be an instance of some polynomial series of one of the types supported by by the numpy.polynomial module, but could be some other class that supports the convert method.

New in version 1.7.0.

Parameters **series** : series

The series instance to be converted.

domain : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form `[beg, end]`, where `beg` and `end` are the endpoints of the window. If None is given then the class window is used. The default is None.

Returns **new_series** : series

A series of the same kind as the calling class and equal to *series* when evaluated.

See also:

convert similar instance method

HermiteE.**convert**(*domain=None*, *kind=None*, *window=None*)

Convert series to a different kind and/or domain and/or window.

Parameters **domain** : array_like, optional

The domain of the converted series. If the value is None, the default domain of *kind* is used.

kind : class, optional

The polynomial series type class to which the current instance should be converted. If kind is None, then the class of the current instance is used.

window : array_like, optional

The window of the converted series. If the value is None, the default window of *kind* is used.

Returns **new_series** : series

The returned class can be of different type than the current instance and/or have a different domain and/or different window.

Notes

Conversion between domains and class types can result in numerically ill defined series.

`HermiteE.`**`copy`**`()`
Return a copy.

Returns **new_series** : series

Copy of self.

`HermiteE.`**`cutdeg`**`(`*deg*`)`
Truncate series to the given degree.

Reduce the degree of the series to *deg* by discarding the high order terms. If *deg* is greater than the current degree a copy of the current series is returned. This can be useful in least squares where the coefficients of the high degree terms may be very small.

New in version 1.5.0.

Parameters **deg** : non-negative int

The series is reduced to degree *deg* by discarding the high order terms. The value of *deg* must be a non-negative integer.

Returns **new_series** : series

New instance of series with reduced degree.

`HermiteE.`**`degree`**`()`
The degree of the series.

New in version 1.5.0.

Returns **degree** : int

Degree of the series, one less than the number of coefficients.

`HermiteE.`**`deriv`**`(`*m=1*`)`
Differentiate.

Return a series instance of that is the derivative of the current series.

Parameters **m** : non-negative int

Find the derivative of order *m*.

Returns **new_series** : series

A new series representing the derivative. The domain is the same as the domain of the differentiated series.

`classmethod` `HermiteE.`**`fit`**`(`*x*, *y*, *deg*, *domain=None*, *rcond=None*, *full=False*, *w=None*, *window=None*`)`
Least squares fit to data.

Return a series instance that is the least squares fit to the data *y* sampled at *x*. The domain of the returned instance can be specified and this will often result in a superior fit with less chance of ill conditioning.

Parameters **x** : array_like, shape (M,)

x-coordinates of the M sample points `(x[i], y[i])`.

y : array_like, shape (M,) or (M, K)

y-coordinates of the sample points. Several data sets of sample points sharing the same x-coordinates can be fitted at once by passing in a 2D-array that contains one dataset per column.

deg : int or 1-D array_like

Degree(s) of the fitting polynomials. If *deg* is a single integer all terms up to and including the *deg*'th term are included in the fit. For NumPy versions >= 1.11.0 a list of integers specifying the degrees of the terms to include may be used instead.

domain : {None, [beg, end], []}, optional

Domain to use for the returned series. If `None`, then a minimal domain that covers the points *x* is chosen. If `[]` the class domain is used. The default value was the class domain in NumPy 1.4 and `None` in later versions. The `[]` option was added in numpy 1.5.0.

rcond : float, optional

Relative condition number of the fit. Singular values smaller than this relative to the largest singular value will be ignored. The default value is len(x)*eps, where eps is the relative precision of the float type, about 2e-16 in most cases.

full : bool, optional

Switch determining nature of return value. When it is False (the default) just the coefficients are returned, when True diagnostic information from the singular value decomposition is also returned.

w : array_like, shape (M,), optional

Weights. If not None the contribution of each point `(x[i],y[i])` to the fit is weighted by *w[i]*. Ideally the weights are chosen so that the errors of the products `w[i]*y[i]` all have the same variance. The default value is None.

New in version 1.5.0.

window : {[beg, end]}, optional

Window to use for the returned series. The default value is the default class domain

New in version 1.6.0.

Returns **new_series** : series

A series that represents the least squares fit to the data and has the domain specified in the call.

[resid, rank, sv, rcond] : list

These values are only returned if *full* = True

resid – sum of squared residuals of the least squares fit rank – the numerical rank of the scaled Vandermonde matrix sv – singular values of the scaled Vandermonde matrix rcond – value of *rcond*.

For more details, see *linalg.lstsq*.

classmethod HermiteE.**fromroots**(*roots*, *domain=[]*, *window=None*)
Return series instance that has the specified roots.

Returns a series representing the product `(x - r[0])*(x - r[1])*...*(x - r[n-1])`, where `r` is a list of roots.

Parameters **roots** : array_like

List of roots.

domain : {[], None, array_like}, optional

Domain for the resulting series. If None the domain is the interval from the smallest root to the largest. If [] the domain is the class domain. The default is [].

window : {None, array_like}, optional

Window for the returned series. If None the class window is used. The default is None.

Returns **new_series** : series

Series with the specified roots.

HermiteE.**has_samecoef**(*other*)
Check if coefficients match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `coef` attribute.

Returns **bool** : boolean

True if the coefficients are the same, False otherwise.

HermiteE.**has_samedomain**(*other*)
Check if domains match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `domain` attribute.

Returns **bool** : boolean

True if the domains are the same, False otherwise.

HermiteE.**has_sametype**(*other*)
Check if types match.

New in version 1.7.0.

Parameters **other** : object

Class instance.

Returns **bool** : boolean

True if other is same class as self

HermiteE.**has_samewindow**(*other*)
Check if windows match.

New in version 1.6.0.

Parameters **other** : class instance

The other class must have the `window` attribute.

Returns **bool** : boolean

True if the windows are the same, False otherwise.

classmethod HermiteE.**identity**(*domain=None*, *window=None*)

Identity function.

If `p` is the returned series, then `p(x) == x` for all values of x.

Parameters **domain** : {None, array_like}, optional

If given, the array must be of the form `[beg, end]`, where `beg` and `end` are the endpoints of the domain. If None is given then the class domain is used. The default is None.

window : {None, array_like}, optional

If given, the resulting array must be if the form `[beg, end]`, where `beg` and `end` are the endpoints of the window. If None is given then the class window is used. The default is None.

Returns **new_series** : series

Series of representing the identity.

HermiteE.**integ**(*m=1*, *k=[]*, *lbnd=None*)

Integrate.

Return a series instance that is the definite integral of the current series.

Parameters **m** : non-negative int

The number of integrations to perform.

k : array_like

Integration constants. The first constant is applied to the first integration, the second to the second, and so on. The list of values must less than or equal to *m* in length and any missing values are set to zero.

lbnd : Scalar

The lower bound of the definite integral.

Returns **new_series** : series

A new series representing the integral. The domain is the same as the domain of the integrated series.

HermiteE.**linspace**(*n=100*, *domain=None*)

Return x, y values at equally spaced points in domain.

Returns the x, y values at *n* linearly spaced points across the domain. Here y is the value of the polynomial at the points x. By default the domain is the same as that of the series instance. This method is intended mostly as a plotting aid.

New in version 1.5.0.

Parameters **n** : int, optional

Number of point pairs to return. The default value is 100.

domain : {None, array_like}, optional

If not None, the specified domain is used instead of that of the calling instance. It should be of the form `[beg,end]`. The default is None which case the class domain is used.

Returns **x, y** : ndarray

x is equal to linspace(self.domain[0], self.domain[1], n) and y is the series evaluated at element of x.

`HermiteE.`**`mapparms`**`()`

Return the mapping parameters.

The returned values define a linear map `off + scl*x` that is applied to the input arguments before the series is evaluated. The map depends on the `domain` and `window`; if the current `domain` is equal to the `window` the resulting map is the identity. If the coefficients of the series instance are to be used by themselves outside this class, then the linear function must be substituted for the `x` in the standard representation of the base polynomials.

Returns **off, scl** : float or complex

The mapping function is defined by `off + scl*x`.

Notes

If the current domain is the interval `[l1, r1]` and the window is `[l2, r2]`, then the linear mapping function `L` is defined by the equations:

```
L(l1) = l2
L(r1) = r2
```

`HermiteE.`**`roots`**`()`

Return the roots of the series polynomial.

Compute the roots for the series. Note that the accuracy of the roots decrease the further outside the domain they lie.

Returns **roots** : ndarray

Array containing the roots of the series.

`HermiteE.`**`trim`**`(`*`tol=0`*`)`

Remove trailing coefficients

Remove trailing coefficients until a coefficient is reached whose absolute value greater than *tol* or the beginning of the series is reached. If all the coefficients would be removed the series is set to `[0]`. A new series instance is returned with the new coefficients. The current instance remains unchanged.

Parameters **tol** : non-negative number.

All trailing coefficients less than *tol* will be removed.

Returns **new_series** : series

Contains the new set of coefficients.

`HermiteE.`**`truncate`**`(`*`size`*`)`

Truncate series to length *size*.

Reduce the series to length *size* by discarding the high degree terms. The value of *size* must be a positive integer. This can be useful in least squares where the coefficients of the high degree terms may be very small.

Parameters **size** : positive int

The series is reduced to length *size* by discarding the high degree terms. The value of *size* must be a positive integer.

Returns **new_series** : series

New instance of series with truncated coefficients.

Basics

hermeval(x, c[, tensor])	Evaluate an HermiteE series at points x.
hermeval2d(x, y, c)	Evaluate a 2-D HermiteE series at points (x, y).
hermeval3d(x, y, z, c)	Evaluate a 3-D Hermite_e series at points (x, y, z).
hermegrid2d(x, y, c)	Evaluate a 2-D HermiteE series on the Cartesian product of x and y.
hermegrid3d(x, y, z, c)	Evaluate a 3-D HermiteE series on the Cartesian product of x, y, and z.
hermeroots(c)	Compute the roots of a HermiteE series.
hermefromroots(roots)	Generate a HermiteE series with given roots.

numpy.polynomial.hermite_e.**hermeval**(*x*, *c*, *tensor=True*)

Evaluate an HermiteE series at points x.

If *c* is of length *n + 1*, this function returns the value:

$$p(x) = c_0 * He_0(x) + c_1 * He_1(x) + ... + c_n * He_n(x)$$

The parameter *x* is converted to an array only if it is a tuple or a list, otherwise it is treated as a scalar. In either case, either *x* or its elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* is a 1-D array, then *p(x)* will have the same shape as *x*. If *c* is multidimensional, then the shape of the result depends on the value of *tensor*. If *tensor* is true the shape will be c.shape[1:] + x.shape. If *tensor* is false the shape will be c.shape[1:]. Note that scalars have shape (,).

Trailing zeros in the coefficients will be used in the evaluation, so they should be avoided if efficiency is a concern.

Parameters **x** : array_like, compatible object

If *x* is a list or tuple, it is converted to an ndarray, otherwise it is left unchanged and treated as a scalar. In either case, *x* or its elements must support addition and multiplication with with themselves and with the elements of *c*.

c : array_like

Array of coefficients ordered so that the coefficients for terms of degree n are contained in c[n]. If *c* is multidimensional the remaining indices enumerate multiple polynomials. In the two dimensional case the coefficients may be thought of as stored in the columns of *c*.

tensor : boolean, optional

If True, the shape of the coefficient array is extended with ones on the right, one for each dimension of *x*. Scalars have dimension 0 for this action. The result is that every column of coefficients in *c* is evaluated for every element of *x*. If False, *x* is broadcast over the columns of *c* for the evaluation. This keyword is useful when *c* is multidimensional. The default value is True.

New in version 1.7.0.

Returns **values** : ndarray, algebra_like

The shape of the return value is described above.

See also:

hermeval2d, *hermegrid2d*, *hermeval3d*, *hermegrid3d*

Notes

The evaluation uses Clenshaw recursion, aka synthetic division.

Examples

```
>>> from numpy.polynomial.hermite_e import hermeval
>>> coef = [1,2,3]
>>> hermeval(1, coef)
3.0
>>> hermeval([[1,2],[3,4]], coef)
array([[  3.,  14.],
       [ 31.,  54.]])
```

numpy.polynomial.hermite_e.**hermeval2d**(*x*, *y*, *c*)

Evaluate a 2-D HermiteE series at points (x, y).

This function returns the values:

$$p(x,y) = \sum_{i,j} c_{i,j} * He_i(x) * He_j(y)$$

The parameters *x* and *y* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars and they must have the same shape after conversion. In either case, either *x* and *y* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* is a 1-D array a one is implicitly appended to its shape to make it 2-D. The shape of the result will be c.shape[2:] + x.shape.

Parameters **x, y** : array_like, compatible objects

The two dimensional series is evaluated at the points *(x, y)*, where *x* and *y* must have the same shape. If *x* or *y* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and if it isn't an ndarray it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficient of the term of multi-degree i,j is contained in `c[i,j]`. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional polynomial at points formed with pairs of corresponding values from *x* and *y*.

See also:

hermeval, *hermegrid2d*, *hermeval3d*, *hermegrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.hermite_e.**hermeval3d**(*x*, *y*, *z*, *c*)
Evaluate a 3-D Hermite_e series at points (x, y, z).

This function returns the values:

$$p(x,y,z) = \sum_{i,j,k} c_{i,j,k} * He_i(x) * He_j(y) * He_k(z)$$

The parameters *x*, *y*, and *z* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars and they must have the same shape after conversion. In either case, either *x*, *y*, and *z* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than 3 dimensions, ones are implicitly appended to its shape to make it 3-D. The shape of the result will be c.shape[3:] + x.shape.

Parameters **x, y, z** : array_like, compatible object

The three dimensional series is evaluated at the points *(x, y, z)*, where *x*, *y*, and *z* must have the same shape. If any of *x*, *y*, or *z* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and if it isn't an ndarray it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficient of the term of multi-degree i,j,k is contained in `c[i,j,k]`. If *c* has dimension greater than 3 the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the multidimensional polynomial on points formed with triples of corresponding values from *x*, *y*, and *z*.

See also:

hermeval, *hermeval2d*, *hermegrid2d*, *hermegrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.hermite_e.**hermegrid2d**(*x*, *y*, *c*)
Evaluate a 2-D HermiteE series on the Cartesian product of x and y.

This function returns the values:

$$p(a,b) = \sum_{i,j} c_{i,j} * H_i(a) * H_j(b)$$

where the points *(a, b)* consist of all pairs formed by taking *a* from *x* and *b* from *y*. The resulting points form a grid with *x* in the first dimension and *y* in the second.

The parameters *x* and *y* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars. In either case, either *x* and *y* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than two dimensions, ones are implicitly appended to its shape to make it 2-D. The shape of the result will be c.shape[2:] + x.shape.

Parameters **x, y** : array_like, compatible objects

The two dimensional series is evaluated at the points in the Cartesian product of *x* and *y*. If *x* or *y* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and, if it isn't an ndarray, it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficients for terms of degree i,j are contained in `c[i,j]`. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional polynomial at points in the Cartesian product of *x* and *y*.

See also:

hermeval, *hermeval2d*, *hermeval3d*, *hermegrid3d*

Notes

New in version 1.7.0.

numpy.polynomial.hermite_e.**hermegrid3d**(*x*, *y*, *z*, *c*)

Evaluate a 3-D HermiteE series on the Cartesian product of x, y, and z.

This function returns the values:

$$p(a,b,c) = \sum_{i,j,k} c_{i,j,k} * He_i(a) * He_j(b) * He_k(c)$$

where the points *(a, b, c)* consist of all triples formed by taking *a* from *x*, *b* from *y*, and *c* from *z*. The resulting points form a grid with *x* in the first dimension, *y* in the second, and *z* in the third.

The parameters *x*, *y*, and *z* are converted to arrays only if they are tuples or a lists, otherwise they are treated as a scalars. In either case, either *x*, *y*, and *z* or their elements must support multiplication and addition both with themselves and with the elements of *c*.

If *c* has fewer than three dimensions, ones are implicitly appended to its shape to make it 3-D. The shape of the result will be c.shape[3:] + x.shape + y.shape + z.shape.

Parameters **x, y, z** : array_like, compatible objects

The three dimensional series is evaluated at the points in the Cartesian product of *x*, *y*, and *z*. If *x*,'y', or *z* is a list or tuple, it is first converted to an ndarray, otherwise it is left unchanged and, if it isn't an ndarray, it is treated as a scalar.

c : array_like

Array of coefficients ordered so that the coefficients for terms of degree i,j are contained in `c[i,j]`. If *c* has dimension greater than two the remaining indices enumerate multiple sets of coefficients.

Returns **values** : ndarray, compatible object

The values of the two dimensional polynomial at points in the Cartesian product of *x* and *y*.

See also:

hermeval, *hermeval2d*, *hermegrid2d*, *hermeval3d*

Notes

New in version 1.7.0.

numpy.polynomial.hermite_e.**hermeroots**(*c*)
Compute the roots of a HermiteE series.

Return the roots (a.k.a. "zeros") of the polynomial

$$p(x) = \sum_i c[i] * He_i(x).$$

Parameters **c** : 1-D array_like

1-D array of coefficients.

Returns **out** : ndarray

Array of the roots of the series. If all the roots are real, then *out* is also real, otherwise it is complex.

See also:

`polyroots`, `legroots`, `lagroots`, `hermroots`, `chebroots`

Notes

The root estimates are obtained as the eigenvalues of the companion matrix, Roots far from the origin of the complex plane may have large errors due to the numerical instability of the series for such values. Roots with multiplicity greater than 1 will also show larger errors as the value of the series near such points is relatively insensitive to errors in the roots. Isolated roots near the origin can be improved by a few iterations of Newton's method.

The HermiteE series basis polynomials aren't powers of *x* so the results of this function may seem unintuitive.

Examples

```
>>> from numpy.polynomial.hermite_e import hermeroots, hermefromroots
>>> coef = hermefromroots([-1, 0, 1])
>>> coef
array([ 0.,  2.,  0.,  1.])
>>> hermeroots(coef)
array([-1.,  0.,  1.])
```

numpy.polynomial.hermite_e.**hermefromroots**(*roots*)
Generate a HermiteE series with given roots.

The function returns the coefficients of the polynomial

$$p(x) = (x - r_0) * (x - r_1) * ... * (x - r_n),$$

in HermiteE form, where the *r_n* are the roots specified in *roots*. If a zero has multiplicity n, then it must appear in *roots* n times. For instance, if 2 is a root of multiplicity three and 3 is a root of multiplicity 2, then *roots* looks something like [2, 2, 2, 3, 3]. The roots can appear in any order.

If the returned coefficients are *c*, then

$$p(x) = c_0 + c_1 * He_1(x) + ... + c_n * He_n(x)$$

The coefficient of the last term is not generally 1 for monic polynomials in HermiteE form.

Parameters **roots** : array_like

Sequence containing the roots.

Returns **out** : ndarray

1-D array of coefficients. If all roots are real then *out* is a real array, if some of the roots are complex, then *out* is complex even if all the coefficients in the result are real (see Examples below).

See also:

`polyfromroots`, `legfromroots`, `lagfromroots`, `hermfromroots`, `chebfromroots`.

Examples

```
>>> from numpy.polynomial.hermite_e import hermefromroots, hermeval
>>> coef = hermefromroots((-1, 0, 1))
>>> hermeval((-1, 0, 1), coef)
array([ 0.,  0.,  0.])
>>> coef = hermefromroots((-1j, 1j))
>>> hermeval((-1j, 1j), coef)
array([ 0.+0.j,  0.+0.j])
```

Fitting

hermefit(x, y, deg[, rcond, full, w])	Least squares fit of Hermite series to data.
hermevander(x, deg)	Pseudo-Vandermonde matrix of given degree.
hermevander2d(x, y, deg)	Pseudo-Vandermonde matrix of given degrees.
hermevander3d(x, y, z, deg)	Pseudo-Vandermonde matrix of given degrees.

`numpy.polynomial.hermite_e.`**`hermefit`**(*x*, *y*, *deg*, *rcond=None*, *full=False*, *w=None*)

Least squares fit of Hermite series to data.

Return the coefficients of a HermiteE series of degree *deg* that is the least squares fit to the data values *y* given at points *x*. If *y* is 1-D the returned coefficients will also be 1-D. If *y* is 2-D multiple fits are done, one for each column of *y*, and the resulting coefficients are stored in the corresponding columns of a 2-D return. The fitted polynomial(s) are in the form

$$p(x) = c_0 + c_1 * He_1(x) + ... + c_n * He_n(x),$$

where *n* is *deg*.

Parameters **x** : array_like, shape (M,)

x-coordinates of the M sample points `(x[i], y[i])`.

y : array_like, shape (M,) or (M, K)

y-coordinates of the sample points. Several data sets of sample points sharing the same x-coordinates can be fitted at once by passing in a 2D-array that contains one dataset per column.

deg : int or 1-D array_like

Degree(s) of the fitting polynomials. If *deg* is a single integer all terms up to and including the *deg*'th term are included in the fit. For NumPy versions >= 1.11.0 a list of

integers specifying the degrees of the terms to include may be used instead.

rcond : float, optional

Relative condition number of the fit. Singular values smaller than this relative to the largest singular value will be ignored. The default value is len(x)*eps, where eps is the relative precision of the float type, about 2e-16 in most cases.

full : bool, optional

Switch determining nature of return value. When it is False (the default) just the coefficients are returned, when True diagnostic information from the singular value decomposition is also returned.

w : array_like, shape (*M*,), optional

Weights. If not None, the contribution of each point `(x[i],y[i])` to the fit is weighted by *w[i]*. Ideally the weights are chosen so that the errors of the products `w[i]*y[i]` all have the same variance. The default value is None.

Returns **coef** : ndarray, shape (M,) or (M, K)

Hermite coefficients ordered from low to high. If *y* was 2-D, the coefficients for the data in column k of *y* are in column *k*.

[residuals, rank, singular_values, rcond] : list

These values are only returned if *full* = True

resid – sum of squared residuals of the least squares fit rank – the numerical rank of the scaled Vandermonde matrix sv – singular values of the scaled Vandermonde matrix rcond – value of *rcond*.

For more details, see *linalg.lstsq*.

Warns **RankWarning**

The rank of the coefficient matrix in the least-squares fit is deficient. The warning is only raised if *full* = False. The warnings can be turned off by

```
>>> import warnings
>>> warnings.simplefilter('ignore', RankWarning)
```

See also:

`chebfit`, `legfit`, `polyfit`, `hermfit`, `polyfit`

hermeval Evaluates a Hermite series.

hermevander pseudo Vandermonde matrix of Hermite series.

hermeweight HermiteE weight function.

`linalg.lstsq` Computes a least-squares fit from the matrix.

`scipy.interpolate.UnivariateSpline` Computes spline fits.

Notes

The solution is the coefficients of the HermiteE series *p* that minimizes the sum of the weighted squared errors

$$E = \sum_j w_j^2 * |y_j - p(x_j)|^2,$$

where the w_j are the weights. This problem is solved by setting up the (typically) overdetermined matrix equation

$$V(x) * c = w * y,$$

where *V* is the pseudo Vandermonde matrix of *x*, the elements of *c* are the coefficients to be solved for, and the elements of *y* are the observed values. This equation is then solved using the singular value decomposition of *V*.

If some of the singular values of *V* are so small that they are neglected, then a *RankWarning* will be issued. This means that the coefficient values may be poorly determined. Using a lower order fit will usually get rid of the warning. The *rcond* parameter can also be set to a value smaller than its default, but the resulting fit may be spurious and have large contributions from roundoff error.

Fits using HermiteE series are probably most useful when the data can be approximated by `sqrt(w(x)) * p(x)`, where *w(x)* is the HermiteE weight. In that case the weight `sqrt(w(x[i])` should be used together with data values `y[i]/sqrt(w(x[i]))`. The weight function is available as *hermeweight*.

References

[R70]

Examples

```
>>> from numpy.polynomial.hermite_e import hermefit, hermeval
>>> x = np.linspace(-10, 10)
>>> err = np.random.randn(len(x))/10
>>> y = hermeval(x, [1, 2, 3]) + err
>>> hermefit(x, y, 2)
array([ 1.01690445,  1.99951418,  2.99948696])
```

numpy.polynomial.hermite_e.**hermevander**(*x*, *deg*)

Pseudo-Vandermonde matrix of given degree.

Returns the pseudo-Vandermonde matrix of degree *deg* and sample points *x*. The pseudo-Vandermonde matrix is defined by

$$V[..., i] = He_i(x),$$

where *0 <= i <= deg*. The leading indices of *V* index the elements of *x* and the last index is the degree of the HermiteE polynomial.

If *c* is a 1-D array of coefficients of length *n + 1* and *V* is the array `V = hermevander(x, n)`, then `np.dot(V, c)` and `hermeval(x, c)` are the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of HermiteE series of the same degree and sample points.

Parameters **x** : array_like

Array of points. The dtype is converted to float64 or complex128 depending on whether any of the elements are complex. If *x* is scalar it is converted to a 1-D array.

deg : int

Degree of the resulting matrix.

Returns **vander** : ndarray

The pseudo-Vandermonde matrix. The shape of the returned matrix is `x.shape + (deg + 1,)`, where The last index is the degree of the corresponding HermiteE polynomial. The dtype will be the same as the converted *x*.

Examples

```
>>> from numpy.polynomial.hermite_e import hermevander
>>> x = np.array([-1, 0, 1])
>>> hermevander(x, 3)
array([[ 1., -1.,  0.,  2.],
       [ 1.,  0., -1., -0.],
       [ 1.,  1.,  0., -2.]])
```

numpy.polynomial.hermite_e.**hermevander2d**(*x*, *y*, *deg*)

Pseudo-Vandermonde matrix of given degrees.

Returns the pseudo-Vandermonde matrix of degrees *deg* and sample points *(x, y)*. The pseudo-Vandermonde matrix is defined by

$$V[..., (deg[1] + 1) * i + j] = He_i(x) * He_j(y),$$

where *0 <= i <= deg[0]* and *0 <= j <= deg[1]*. The leading indices of *V* index the points *(x, y)* and the last index encodes the degrees of the HermiteE polynomials.

If `V = hermevander2d(x, y, [xdeg, ydeg])`, then the columns of *V* correspond to the elements of a 2-D coefficient array *c* of shape (xdeg + 1, ydeg + 1) in the order

$$c_{00}, c_{01}, c_{02}..., c_{10}, c_{11}, c_{12}...$$

and `np.dot(V, c.flat)` and `hermeval2d(x, y, c)` will be the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of 2-D HermiteE series of the same degrees and sample points.

Parameters **x, y** : array_like

Arrays of point coordinates, all of the same shape. The dtypes will be converted to either float64 or complex128 depending on whether any of the elements are complex. Scalars are converted to 1-D arrays.

deg : list of ints

List of maximum degrees of the form [x_deg, y_deg].

Returns **vander2d** : ndarray

The shape of the returned matrix is `x.shape + (order,)`, where $order = (deg[0] + 1) * (deg([1] + 1)$. The dtype will be the same as the converted *x* and *y*.

See also:

hermevander, hermevander3d., *hermeval3d*

Notes

New in version 1.7.0.

numpy.polynomial.hermite_e.**hermevander3d**(*x*, *y*, *z*, *deg*)

Pseudo-Vandermonde matrix of given degrees.

Returns the pseudo-Vandermonde matrix of degrees *deg* and sample points *(x, y, z)*. If *l, m, n* are the given degrees in *x, y, z*, then Hehe pseudo-Vandermonde matrix is defined by

$$V[..., (m + 1)(n + 1)i + (n + 1)j + k] = He_i(x) * He_j(y) * He_k(z),$$

where *0 <= i <= l*, *0 <= j <= m*, and *0 <= j <= n*. The leading indices of *V* index the points *(x, y, z)* and the last index encodes the degrees of the HermiteE polynomials.

If `V = hermevander3d(x, y, z, [xdeg, ydeg, zdeg])`, then the columns of *V* correspond to the elements of a 3-D coefficient array *c* of shape (xdeg + 1, ydeg + 1, zdeg + 1) in the order

$$c_{000}, c_{001}, c_{002}, ..., c_{010}, c_{011}, c_{012}, ...$$

and `np.dot(V, c.flat)` and `hermeval3d(x, y, z, c)` will be the same up to roundoff. This equivalence is useful both for least squares fitting and for the evaluation of a large number of 3-D HermiteE series of the same degrees and sample points.

Parameters **x, y, z** : array_like

Arrays of point coordinates, all of the same shape. The dtypes will be converted to either float64 or complex128 depending on whether any of the elements are complex. Scalars are converted to 1-D arrays.

deg : list of ints

List of maximum degrees of the form [x_deg, y_deg, z_deg].

Returns **vander3d** : ndarray

The shape of the returned matrix is `x.shape + (order,)`, where $order = (deg[0] + 1) * (deg([1] + 1) * (deg[2] + 1)$. The dtype will be the same as the converted *x*, *y*, and *z*.

See also:

hermevander, `hermevander3d.`, *hermeval3d*

Notes

New in version 1.7.0.

Calculus

hermeder(c[, m, scl, axis])	Differentiate a Hermite_e series.
hermeint(c[, m, k, lbnd, scl, axis])	Integrate a Hermite_e series.

`numpy.polynomial.hermite_e.`**`hermeder`**(*c*, *m=1*, *scl=1*, *axis=0*)

Differentiate a Hermite_e series.

Returns the series coefficients *c* differentiated *m* times along *axis*. At each iteration the result is multiplied by *scl* (the scaling factor is for use in a linear change of variable). The argument *c* is an array of coefficients from low to high degree along each axis, e.g., [1,2,3] represents the series `1*He_0 + 2*He_1 + 3*He_2` while [[1,2],[1,2]] represents `1*He_0(x)*He_0(y) + 1*He_1(x)*He_0(y) + 2*He_0(x)*He_1(y) + 2*He_1(x)*He_1(y)` if axis=0 is `x` and axis=1 is `y`.

Parameters **c** : array_like

Array of Hermite_e series coefficients. If *c* is multidimensional the different axis correspond to different variables with the degree in each axis given by the corresponding index.

m : int, optional

Number of derivatives taken, must be non-negative. (Default: 1)

scl : scalar, optional

Each differentiation is multiplied by *scl*. The end result is multiplication by `scl**m`. This is for use in a linear change of variable. (Default: 1)

axis : int, optional

Axis over which the derivative is taken. (Default: 0).

New in version 1.7.0.

Returns **der** : ndarray

Hermite series of the derivative.

See also:

hermeint

Notes

In general, the result of differentiating a Hermite series does not resemble the same operation on a power series. Thus the result of this function may be "unintuitive," albeit correct; see Examples section below.

Examples

```
>>> from numpy.polynomial.hermite_e import hermeder
>>> hermeder([ 1.,  1.,  1.,  1.])
array([ 1.,  2.,  3.])
>>> hermeder([-0.25,  1.,  1./2.,  1./3.,  1./4 ], m=2)
array([ 1.,  2.,  3.])
```

numpy.polynomial.hermite_e.**hermeint**(*c*, *m=1*, *k=[]*, *lbnd=0*, *scl=1*, *axis=0*)

Integrate a Hermite_e series.

Returns the Hermite_e series coefficients *c* integrated *m* times from *lbnd* along *axis*. At each iteration the resulting series is **multiplied** by *scl* and an integration constant, *k*, is added. The scaling factor is for use in a linear change of variable. ("Buyer beware": note that, depending on what one is doing, one may want *scl* to be the reciprocal of what one might expect; for more information, see the Notes section below.) The argument *c* is an array of coefficients from low to high degree along each axis, e.g., [1,2,3] represents the series `H_0 + 2*H_1 + 3*H_2` while [[1,2],[1,2]] represents `1*H_0(x)*H_0(y) + 1*H_1(x)*H_0(y) + 2*H_0(x)*H_1(y) + 2*H_1(x)*H_1(y)` if axis=0 is `x` and axis=1 is `y`.

Parameters **c** : array_like

Array of Hermite_e series coefficients. If c is multidimensional the different axis correspond to different variables with the degree in each axis given by the corresponding index.

m : int, optional

Order of integration, must be positive. (Default: 1)

k : {[], list, scalar}, optional

Integration constant(s). The value of the first integral at `lbnd` is the first value in the list, the value of the second integral at `lbnd` is the second value, etc. If `k == []` (the

default), all constants are set to zero. If `m == 1`, a single scalar can be given instead of a list.

lbnd : scalar, optional

The lower bound of the integral. (Default: 0)

scl : scalar, optional

Following each integration the result is *multiplied* by *scl* before the integration constant is added. (Default: 1)

axis : int, optional

Axis over which the integral is taken. (Default: 0).

New in version 1.7.0.

Returns **S** : ndarray

Hermite_e series coefficients of the integral.

Raises **ValueError**

If `m < 0`, `len(k) > m`, `np.ndim(lbnd) != 0`, or `np.ndim(scl) != 0`.

See also:

hermeder

Notes

Note that the result of each integration is *multiplied* by *scl*. Why is this important to note? Say one is making a linear change of variable $u = ax + b$ in an integral relative to x. Then $dx = du/a$, so one will need to set *scl* equal to $1/a$ - perhaps not what one would have first thought.

Also note that, in general, the result of integrating a C-series needs to be "reprojected" onto the C-series basis set. Thus, typically, the result of this function is "unintuitive," albeit correct; see Examples section below.

Examples

```
>>> from numpy.polynomial.hermite_e import hermeint
>>> hermeint([1, 2, 3]) # integrate once, value 0 at 0.
array([ 1.,  1.,  1.,  1.])
>>> hermeint([1, 2, 3], m=2) # integrate twice, value & deriv 0 at 0
array([-0.25      ,  1.        ,  0.5       ,  0.33333333,  0.25      ])
>>> hermeint([1, 2, 3], k=1) # integrate once, value 1 at 0.
array([ 2.,  1.,  1.,  1.])
>>> hermeint([1, 2, 3], lbnd=-1) # integrate once, value 0 at -1
array([-1.,  1.,  1.,  1.])
>>> hermeint([1, 2, 3], m=2, k=[1, 2], lbnd=-1)
array([ 1.83333333,  0.        ,  0.5       ,  0.33333333,  0.25      ])
```

Algebra

hermeadd(c1, c2)	Add one Hermite series to another.

Continued on next page

Table 142 – continued from previous page

hermesub(c1, c2)	Subtract one Hermite series from another.
hermemul(c1, c2)	Multiply one Hermite series by another.
hermemulx(c)	Multiply a Hermite series by x.
hermediv(c1, c2)	Divide one Hermite series by another.
hermepow(c, pow[, maxpower])	Raise a Hermite series to a power.

numpy.polynomial.hermite_e.**hermeadd**(*c1*, *c2*)

Add one Hermite series to another.

Returns the sum of two Hermite series *c1* + *c2*. The arguments are sequences of coefficients ordered from lowest order term to highest, i.e., [1,2,3] represents the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c1, c2** : array_like

1-D arrays of Hermite series coefficients ordered from low to high.

Returns **out** : ndarray

Array representing the Hermite series of their sum.

See also:

hermesub, *hermemul*, *hermediv*, *hermepow*

Notes

Unlike multiplication, division, etc., the sum of two Hermite series is a Hermite series (without having to "re-project" the result onto the basis set) so addition, just like that of "standard" polynomials, is simply "component-wise."

Examples

```
>>> from numpy.polynomial.hermite_e import hermeadd
>>> hermeadd([1, 2, 3], [1, 2, 3, 4])
array([ 2.,  4.,  6.,  4.])
```

numpy.polynomial.hermite_e.**hermesub**(*c1*, *c2*)

Subtract one Hermite series from another.

Returns the difference of two Hermite series *c1* - *c2*. The sequences of coefficients are from lowest order term to highest, i.e., [1,2,3] represents the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c1, c2** : array_like

1-D arrays of Hermite series coefficients ordered from low to high.

Returns **out** : ndarray

Of Hermite series coefficients representing their difference.

See also:

hermeadd, *hermemul*, *hermediv*, *hermepow*

Notes

Unlike multiplication, division, etc., the difference of two Hermite series is a Hermite series (without having to "reproject" the result onto the basis set) so subtraction, just like that of "standard" polynomials, is simply "component-wise."

Examples

```
>>> from numpy.polynomial.hermite_e import hermesub
>>> hermesub([1, 2, 3, 4], [1, 2, 3])
array([ 0.,  0.,  0.,  4.])
```

numpy.polynomial.hermite_e.**hermemul**(*c1*, *c2*)
Multiply one Hermite series by another.

Returns the product of two Hermite series *c1* * *c2*. The arguments are sequences of coefficients, from lowest order "term" to highest, e.g., [1,2,3] represents the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c1, c2** : array_like

1-D arrays of Hermite series coefficients ordered from low to high.

Returns **out** : ndarray

Of Hermite series coefficients representing their product.

See also:

hermeadd, *hermesub*, *hermediv*, *hermepow*

Notes

In general, the (polynomial) product of two C-series results in terms that are not in the Hermite polynomial basis set. Thus, to express the product as a Hermite series, it is necessary to "reproject" the product onto said basis set, which may produce "unintuitive" (but correct) results; see Examples section below.

Examples

```
>>> from numpy.polynomial.hermite_e import hermemul
>>> hermemul([1, 2, 3], [0, 1, 2])
array([ 14.,  15.,  28.,   7.,   6.])
```

numpy.polynomial.hermite_e.**hermemulx**(*c*)
Multiply a Hermite series by x.

Multiply the Hermite series *c* by x, where x is the independent variable.

Parameters **c** : array_like

1-D array of Hermite series coefficients ordered from low to high.

Returns **out** : ndarray

Array representing the result of the multiplication.

Notes

The multiplication uses the recursion relationship for Hermite polynomials in the form

xP_i(x) = (P_{i + 1}(x) + iP_{i - 1}(x)))

Examples

```
>>> from numpy.polynomial.hermite_e import hermemulx
>>> hermemulx([1, 2, 3])
array([ 2.,  7.,  2.,  3.])
```

numpy.polynomial.hermite_e.**hermediv**(*c1*, *c2*)

Divide one Hermite series by another.

Returns the quotient-with-remainder of two Hermite series *c1* / *c2*. The arguments are sequences of coefficients from lowest order "term" to highest, e.g., [1,2,3] represents the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c1, c2** : array_like

1-D arrays of Hermite series coefficients ordered from low to high.

Returns **[quo, rem]** : ndarrays

Of Hermite series coefficients representing the quotient and remainder.

See also:

hermeadd, *hermesub*, *hermemul*, *hermepow*

Notes

In general, the (polynomial) division of one Hermite series by another results in quotient and remainder terms that are not in the Hermite polynomial basis set. Thus, to express these results as a Hermite series, it is necessary to "reproject" the results onto the Hermite basis set, which may produce "unintuitive" (but correct) results; see Examples section below.

Examples

```
>>> from numpy.polynomial.hermite_e import hermediv
>>> hermediv([ 14.,  15.,  28.,   7.,   6.], [0, 1, 2])
(array([ 1.,  2.,  3.]), array([ 0.]))
>>> hermediv([ 15.,  17.,  28.,   7.,   6.], [0, 1, 2])
(array([ 1.,  2.,  3.]), array([ 1.,  2.]))
```

numpy.polynomial.hermite_e.**hermepow**(*c*, *pow*, *maxpower=16*)

Raise a Hermite series to a power.

Returns the Hermite series *c* raised to the power *pow*. The argument *c* is a sequence of coefficients ordered from low to high. i.e., [1,2,3] is the series `P_0 + 2*P_1 + 3*P_2`.

Parameters **c** : array_like

1-D array of Hermite series coefficients ordered from low to high.

pow : integer

Power to which the series will be raised

maxpower : integer, optional

Maximum power allowed. This is mainly to limit growth of the series to unmanageable size. Default is 16

Returns **coef** : ndarray

Hermite series of power.

See also:

hermeadd, *hermesub*, *hermemul*, *hermediv*

Examples

```
>>> from numpy.polynomial.hermite_e import hermepow
>>> hermepow([1, 2, 3], 2)
array([ 23.,  28.,  46.,  12.,   9.])
```

Quadrature

hermegauss(deg)	Gauss-HermiteE quadrature.
hermeweight(x)	Weight function of the Hermite_e polynomials.

numpy.polynomial.hermite_e.**hermegauss**(*deg*)

Gauss-HermiteE quadrature.

Computes the sample points and weights for Gauss-HermiteE quadrature. These sample points and weights will correctly integrate polynomials of degree $2 * deg - 1$ or less over the interval $[-\inf, \inf]$ with the weight function $f(x) = \exp(-x^2/2)$.

Parameters **deg** : int

Number of sample points and weights. It must be >= 1.

Returns **x** : ndarray

1-D ndarray containing the sample points.

y : ndarray

1-D ndarray containing the weights.

Notes

New in version 1.7.0.

The results have only been tested up to degree 100, higher degrees may be problematic. The weights are determined by using the fact that

$$w_k = c/(He'_n(x_k) * He_{n-1}(x_k))$$

where c is a constant independent of k and x_k is the k'th root of He_n, and then scaling the results to get the right value when integrating 1.

numpy.polynomial.hermite_e.**hermeweight**(*x*)
Weight function of the Hermite_e polynomials.

The weight function is $\exp(-x^2/2)$ and the interval of integration is $[-\inf, \inf]$. the HermiteE polynomials are orthogonal, but not normalized, with respect to this weight function.

Parameters **x** : array_like

Values at which the weight function will be computed.

Returns **w** : ndarray

The weight function at *x*.

Notes

New in version 1.7.0.

Miscellaneous

hermecompanion(c)	Return the scaled companion matrix of c.
hermedomain	
hermezero	
hermeone	
hermex	
hermetrim(c[, tol])	Remove “small” “trailing” coefficients from a polynomial.
hermeline(off, scl)	Hermite series whose graph is a straight line.
herme2poly(c)	Convert a Hermite series to a polynomial.
poly2herme(pol)	Convert a polynomial to a Hermite series.

numpy.polynomial.hermite_e.**hermecompanion**(*c*)
Return the scaled companion matrix of c.

The basis polynomials are scaled so that the companion matrix is symmetric when *c* is an HermiteE basis polynomial. This provides better eigenvalue estimates than the unscaled case and for basis polynomials the eigenvalues are guaranteed to be real if *numpy.linalg.eigvalsh* is used to obtain them.

Parameters **c** : array_like

1-D array of HermiteE series coefficients ordered from low to high degree.

Returns **mat** : ndarray

Scaled companion matrix of dimensions (deg, deg).

Notes

New in version 1.7.0.

numpy.polynomial.hermite_e.**hermedomain = array([-1, 1])**

numpy.polynomial.hermite_e.**hermezero = array([0])**

numpy.polynomial.hermite_e.**hermeone = array([1])**

numpy.polynomial.hermite_e.**hermex = array([0, 1])**

numpy.polynomial.hermite_e.**hermetrim**(*c*, *tol=0*)

Remove "small" "trailing" coefficients from a polynomial.

"Small" means "small in absolute value" and is controlled by the parameter *tol*; "trailing" means highest order coefficient(s), e.g., in `[0, 1, 1, 0, 0]` (which represents `0 + x + x**2 + 0*x**3 + 0*x**4`) both the 3-rd and 4-th order coefficients would be "trimmed."

Parameters **c** : array_like

1-d array of coefficients, ordered from lowest order to highest.

tol : number, optional

Trailing (i.e., highest order) elements with absolute value less than or equal to *tol* (default value is zero) are removed.

Returns **trimmed** : ndarray

1-d array with trailing zeros removed. If the resulting series would be empty, a series containing a single zero is returned.

Raises **ValueError**

If *tol* < 0

See also:

`trimseq`

Examples

```
>>> from numpy.polynomial import polyutils as pu
>>> pu.trimcoef((0,0,3,0,5,0,0))
array([ 0.,  0.,  3.,  0.,  5.])
>>> pu.trimcoef((0,0,1e-3,0,1e-5,0,0),1e-3) # item == tol is trimmed
array([ 0.])
>>> i = complex(0,1) # works for complex
>>> pu.trimcoef((3e-4,1e-3*(1-i),5e-4,2e-5*(1+i)), 1e-3)
array([ 0.0003+0.j   ,  0.0010-0.001j])
```

numpy.polynomial.hermite_e.**hermeline**(*off*, *scl*)

Hermite series whose graph is a straight line.

Parameters **off, scl** : scalars

The specified line is given by `off + scl*x`.

Returns **y** : ndarray

This module's representation of the Hermite series for `off + scl*x`.

See also:

`polyline`, `chebline`

Examples

```
>>> from numpy.polynomial.hermite_e import hermeline
>>> from numpy.polynomial.hermite_e import hermeline, hermeval
>>> hermeval(0,hermeline(3, 2))
3.0
>>> hermeval(1,hermeline(3, 2))
5.0
```

numpy.polynomial.hermite_e.**herme2poly**(*c*)

Convert a Hermite series to a polynomial.

Convert an array representing the coefficients of a Hermite series, ordered from lowest degree to highest, to an array of the coefficients of the equivalent polynomial (relative to the "standard" basis) ordered from lowest to highest degree.

Parameters **c** : array_like

1-D array containing the Hermite series coefficients, ordered from lowest order term to highest.

Returns **pol** : ndarray

1-D array containing the coefficients of the equivalent polynomial (relative to the "standard" basis) ordered from lowest order term to highest.

See also:

poly2herme

Notes

The easy way to do conversions between polynomial basis sets is to use the convert method of a class instance.

Examples

```
>>> from numpy.polynomial.hermite_e import herme2poly
>>> herme2poly([  2.,  10.,   2.,   3.])
array([ 0.,  1.,  2.,  3.])
```

numpy.polynomial.hermite_e.**poly2herme**(*pol*)

Convert a polynomial to a Hermite series.

Convert an array representing the coefficients of a polynomial (relative to the "standard" basis) ordered from lowest degree to highest, to an array of the coefficients of the equivalent Hermite series, ordered from lowest to highest degree.

Parameters **pol** : array_like

1-D array containing the polynomial coefficients

Returns **c** : ndarray

1-D array containing the coefficients of the equivalent Hermite series.

See also:

herme2poly

Notes

The easy way to do conversions between polynomial basis sets is to use the convert method of a class instance.

Examples

```
>>> from numpy.polynomial.hermite_e import poly2herme
>>> poly2herme(np.arange(4))
array([  2.,  10.,   2.,   3.])
```

Polyutils

Utility classes and functions for the polynomial modules.

This module provides: error and warning objects; a polynomial base class; and some routines used in both the *polynomial* and *chebyshev* modules.

Error objects

PolyError	Base class for errors in this module.
PolyDomainError	Issued by the generic Poly class when two domains don't match.

exception numpy.polynomial.polyutils.**PolyError**
Base class for errors in this module.

exception numpy.polynomial.polyutils.**PolyDomainError**
Issued by the generic Poly class when two domains don't match.

This is raised when an binary operation is passed Poly objects with different domains.

Warning objects

RankWarning	Issued by chebfit when the design matrix is rank deficient.

exception numpy.polynomial.polyutils.**RankWarning**
Issued by chebfit when the design matrix is rank deficient.

Base class

PolyBase	Base class for all polynomial types.

class numpy.polynomial.polyutils.**PolyBase**
Base class for all polynomial types.

Deprecated in numpy 1.9.0, use the abstract ABCPolyBase class instead. Note that the latter requires a number of virtual functions to be implemented.

Functions

as_series(alist[, trim])	Return argument as a list of 1-d arrays.
trimseq(seq)	Remove small Poly series coefficients.
trimcoef(c[, tol])	Remove "small" "trailing" coefficients from a polynomial.
getdomain(x)	Return a domain suitable for given abscissae.
mapdomain(x, old, new)	Apply linear map to input points.
mapparms(old, new)	Linear map parameters between domains.

numpy.polynomial.polyutils.**as_series**(*alist*, *trim=True*)

Return argument as a list of 1-d arrays.

The returned list contains array(s) of dtype double, complex double, or object. A 1-d argument of shape `(N,)` is parsed into `N` arrays of size one; a 2-d argument of shape `(M,N)` is parsed into `M` arrays of size `N` (i.e., is "parsed by row"); and a higher dimensional array raises a Value Error if it is not first reshaped into either a 1-d or 2-d array.

Parameters **alist** : array_like

A 1- or 2-d array_like

trim : boolean, optional

When True, trailing zeros are removed from the inputs. When False, the inputs are passed through intact.

Returns **[a1, a2,...]** : list of 1-D arrays

A copy of the input data as a list of 1-d arrays.

Raises **ValueError**

Raised when *as_series* cannot convert its input to 1-d arrays, or at least one of the resulting arrays is empty.

Examples

```
>>> from numpy.polynomial import polyutils as pu
>>> a = np.arange(4)
>>> pu.as_series(a)
[array([ 0.]), array([ 1.]), array([ 2.]), array([ 3.])]
>>> b = np.arange(6).reshape((2,3))
>>> pu.as_series(b)
[array([ 0.,  1.,  2.]), array([ 3.,  4.,  5.])]
```

```
>>> pu.as_series((1, np.arange(3), np.arange(2, dtype=np.float16)))
[array([ 1.]), array([ 0.,  1.,  2.]), array([ 0.,  1.])]
```

```
>>> pu.as_series([2, [1.1, 0.]])
[array([ 2.]), array([ 1.1])]
```

```
>>> pu.as_series([2, [1.1, 0.]], trim=False)
[array([ 2.]), array([ 1.1,  0. ])]
```

numpy.polynomial.polyutils.**trimseq**(*seq*)

Remove small Poly series coefficients.

Parameters **seq** : sequence

Sequence of Poly series coefficients. This routine fails for empty sequences.

Returns **series** : sequence

Subsequence with trailing zeros removed. If the resulting sequence would be empty, return the first element. The returned sequence may or may not be a view.

Notes

Do not lose the type info if the sequence contains unknown objects.

numpy.polynomial.polyutils.**trimcoef**(*c*, *tol=0*)

Remove "small" "trailing" coefficients from a polynomial.

"Small" means "small in absolute value" and is controlled by the parameter *tol*; "trailing" means highest order coefficient(s), e.g., in `[0, 1, 1, 0, 0]` (which represents `0 + x + x**2 + 0*x**3 + 0*x**4`) both the 3-rd and 4-th order coefficients would be "trimmed."

Parameters **c** : array_like

1-d array of coefficients, ordered from lowest order to highest.

tol : number, optional

Trailing (i.e., highest order) elements with absolute value less than or equal to *tol* (default value is zero) are removed.

Returns **trimmed** : ndarray

1-d array with trailing zeros removed. If the resulting series would be empty, a series containing a single zero is returned.

Raises **ValueError**

If *tol* < 0

See also:

trimseq

Examples

```
>>> from numpy.polynomial import polyutils as pu
>>> pu.trimcoef((0,0,3,0,5,0,0))
array([ 0.,  0.,  3.,  0.,  5.])
>>> pu.trimcoef((0,0,1e-3,0,1e-5,0,0),1e-3) # item == tol is trimmed
array([ 0.])
>>> i = complex(0,1) # works for complex
>>> pu.trimcoef((3e-4,1e-3*(1-i),5e-4,2e-5*(1+i)), 1e-3)
array([ 0.0003+0.j   ,  0.0010-0.001j])
```

numpy.polynomial.polyutils.**getdomain**(*x*)

Return a domain suitable for given abscissae.

Find a domain suitable for a polynomial or Chebyshev series defined at the values supplied.

Parameters **x** : array_like

1-d array of abscissae whose domain will be determined.

Returns **domain** : ndarray

1-d array containing two values. If the inputs are complex, then the two returned points are the lower left and upper right corners of the smallest rectangle (aligned with the axes) in the complex plane containing the points *x*. If the inputs are real, then the two points are the ends of the smallest interval containing the points *x*.

See also:

mapparms, *mapdomain*

Examples

```
>>> from numpy.polynomial import polyutils as pu
>>> points = np.arange(4)**2 - 5; points
array([-5, -4, -1,  4])
>>> pu.getdomain(points)
array([-5.,  4.])
>>> c = np.exp(complex(0,1)*np.pi*np.arange(12)/6) # unit circle
>>> pu.getdomain(c)
array([-1.-1.j,  1.+1.j])
```

numpy.polynomial.polyutils.**mapdomain**(*x*, *old*, *new*)

Apply linear map to input points.

The linear map `offset + scale*x` that maps the domain *old* to the domain *new* is applied to the points *x*.

Parameters **x** : array_like

Points to be mapped. If *x* is a subtype of ndarray the subtype will be preserved.

old, new : array_like

The two domains that determine the map. Each must (successfully) convert to 1-d arrays containing precisely two values.

Returns **x_out** : ndarray

Array of points of the same shape as *x*, after application of the linear map between the two domains.

See also:

getdomain, *mapparms*

Notes

Effectively, this implements:

$$x_out = new[0] + m(x - old[0])$$

where

$$m = \frac{new[1] - new[0]}{old[1] - old[0]}$$

Examples

```
>>> from numpy.polynomial import polyutils as pu
>>> old_domain = (-1,1)
>>> new_domain = (0,2*np.pi)
>>> x = np.linspace(-1,1,6); x
array([-1. , -0.6, -0.2,  0.2,  0.6,  1. ])
>>> x_out = pu.mapdomain(x, old_domain, new_domain); x_out
array([ 0.        ,  1.25663706,  2.51327412,  3.76991118,  5.02654825,
        6.28318531])
>>> x - pu.mapdomain(x_out, new_domain, old_domain)
array([ 0.,  0.,  0.,  0.,  0.,  0.])
```

Also works for complex numbers (and thus can be used to map any line in the complex plane to any other line therein).

```
>>> i = complex(0,1)
>>> old = (-1 - i, 1 + i)
>>> new = (-1 + i, 1 - i)
>>> z = np.linspace(old[0], old[1], 6); z
array([-1.0-1.j , -0.6-0.6j, -0.2-0.2j,  0.2+0.2j,  0.6+0.6j,  1.0+1.j ])
>>> new_z = P.mapdomain(z, old, new); new_z
array([-1.0+1.j , -0.6+0.6j, -0.2+0.2j,  0.2-0.2j,  0.6-0.6j,  1.0-1.j ])
```

numpy.polynomial.polyutils.**mapparms**(*old*, *new*)

Linear map parameters between domains.

Return the parameters of the linear map `offset + scale*x` that maps *old* to *new* such that `old[i] -> new[i], i = 0, 1`.

Parameters **old, new** : array_like

Domains. Each domain must (successfully) convert to a 1-d array containing precisely two values.

Returns **offset, scale** : scalars

The map `L(x) = offset + scale*x` maps the first domain to the second.

See also:

getdomain, *mapdomain*

Notes

Also works for complex numbers, and thus can be used to calculate the parameters required to map any line in the complex plane to any other line therein.

Examples

```
>>> from numpy.polynomial import polyutils as pu
>>> pu.mapparms((-1,1),(-1,1))
(0.0, 1.0)
>>> pu.mapparms((1,-1),(-1,1))
(0.0, -1.0)
>>> i = complex(0,1)
```

(continues on next page)

(continued from previous page)

```
>>> pu.mapparms((-i,-1),(1,i))
((1+1j), (1+0j))
```

Poly1d

Basics

poly1d(c_or_r[, r, variable])	A one-dimensional polynomial class.
polyval(p, x)	Evaluate a polynomial at specific values.
poly(seq_of_zeros)	Find the coefficients of a polynomial with the given sequence of roots.
roots(p)	Return the roots of a polynomial with coefficients given in p.

class numpy.**poly1d**(*c_or_r*, *r=False*, *variable=None*)

A one-dimensional polynomial class.

A convenience class, used to encapsulate "natural" operations on polynomials so that said operations may take on their customary form in code (see Examples).

Parameters **c_or_r** : array_like

The polynomial's coefficients, in decreasing powers, or if the value of the second parameter is True, the polynomial's roots (values where the polynomial evaluates to 0). For example, `poly1d([1, 2, 3])` returns an object that represents x^2+2x+3, whereas `poly1d([1, 2, 3], True)` returns one that represents $(x-1)(x-2)(x-3) = x^3 - 6x^2 + 11x - 6$.

r : bool, optional

If True, *c_or_r* specifies the polynomial's roots; the default is False.

variable : str, optional

Changes the variable used when printing *p* from *x* to *variable* (see Examples).

Examples

Construct the polynomial $x^2 + 2x + 3$:

```
>>> p = np.poly1d([1, 2, 3])
>>> print(np.poly1d(p))
   2
1 x + 2 x + 3
```

Evaluate the polynomial at $x = 0.5$:

```
>>> p(0.5)
4.25
```

Find the roots:

```
>>> p.r
array([-1.+1.41421356j, -1.-1.41421356j])
>>> p(p.r)
array([ -4.44089210e-16+0.j,  -4.44089210e-16+0.j])
```

These numbers in the previous line represent (0, 0) to machine precision

Show the coefficients:

```
>>> p.c
array([1, 2, 3])
```

Display the order (the leading zero-coefficients are removed):

```
>>> p.order
2
```

Show the coefficient of the k-th power in the polynomial (which is equivalent to `p.c[-(i+1)]`):

```
>>> p[1]
2
```

Polynomials can be added, subtracted, multiplied, and divided (returns quotient and remainder):

```
>>> p * p
poly1d([ 1,  4, 10, 12,  9])
```

```
>>> (p**3 + 4) / p
(poly1d([  1.,   4.,  10.,  12.,   9.]), poly1d([ 4.]))
```

`asarray(p)` gives the coefficient array, so polynomials can be used in all functions that accept arrays:

```
>>> p**2 # square of polynomial
poly1d([ 1,  4, 10, 12,  9])
```

```
>>> np.square(p) # square of individual coefficients
array([1, 4, 9])
```

The variable used in the string representation of *p* can be modified, using the *variable* parameter:

```
>>> p = np.poly1d([1,2,3], variable='z')
>>> print(p)
   2
1 z + 2 z + 3
```

Construct a polynomial from its roots:

```
>>> np.poly1d([1, 2], True)
poly1d([ 1, -3,  2])
```

This is the same polynomial as obtained by:

```
>>> np.poly1d([1, -1]) * np.poly1d([1, -2])
poly1d([ 1, -3,  2])
```

Attributes

c	A copy of the polynomial coefficients
coef	A copy of the polynomial coefficients
coefficients	A copy of the polynomial coefficients
coeffs	A copy of the polynomial coefficients
o	The order or degree of the polynomial
order	The order or degree of the polynomial
r	The roots of the polynomial, where self(x) == 0
roots	The roots of the polynomial, where self(x) == 0
variable	The name of the polynomial variable

poly1d.**c**
A copy of the polynomial coefficients

poly1d.**coef**
A copy of the polynomial coefficients

poly1d.**coefficients**
A copy of the polynomial coefficients

poly1d.**coeffs**
A copy of the polynomial coefficients

poly1d.**o**
The order or degree of the polynomial

poly1d.**order**
The order or degree of the polynomial

poly1d.**r**
The roots of the polynomial, where self(x) == 0

poly1d.**roots**
The roots of the polynomial, where self(x) == 0

poly1d.**variable**
The name of the polynomial variable

Methods

__call__(val)	Call self as a function.
deriv([m])	Return a derivative of this polynomial.
integ([m, k])	Return an antiderivative (indefinite integral) of this polynomial.

poly1d.**__call__**(*val*)
Call self as a function.

poly1d.**deriv**(*m=1*)
Return a derivative of this polynomial.

Refer to *polyder* for full documentation.

See also:

polyder equivalent function

poly1d.**integ**(*m=1*, *k=0*)

Return an antiderivative (indefinite integral) of this polynomial.

Refer to *polyint* for full documentation.

See also:

polyint equivalent function

numpy.**polyval**(*p*, *x*)

Evaluate a polynomial at specific values.

If *p* is of length N, this function returns the value:

```
p[0]*x**(N-1) + p[1]*x**(N-2) + ... + p[N-2]*x + p[N-1]
```

If *x* is a sequence, then *p(x)* is returned for each element of *x*. If *x* is another polynomial then the composite polynomial *p(x(t))* is returned.

Parameters **p** : array_like or poly1d object

1D array of polynomial coefficients (including coefficients equal to zero) from highest degree to the constant term, or an instance of poly1d.

x : array_like or poly1d object

A number, an array of numbers, or an instance of poly1d, at which to evaluate *p*.

Returns **values** : ndarray or poly1d

If *x* is a poly1d instance, the result is the composition of the two polynomials, i.e., *x* is "substituted" in *p* and the simplified result is returned. In addition, the type of *x* - array_like or poly1d - governs the type of the output: *x* array_like => *values* array_like, *x* a poly1d object => *values* is also.

See also:

poly1d A polynomial class.

Notes

Horner's scheme *[R73]* is used to evaluate the polynomial. Even so, for polynomials of high degree the values may be inaccurate due to rounding errors. Use carefully.

References

[R73]

Examples

```
>>> np.polyval([3,0,1], 5)  # 3 * 5**2 + 0 * 5**1 + 1
76
>>> np.polyval([3,0,1], np.poly1d(5))
poly1d([ 76.])
```

(continues on next page)

(continued from previous page)

```
>>> np.polyval(np.poly1d([3,0,1]), 5)
76
>>> np.polyval(np.poly1d([3,0,1]), np.poly1d(5))
poly1d([ 76.])
```

numpy.**poly**(*seq_of_zeros*)

Find the coefficients of a polynomial with the given sequence of roots.

Returns the coefficients of the polynomial whose leading coefficient is one for the given sequence of zeros (multiple roots must be included in the sequence as many times as their multiplicity; see Examples). A square matrix (or array, which will be treated as a matrix) can also be given, in which case the coefficients of the characteristic polynomial of the matrix are returned.

Parameters **seq_of_zeros** : array_like, shape (N,) or (N, N)

A sequence of polynomial roots, or a square array or matrix object.

Returns **c** : ndarray

1D array of polynomial coefficients from highest to lowest degree:

`c[0] * x**(N) + c[1] * x**(N-1) + ... + c[N-1] * x + c[N]`
where c[0] always equals 1.

Raises **ValueError**

If input is the wrong shape (the input must be a 1-D or square 2-D array).

See also:

polyval Compute polynomial values.

roots Return the roots of a polynomial.

polyfit Least squares polynomial fit.

poly1d A one-dimensional polynomial class.

Notes

Specifying the roots of a polynomial still leaves one degree of freedom, typically represented by an undetermined leading coefficient. *[R64]* In the case of this function, that coefficient - the first one in the returned array - is always taken as one. (If for some reason you have one other point, the only automatic way presently to leverage that information is to use `polyfit`.)

The characteristic polynomial, $p_a(t)$, of an *n*-by-*n* matrix **A** is given by

$$p_a(t) = \det(t\,\mathbf{I} - \mathbf{A}),$$

where **I** is the *n*-by-*n* identity matrix. *[R65]*

References

[R64], *[R65]*

Examples

Given a sequence of a polynomial's zeros:

```
>>> np.poly((0, 0, 0)) # Multiple root example
array([1, 0, 0, 0])
```

The line above represents z**3 + 0*z**2 + 0*z + 0.

```
>>> np.poly((-1./2, 0, 1./2))
array([ 1.  ,  0.  , -0.25,  0.  ])
```

The line above represents z**3 - z/4

```
>>> np.poly((np.random.random(1.)[0], 0, np.random.random(1.)[0]))
array([ 1.        , -0.77086955,  0.08618131,  0.        ]) #random
```

Given a square array object:

```
>>> P = np.array([[0, 1./3], [-1./2, 0]])
>>> np.poly(P)
array([ 1.        ,  0.        ,  0.16666667])
```

Or a square matrix object:

```
>>> np.poly(np.matrix(P))
array([ 1.        ,  0.        ,  0.16666667])
```

Note how in all cases the leading coefficient is always 1.

numpy.**roots**(*p*)

Return the roots of a polynomial with coefficients given in p.

The values in the rank-1 array *p* are coefficients of a polynomial. If the length of *p* is n+1 then the polynomial is described by:

```
p[0] * x**n + p[1] * x**(n-1) + ... + p[n-1]*x + p[n]
```

Parameters **p** : array_like

Rank-1 array of polynomial coefficients.

Returns **out** : ndarray

An array containing the roots of the polynomial.

Raises **ValueError**

When *p* cannot be converted to a rank-1 array.

See also:

poly Find the coefficients of a polynomial with a given sequence of roots.

polyval Compute polynomial values.

polyfit Least squares polynomial fit.

poly1d A one-dimensional polynomial class.

Notes

The algorithm relies on computing the eigenvalues of the companion matrix *[R288]*.

References

[R288]

Examples

```
>>> coeff = [3.2, 2, 1]
>>> np.roots(coeff)
array([-0.3125+0.46351241j, -0.3125-0.46351241j])
```

Fitting

polyfit(x, y, deg[, rcond, full, w, cov])	Least squares polynomial fit.

numpy.**polyfit**(*x*, *y*, *deg*, *rcond=None*, *full=False*, *w=None*, *cov=False*)

Least squares polynomial fit.

Fit a polynomial `p(x) = p[0] * x**deg + ... + p[deg]` of degree *deg* to points *(x, y)*. Returns a vector of coefficients *p* that minimises the squared error.

Parameters **x** : array_like, shape (M,)

x-coordinates of the M sample points `(x[i], y[i])`.

y : array_like, shape (M,) or (M, K)

y-coordinates of the sample points. Several data sets of sample points sharing the same x-coordinates can be fitted at once by passing in a 2D-array that contains one dataset per column.

deg : int

Degree of the fitting polynomial

rcond : float, optional

Relative condition number of the fit. Singular values smaller than this relative to the largest singular value will be ignored. The default value is len(x)*eps, where eps is the relative precision of the float type, about 2e-16 in most cases.

full : bool, optional

Switch determining nature of return value. When it is False (the default) just the coefficients are returned, when True diagnostic information from the singular value decomposition is also returned.

w : array_like, shape (M,), optional

Weights to apply to the y-coordinates of the sample points. For gaussian uncertainties, use 1/sigma (not 1/sigma**2).

cov : bool, optional

Return the estimate and the covariance matrix of the estimate If full is True, then cov is not returned.

Returns **p** : ndarray, shape (deg + 1,) or (deg + 1, K)

Polynomial coefficients, highest power first. If *y* was 2-D, the coefficients for *k*-th data set are in `p[:,k]`.

residuals, rank, singular_values, rcond

Present only if *full* = True. Residuals of the least-squares fit, the effective rank of the scaled Vandermonde coefficient matrix, its singular values, and the specified value of *rcond*. For more details, see *linalg.lstsq*.

V : ndarray, shape (M,M) or (M,M,K)

Present only if *full* = False and *cov*'=True. *The covariance matrix of the polynomial coefficient estimates. The diagonal of this matrix are the variance estimates for each coefficient. If y is a 2-D array, then the covariance matrix for the '*k*-th data set are in `V[:,:,k]`

Warns **RankWarning**

The rank of the coefficient matrix in the least-squares fit is deficient. The warning is only raised if *full* = False.

The warnings can be turned off by

```
>>> import warnings
>>> warnings.simplefilter('ignore', np.RankWarning)
```

See also:

polyval Compute polynomial values.

linalg.lstsq Computes a least-squares fit.

scipy.interpolate.UnivariateSpline Computes spline fits.

Notes

The solution minimizes the squared error

$$E = \sum_{j=0}^{k} |p(x_j) - y_j|^2$$

in the equations:

```
x[0]**n * p[0] + ... + x[0] * p[n-1] + p[n] = y[0]
x[1]**n * p[0] + ... + x[1] * p[n-1] + p[n] = y[1]
...
x[k]**n * p[0] + ... + x[k] * p[n-1] + p[n] = y[k]
```

The coefficient matrix of the coefficients *p* is a Vandermonde matrix.

polyfit issues a *RankWarning* when the least-squares fit is badly conditioned. This implies that the best fit is not well-defined due to numerical error. The results may be improved by lowering the polynomial degree or by replacing *x* by *x* - *x*.mean(). The *rcond* parameter can also be set to a value smaller than its default, but the resulting fit may be spurious: including contributions from the small singular values can add numerical noise to the result.

Note that fitting polynomial coefficients is inherently badly conditioned when the degree of the polynomial is large or the interval of sample points is badly centered. The quality of the fit should always be checked in these cases. When polynomial fits are not satisfactory, splines may be a good alternative.

References

[R66], *[R67]*

Examples

```
>>> x = np.array([0.0, 1.0, 2.0, 3.0,  4.0,  5.0])
>>> y = np.array([0.0, 0.8, 0.9, 0.1, -0.8, -1.0])
>>> z = np.polyfit(x, y, 3)
>>> z
array([ 0.08703704, -0.81349206,  1.69312169, -0.03968254])
```

It is convenient to use *poly1d* objects for dealing with polynomials:

```
>>> p = np.poly1d(z)
>>> p(0.5)
0.6143849206349179
>>> p(3.5)
-0.34732142857143039
>>> p(10)
22.579365079365115
```

High-order polynomials may oscillate wildly:

```
>>> p30 = np.poly1d(np.polyfit(x, y, 30))
/... RankWarning: Polyfit may be poorly conditioned...
>>> p30(4)
-0.80000000000000204
>>> p30(5)
-0.99999999999999445
>>> p30(4.5)
-0.10547061179440398
```

Illustration:

```
>>> import matplotlib.pyplot as plt
>>> xp = np.linspace(-2, 6, 100)
>>> _ = plt.plot(x, y, '.', xp, p(xp), '-', xp, p30(xp), '--')
>>> plt.ylim(-2,2)
(-2, 2)
>>> plt.show()
```

Calculus

polyder(p[, m])	Return the derivative of the specified order of a polynomial.
polyint(p[, m, k])	Return an antiderivative (indefinite integral) of a polynomial.

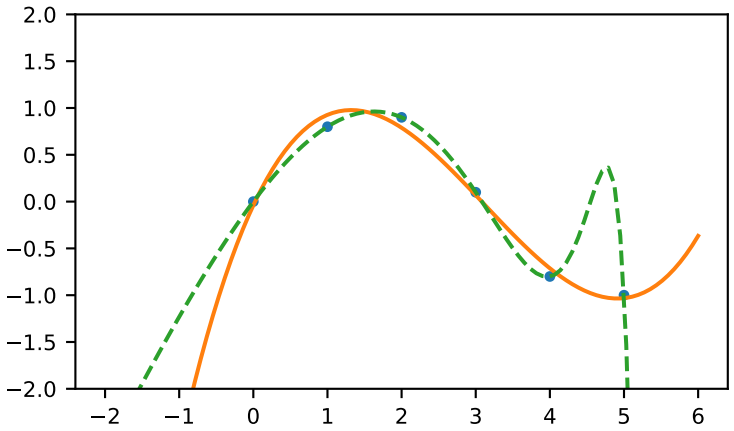

numpy.**polyder**(*p*, *m=1*)

Return the derivative of the specified order of a polynomial.

Parameters **p** : poly1d or sequence

Polynomial to differentiate. A sequence is interpreted as polynomial coefficients, see *poly1d*.

m : int, optional

Order of differentiation (default: 1)

Returns **der** : poly1d

A new polynomial representing the derivative.

See also:

polyint Anti-derivative of a polynomial.

poly1d Class for one-dimensional polynomials.

Examples

The derivative of the polynomial $x^3 + x^2 + x^1 + 1$ is:

```
>>> p = np.poly1d([1,1,1,1])
>>> p2 = np.polyder(p)
>>> p2
poly1d([3, 2, 1])
```

which evaluates to:

```
>>> p2(2.)
17.0
```

We can verify this, approximating the derivative with `(f(x + h) - f(x))/h`:

```
>>> (p(2. + 0.001) - p(2.)) / 0.001
17.007000999997857
```

The fourth-order derivative of a 3rd-order polynomial is zero:

```
>>> np.polyder(p, 2)
poly1d([6, 2])
>>> np.polyder(p, 3)
poly1d([6])
>>> np.polyder(p, 4)
poly1d([ 0.])
```

numpy.**polyint**(*p*, *m=1*, *k=None*)

Return an antiderivative (indefinite integral) of a polynomial.

The returned order *m* antiderivative *P* of polynomial *p* satisfies $\frac{d^m}{dx^m}P(x) = p(x)$ and is defined up to *m - 1* integration constants *k*. The constants determine the low-order polynomial part

$$\frac{k_{m-1}}{0!}x^0 + \ldots + \frac{k_0}{(m-1)!}x^{m-1}$$

of *P* so that $P^{(j)}(0) = k_{m-j-1}$.

Parameters **p** : array_like or poly1d

Polynomial to differentiate. A sequence is interpreted as polynomial coefficients, see *poly1d*.

m : int, optional

Order of the antiderivative. (Default: 1)

k : list of *m* scalars or scalar, optional

Integration constants. They are given in the order of integration: those corresponding to highest-order terms come first.

If `None` (default), all constants are assumed to be zero. If *m = 1*, a single scalar can be given instead of a list.

See also:

polyder derivative of a polynomial

poly1d.integ equivalent method

Examples

The defining property of the antiderivative:

```
>>> p = np.poly1d([1,1,1])
>>> P = np.polyint(p)
>>> P
poly1d([ 0.33333333,  0.5       ,  1.        ,  0.        ])
>>> np.polyder(P) == p
True
```

The integration constants default to zero, but can be specified:

```
>>> P = np.polyint(p, 3)
>>> P(0)
0.0
>>> np.polyder(P)(0)
0.0
>>> np.polyder(P, 2)(0)
0.0
>>> P = np.polyint(p, 3, k=[6,5,3])
>>> P
poly1d([ 0.01666667,  0.04166667,  0.16666667,  3. ,  5. ,  3. ])
```

Note that 3 = 6 / 2!, and that the constants are given in the order of integrations. Constant of the highest-order polynomial term comes first:

```
>>> np.polyder(P, 2)(0)
6.0
>>> np.polyder(P, 1)(0)
5.0
>>> P(0)
3.0
```

Arithmetic

polyadd(a1, a2)	Find the sum of two polynomials.
polydiv(u, v)	Returns the quotient and remainder of polynomial division.
polymul(a1, a2)	Find the product of two polynomials.
polysub(a1, a2)	Difference (subtraction) of two polynomials.

numpy.**polyadd**(*a1*, *a2*)

Find the sum of two polynomials.

Returns the polynomial resulting from the sum of two input polynomials. Each input must be either a poly1d object or a 1D sequence of polynomial coefficients, from highest to lowest degree.

Parameters **a1, a2** : array_like or poly1d object

Input polynomials.

Returns **out** : ndarray or poly1d object

The sum of the inputs. If either input is a poly1d object, then the output is also a poly1d object. Otherwise, it is a 1D array of polynomial coefficients from highest to lowest degree.

See also:

poly1d A one-dimensional polynomial class.

poly, *polyadd*, *polyder*, *polydiv*, *polyfit*, *polyint*, *polysub*, *polyval*

Examples

```
>>> np.polyadd([1, 2], [9, 5, 4])
array([9, 6, 6])
```

Using poly1d objects:

```
>>> p1 = np.poly1d([1, 2])
>>> p2 = np.poly1d([9, 5, 4])
>>> print(p1)
1 x + 2
>>> print(p2)
   2
9 x + 5 x + 4
>>> print(np.polyadd(p1, p2))
   2
9 x + 6 x + 6
```

numpy.**polydiv**(*u*, *v*)

Returns the quotient and remainder of polynomial division.

The input arrays are the coefficients (including any coefficients equal to zero) of the "numerator" (dividend) and "denominator" (divisor) polynomials, respectively.

Parameters **u** : array_like or poly1d

Dividend polynomial's coefficients.

v : array_like or poly1d

Divisor polynomial's coefficients.

Returns **q** : ndarray

Coefficients, including those equal to zero, of the quotient.

r : ndarray

Coefficients, including those equal to zero, of the remainder.

See also:

poly, *polyadd*, *polyder*, *polydiv*, *polyfit*, *polyint*, *polymul*, *polysub*, *polyval*

Notes

Both *u* and *v* must be 0-d or 1-d (ndim = 0 or 1), but *u.ndim* need not equal *v.ndim*. In other words, all four possible combinations - `u.ndim = v.ndim = 0`, `u.ndim = v.ndim = 1`, `u.ndim = 1, v.ndim = 0`, and `u.ndim = 0, v.ndim = 1` - work.

Examples

$$\frac{3x^2 + 5x + 2}{2x + 1} = 1.5x + 1.75, remainder 0.25$$

```
>>> x = np.array([3.0, 5.0, 2.0])
>>> y = np.array([2.0, 1.0])
>>> np.polydiv(x, y)
(array([ 1.5 ,  1.75]), array([ 0.25]))
```

numpy.**polymul**(*a1*, *a2*)

Find the product of two polynomials.

Finds the polynomial resulting from the multiplication of the two input polynomials. Each input must be either a poly1d object or a 1D sequence of polynomial coefficients, from highest to lowest degree.

Parameters **a1, a2** : array_like or poly1d object

Input polynomials.

Returns **out** : ndarray or poly1d object

The polynomial resulting from the multiplication of the inputs. If either inputs is a poly1d object, then the output is also a poly1d object. Otherwise, it is a 1D array of polynomial coefficients from highest to lowest degree.

See also:

poly1d A one-dimensional polynomial class.

poly, *polyadd*, *polyder*, *polydiv*, *polyfit*, *polyint*, *polysub*, *polyval*

convolve Array convolution. Same output as polymul, but has parameter for overlap mode.

Examples

```
>>> np.polymul([1, 2, 3], [9, 5, 1])
array([ 9, 23, 38, 17,  3])
```

Using poly1d objects:

```
>>> p1 = np.poly1d([1, 2, 3])
>>> p2 = np.poly1d([9, 5, 1])
>>> print(p1)
   2
1 x + 2 x + 3
>>> print(p2)
   2
9 x + 5 x + 1
>>> print(np.polymul(p1, p2))
   4      3      2
9 x + 23 x + 38 x + 17 x + 3
```

numpy.**polysub**(*a1*, *a2*)

Difference (subtraction) of two polynomials.

Given two polynomials *a1* and *a2*, returns `a1 - a2`. *a1* and *a2* can be either array_like sequences of the polynomials' coefficients (including coefficients equal to zero), or *poly1d* objects.

Parameters **a1, a2** : array_like or poly1d

Minuend and subtrahend polynomials, respectively.

Returns **out** : ndarray or poly1d

Array or *poly1d* object of the difference polynomial's coefficients.

See also:

polyval, *polydiv*, *polymul*, *polyadd*

Examples

$$(2x^2 + 10x - 2) - (3x^2 + 10x - 4) = (-x^2 + 2)$$

```
>>> np.polysub([2, 10, -2], [3, 10, -4])
array([-1,  0,  2])
```

Warnings

RankWarning	Issued by *polyfit* when the Vandermonde matrix is rank deficient.

exception numpy.**RankWarning**
Issued by *polyfit* when the Vandermonde matrix is rank deficient.

For more information, a way to suppress the warning, and an example of *RankWarning* being issued, see *polyfit*.

3.24 Random sampling (numpy.random)

3.24.1 Simple random data

rand(d0, d1, ..., dn)	Random values in a given shape.
randn(d0, d1, ..., dn)	Return a sample (or samples) from the "standard normal" distribution.
randint(low[, high, size, dtype])	Return random integers from *low* (inclusive) to *high* (exclusive).
random_integers(low[, high, size])	Random integers of type np.int between *low* and *high*, inclusive.
random_sample([size])	Return random floats in the half-open interval [0.0, 1.0).
random([size])	Return random floats in the half-open interval [0.0, 1.0).
ranf([size])	Return random floats in the half-open interval [0.0, 1.0).
sample([size])	Return random floats in the half-open interval [0.0, 1.0).
choice(a[, size, replace, p])	Generates a random sample from a given 1-D array
bytes(length)	Return random bytes.

numpy.random.**rand**(*d0*, *d1*, ..., *dn*)
Random values in a given shape.

Create an array of the given shape and populate it with random samples from a uniform distribution over `[0, 1)`.

Parameters **d0, d1, ..., dn** : int, optional

The dimensions of the returned array, should all be positive. If no argument is given a single Python float is returned.

Returns **out** : ndarray, shape `(d0, d1, ..., dn)`

Random values.

See also:

random

Notes

This is a convenience function. If you want an interface that takes a shape-tuple as the first argument, refer to np.random.random_sample .

Examples

```
>>> np.random.rand(3,2)
array([[ 0.14022471,  0.96360618],  #random
       [ 0.37601032,  0.25528411],  #random
       [ 0.49313049,  0.94909878]]) #random
```

numpy.random.**randn**(*d0*, *d1*, ..., *dn*)

Return a sample (or samples) from the "standard normal" distribution.

If positive, int_like or int-convertible arguments are provided, *randn* generates an array of shape `(d0, d1, ..., dn)`, filled with random floats sampled from a univariate "normal" (Gaussian) distribution of mean 0 and variance 1 (if any of the d_i are floats, they are first converted to integers by truncation). A single float randomly sampled from the distribution is returned if no argument is provided.

This is a convenience function. If you want an interface that takes a tuple as the first argument, use *numpy.random.standard_normal* instead.

Parameters **d0, d1, ..., dn** : int, optional

The dimensions of the returned array, should be all positive. If no argument is given a single Python float is returned.

Returns **Z** : ndarray or float

A `(d0, d1, ..., dn)`-shaped array of floating-point samples from the standard normal distribution, or a single such float if no parameters were supplied.

See also:

random.standard_normal Similar, but takes a tuple as its argument.

Notes

For random samples from $N(\mu, \sigma^2)$, use:

`sigma * np.random.randn(...) + mu`

Examples

```
>>> np.random.randn()
2.1923875335537315 #random
```

Two-by-four array of samples from N(3, 6.25):

```
>>> 2.5 * np.random.randn(2, 4) + 3
array([[-4.49401501,  4.00950034, -1.81814867,  7.29718677],  #random
       [ 0.39924804,  4.68456316,  4.99394529,  4.84057254]]) #random
```

numpy.random.**randint**(*low*, *high=None*, *size=None*, *dtype='l'*)

Return random integers from *low* (inclusive) to *high* (exclusive).

Return random integers from the "discrete uniform" distribution of the specified dtype in the "half-open" interval [*low*, *high*). If *high* is None (the default), then results are from [0, *low*).

Parameters **low** : int

Lowest (signed) integer to be drawn from the distribution (unless `high=None`, in which case this parameter is one above the *highest* such integer).

high : int, optional

If provided, one above the largest (signed) integer to be drawn from the distribution (see above for behavior if `high=None`).

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

dtype : dtype, optional

Desired dtype of the result. All dtypes are determined by their name, i.e., 'int64', 'int', etc, so byteorder is not available and a specific precision may have different C types depending on the platform. The default value is 'np.int'.

New in version 1.11.0.

Returns **out** : int or ndarray of ints

size-shaped array of random integers from the appropriate distribution, or a single such random int if *size* not provided.

See also:

random.random_integers similar to *randint*, only for the closed interval [*low*, *high*], and 1 is the lowest value if *high* is omitted. In particular, this other one is the one to use to generate uniformly distributed discrete non-integers.

Examples

```
>>> np.random.randint(2, size=10)
array([1, 0, 0, 0, 1, 1, 0, 0, 1, 0])
>>> np.random.randint(1, size=10)
array([0, 0, 0, 0, 0, 0, 0, 0, 0, 0])
```

Generate a 2 x 4 array of ints between 0 and 4, inclusive:

```
>>> np.random.randint(5, size=(2, 4))
array([[4, 0, 2, 1],
       [3, 2, 2, 0]])
```

numpy.random.**random_integers**(*low*, *high=None*, *size=None*)

Random integers of type np.int between *low* and *high*, inclusive.

Return random integers of type np.int from the "discrete uniform" distribution in the closed interval [*low*, *high*]. If *high* is None (the default), then results are from [1, *low*]. The np.int type translates to the C long type used by Python 2 for "short" integers and its precision is platform dependent.

This function has been deprecated. Use randint instead.

Deprecated since version 1.11.0.

Parameters **low** : int

Lowest (signed) integer to be drawn from the distribution (unless `high=None`, in which case this parameter is the *highest* such integer).

high : int, optional

If provided, the largest (signed) integer to be drawn from the distribution (see above for behavior if `high=None`).

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **out** : int or ndarray of ints

size-shaped array of random integers from the appropriate distribution, or a single such random int if *size* not provided.

See also:

`random.randint` Similar to *`random_integers`*, only for the half-open interval [*low*, *high*), and 0 is the lowest value if *high* is omitted.

Notes

To sample from N evenly spaced floating-point numbers between a and b, use:

```
a + (b - a) * (np.random.random_integers(N) - 1) / (N - 1.)
```

Examples

```
>>> np.random.random_integers(5)
4
>>> type(np.random.random_integers(5))
<type 'int'>
>>> np.random.random_integers(5, size=(3,2))
array([[5, 4],
       [3, 3],
       [4, 5]])
```

Choose five random numbers from the set of five evenly-spaced numbers between 0 and 2.5, inclusive (*i.e.*, from the set $0, 5/8, 10/8, 15/8, 20/8$):

```
>>> 2.5 * (np.random.random_integers(5, size=(5,)) - 1) / 4.
array([ 0.625,  1.25 ,  0.625,  0.625,  2.5  ])
```

Roll two six sided dice 1000 times and sum the results:

```
>>> d1 = np.random.random_integers(1, 6, 1000)
>>> d2 = np.random.random_integers(1, 6, 1000)
>>> dsums = d1 + d2
```

Display results as a histogram:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, ignored = plt.hist(dsums, 11, normed=True)
>>> plt.show()
```

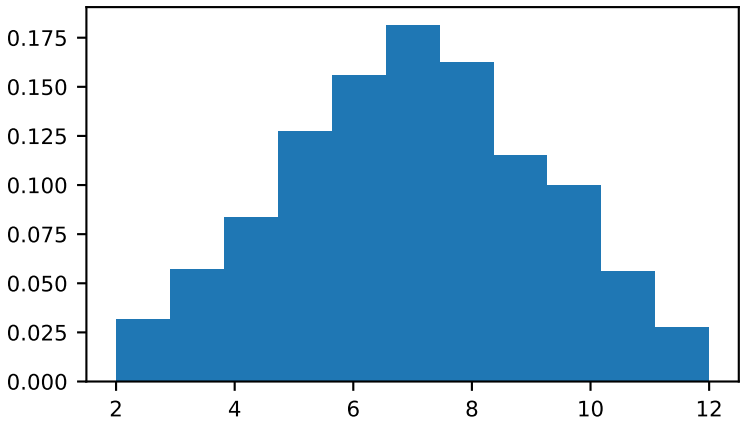

numpy.random.**random_sample**(*size=None*)

Return random floats in the half-open interval [0.0, 1.0).

Results are from the "continuous uniform" distribution over the stated interval. To sample $Unif[a, b), b > a$ multiply the output of `random_sample` by *(b-a)* and add *a*:

```
(b - a) * random_sample() + a
```

Parameters **size** : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **out** : float or ndarray of floats

Array of random floats of shape *size* (unless `size=None`, in which case a single float is returned).

Examples

```
>>> np.random.random_sample()
0.47108547995356098
>>> type(np.random.random_sample())
<type 'float'>
```

(continues on next page)

(continued from previous page)

```
>>> np.random.random_sample((5,))
array([ 0.30220482,  0.86820401,  0.1654503 ,  0.11659149,  0.54323428])
```

Three-by-two array of random numbers from [-5, 0):

```
>>> 5 * np.random.random_sample((3, 2)) - 5
array([[-3.99149989, -0.52338984],
       [-2.99091858, -0.79479508],
       [-1.23204345, -1.75224494]])
```

numpy.random.**random**(*size=None*)

Return random floats in the half-open interval [0.0, 1.0).

Results are from the "continuous uniform" distribution over the stated interval. To sample $Unif[a, b), b > a$ multiply the output of *random_sample* by *(b-a)* and add *a*:

```
(b - a) * random_sample() + a
```

Parameters **size** : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **out** : float or ndarray of floats

Array of random floats of shape *size* (unless `size=None`, in which case a single float is returned).

Examples

```
>>> np.random.random_sample()
0.47108547995356098
>>> type(np.random.random_sample())
<type 'float'>
>>> np.random.random_sample((5,))
array([ 0.30220482,  0.86820401,  0.1654503 ,  0.11659149,  0.54323428])
```

Three-by-two array of random numbers from [-5, 0):

```
>>> 5 * np.random.random_sample((3, 2)) - 5
array([[-3.99149989, -0.52338984],
       [-2.99091858, -0.79479508],
       [-1.23204345, -1.75224494]])
```

numpy.random.**ranf**(*size=None*)

Return random floats in the half-open interval [0.0, 1.0).

Results are from the "continuous uniform" distribution over the stated interval. To sample $Unif[a, b), b > a$ multiply the output of *random_sample* by *(b-a)* and add *a*:

```
(b - a) * random_sample() + a
```

Parameters **size** : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **out** : float or ndarray of floats

Array of random floats of shape *size* (unless `size=None`, in which case a single float is returned).

Examples

```
>>> np.random.random_sample()
0.47108547995356098
>>> type(np.random.random_sample())
<type 'float'>
>>> np.random.random_sample((5,))
array([ 0.30220482,  0.86820401,  0.1654503 ,  0.11659149,  0.54323428])
```

Three-by-two array of random numbers from [-5, 0):

```
>>> 5 * np.random.random_sample((3, 2)) - 5
array([[-3.99149989, -0.52338984],
       [-2.99091858, -0.79479508],
       [-1.23204345, -1.75224494]])
```

numpy.random.**sample**(*size=None*)

Return random floats in the half-open interval [0.0, 1.0).

Results are from the "continuous uniform" distribution over the stated interval. To sample $Unif[a, b), b > a$ multiply the output of *random_sample* by *(b-a)* and add *a*:

```
(b - a) * random_sample() + a
```

Parameters **size** : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **out** : float or ndarray of floats

Array of random floats of shape *size* (unless `size=None`, in which case a single float is returned).

Examples

```
>>> np.random.random_sample()
0.47108547995356098
>>> type(np.random.random_sample())
<type 'float'>
>>> np.random.random_sample((5,))
array([ 0.30220482,  0.86820401,  0.1654503 ,  0.11659149,  0.54323428])
```

Three-by-two array of random numbers from [-5, 0):

```
>>> 5 * np.random.random_sample((3, 2)) - 5
array([[-3.99149989, -0.52338984],
       [-2.99091858, -0.79479508],
       [-1.23204345, -1.75224494]])
```

numpy.random.**choice**(*a*, *size=None*, *replace=True*, *p=None*)

Generates a random sample from a given 1-D array

New in version 1.7.0.

Parameters **a** : 1-D array-like or int

If an ndarray, a random sample is generated from its elements. If an int, the random sample is generated as if a were np.arange(a)

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

replace : boolean, optional

Whether the sample is with or without replacement

p : 1-D array-like, optional

The probabilities associated with each entry in a. If not given the sample assumes a uniform distribution over all entries in a.

Returns **samples** : single item or ndarray

The generated random samples

Raises **ValueError**

If a is an int and less than zero, if a or p are not 1-dimensional, if a is an array-like of size 0, if p is not a vector of probabilities, if a and p have different lengths, or if replace=False and the sample size is greater than the population size

See also:

randint, *shuffle*, *permutation*

Examples

Generate a uniform random sample from np.arange(5) of size 3:

```
>>> np.random.choice(5, 3)
array([0, 3, 4])
>>> #This is equivalent to np.random.randint(0,5,3)
```

Generate a non-uniform random sample from np.arange(5) of size 3:

```
>>> np.random.choice(5, 3, p=[0.1, 0, 0.3, 0.6, 0])
array([3, 3, 0])
```

Generate a uniform random sample from np.arange(5) of size 3 without replacement:

```
>>> np.random.choice(5, 3, replace=False)
array([3,1,0])
>>> #This is equivalent to np.random.permutation(np.arange(5))[:3]
```

Generate a non-uniform random sample from np.arange(5) of size 3 without replacement:

```
>>> np.random.choice(5, 3, replace=False, p=[0.1, 0, 0.3, 0.6, 0])
array([2, 3, 0])
```

Any of the above can be repeated with an arbitrary array-like instead of just integers. For instance:

```
>>> aa_milne_arr = ['pooh', 'rabbit', 'piglet', 'Christopher']
>>> np.random.choice(aa_milne_arr, 5, p=[0.5, 0.1, 0.1, 0.3])
array(['pooh', 'pooh', 'pooh', 'Christopher', 'piglet'],
      dtype='|S11')
```

numpy.random.**bytes**(*length*)

Return random bytes.

Parameters **length** : int

Number of random bytes.

Returns **out** : str

String of length *length*.

Examples

```
>>> np.random.bytes(10)
' eh\x85\x022SZ\xbf\xa4' #random
```

3.24.2 Permutations

shuffle(x)	Modify a sequence in-place by shuffling its contents.
permutation(x)	Randomly permute a sequence, or return a permuted range.

numpy.random.**shuffle**(*x*)

Modify a sequence in-place by shuffling its contents.

This function only shuffles the array along the first axis of a multi-dimensional array. The order of sub-arrays is changed but their contents remains the same.

Parameters **x** : array_like

The array or list to be shuffled.

Returns None

Examples

```
>>> arr = np.arange(10)
>>> np.random.shuffle(arr)
>>> arr
[1 7 5 2 9 4 3 6 0 8]
```

Multi-dimensional arrays are only shuffled along the first axis:

```
>>> arr = np.arange(9).reshape((3, 3))
>>> np.random.shuffle(arr)
>>> arr
array([[3, 4, 5],
```

(continues on next page)

(continued from previous page)

```
       [6, 7, 8],
       [0, 1, 2]])
```

numpy.random.**permutation**(*x*)

Randomly permute a sequence, or return a permuted range.

If *x* is a multi-dimensional array, it is only shuffled along its first index.

Parameters **x** : int or array_like

If *x* is an integer, randomly permute `np.arange(x)`. If *x* is an array, make a copy and shuffle the elements randomly.

Returns **out** : ndarray

Permuted sequence or array range.

Examples

```
>>> np.random.permutation(10)
array([1, 7, 4, 3, 0, 9, 2, 5, 8, 6])
```

```
>>> np.random.permutation([1, 4, 9, 12, 15])
array([15,  1,  9,  4, 12])
```

```
>>> arr = np.arange(9).reshape((3, 3))
>>> np.random.permutation(arr)
array([[6, 7, 8],
       [0, 1, 2],
       [3, 4, 5]])
```

3.24.3 Distributions

beta(a, b[, size])	Draw samples from a Beta distribution.
binomial(n, p[, size])	Draw samples from a binomial distribution.
chisquare(df[, size])	Draw samples from a chi-square distribution.
dirichlet(alpha[, size])	Draw samples from the Dirichlet distribution.
exponential([scale, size])	Draw samples from an exponential distribution.
f(dfnum, dfden[, size])	Draw samples from an F distribution.
gamma(shape[, scale, size])	Draw samples from a Gamma distribution.
geometric(p[, size])	Draw samples from the geometric distribution.
gumbel([loc, scale, size])	Draw samples from a Gumbel distribution.
hypergeometric(ngood, nbad, nsample[, size])	Draw samples from a Hypergeometric distribution.
laplace([loc, scale, size])	Draw samples from the Laplace or double exponential distribution with specified location (or mean) and scale (decay).
logistic([loc, scale, size])	Draw samples from a logistic distribution.
lognormal([mean, sigma, size])	Draw samples from a log-normal distribution.
logseries(p[, size])	Draw samples from a logarithmic series distribution.
multinomial(n, pvals[, size])	Draw samples from a multinomial distribution.

Continued on next page

Table 158 – continued from previous page

multivariate_normal(mean, cov[, size, ...)	Draw random samples from a multivariate normal distribution.
negative_binomial(n, p[, size])	Draw samples from a negative binomial distribution.
noncentral_chisquare(df, nonc[, size])	Draw samples from a noncentral chi-square distribution.
noncentral_f(dfnum, dfden, nonc[, size])	Draw samples from the noncentral F distribution.
normal([loc, scale, size])	Draw random samples from a normal (Gaussian) distribution.
pareto(a[, size])	Draw samples from a Pareto II or Lomax distribution with specified shape.
poisson([lam, size])	Draw samples from a Poisson distribution.
power(a[, size])	Draws samples in [0, 1] from a power distribution with positive exponent a - 1.
rayleigh([scale, size])	Draw samples from a Rayleigh distribution.
standard_cauchy([size])	Draw samples from a standard Cauchy distribution with mode = 0.
standard_exponential([size])	Draw samples from the standard exponential distribution.
standard_gamma(shape[, size])	Draw samples from a standard Gamma distribution.
standard_normal([size])	Draw samples from a standard Normal distribution (mean=0, stdev=1).
standard_t(df[, size])	Draw samples from a standard Student's t distribution with *df* degrees of freedom.
triangular(left, mode, right[, size])	Draw samples from the triangular distribution over the interval `[left, right]`.
uniform([low, high, size])	Draw samples from a uniform distribution.
vonmises(mu, kappa[, size])	Draw samples from a von Mises distribution.
wald(mean, scale[, size])	Draw samples from a Wald, or inverse Gaussian, distribution.
weibull(a[, size])	Draw samples from a Weibull distribution.
zipf(a[, size])	Draw samples from a Zipf distribution.

numpy.random.**beta**(*a*, *b*, *size=None*)

Draw samples from a Beta distribution.

The Beta distribution is a special case of the Dirichlet distribution, and is related to the Gamma distribution. It has the probability distribution function

$$f(x; a, b) = \frac{1}{B(\alpha, \beta)} x^{\alpha-1}(1-x)^{\beta-1},$$

where the normalisation, B, is the beta function,

$$B(\alpha, \beta) = \int_0^1 t^{\alpha-1}(1-t)^{\beta-1} dt.$$

It is often seen in Bayesian inference and order statistics.

Parameters **a** : float or array_like of floats

Alpha, non-negative.

b : float or array_like of floats

Beta, non-negative.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `a` and `b` are both scalars. Otherwise, `np.broadcast(a, b).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized beta distribution.

`numpy.random.`**`binomial`**(*n*, *p*, *size=None*)

Draw samples from a binomial distribution.

Samples are drawn from a binomial distribution with specified parameters, n trials and p probability of success where n an integer >= 0 and p is in the interval [0,1]. (n may be input as a float, but it is truncated to an integer in use)

Parameters **n** : int or array_like of ints

Parameter of the distribution, >= 0. Floats are also accepted, but they will be truncated to integers.

p : float or array_like of floats

Parameter of the distribution, >= 0 and <=1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `n` and `p` are both scalars. Otherwise, `np.broadcast(n, p).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized binomial distribution, where each sample is equal to the number of successes over the n trials.

See also:

`scipy.stats.binom` probability density function, distribution or cumulative density function, etc.

Notes

The probability density for the binomial distribution is

$$P(N) = \binom{n}{N} p^N (1-p)^{n-N},$$

where n is the number of trials, p is the probability of success, and N is the number of successes.

When estimating the standard error of a proportion in a population by using a random sample, the normal distribution works well unless the product p*n <=5, where p = population proportion estimate, and n = number of samples, in which case the binomial distribution is used instead. For example, a sample of 15 people shows 4 who are left handed, and 11 who are right handed. Then p = 4/15 = 27%. 0.27*15 = 4, so the binomial distribution should be used in this case.

References

[R217], *[R218]*, *[R219]*, *[R220]*, *[R221]*

Examples

Draw samples from the distribution:

```
>>> n, p = 10, .5  # number of trials, probability of each trial
>>> s = np.random.binomial(n, p, 1000)
# result of flipping a coin 10 times, tested 1000 times.
```

A real world example. A company drills 9 wild-cat oil exploration wells, each with an estimated probability of success of 0.1. All nine wells fail. What is the probability of that happening?

Let's do 20,000 trials of the model, and count the number that generate zero positive results.

```
>>> sum(np.random.binomial(9, 0.1, 20000) == 0)/20000.
# answer = 0.38885, or 38%.
```

numpy.random.**chisquare**(*df*, *size=None*)

Draw samples from a chi-square distribution.

When *df* independent random variables, each with standard normal distributions (mean 0, variance 1), are squared and summed, the resulting distribution is chi-square (see Notes). This distribution is often used in hypothesis testing.

Parameters **df** : float or array_like of floats

Number of degrees of freedom, should be > 0.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `df` is a scalar. Otherwise, `np.array(df).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized chi-square distribution.

Raises **ValueError**

When *df* <= 0 or when an inappropriate *size* (e.g. `size=-1`) is given.

Notes

The variable obtained by summing the squares of *df* independent, standard normally distributed random variables:

$$Q = \sum_{i=0}^{\mathtt{df}} X_i^2$$

is chi-square distributed, denoted

$$Q \sim \chi_k^2.$$

The probability density function of the chi-squared distribution is

$$p(x) = \frac{(1/2)^{k/2}}{\Gamma(k/2)} x^{k/2-1} e^{-x/2},$$

where Γ is the gamma function,

$$\Gamma(x) = \int_0^{-\infty} t^{x-1} e^{-t} dt.$$

References

[R222]

Examples

```
>>> np.random.chisquare(2,4)
array([ 1.89920014,  9.00867716,  3.13710533,  5.62318272])
```

numpy.random.**dirichlet**(*alpha*, *size=None*)

Draw samples from the Dirichlet distribution.

Draw *size* samples of dimension k from a Dirichlet distribution. A Dirichlet-distributed random variable can be seen as a multivariate generalization of a Beta distribution. Dirichlet pdf is the conjugate prior of a multinomial in Bayesian inference.

Parameters **alpha** : array

Parameter of the distribution (k dimension for sample of dimension k).

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **samples** : ndarray,

The drawn samples, of shape (size, alpha.ndim).

Raises **ValueError**

If any value in alpha is less than or equal to zero

Notes

$$X \approx \prod_{i=1}^{k} x_i^{\alpha_i - 1}$$

Uses the following property for computation: for each dimension, draw a random sample y_i from a standard gamma generator of shape *alpha_i*, then $X = \frac{1}{\sum_{i=1}^{k} y_i}(y_1, \ldots, y_n)$ is Dirichlet distributed.

References

[R223], *[R224]*

Examples

Taking an example cited in Wikipedia, this distribution can be used if one wanted to cut strings (each of initial length 1.0) into K pieces with different lengths, where each piece had, on average, a designated average length, but allowing some variation in the relative sizes of the pieces.

```
>>> s = np.random.dirichlet((10, 5, 3), 20).transpose()
```

```
>>> plt.barh(range(20), s[0])
>>> plt.barh(range(20), s[1], left=s[0], color='g')
>>> plt.barh(range(20), s[2], left=s[0]+s[1], color='r')
>>> plt.title("Lengths of Strings")
```

numpy.random.**exponential**(*scale=1.0*, *size=None*)

Draw samples from an exponential distribution.

Its probability density function is

$$f(x; \frac{1}{\beta}) = \frac{1}{\beta} \exp(-\frac{x}{\beta}),$$

for `x > 0` and 0 elsewhere. β is the scale parameter, which is the inverse of the rate parameter $\lambda = 1/\beta$. The rate parameter is an alternative, widely used parameterization of the exponential distribution *[R227]*.

The exponential distribution is a continuous analogue of the geometric distribution. It describes many common situations, such as the size of raindrops measured over many rainstorms *[R225]*, or the time between page requests to Wikipedia *[R226]*.

Parameters **scale** : float or array_like of floats

The scale parameter, $\beta = 1/\lambda$.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `scale` is a scalar. Otherwise, `np.array(scale).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized exponential distribution.

References

[R225], *[R226]*, *[R227]*

numpy.random.**f**(*dfnum*, *dfden*, *size=None*)

Draw samples from an F distribution.

Samples are drawn from an F distribution with specified parameters, *dfnum* (degrees of freedom in numerator) and *dfden* (degrees of freedom in denominator), where both parameters should be greater than zero.

The random variate of the F distribution (also known as the Fisher distribution) is a continuous probability distribution that arises in ANOVA tests, and is the ratio of two chi-square variates.

Parameters **dfnum** : float or array_like of floats

Degrees of freedom in numerator, should be > 0.

dfden : float or array_like of float

Degrees of freedom in denominator, should be > 0.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `dfnum` and `dfden`

are both scalars. Otherwise, `np.broadcast(dfnum, dfden).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Fisher distribution.

See also:

`scipy.stats.f` probability density function, distribution or cumulative density function, etc.

Notes

The F statistic is used to compare in-group variances to between-group variances. Calculating the distribution depends on the sampling, and so it is a function of the respective degrees of freedom in the problem. The variable *dfnum* is the number of samples minus one, the between-groups degrees of freedom, while *dfden* is the within-groups degrees of freedom, the sum of the number of samples in each group minus the number of groups.

References

[R228], *[R229]*

Examples

An example from Glantz[1], pp 47-40:

Two groups, children of diabetics (25 people) and children from people without diabetes (25 controls). Fasting blood glucose was measured, case group had a mean value of 86.1, controls had a mean value of 82.2. Standard deviations were 2.09 and 2.49 respectively. Are these data consistent with the null hypothesis that the parents diabetic status does not affect their children's blood glucose levels? Calculating the F statistic from the data gives a value of 36.01.

Draw samples from the distribution:

```
>>> dfnum = 1. # between group degrees of freedom
>>> dfden = 48. # within groups degrees of freedom
>>> s = np.random.f(dfnum, dfden, 1000)
```

The lower bound for the top 1% of the samples is :

```
>>> sort(s)[-10]
7.61988120985
```

So there is about a 1% chance that the F statistic will exceed 7.62, the measured value is 36, so the null hypothesis is rejected at the 1% level.

`numpy.random.`**`gamma`**(*shape*, *scale=1.0*, *size=None*)

Draw samples from a Gamma distribution.

Samples are drawn from a Gamma distribution with specified parameters, *shape* (sometimes designated "k") and *scale* (sometimes designated "theta"), where both parameters are > 0.

Parameters **shape** : float or array_like of floats

The shape of the gamma distribution. Should be greater than zero.

scale : float or array_like of floats, optional

The scale of the gamma distribution. Should be greater than zero. Default is equal to 1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `shape` and `scale` are both scalars. Otherwise, `np.broadcast(shape, scale).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized gamma distribution.

See also:

`scipy.stats.gamma` probability density function, distribution or cumulative density function, etc.

Notes

The probability density for the Gamma distribution is

$$p(x) = x^{k-1}\frac{e^{-x/\theta}}{\theta^k \Gamma(k)},$$

where k is the shape and θ the scale, and Γ is the Gamma function.

The Gamma distribution is often used to model the times to failure of electronic components, and arises naturally in processes for which the waiting times between Poisson distributed events are relevant.

References

[R230], *[R231]*

Examples

Draw samples from the distribution:

```
>>> shape, scale = 2., 2.  # mean=4, std=2*sqrt(2)
>>> s = np.random.gamma(shape, scale, 1000)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> import scipy.special as sps
>>> count, bins, ignored = plt.hist(s, 50, normed=True)
>>> y = bins**(shape-1)*(np.exp(-bins/scale) /
...                      (sps.gamma(shape)*scale**shape))
>>> plt.plot(bins, y, linewidth=2, color='r')
>>> plt.show()
```

`numpy.random.`**`geometric`**(*p*, *size=None*)

Draw samples from the geometric distribution.

Bernoulli trials are experiments with one of two outcomes: success or failure (an example of such an experiment is flipping a coin). The geometric distribution models the number of trials that must be run in order to achieve success. It is therefore supported on the positive integers, `k = 1, 2, ...`.

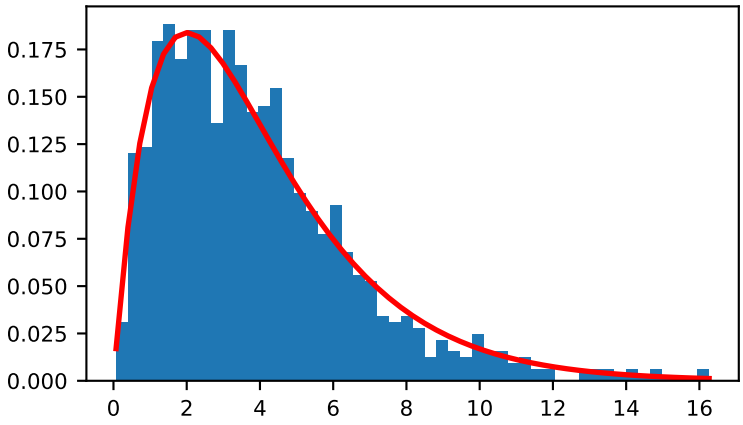

The probability mass function of the geometric distribution is

$$f(k) = (1-p)^{k-1}p$$

where p is the probability of success of an individual trial.

Parameters **p** : float or array_like of floats

The probability of success of an individual trial.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `p` is a scalar. Otherwise, `np.array(p).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized geometric distribution.

Examples

Draw ten thousand values from the geometric distribution, with the probability of an individual success equal to 0.35:

```
>>> z = np.random.geometric(p=0.35, size=10000)
```

How many trials succeeded after a single run?

```
>>> (z == 1).sum() / 10000.
0.34889999999999999 #random
```

`numpy.random.`**`gumbel`**(*loc=0.0*, *scale=1.0*, *size=None*)

Draw samples from a Gumbel distribution.

Draw samples from a Gumbel distribution with specified location and scale. For more information on the Gumbel distribution, see Notes and References below.

Parameters **loc** : float or array_like of floats, optional

The location of the mode of the distribution. Default is 0.

scale : float or array_like of floats, optional

The scale parameter of the distribution. Default is 1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `loc` and `scale` are both scalars. Otherwise, `np.broadcast(loc, scale).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Gumbel distribution.

See also:

`scipy.stats.gumbel_l`, `scipy.stats.gumbel_r`, `scipy.stats.genextreme`, *weibull*

Notes

The Gumbel (or Smallest Extreme Value (SEV) or the Smallest Extreme Value Type I) distribution is one of a class of Generalized Extreme Value (GEV) distributions used in modeling extreme value problems. The Gumbel is a special case of the Extreme Value Type I distribution for maximums from distributions with "exponential-like" tails.

The probability density for the Gumbel distribution is

$$p(x) = \frac{e^{-(x-\mu)/\beta}}{\beta} e^{-e^{-(x-\mu)/\beta}},$$

where μ is the mode, a location parameter, and β is the scale parameter.

The Gumbel (named for German mathematician Emil Julius Gumbel) was used very early in the hydrology literature, for modeling the occurrence of flood events. It is also used for modeling maximum wind speed and rainfall rates. It is a "fat-tailed" distribution - the probability of an event in the tail of the distribution is larger than if one used a Gaussian, hence the surprisingly frequent occurrence of 100-year floods. Floods were initially modeled as a Gaussian process, which underestimated the frequency of extreme events.

It is one of a class of extreme value distributions, the Generalized Extreme Value (GEV) distributions, which also includes the Weibull and Frechet.

The function has a mean of $\mu + 0.57721\beta$ and a variance of $\frac{\pi^2}{6}\beta^2$.

References

[R232], *[R233]*

Examples

Draw samples from the distribution:

```
>>> mu, beta = 0, 0.1 # location and scale
>>> s = np.random.gumbel(mu, beta, 1000)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, ignored = plt.hist(s, 30, normed=True)
>>> plt.plot(bins, (1/beta)*np.exp(-(bins - mu)/beta)
...          * np.exp( -np.exp( -(bins - mu) /beta) ),
...          linewidth=2, color='r')
>>> plt.show()
```

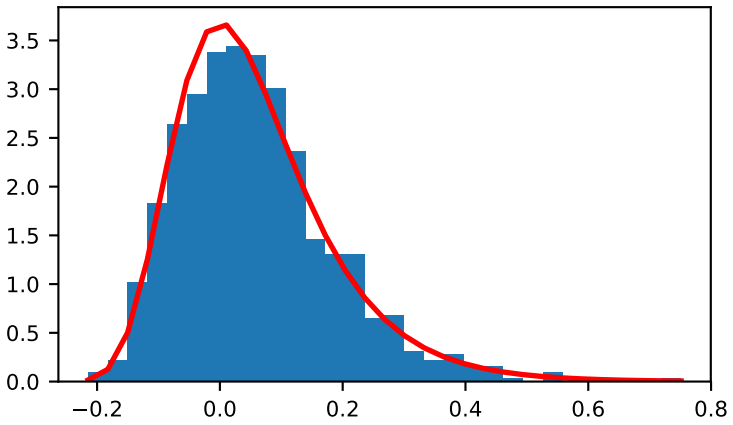

Show how an extreme value distribution can arise from a Gaussian process and compare to a Gaussian:

```
>>> means = []
>>> maxima = []
>>> for i in range(0,1000) :
...    a = np.random.normal(mu, beta, 1000)
...    means.append(a.mean())
...    maxima.append(a.max())
>>> count, bins, ignored = plt.hist(maxima, 30, normed=True)
>>> beta = np.std(maxima) * np.sqrt(6) / np.pi
>>> mu = np.mean(maxima) - 0.57721*beta
>>> plt.plot(bins, (1/beta)*np.exp(-(bins - mu)/beta)
...          * np.exp(-np.exp(-(bins - mu)/beta)),
...          linewidth=2, color='r')
>>> plt.plot(bins, 1/(beta * np.sqrt(2 * np.pi))
...          * np.exp(-(bins - mu)**2 / (2 * beta**2)),
...          linewidth=2, color='g')
>>> plt.show()
```

numpy.random.**hypergeometric**(*ngood*, *nbad*, *nsample*, *size=None*)

Draw samples from a Hypergeometric distribution.

Samples are drawn from a hypergeometric distribution with specified parameters, ngood (ways to make a good selection), nbad (ways to make a bad selection), and nsample = number of items sampled, which is less than or equal to the sum ngood + nbad.

Parameters **ngood** : int or array_like of ints

Number of ways to make a good selection. Must be nonnegative.

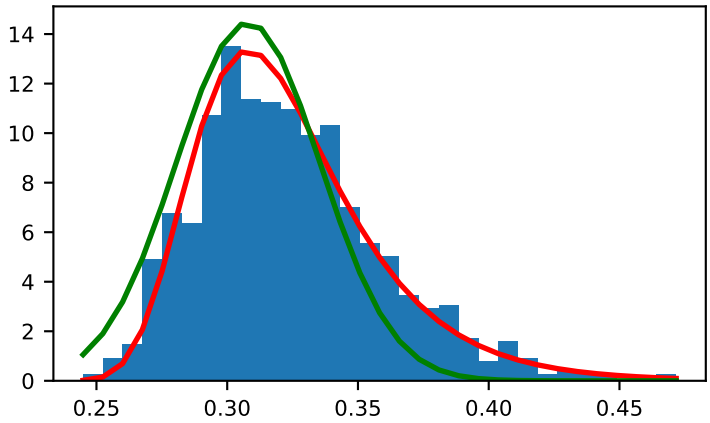

nbad : int or array_like of ints

Number of ways to make a bad selection. Must be nonnegative.

nsample : int or array_like of ints

Number of items sampled. Must be at least 1 and at most `ngood + nbad`.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `ngood`, `nbad`, and `nsample` are all scalars. Otherwise, `np.broadcast(ngood, nbad, nsample).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized hypergeometric distribution.

See also:

`scipy.stats.hypergeom` probability density function, distribution or cumulative density function, etc.

Notes

The probability density for the Hypergeometric distribution is

$$P(x) = \frac{\binom{m}{n}\binom{N-m}{n-x}}{\binom{N}{n}},$$

where $0 \leq x \leq m$ and $n + m - N \leq x \leq n$

for P(x) the probability of x successes, n = ngood, m = nbad, and N = number of samples.

Consider an urn with black and white marbles in it, ngood of them black and nbad are white. If you draw nsample balls without replacement, then the hypergeometric distribution describes the distribution of black balls in the drawn sample.

Note that this distribution is very similar to the binomial distribution, except that in this case, samples are drawn without replacement, whereas in the Binomial case samples are drawn with replacement (or the sample space is infinite). As the sample space becomes large, this distribution approaches the binomial.

References

[R234], *[R235]*, *[R236]*

Examples

Draw samples from the distribution:

```
>>> ngood, nbad, nsamp = 100, 2, 10
# number of good, number of bad, and number of samples
>>> s = np.random.hypergeometric(ngood, nbad, nsamp, 1000)
>>> hist(s)
#   note that it is very unlikely to grab both bad items
```

Suppose you have an urn with 15 white and 15 black marbles. If you pull 15 marbles at random, how likely is it that 12 or more of them are one color?

```
>>> s = np.random.hypergeometric(15, 15, 15, 100000)
>>> sum(s>=12)/100000. + sum(s<=3)/100000.
#   answer = 0.003 ... pretty unlikely!
```

`numpy.random.`**`laplace`**(*loc=0.0*, *scale=1.0*, *size=None*)

Draw samples from the Laplace or double exponential distribution with specified location (or mean) and scale (decay).

The Laplace distribution is similar to the Gaussian/normal distribution, but is sharper at the peak and has fatter tails. It represents the difference between two independent, identically distributed exponential random variables.

Parameters **loc** : float or array_like of floats, optional

The position, μ, of the distribution peak. Default is 0.

scale : float or array_like of floats, optional

λ, the exponential decay. Default is 1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `loc` and `scale` are both scalars. Otherwise, `np.broadcast(loc, scale).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Laplace distribution.

Notes

It has the probability density function

$$f(x; \mu, \lambda) = \frac{1}{2\lambda} \exp\left(-\frac{|x-\mu|}{\lambda}\right).$$

The first law of Laplace, from 1774, states that the frequency of an error can be expressed as an exponential function of the absolute magnitude of the error, which leads to the Laplace distribution. For many problems in economics and health sciences, this distribution seems to model the data better than the standard Gaussian distribution.

References

[R237], *[R238]*, *[R239]*, *[R240]*

Examples

Draw samples from the distribution

```
>>> loc, scale = 0., 1.
>>> s = np.random.laplace(loc, scale, 1000)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, ignored = plt.hist(s, 30, normed=True)
>>> x = np.arange(-8., 8., .01)
>>> pdf = np.exp(-abs(x-loc)/scale)/(2.*scale)
>>> plt.plot(x, pdf)
```

Plot Gaussian for comparison:

```
>>> g = (1/(scale * np.sqrt(2 * np.pi)) *
...      np.exp(-(x - loc)**2 / (2 * scale**2)))
>>> plt.plot(x,g)
```

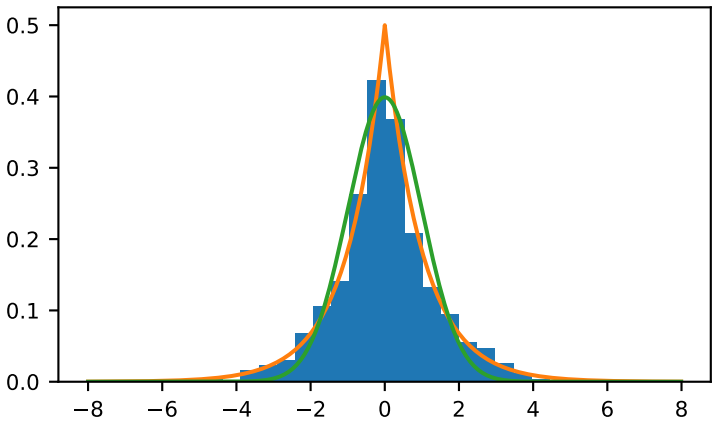

numpy.random.**logistic**(*loc=0.0*, *scale=1.0*, *size=None*)

Draw samples from a logistic distribution.

Samples are drawn from a logistic distribution with specified parameters, loc (location or mean, also median), and scale (>0).

Parameters **loc** : float or array_like of floats, optional

Parameter of the distribution. Default is 0.

scale : float or array_like of floats, optional

Parameter of the distribution. Should be greater than zero. Default is 1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `loc` and `scale` are both scalars. Otherwise, `np.broadcast(loc, scale).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized logistic distribution.

See also:

`scipy.stats.logistic` probability density function, distribution or cumulative density function, etc.

Notes

The probability density for the Logistic distribution is

$$P(x) = P(x) = \frac{e^{-(x-\mu)/s}}{s(1+e^{-(x-\mu)/s})^2},$$

where μ = location and s = scale.

The Logistic distribution is used in Extreme Value problems where it can act as a mixture of Gumbel distributions, in Epidemiology, and by the World Chess Federation (FIDE) where it is used in the Elo ranking system, assuming the performance of each player is a logistically distributed random variable.

References

[R241], *[R242]*, *[R243]*

Examples

Draw samples from the distribution:

```
>>> loc, scale = 10, 1
>>> s = np.random.logistic(loc, scale, 10000)
>>> count, bins, ignored = plt.hist(s, bins=50)
```

plot against distribution

```
>>> def logist(x, loc, scale):
...     return exp((loc-x)/scale)/(scale*(1+exp((loc-x)/scale))**2)
>>> plt.plot(bins, logist(bins, loc, scale)*count.max()/\
... logist(bins, loc, scale).max())
>>> plt.show()
```

numpy.random.**lognormal**(*mean=0.0*, *sigma=1.0*, *size=None*)

Draw samples from a log-normal distribution.

Draw samples from a log-normal distribution with specified mean, standard deviation, and array shape. Note that the mean and standard deviation are not the values for the distribution itself, but of the underlying normal distribution it is derived from.

Parameters **mean** : float or array_like of floats, optional

Mean value of the underlying normal distribution. Default is 0.

sigma : float or array_like of floats, optional

Standard deviation of the underlying normal distribution. Should be greater than zero. Default is 1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `mean` and `sigma` are both scalars. Otherwise, `np.broadcast(mean, sigma).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized log-normal distribution.

See also:

scipy.stats.lognorm probability density function, distribution, cumulative density function, etc.

Notes

A variable *x* has a log-normal distribution if *log(x)* is normally distributed. The probability density function for the log-normal distribution is:

$$p(x) = \frac{1}{\sigma x\sqrt{2\pi}} e^{(-\frac{(ln(x)-\mu)^2}{2\sigma^2})}$$

where μ is the mean and σ is the standard deviation of the normally distributed logarithm of the variable. A log-normal distribution results if a random variable is the *product* of a large number of independent, identically-distributed variables in the same way that a normal distribution results if the variable is the *sum* of a large number of independent, identically-distributed variables.

References

[R244], *[R245]*

Examples

Draw samples from the distribution:

```
>>> mu, sigma = 3., 1. # mean and standard deviation
>>> s = np.random.lognormal(mu, sigma, 1000)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, ignored = plt.hist(s, 100, normed=True, align='mid')
```

```
>>> x = np.linspace(min(bins), max(bins), 10000)
>>> pdf = (np.exp(-(np.log(x) - mu)**2 / (2 * sigma**2))
...        / (x * sigma * np.sqrt(2 * np.pi)))
```

```
>>> plt.plot(x, pdf, linewidth=2, color='r')
>>> plt.axis('tight')
>>> plt.show()
```

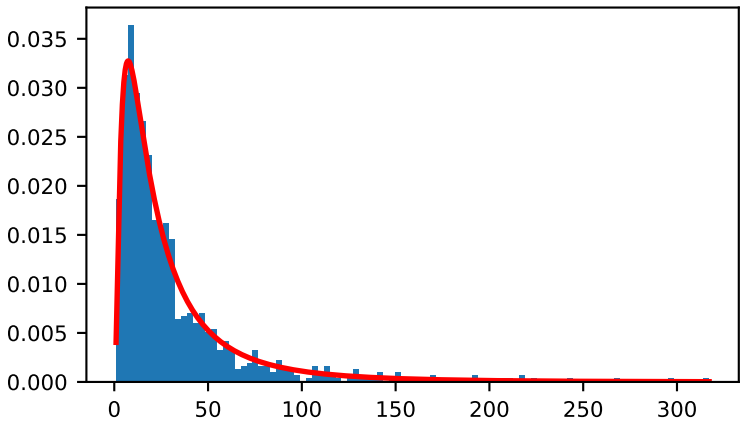

Demonstrate that taking the products of random samples from a uniform distribution can be fit well by a log-normal probability density function.

```
>>> # Generate a thousand samples: each is the product of 100 random
>>> # values, drawn from a normal distribution.
>>> b = []
>>> for i in range(1000):
...     a = 10. + np.random.random(100)
...     b.append(np.product(a))
```

```
>>> b = np.array(b) / np.min(b) # scale values to be positive
>>> count, bins, ignored = plt.hist(b, 100, normed=True, align='mid')
>>> sigma = np.std(np.log(b))
>>> mu = np.mean(np.log(b))
```

```
>>> x = np.linspace(min(bins), max(bins), 10000)
>>> pdf = (np.exp(-(np.log(x) - mu)**2 / (2 * sigma**2))
...        / (x * sigma * np.sqrt(2 * np.pi)))
```

```
>>> plt.plot(x, pdf, color='r', linewidth=2)
>>> plt.show()
```

numpy.random.**logseries**(*p*, *size=None*)

Draw samples from a logarithmic series distribution.

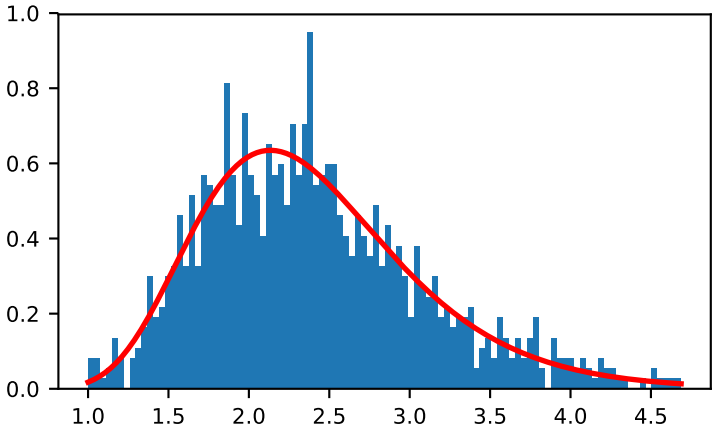

Samples are drawn from a log series distribution with specified shape parameter, 0 < `p` < 1.

Parameters **p** : float or array_like of floats

Shape parameter for the distribution. Must be in the range (0, 1).

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `p` is a scalar. Otherwise, `np.array(p).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized logarithmic series distribution.

See also:

`scipy.stats.logser` probability density function, distribution or cumulative density function, etc.

Notes

The probability density for the Log Series distribution is

$$P(k) = \frac{-p^k}{k \ln(1-p)},$$

where p = probability.

The log series distribution is frequently used to represent species richness and occurrence, first proposed by Fisher, Corbet, and Williams in 1943 [2]. It may also be used to model the numbers of occupants seen in cars [3].

References

[R246], *[R247]*, *[R248]*, *[R249]*

Examples

Draw samples from the distribution:

```
>>> a = .6
>>> s = np.random.logseries(a, 10000)
>>> count, bins, ignored = plt.hist(s)
```

plot against distribution

```
>>> def logseries(k, p):
...     return -p**k/(k*log(1-p))
>>> plt.plot(bins, logseries(bins, a)*count.max()/
             logseries(bins, a).max(), 'r')
>>> plt.show()
```

numpy.random.**multinomial**(*n*, *pvals*, *size=None*)

Draw samples from a multinomial distribution.

The multinomial distribution is a multivariate generalisation of the binomial distribution. Take an experiment with one of `p` possible outcomes. An example of such an experiment is throwing a dice, where the outcome can be 1 through 6. Each sample drawn from the distribution represents *n* such experiments. Its values, `X_i = [X_0, X_1, ..., X_p]`, represent the number of times the outcome was `i`.

Parameters **n** : int

Number of experiments.

pvals : sequence of floats, length p

Probabilities of each of the `p` different outcomes. These should sum to 1 (however, the last element is always assumed to account for the remaining probability, as long as `sum(pvals[:-1]) <= 1)`.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **out** : ndarray

The drawn samples, of shape *size*, if that was provided. If not, the shape is `(N,)`.

In other words, each entry `out[i,j,...,:]` is an N-dimensional value drawn from the distribution.

Examples

Throw a dice 20 times:

```
>>> np.random.multinomial(20, [1/6.]*6, size=1)
array([[4, 1, 7, 5, 2, 1]])
```

It landed 4 times on 1, once on 2, etc.

Now, throw the dice 20 times, and 20 times again:

```
>>> np.random.multinomial(20, [1/6.]*6, size=2)
array([[3, 4, 3, 3, 4, 3],
       [2, 4, 3, 4, 0, 7]])
```

For the first run, we threw 3 times 1, 4 times 2, etc. For the second, we threw 2 times 1, 4 times 2, etc.

A loaded die is more likely to land on number 6:

```
>>> np.random.multinomial(100, [1/7.]*5 + [2/7.])
array([11, 16, 14, 17, 16, 26])
```

The probability inputs should be normalized. As an implementation detail, the value of the last entry is ignored and assumed to take up any leftover probability mass, but this should not be relied on. A biased coin which has twice as much weight on one side as on the other should be sampled like so:

```
>>> np.random.multinomial(100, [1.0 / 3, 2.0 / 3])  # RIGHT
array([38, 62])
```

not like:

```
>>> np.random.multinomial(100, [1.0, 2.0])  # WRONG
array([100,   0])
```

numpy.random.**multivariate_normal**(*mean*, *cov*[, *size*, *check_valid*, *tol*])

Draw random samples from a multivariate normal distribution.

The multivariate normal, multinormal or Gaussian distribution is a generalization of the one-dimensional normal distribution to higher dimensions. Such a distribution is specified by its mean and covariance matrix. These parameters are analogous to the mean (average or "center") and variance (standard deviation, or "width," squared) of the one-dimensional normal distribution.

Parameters **mean** : 1-D array_like, of length N

Mean of the N-dimensional distribution.

cov : 2-D array_like, of shape (N, N)

Covariance matrix of the distribution. It must be symmetric and positive-semidefinite for proper sampling.

size : int or tuple of ints, optional

Given a shape of, for example, `(m,n,k)`, `m*n*k` samples are generated, and packed in an *m*-by-*n*-by-*k* arrangement. Because each sample is *N*-dimensional, the output shape is `(m,n,k,N)`. If no shape is specified, a single (*N*-D) sample is returned.

check_valid : { 'warn', 'raise', 'ignore' }, optional

Behavior when the covariance matrix is not positive semidefinite.

tol : float, optional

Tolerance when checking the singular values in covariance matrix.

Returns **out** : ndarray

The drawn samples, of shape *size*, if that was provided. If not, the shape is `(N,)`.

In other words, each entry `out[i,j,...,:]` is an N-dimensional value drawn from the distribution.

Notes

The mean is a coordinate in N-dimensional space, which represents the location where samples are most likely to be generated. This is analogous to the peak of the bell curve for the one-dimensional or univariate normal distribution.

Covariance indicates the level to which two variables vary together. From the multivariate normal distribution, we draw N-dimensional samples, $X = [x_1, x_2, ...x_N]$. The covariance matrix element C_{ij} is the covariance of x_i and x_j. The element C_{ii} is the variance of x_i (i.e. its "spread").

Instead of specifying the full covariance matrix, popular approximations include:

- Spherical covariance (*cov* is a multiple of the identity matrix)
- Diagonal covariance (*cov* has non-negative elements, and only on the diagonal)

This geometrical property can be seen in two dimensions by plotting generated data-points:

```
>>> mean = [0, 0]
>>> cov = [[1, 0], [0, 100]]  # diagonal covariance
```

Diagonal covariance means that points are oriented along x or y-axis:

```
>>> import matplotlib.pyplot as plt
>>> x, y = np.random.multivariate_normal(mean, cov, 5000).T
>>> plt.plot(x, y, 'x')
>>> plt.axis('equal')
>>> plt.show()
```

Note that the covariance matrix must be positive semidefinite (a.k.a. nonnegative-definite). Otherwise, the behavior of this method is undefined and backwards compatibility is not guaranteed.

References

[R250], *[R251]*

Examples

```
>>> mean = (1, 2)
>>> cov = [[1, 0], [0, 1]]
>>> x = np.random.multivariate_normal(mean, cov, (3, 3))
>>> x.shape
(3, 3, 2)
```

The following is probably true, given that 0.6 is roughly twice the standard deviation:

```
>>> list((x[0,0,:] - mean) < 0.6)
[True, True]
```

numpy.random.**negative_binomial**(*n*, *p*, *size=None*)

Draw samples from a negative binomial distribution.

Samples are drawn from a negative binomial distribution with specified parameters, *n* trials and *p* probability of success where *n* is an integer > 0 and *p* is in the interval [0, 1].

Parameters **n** : int or array_like of ints

Parameter of the distribution, > 0. Floats are also accepted, but they will be truncated to integers.

p : float or array_like of floats

Parameter of the distribution, >= 0 and <=1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `n` and `p` are both scalars. Otherwise, `np.broadcast(n, p).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized negative binomial distribution, where each sample is equal to N, the number of trials it took to achieve n - 1 successes, N - (n - 1) failures, and a success on the, (N + n)th trial.

Notes

The probability density for the negative binomial distribution is

$$P(N;n,p) = \binom{N+n-1}{n-1} p^n (1-p)^N,$$

where $n-1$ is the number of successes, p is the probability of success, and $N+n-1$ is the number of trials. The negative binomial distribution gives the probability of n-1 successes and N failures in N+n-1 trials, and success on the (N+n)th trial.

If one throws a die repeatedly until the third time a "1" appears, then the probability distribution of the number of non-"1"s that appear before the third "1" is a negative binomial distribution.

References

[R252], *[R253]*

Examples

Draw samples from the distribution:

A real world example. A company drills wild-cat oil exploration wells, each with an estimated probability of success of 0.1. What is the probability of having one success for each successive well, that is what is the probability of a single success after drilling 5 wells, after 6 wells, etc.?

```
>>> s = np.random.negative_binomial(1, 0.1, 100000)
>>> for i in range(1, 11):
...    probability = sum(s<i) / 100000.
...    print i, "wells drilled, probability of one success =", probability
```

`numpy.random.`**`noncentral_chisquare`**(*df*, *nonc*, *size=None*)

Draw samples from a noncentral chi-square distribution.

The noncentral χ^2 distribution is a generalisation of the χ^2 distribution.

Parameters **df** : float or array_like of floats

Degrees of freedom, should be > 0.

Changed in version 1.10.0: Earlier NumPy versions required dfnum > 1.

nonc : float or array_like of floats

Non-centrality, should be non-negative.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `df` and `nonc` are both scalars. Otherwise, `np.broadcast(df, nonc).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized noncentral chi-square distribution.

Notes

The probability density function for the noncentral Chi-square distribution is

$$P(x;df,nonc) = \sum_{i=0}^{\infty} \frac{e^{-nonc/2}(nonc/2)^i}{i!} \P_{Y_{df+2i}}(x),$$

where Y_q is the Chi-square with q degrees of freedom.

In Delhi (2007), it is noted that the noncentral chi-square is useful in bombing and coverage problems, the probability of killing the point target given by the noncentral chi-squared distribution.

References

[R254], *[R255]*

Examples

Draw values from the distribution and plot the histogram

```
>>> import matplotlib.pyplot as plt
>>> values = plt.hist(np.random.noncentral_chisquare(3, 20, 100000),
...                   bins=200, normed=True)
>>> plt.show()
```

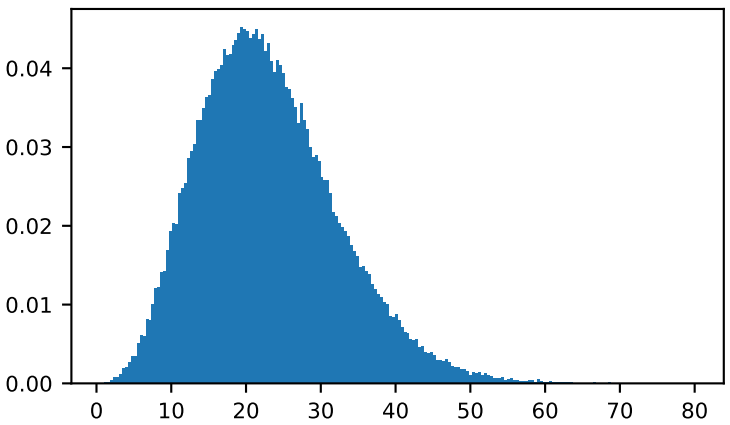

Draw values from a noncentral chisquare with very small noncentrality, and compare to a chisquare.

```
>>> plt.figure()
>>> values = plt.hist(np.random.noncentral_chisquare(3, .0000001, 100000),
...                   bins=np.arange(0., 25, .1), normed=True)
>>> values2 = plt.hist(np.random.chisquare(3, 100000),
...                    bins=np.arange(0., 25, .1), normed=True)
>>> plt.plot(values[1][0:-1], values[0]-values2[0], 'ob')
>>> plt.show()
```

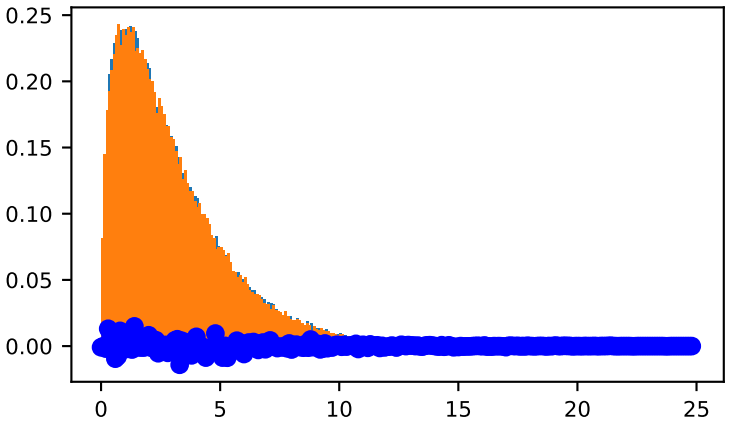

Demonstrate how large values of non-centrality lead to a more symmetric distribution.

```
>>> plt.figure()
>>> values = plt.hist(np.random.noncentral_chisquare(3, 20, 100000),
...                   bins=200, normed=True)
>>> plt.show()
```

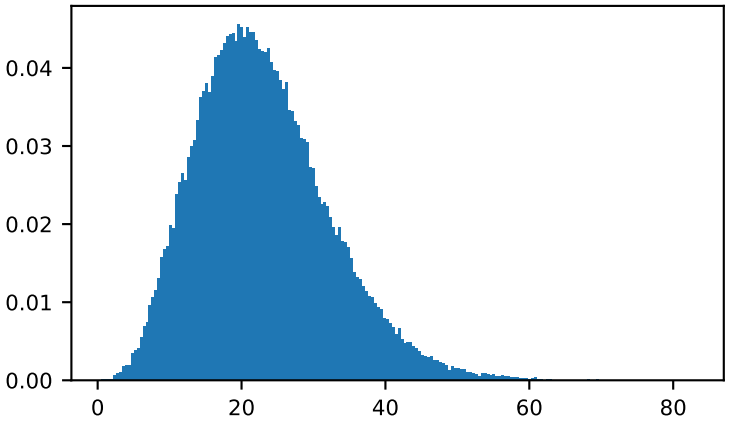

numpy.random.**noncentral_f**(*dfnum*, *dfden*, *nonc*, *size=None*)

Draw samples from the noncentral F distribution.

Samples are drawn from an F distribution with specified parameters, *dfnum* (degrees of freedom in numerator) and *dfden* (degrees of freedom in denominator), where both parameters > 1. *nonc* is the non-centrality parameter.

Parameters **dfnum** : float or array_like of floats

Numerator degrees of freedom, should be > 0.

Changed in version 1.14.0: Earlier NumPy versions required dfnum > 1.

dfden : float or array_like of floats

Denominator degrees of freedom, should be > 0.

nonc : float or array_like of floats

Non-centrality parameter, the sum of the squares of the numerator means, should be >= 0.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `dfnum`, `dfden`, and `nonc` are all scalars. Otherwise, `np.broadcast(dfnum, dfden, nonc).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized noncentral Fisher distribution.

Notes

When calculating the power of an experiment (power = probability of rejecting the null hypothesis when a specific alternative is true) the non-central F statistic becomes important. When the null hypothesis is true, the F statistic follows a central F distribution. When the null hypothesis is not true, then it follows a non-central F statistic.

References

[R256], *[R257]*

Examples

In a study, testing for a specific alternative to the null hypothesis requires use of the Noncentral F distribution. We need to calculate the area in the tail of the distribution that exceeds the value of the F distribution for the null hypothesis. We'll plot the two probability distributions for comparison.

```
>>> dfnum = 3 # between group deg of freedom
>>> dfden = 20 # within groups degrees of freedom
>>> nonc = 3.0
>>> nc_vals = np.random.noncentral_f(dfnum, dfden, nonc, 1000000)
>>> NF = np.histogram(nc_vals, bins=50, normed=True)
>>> c_vals = np.random.f(dfnum, dfden, 1000000)
>>> F = np.histogram(c_vals, bins=50, normed=True)
>>> plt.plot(F[1][1:], F[0])
```

(continues on next page)

(continued from previous page)

```
>>> plt.plot(NF[1][1:], NF[0])
>>> plt.show()
```

numpy.random.**normal**(*loc=0.0*, *scale=1.0*, *size=None*)

Draw random samples from a normal (Gaussian) distribution.

The probability density function of the normal distribution, first derived by De Moivre and 200 years later by both Gauss and Laplace independently *[R259]*, is often called the bell curve because of its characteristic shape (see the example below).

The normal distributions occurs often in nature. For example, it describes the commonly occurring distribution of samples influenced by a large number of tiny, random disturbances, each with its own unique distribution *[R259]*.

Parameters **loc** : float or array_like of floats

Mean ("centre") of the distribution.

scale : float or array_like of floats

Standard deviation (spread or "width") of the distribution.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `loc` and `scale` are both scalars. Otherwise, `np.broadcast(loc, scale).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized normal distribution.

See also:

scipy.stats.norm probability density function, distribution or cumulative density function, etc.

Notes

The probability density for the Gaussian distribution is

$$p(x) = \frac{1}{\sqrt{2\pi\sigma^2}} e^{-\frac{(x-\mu)^2}{2\sigma^2}},$$

where μ is the mean and σ the standard deviation. The square of the standard deviation, σ^2, is called the variance.

The function has its peak at the mean, and its "spread" increases with the standard deviation (the function reaches 0.607 times its maximum at $x + \sigma$ and $x - \sigma$ *[R259]*). This implies that *numpy.random.normal* is more likely to return samples lying close to the mean, rather than those far away.

References

[R258], *[R259]*

Examples

Draw samples from the distribution:

```
>>> mu, sigma = 0, 0.1 # mean and standard deviation
>>> s = np.random.normal(mu, sigma, 1000)
```

Verify the mean and the variance:

```
>>> abs(mu - np.mean(s)) < 0.01
True
```

```
>>> abs(sigma - np.std(s, ddof=1)) < 0.01
True
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, ignored = plt.hist(s, 30, normed=True)
>>> plt.plot(bins, 1/(sigma * np.sqrt(2 * np.pi)) *
...                np.exp( - (bins - mu)**2 / (2 * sigma**2) ),
...          linewidth=2, color='r')
>>> plt.show()
```

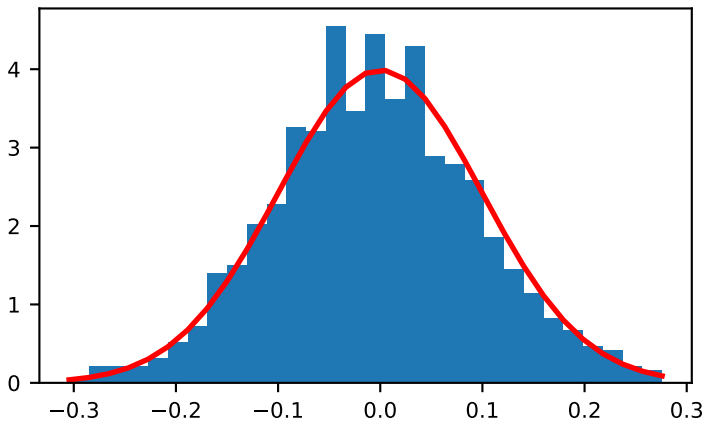

numpy.random.**pareto**(*a*, *size=None*)

Draw samples from a Pareto II or Lomax distribution with specified shape.

The Lomax or Pareto II distribution is a shifted Pareto distribution. The classical Pareto distribution can be obtained from the Lomax distribution by adding 1 and multiplying by the scale parameter `m` (see Notes). The smallest value of the Lomax distribution is zero while for the classical Pareto distribution it is `mu`, where the standard Pareto distribution has location `mu = 1`. Lomax can also be considered as a simplified version of the Generalized Pareto distribution (available in SciPy), with the scale set to one and the location set to zero.

The Pareto distribution must be greater than zero, and is unbounded above. It is also known as the "80-20 rule". In this distribution, 80 percent of the weights are in the lowest 20 percent of the range, while the other 20 percent fill the remaining 80 percent of the range.

Parameters **a** : float or array_like of floats

Shape of the distribution. Should be greater than zero.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `a` is a scalar. Otherwise, `np.array(a).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Pareto distribution.

See also:

scipy.stats.lomax probability density function, distribution or cumulative density function, etc.

scipy.stats.genpareto probability density function, distribution or cumulative density function, etc.

Notes

The probability density for the Pareto distribution is

$$p(x) = \frac{am^a}{x^{a+1}}$$

where a is the shape and m the scale.

The Pareto distribution, named after the Italian economist Vilfredo Pareto, is a power law probability distribution useful in many real world problems. Outside the field of economics it is generally referred to as the Bradford distribution. Pareto developed the distribution to describe the distribution of wealth in an economy. It has also found use in insurance, web page access statistics, oil field sizes, and many other problems, including the download frequency for projects in Sourceforge *[R260]*. It is one of the so-called "fat-tailed" distributions.

References

[R260], *[R261]*, *[R262]*, *[R263]*

Examples

Draw samples from the distribution:

```
>>> a, m = 3., 2.  # shape and mode
>>> s = (np.random.pareto(a, 1000) + 1) * m
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, _ = plt.hist(s, 100, normed=True)
>>> fit = a*m**a / bins**(a+1)
>>> plt.plot(bins, max(count)*fit/max(fit), linewidth=2, color='r')
>>> plt.show()
```

numpy.random.**poisson**(*lam=1.0*, *size=None*)

Draw samples from a Poisson distribution.

The Poisson distribution is the limit of the binomial distribution for large N.

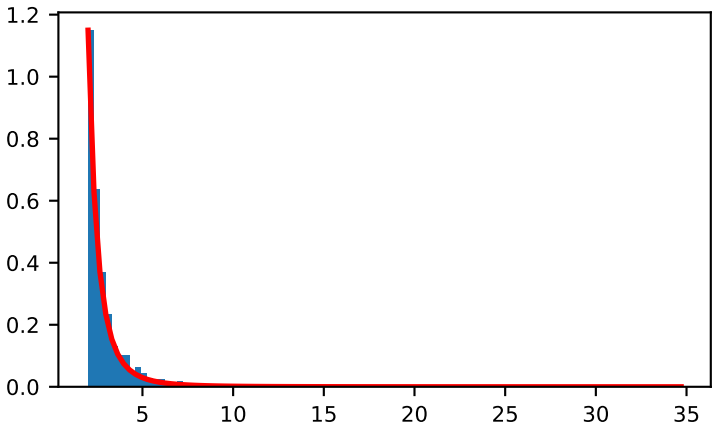

Parameters **lam** : float or array_like of floats

Expectation of interval, should be >= 0. A sequence of expectation intervals must be broadcastable over the requested size.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `lam` is a scalar. Otherwise, `np.array(lam).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Poisson distribution.

Notes

The Poisson distribution

$$f(k; \lambda) = \frac{\lambda^k e^{-\lambda}}{k!}$$

For events with an expected separation λ the Poisson distribution $f(k; \lambda)$ describes the probability of k events occurring within the observed interval λ.

Because the output is limited to the range of the C long type, a ValueError is raised when *lam* is within 10 sigma of the maximum representable value.

References

[R264], *[R265]*

Examples

Draw samples from the distribution:

```
>>> import numpy as np
>>> s = np.random.poisson(5, 10000)
```

Display histogram of the sample:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, ignored = plt.hist(s, 14, normed=True)
>>> plt.show()
```

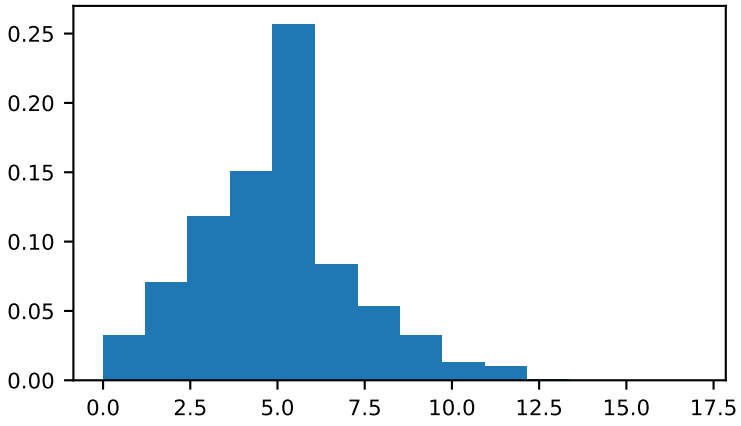

Draw each 100 values for lambda 100 and 500:

```
>>> s = np.random.poisson(lam=(100., 500.), size=(100, 2))
```

numpy.random.**power**(*a*, *size=None*)

Draws samples in [0, 1] from a power distribution with positive exponent a - 1.

Also known as the power function distribution.

Parameters **a** : float or array_like of floats

Parameter of the distribution. Should be greater than zero.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `a` is a scalar. Otherwise, `np.array(a).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized power distribution.

Raises **ValueError**

If a < 1.

Notes

The probability density function is

$$P(x; a) = ax^{a-1}, 0 \leq x \leq 1, a > 0.$$

The power function distribution is just the inverse of the Pareto distribution. It may also be seen as a special case of the Beta distribution.

It is used, for example, in modeling the over-reporting of insurance claims.

References

[R266], *[R267]*

Examples

Draw samples from the distribution:

```
>>> a = 5. # shape
>>> samples = 1000
>>> s = np.random.power(a, samples)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, ignored = plt.hist(s, bins=30)
>>> x = np.linspace(0, 1, 100)
>>> y = a*x**(a-1.)
>>> normed_y = samples*np.diff(bins)[0]*y
>>> plt.plot(x, normed_y)
>>> plt.show()
```

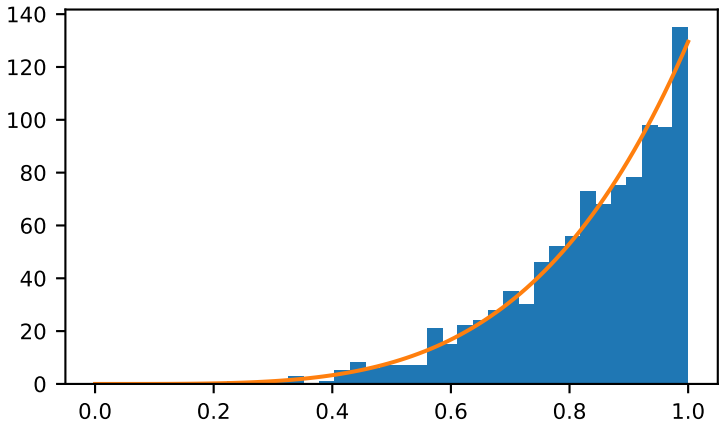

Compare the power function distribution to the inverse of the Pareto.

```
>>> from scipy import stats
>>> rvs = np.random.power(5, 1000000)
>>> rvsp = np.random.pareto(5, 1000000)
>>> xx = np.linspace(0,1,100)
>>> powpdf = stats.powerlaw.pdf(xx,5)
```

```
>>> plt.figure()
>>> plt.hist(rvs, bins=50, normed=True)
>>> plt.plot(xx,powpdf,'r-')
>>> plt.title('np.random.power(5)')
```

```
>>> plt.figure()
>>> plt.hist(1./(1.+rvsp), bins=50, normed=True)
>>> plt.plot(xx,powpdf,'r-')
>>> plt.title('inverse of 1 + np.random.pareto(5)')
```

```
>>> plt.figure()
>>> plt.hist(1./(1.+rvsp), bins=50, normed=True)
>>> plt.plot(xx,powpdf,'r-')
>>> plt.title('inverse of stats.pareto(5)')
```

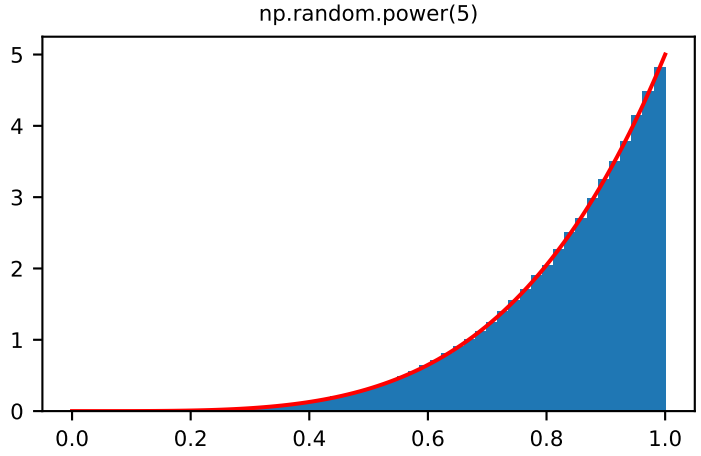

numpy.random.**rayleigh**(*scale=1.0*, *size=None*)

Draw samples from a Rayleigh distribution.

The χ and Weibull distributions are generalizations of the Rayleigh.

Parameters **scale** : float or array_like of floats, optional

Scale, also equals the mode. Should be >= 0. Default is 1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `scale` is a scalar. Otherwise, `np.array(scale).size` samples are drawn.

Returns **out** : ndarray or scalar

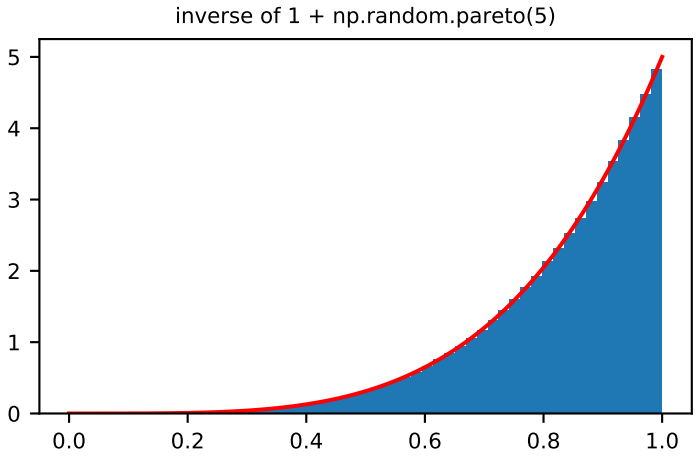
inverse of 1 + np.random.pareto(5)
0
1
2
3
4
5
0.0
0.2
0.4
0.6
0.8
1.0

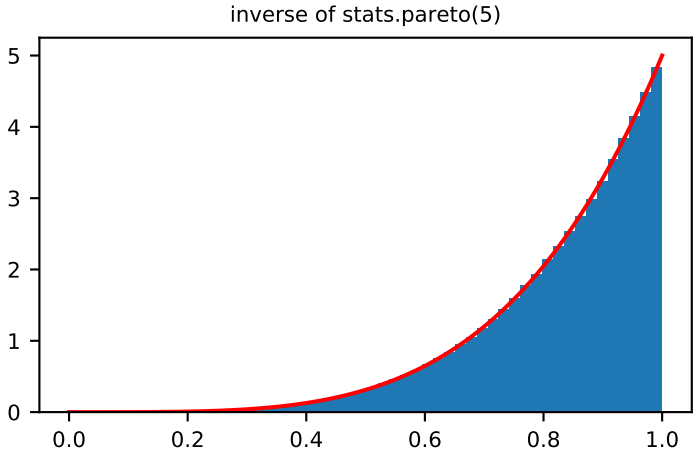
inverse of stats.pareto(5)
0
1
2
3
4
5
0.0
0.2
0.4
0.6
0.8
1.0

Drawn samples from the parameterized Rayleigh distribution.

Notes

The probability density function for the Rayleigh distribution is

$$P(x;scale) = \frac{x}{scale^2}e^{\frac{-x^2}{2\cdot scale^2}}$$

The Rayleigh distribution would arise, for example, if the East and North components of the wind velocity had identical zero-mean Gaussian distributions. Then the wind speed would have a Rayleigh distribution.

References

[R268], *[R269]*

Examples

Draw values from the distribution and plot the histogram

```
>>> values = hist(np.random.rayleigh(3, 100000), bins=200, normed=True)
```

Wave heights tend to follow a Rayleigh distribution. If the mean wave height is 1 meter, what fraction of waves are likely to be larger than 3 meters?

```
>>> meanvalue = 1
>>> modevalue = np.sqrt(2 / np.pi) * meanvalue
>>> s = np.random.rayleigh(modevalue, 1000000)
```

The percentage of waves larger than 3 meters is:

```
>>> 100.*sum(s>3)/1000000.
0.087300000000000003
```

numpy.random.**standard_cauchy**(*size=None*)

Draw samples from a standard Cauchy distribution with mode = 0.

Also known as the Lorentz distribution.

Parameters **size** : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **samples** : ndarray or scalar

The drawn samples.

Notes

The probability density function for the full Cauchy distribution is

$$P(x;x_0,\gamma) = \frac{1}{\pi\gamma\left[1+(\frac{x-x_0}{\gamma})^2\right]}$$

and the Standard Cauchy distribution just sets $x_0 = 0$ and $\gamma = 1$

The Cauchy distribution arises in the solution to the driven harmonic oscillator problem, and also describes spectral line broadening. It also describes the distribution of values at which a line tilted at a random angle will cut the x axis.

When studying hypothesis tests that assume normality, seeing how the tests perform on data from a Cauchy distribution is a good indicator of their sensitivity to a heavy-tailed distribution, since the Cauchy looks very much like a Gaussian distribution, but with heavier tails.

References

[R271], *[R272]*, *[R273]*

Examples

Draw samples and plot the distribution:

```
>>> s = np.random.standard_cauchy(1000000)
>>> s = s[(s>-25) & (s<25)]  # truncate distribution so it plots well
>>> plt.hist(s, bins=100)
>>> plt.show()
```

numpy.random.**standard_exponential**(*size=None*)

Draw samples from the standard exponential distribution.

standard_exponential is identical to the exponential distribution with a scale parameter of 1.

Parameters **size** : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **out** : float or ndarray

Drawn samples.

Examples

Output a 3x8000 array:

```
>>> n = np.random.standard_exponential((3, 8000))
```

numpy.random.**standard_gamma**(*shape*, *size=None*)

Draw samples from a standard Gamma distribution.

Samples are drawn from a Gamma distribution with specified parameters, shape (sometimes designated "k") and scale=1.

Parameters **shape** : float or array_like of floats

Parameter, should be > 0.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `shape` is a scalar. Otherwise, `np.array(shape).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized standard gamma distribution.

See also:

`scipy.stats.gamma` probability density function, distribution or cumulative density function, etc.

Notes

The probability density for the Gamma distribution is

$$p(x) = x^{k-1}\frac{e^{-x/\theta}}{\theta^k \Gamma(k)},$$

where k is the shape and θ the scale, and Γ is the Gamma function.

The Gamma distribution is often used to model the times to failure of electronic components, and arises naturally in processes for which the waiting times between Poisson distributed events are relevant.

References

[R274], *[R275]*

Examples

Draw samples from the distribution:

```
>>> shape, scale = 2., 1. # mean and width
>>> s = np.random.standard_gamma(shape, 1000000)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> import scipy.special as sps
>>> count, bins, ignored = plt.hist(s, 50, normed=True)
>>> y = bins**(shape-1) * ((np.exp(-bins/scale))/ \
...                       (sps.gamma(shape) * scale**shape))
>>> plt.plot(bins, y, linewidth=2, color='r')
>>> plt.show()
```

numpy.random.**standard_normal**(*size=None*)

Draw samples from a standard Normal distribution (mean=0, stdev=1).

Parameters **size** : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **out** : float or ndarray

Drawn samples.

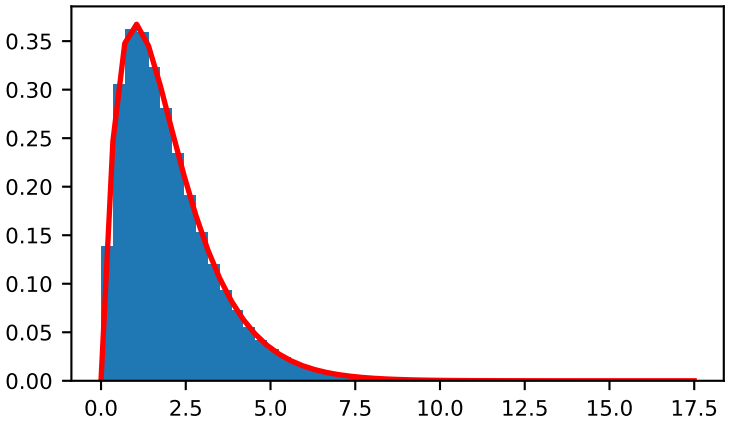

Examples

```
>>> s = np.random.standard_normal(8000)
>>> s
array([ 0.6888893 ,  0.78096262, -0.89086505, ...,  0.49876311, #random
       -0.38672696, -0.4685006 ])                                #random
>>> s.shape
(8000,)
>>> s = np.random.standard_normal(size=(3, 4, 2))
>>> s.shape
(3, 4, 2)
```

numpy.random.**standard_t**(*df*, *size=None*)

Draw samples from a standard Student's t distribution with *df* degrees of freedom.

A special case of the hyperbolic distribution. As *df* gets large, the result resembles that of the standard normal distribution (*standard_normal*).

Parameters **df** : float or array_like of floats

Degrees of freedom, should be > 0.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `df` is a scalar. Otherwise, `np.array(df).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized standard Student's t distribution.

Notes

The probability density function for the t distribution is

$$P(x, df) = \frac{\Gamma(\frac{df+1}{2})}{\sqrt{\pi df}\,\Gamma(\frac{df}{2})}\left(1 + \frac{x^2}{df}\right)^{-(df+1)/2}$$

The t test is based on an assumption that the data come from a Normal distribution. The t test provides a way to test whether the sample mean (that is the mean calculated from the data) is a good estimate of the true mean.

The derivation of the t-distribution was first published in 1908 by William Gosset while working for the Guinness Brewery in Dublin. Due to proprietary issues, he had to publish under a pseudonym, and so he used the name Student.

References

[R276], *[R277]*

Examples

From Dalgaard page 83 *[R276]*, suppose the daily energy intake for 11 women in Kj is:

```
>>> intake = np.array([5260., 5470, 5640, 6180, 6390, 6515, 6805, 7515, \
...                    7515, 8230, 8770])
```

Does their energy intake deviate systematically from the recommended value of 7725 kJ?

We have 10 degrees of freedom, so is the sample mean within 95% of the recommended value?

```
>>> s = np.random.standard_t(10, size=100000)
>>> np.mean(intake)
6753.636363636364
>>> intake.std(ddof=1)
1142.1232221373727
```

Calculate the t statistic, setting the ddof parameter to the unbiased value so the divisor in the standard deviation will be degrees of freedom, N-1.

```
>>> t = (np.mean(intake)-7725)/(intake.std(ddof=1)/np.sqrt(len(intake)))
>>> import matplotlib.pyplot as plt
>>> h = plt.hist(s, bins=100, normed=True)
```

For a one-sided t-test, how far out in the distribution does the t statistic appear?

```
>>> np.sum(s<t) / float(len(s))
0.0090699999999999999  #random
```

So the p-value is about 0.009, which says the null hypothesis has a probability of about 99% of being true.

numpy.random.**triangular**(*left*, *mode*, *right*, *size=None*)

Draw samples from the triangular distribution over the interval `[left, right]`.

The triangular distribution is a continuous probability distribution with lower limit left, peak at mode, and upper limit right. Unlike the other distributions, these parameters directly define the shape of the pdf.

Parameters **left** : float or array_like of floats

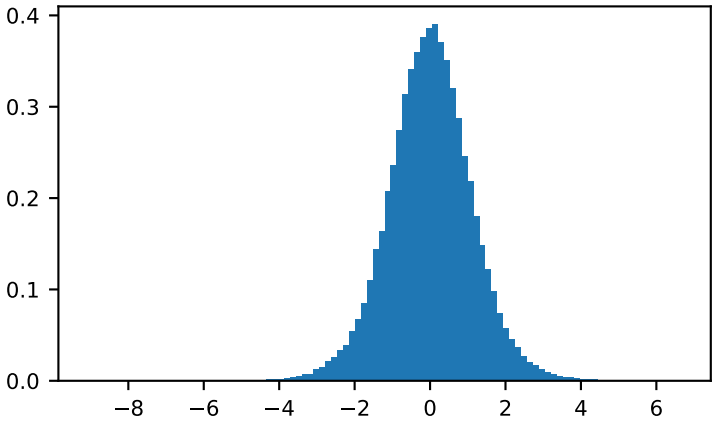

Lower limit.

mode : float or array_like of floats

The value where the peak of the distribution occurs. The value should fulfill the condition `left <= mode <= right`.

right : float or array_like of floats

Upper limit, should be larger than *left*.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `left`, `mode`, and `right` are all scalars. Otherwise, `np.broadcast(left, mode, right).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized triangular distribution.

Notes

The probability density function for the triangular distribution is

$$P(x;l,m,r) = \begin{cases} \frac{2(x-l)}{(r-l)(m-l)} & \text{for } l \leq x \leq m, \\ \frac{2(r-x)}{(r-l)(r-m)} & \text{for } m \leq x \leq r, \\ 0 & \text{otherwise.} \end{cases}$$

The triangular distribution is often used in ill-defined problems where the underlying distribution is not known, but some knowledge of the limits and mode exists. Often it is used in simulations.

References

[R278]

Examples

Draw values from the distribution and plot the histogram:

```
>>> import matplotlib.pyplot as plt
>>> h = plt.hist(np.random.triangular(-3, 0, 8, 100000), bins=200,
...              normed=True)
>>> plt.show()
```

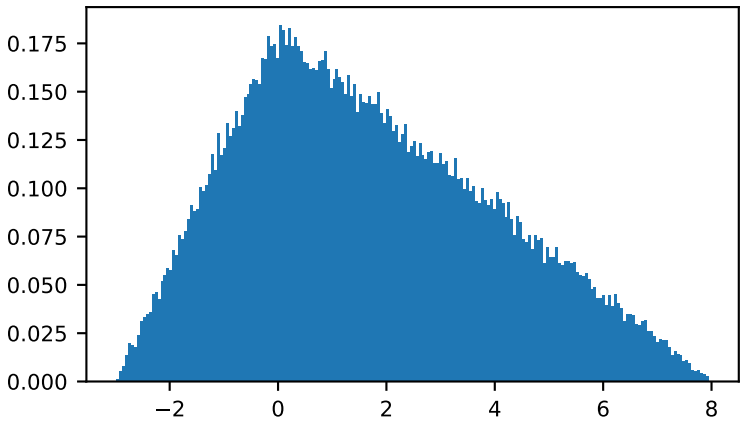

numpy.random.**uniform**(*low=0.0*, *high=1.0*, *size=None*)

Draw samples from a uniform distribution.

Samples are uniformly distributed over the half-open interval `[low, high)` (includes low, but excludes high). In other words, any value within the given interval is equally likely to be drawn by *uniform*.

Parameters **low** : float or array_like of floats, optional

Lower boundary of the output interval. All values generated will be greater than or equal to low. The default value is 0.

high : float or array_like of floats

Upper boundary of the output interval. All values generated will be less than high. The default value is 1.0.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `low` and `high` are both scalars. Otherwise, `np.broadcast(low, high).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized uniform distribution.

See also:

randint Discrete uniform distribution, yielding integers.

random_integers Discrete uniform distribution over the closed interval `[low, high]`.

random_sample Floats uniformly distributed over `[0, 1)`.

random Alias for *random_sample*.

rand Convenience function that accepts dimensions as input, e.g., `rand(2,2)` would generate a 2-by-2 array of floats, uniformly distributed over `[0, 1)`.

Notes

The probability density function of the uniform distribution is

$$p(x) = \frac{1}{b - a}$$

anywhere within the interval `[a, b)`, and zero elsewhere.

When `high` == `low`, values of `low` will be returned. If `high` < `low`, the results are officially undefined and may eventually raise an error, i.e. do not rely on this function to behave when passed arguments satisfying that inequality condition.

Examples

Draw samples from the distribution:

```
>>> s = np.random.uniform(-1,0,1000)
```

All values are within the given interval:

```
>>> np.all(s >= -1)
True
>>> np.all(s < 0)
True
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, ignored = plt.hist(s, 15, normed=True)
>>> plt.plot(bins, np.ones_like(bins), linewidth=2, color='r')
>>> plt.show()
```

numpy.random.**vonmises**(*mu*, *kappa*, *size=None*)

Draw samples from a von Mises distribution.

Samples are drawn from a von Mises distribution with specified mode (mu) and dispersion (kappa), on the interval [-pi, pi].

The von Mises distribution (also known as the circular normal distribution) is a continuous probability distribution on the unit circle. It may be thought of as the circular analogue of the normal distribution.

Parameters **mu** : float or array_like of floats

Mode (“center”) of the distribution.

kappa : float or array_like of floats

Dispersion of the distribution, has to be >=0.

size : int or tuple of ints, optional

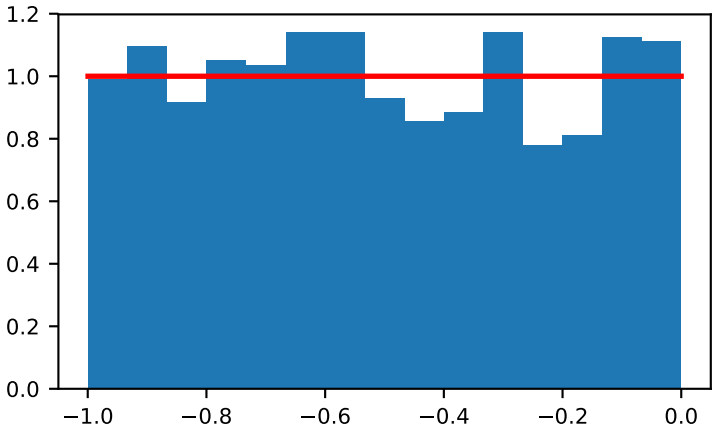

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `mu` and `kappa` are both scalars. Otherwise, `np.broadcast(mu, kappa).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized von Mises distribution.

See also:

`scipy.stats.vonmises` probability density function, distribution, or cumulative density function, etc.

Notes

The probability density for the von Mises distribution is

$$p(x) = \frac{e^{\kappa cos(x-\mu)}}{2\pi I_0(\kappa)},$$

where μ is the mode and κ the dispersion, and $I_0(\kappa)$ is the modified Bessel function of order 0.

The von Mises is named for Richard Edler von Mises, who was born in Austria-Hungary, in what is now the Ukraine. He fled to the United States in 1939 and became a professor at Harvard. He worked in probability theory, aerodynamics, fluid mechanics, and philosophy of science.

References

[R279], *[R280]*

Examples

Draw samples from the distribution:

```
>>> mu, kappa = 0.0, 4.0 # mean and dispersion
>>> s = np.random.vonmises(mu, kappa, 1000)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> from scipy.special import i0
>>> plt.hist(s, 50, normed=True)
>>> x = np.linspace(-np.pi, np.pi, num=51)
>>> y = np.exp(kappa*np.cos(x-mu))/(2*np.pi*i0(kappa))
>>> plt.plot(x, y, linewidth=2, color='r')
>>> plt.show()
```

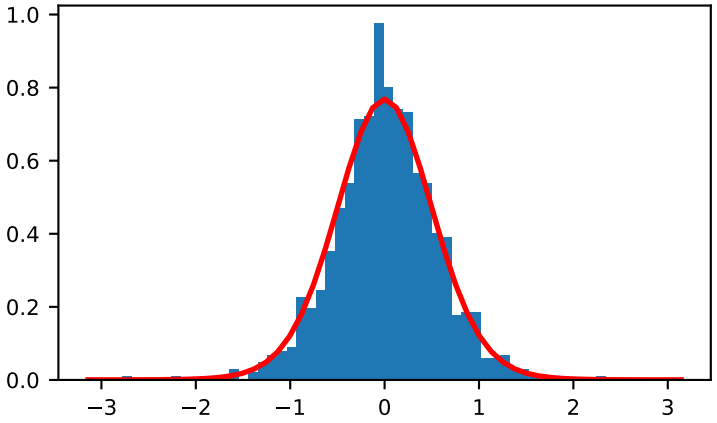

numpy.random.**wald**(*mean*, *scale*, *size=None*)

Draw samples from a Wald, or inverse Gaussian, distribution.

As the scale approaches infinity, the distribution becomes more like a Gaussian. Some references claim that the Wald is an inverse Gaussian with mean equal to 1, but this is by no means universal.

The inverse Gaussian distribution was first studied in relationship to Brownian motion. In 1956 M.C.K. Tweedie used the name inverse Gaussian because there is an inverse relationship between the time to cover a unit distance and distance covered in unit time.

Parameters **mean** : float or array_like of floats

Distribution mean, should be > 0.

scale : float or array_like of floats

Scale parameter, should be >= 0.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `mean` and `scale` are both scalars. Otherwise, `np.broadcast(mean, scale).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Wald distribution.

Notes

The probability density function for the Wald distribution is

$$P(x; mean, scale) = \sqrt{\frac{scale}{2\pi x^3}} e^{\frac{-scale(x-mean)^2}{2 \cdot mean^2 x}}$$

As noted above the inverse Gaussian distribution first arise from attempts to model Brownian motion. It is also a competitor to the Weibull for use in reliability modeling and modeling stock returns and interest rate processes.

References

[R281], *[R282]*, *[R283]*

Examples

Draw values from the distribution and plot the histogram:

```
>>> import matplotlib.pyplot as plt
>>> h = plt.hist(np.random.wald(3, 2, 100000), bins=200, normed=True)
>>> plt.show()
```

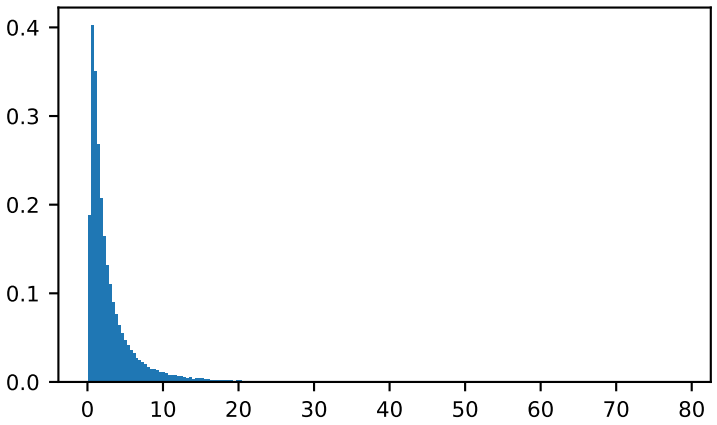

numpy.random.**weibull**(*a*, *size=None*)

Draw samples from a Weibull distribution.

Draw samples from a 1-parameter Weibull distribution with the given shape parameter a.

$$X = (-ln(U))^{1/a}$$

Here, U is drawn from the uniform distribution over (0,1].

The more common 2-parameter Weibull, including a scale parameter λ is just $X = \lambda(-ln(U))^{1/a}$.

Parameters **a** : float or array_like of floats

Shape of the distribution. Should be greater than zero.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `a` is a scalar. Otherwise, `np.array(a).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Weibull distribution.

See also:

`scipy.stats.weibull_max`, `scipy.stats.weibull_min`, `scipy.stats.genextreme`, *gumbel*

Notes

The Weibull (or Type III asymptotic extreme value distribution for smallest values, SEV Type III, or Rosin-Rammler distribution) is one of a class of Generalized Extreme Value (GEV) distributions used in modeling extreme value problems. This class includes the Gumbel and Frechet distributions.

The probability density for the Weibull distribution is

$$p(x) = \frac{a}{\lambda}(\frac{x}{\lambda})^{a-1}e^{-(x/\lambda)^a},$$

where a is the shape and λ the scale.

The function has its peak (the mode) at $\lambda(\frac{a-1}{a})^{1/a}$.

When `a = 1`, the Weibull distribution reduces to the exponential distribution.

References

[R284], *[R285]*, *[R286]*

Examples

Draw samples from the distribution:

```
>>> a = 5. # shape
>>> s = np.random.weibull(a, 1000)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> x = np.arange(1,100.)/50.
>>> def weib(x,n,a):
...     return (a / n) * (x / n)**(a - 1) * np.exp(-(x / n)**a)
```

```
>>> count, bins, ignored = plt.hist(np.random.weibull(5.,1000))
>>> x = np.arange(1,100.)/50.
>>> scale = count.max()/weib(x, 1., 5.).max()
>>> plt.plot(x, weib(x, 1., 5.)*scale)
>>> plt.show()
```

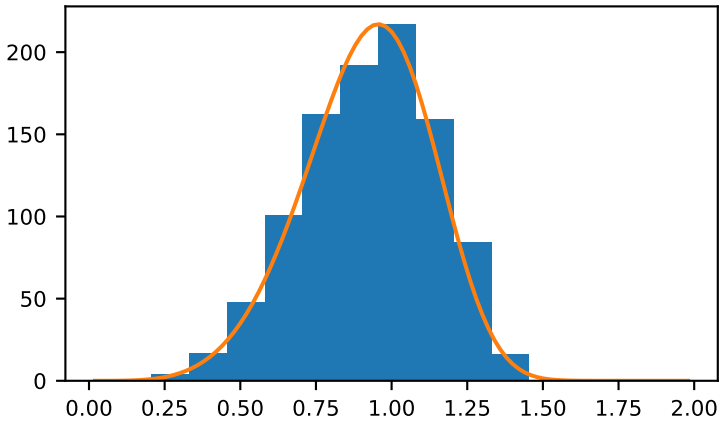

numpy.random.**zipf**(*a*, *size=None*)

Draw samples from a Zipf distribution.

Samples are drawn from a Zipf distribution with specified parameter $a > 1$.

The Zipf distribution (also known as the zeta distribution) is a continuous probability distribution that satisfies Zipf's law: the frequency of an item is inversely proportional to its rank in a frequency table.

Parameters **a** : float or array_like of floats

Distribution parameter. Should be greater than 1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `a` is a scalar. Otherwise, `np.array(a).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Zipf distribution.

See also:

`scipy.stats.zipf` probability density function, distribution, or cumulative density function, etc.

Notes

The probability density for the Zipf distribution is

$$p(x) = \frac{x^{-a}}{\zeta(a)},$$

where ζ is the Riemann Zeta function.

It is named for the American linguist George Kingsley Zipf, who noted that the frequency of any word in a sample of a language is inversely proportional to its rank in the frequency table.

References

[R287]

Examples

Draw samples from the distribution:

```
>>> a = 2. # parameter
>>> s = np.random.zipf(a, 1000)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> from scipy import special
```

Truncate s values at 50 so plot is interesting:

```
>>> count, bins, ignored = plt.hist(s[s<50], 50, normed=True)
>>> x = np.arange(1., 50.)
>>> y = x**(-a) / special.zetac(a)
>>> plt.plot(x, y/max(y), linewidth=2, color='r')
>>> plt.show()
```

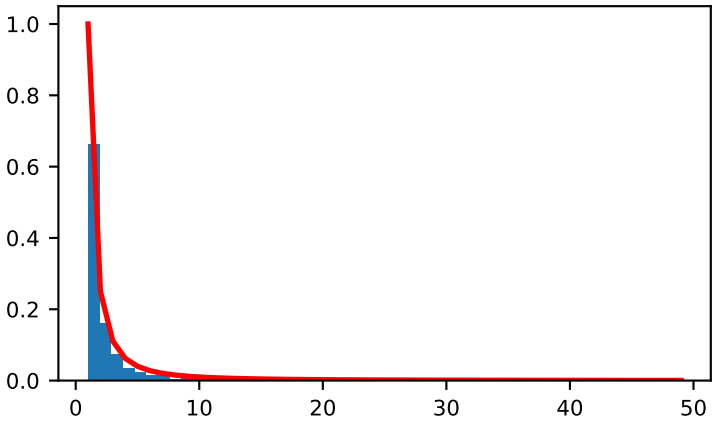

3.24.4 Random generator

RandomState([seed])	Container for the Mersenne Twister pseudo-random number generator.
seed([seed])	Seed the generator.
get_state()	Return a tuple representing the internal state of the generator.
set_state(state)	Set the internal state of the generator from a tuple.

class numpy.random.**RandomState**(*seed=None*)

Container for the Mersenne Twister pseudo-random number generator.

RandomState exposes a number of methods for generating random numbers drawn from a variety of probability distributions. In addition to the distribution-specific arguments, each method takes a keyword argument *size* that defaults to None. If *size* is None, then a single value is generated and returned. If *size* is an integer, then a 1-D array filled with generated values is returned. If *size* is a tuple, then an array with that shape is filled and returned.

Compatibility Guarantee A fixed seed and a fixed series of calls to 'RandomState' methods using the same parameters will always produce the same results up to roundoff error except when the values were incorrect. Incorrect values will be fixed and the NumPy version in which the fix was made will be noted in the relevant docstring. Extension of existing parameter ranges and the addition of new parameters is allowed as long the previous behavior remains unchanged.

Parameters **seed** : {None, int, array_like}, optional

Random seed used to initialize the pseudo-random number generator. Can be any integer between 0 and 2**32 - 1 inclusive, an array (or other sequence) of such integers, or None (the default). If *seed* is None, then *RandomState* will try to read data from /dev/urandom (or the Windows analogue) if available or seed from the clock otherwise.

Notes

The Python stdlib module "random" also contains a Mersenne Twister pseudo-random number generator with a number of methods that are similar to the ones available in *RandomState*. *RandomState*, besides being NumPy-aware, has the advantage that it provides a much larger number of probability distributions to choose from.

Methods

beta(a, b[, size])	Draw samples from a Beta distribution.
binomial(n, p[, size])	Draw samples from a binomial distribution.
bytes(length)	Return random bytes.
chisquare(df[, size])	Draw samples from a chi-square distribution.
choice(a[, size, replace, p])	Generates a random sample from a given 1-D array
dirichlet(alpha[, size])	Draw samples from the Dirichlet distribution.
exponential([scale, size])	Draw samples from an exponential distribution.
f(dfnum, dfden[, size])	Draw samples from an F distribution.
gamma(shape[, scale, size])	Draw samples from a Gamma distribution.
geometric(p[, size])	Draw samples from the geometric distribution.
get_state()	Return a tuple representing the internal state of the generator.
gumbel([loc, scale, size])	Draw samples from a Gumbel distribution.
hypergeometric(ngood, nbad, nsample[, size])	Draw samples from a Hypergeometric distribution.
laplace([loc, scale, size])	Draw samples from the Laplace or double exponential distribution with specified location (or mean) and scale (decay).
logistic([loc, scale, size])	Draw samples from a logistic distribution.
lognormal([mean, sigma, size])	Draw samples from a log-normal distribution.
logseries(p[, size])	Draw samples from a logarithmic series distribution.

Continued on next page

Table 160 – continued from previous page

multinomial(n, pvals[, size])	Draw samples from a multinomial distribution.
multivariate_normal(mean, cov[, size, ...)	Draw random samples from a multivariate normal distribution.
negative_binomial(n, p[, size])	Draw samples from a negative binomial distribution.
noncentral_chisquare(df, nonc[, size])	Draw samples from a noncentral chi-square distribution.
noncentral_f(dfnum, dfden, nonc[, size])	Draw samples from the noncentral F distribution.
normal([loc, scale, size])	Draw random samples from a normal (Gaussian) distribution.
pareto(a[, size])	Draw samples from a Pareto II or Lomax distribution with specified shape.
permutation(x)	Randomly permute a sequence, or return a permuted range.
poisson([lam, size])	Draw samples from a Poisson distribution.
power(a[, size])	Draws samples in [0, 1] from a power distribution with positive exponent a - 1.
rand(d0, d1, ..., dn)	Random values in a given shape.
randint(low[, high, size, dtype])	Return random integers from *low* (inclusive) to *high* (exclusive).
randn(d0, d1, ..., dn)	Return a sample (or samples) from the "standard normal" distribution.
random_integers(low[, high, size])	Random integers of type np.int between *low* and *high*, inclusive.
random_sample([size])	Return random floats in the half-open interval [0.0, 1.0).
rayleigh([scale, size])	Draw samples from a Rayleigh distribution.
seed([seed])	Seed the generator.
set_state(state)	Set the internal state of the generator from a tuple.
shuffle(x)	Modify a sequence in-place by shuffling its contents.
standard_cauchy([size])	Draw samples from a standard Cauchy distribution with mode = 0.
standard_exponential([size])	Draw samples from the standard exponential distribution.
standard_gamma(shape[, size])	Draw samples from a standard Gamma distribution.
standard_normal([size])	Draw samples from a standard Normal distribution (mean=0, stdev=1).
standard_t(df[, size])	Draw samples from a standard Student's t distribution with *df* degrees of freedom.
tomaxint([size])	Random integers between 0 and `sys.maxint`, inclusive.
triangular(left, mode, right[, size])	Draw samples from the triangular distribution over the interval `[left, right]`.
uniform([low, high, size])	Draw samples from a uniform distribution.
vonmises(mu, kappa[, size])	Draw samples from a von Mises distribution.
wald(mean, scale[, size])	Draw samples from a Wald, or inverse Gaussian, distribution.
weibull(a[, size])	Draw samples from a Weibull distribution.
zipf(a[, size])	Draw samples from a Zipf distribution.

RandomState.**beta**(*a*, *b*, *size=None*)

Draw samples from a Beta distribution.

The Beta distribution is a special case of the Dirichlet distribution, and is related to the Gamma distribution.

It has the probability distribution function

$$f(x; a, b) = \frac{1}{B(\alpha, \beta)} x^{\alpha-1}(1-x)^{\beta-1},$$

where the normalisation, B, is the beta function,

$$B(\alpha, \beta) = \int_0^1 t^{\alpha-1}(1-t)^{\beta-1} dt.$$

It is often seen in Bayesian inference and order statistics.

Parameters **a** : float or array_like of floats

Alpha, non-negative.

b : float or array_like of floats

Beta, non-negative.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `a` and `b` are both scalars. Otherwise, `np.broadcast(a, b).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized beta distribution.

`RandomState.`**`binomial`**(*n*, *p*, *size=None*)

Draw samples from a binomial distribution.

Samples are drawn from a binomial distribution with specified parameters, n trials and p probability of success where n an integer >= 0 and p is in the interval [0,1]. (n may be input as a float, but it is truncated to an integer in use)

Parameters **n** : int or array_like of ints

Parameter of the distribution, >= 0. Floats are also accepted, but they will be truncated to integers.

p : float or array_like of floats

Parameter of the distribution, >= 0 and <=1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `n` and `p` are both scalars. Otherwise, `np.broadcast(n, p).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized binomial distribution, where each sample is equal to the number of successes over the n trials.

See also:

`scipy.stats.binom` probability density function, distribution or cumulative density function, etc.

Notes

The probability density for the binomial distribution is

$$P(N) = \binom{n}{N} p^N (1-p)^{n-N},$$

where n is the number of trials, p is the probability of success, and N is the number of successes.

When estimating the standard error of a proportion in a population by using a random sample, the normal distribution works well unless the product p*n <=5, where p = population proportion estimate, and n = number of samples, in which case the binomial distribution is used instead. For example, a sample of 15 people shows 4 who are left handed, and 11 who are right handed. Then p = 4/15 = 27%. 0.27*15 = 4, so the binomial distribution should be used in this case.

References

[R146], *[R147]*, *[R148]*, *[R149]*, *[R150]*

Examples

Draw samples from the distribution:

```
>>> n, p = 10, .5  # number of trials, probability of each trial
>>> s = np.random.binomial(n, p, 1000)
# result of flipping a coin 10 times, tested 1000 times.
```

A real world example. A company drills 9 wild-cat oil exploration wells, each with an estimated probability of success of 0.1. All nine wells fail. What is the probability of that happening?

Let's do 20,000 trials of the model, and count the number that generate zero positive results.

```
>>> sum(np.random.binomial(9, 0.1, 20000) == 0)/20000.
# answer = 0.38885, or 38%.
```

RandomState.**bytes**(*length*)
Return random bytes.

Parameters **length** : int

Number of random bytes.

Returns **out** : str

String of length *length*.

Examples

```
>>> np.random.bytes(10)
' eh\x85\x022SZ\xbf\xa4' #random
```

RandomState.**chisquare**(*df*, *size=None*)
Draw samples from a chi-square distribution.

When *df* independent random variables, each with standard normal distributions (mean 0, variance 1), are squared and summed, the resulting distribution is chi-square (see Notes). This distribution is often used in hypothesis testing.

Parameters **df** : float or array_like of floats

Number of degrees of freedom, should be > 0.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `df` is a scalar. Otherwise, `np.array(df).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized chi-square distribution.

Raises **ValueError**

When *df* <= 0 or when an inappropriate *size* (e.g. `size=-1`) is given.

Notes

The variable obtained by summing the squares of *df* independent, standard normally distributed random variables:

$$Q = \sum_{i=0}^{\mathtt{df}} X_i^2$$

is chi-square distributed, denoted

$$Q \sim \chi_k^2.$$

The probability density function of the chi-squared distribution is

$$p(x) = \frac{(1/2)^{k/2}}{\Gamma(k/2)} x^{k/2-1} e^{-x/2},$$

where Γ is the gamma function,

$$\Gamma(x) = \int_0^{-\infty} t^{x-1} e^{-t} dt.$$

References

[R151]

Examples

```
>>> np.random.chisquare(2,4)
array([ 1.89920014,  9.00867716,  3.13710533,  5.62318272])
```

`RandomState.`**`choice`**(*a*, *size=None*, *replace=True*, *p=None*)

Generates a random sample from a given 1-D array

New in version 1.7.0.

Parameters **a** : 1-D array-like or int

If an ndarray, a random sample is generated from its elements. If an int, the random sample is generated as if a were np.arange(a)

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

replace : boolean, optional

Whether the sample is with or without replacement

p : 1-D array-like, optional

The probabilities associated with each entry in a. If not given the sample assumes a uniform distribution over all entries in a.

Returns **samples** : single item or ndarray

The generated random samples

Raises **ValueError**

If a is an int and less than zero, if a or p are not 1-dimensional, if a is an array-like of size 0, if p is not a vector of probabilities, if a and p have different lengths, or if replace=False and the sample size is greater than the population size

See also:

randint, *shuffle*, *permutation*

Examples

Generate a uniform random sample from np.arange(5) of size 3:

```
>>> np.random.choice(5, 3)
array([0, 3, 4])
>>> #This is equivalent to np.random.randint(0,5,3)
```

Generate a non-uniform random sample from np.arange(5) of size 3:

```
>>> np.random.choice(5, 3, p=[0.1, 0, 0.3, 0.6, 0])
array([3, 3, 0])
```

Generate a uniform random sample from np.arange(5) of size 3 without replacement:

```
>>> np.random.choice(5, 3, replace=False)
array([3,1,0])
>>> #This is equivalent to np.random.permutation(np.arange(5))[:3]
```

Generate a non-uniform random sample from np.arange(5) of size 3 without replacement:

```
>>> np.random.choice(5, 3, replace=False, p=[0.1, 0, 0.3, 0.6, 0])
array([2, 3, 0])
```

Any of the above can be repeated with an arbitrary array-like instead of just integers. For instance:

```
>>> aa_milne_arr = ['pooh', 'rabbit', 'piglet', 'Christopher']
>>> np.random.choice(aa_milne_arr, 5, p=[0.5, 0.1, 0.1, 0.3])
array(['pooh', 'pooh', 'pooh', 'Christopher', 'piglet'],
      dtype='|S11')
```

RandomState.**dirichlet**(*alpha*, *size=None*)

Draw samples from the Dirichlet distribution.

Draw *size* samples of dimension k from a Dirichlet distribution. A Dirichlet-distributed random variable can be seen as a multivariate generalization of a Beta distribution. Dirichlet pdf is the conjugate prior of a multinomial in Bayesian inference.

Parameters **alpha** : array

Parameter of the distribution (k dimension for sample of dimension k).

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **samples** : ndarray,

The drawn samples, of shape (size, alpha.ndim).

Raises **ValueError**

If any value in alpha is less than or equal to zero

Notes

$$X \approx \prod_{i=1}^{k} x_i^{\alpha_i - 1}$$

Uses the following property for computation: for each dimension, draw a random sample y_i from a standard gamma generator of shape *alpha_i*, then $X = \frac{1}{\sum_{i=1}^{k} y_i}(y_1, \ldots, y_n)$ is Dirichlet distributed.

References

[R152], *[R153]*

Examples

Taking an example cited in Wikipedia, this distribution can be used if one wanted to cut strings (each of initial length 1.0) into K pieces with different lengths, where each piece had, on average, a designated average length, but allowing some variation in the relative sizes of the pieces.

```
>>> s = np.random.dirichlet((10, 5, 3), 20).transpose()
```

```
>>> plt.barh(range(20), s[0])
>>> plt.barh(range(20), s[1], left=s[0], color='g')
>>> plt.barh(range(20), s[2], left=s[0]+s[1], color='r')
>>> plt.title("Lengths of Strings")
```

RandomState.**exponential**(*scale=1.0*, *size=None*)

Draw samples from an exponential distribution.

Its probability density function is

$$f(x; \frac{1}{\beta}) = \frac{1}{\beta} \exp(-\frac{x}{\beta}),$$

for `x > 0` and 0 elsewhere. β is the scale parameter, which is the inverse of the rate parameter $\lambda = 1/\beta$. The rate parameter is an alternative, widely used parameterization of the exponential distribution *[R156]*.

The exponential distribution is a continuous analogue of the geometric distribution. It describes many common situations, such as the size of raindrops measured over many rainstorms *[R154]*, or the time between page requests to Wikipedia *[R155]*.

Parameters **scale** : float or array_like of floats

The scale parameter, $\beta = 1/\lambda$.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `scale` is a scalar. Otherwise, `np.array(scale).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized exponential distribution.

References

[R154], *[R155]*, *[R156]*

RandomState.**f**(*dfnum*, *dfden*, *size=None*)

Draw samples from an F distribution.

Samples are drawn from an F distribution with specified parameters, *dfnum* (degrees of freedom in numerator) and *dfden* (degrees of freedom in denominator), where both parameters should be greater than zero.

The random variate of the F distribution (also known as the Fisher distribution) is a continuous probability distribution that arises in ANOVA tests, and is the ratio of two chi-square variates.

Parameters **dfnum** : float or array_like of floats

Degrees of freedom in numerator, should be > 0.

dfden : float or array_like of float

Degrees of freedom in denominator, should be > 0.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `dfnum` and `dfden` are both scalars. Otherwise, `np.broadcast(dfnum, dfden).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Fisher distribution.

See also:

`scipy.stats.f` probability density function, distribution or cumulative density function, etc.

Notes

The F statistic is used to compare in-group variances to between-group variances. Calculating the distribution depends on the sampling, and so it is a function of the respective degrees of freedom in the problem. The variable *dfnum* is the number of samples minus one, the between-groups degrees of freedom, while *dfden* is the within-groups degrees of freedom, the sum of the number of samples in each group minus the number of groups.

References

[R157], *[R158]*

Examples

An example from Glantz[1], pp 47-40:

Two groups, children of diabetics (25 people) and children from people without diabetes (25 controls). Fasting blood glucose was measured, case group had a mean value of 86.1, controls had a mean value of 82.2. Standard deviations were 2.09 and 2.49 respectively. Are these data consistent with the null hypothesis that the parents diabetic status does not affect their children's blood glucose levels? Calculating the F statistic from the data gives a value of 36.01.

Draw samples from the distribution:

```
>>> dfnum = 1. # between group degrees of freedom
>>> dfden = 48. # within groups degrees of freedom
>>> s = np.random.f(dfnum, dfden, 1000)
```

The lower bound for the top 1% of the samples is :

```
>>> sort(s)[-10]
7.61988120985
```

So there is about a 1% chance that the F statistic will exceed 7.62, the measured value is 36, so the null hypothesis is rejected at the 1% level.

`RandomState.`**`gamma`**(*shape*, *scale=1.0*, *size=None*)

Draw samples from a Gamma distribution.

Samples are drawn from a Gamma distribution with specified parameters, *shape* (sometimes designated "k") and *scale* (sometimes designated "theta"), where both parameters are > 0.

Parameters **shape** : float or array_like of floats

The shape of the gamma distribution. Should be greater than zero.

scale : float or array_like of floats, optional

The scale of the gamma distribution. Should be greater than zero. Default is equal to 1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `shape` and `scale`

are both scalars. Otherwise, `np.broadcast(shape, scale).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized gamma distribution.

See also:

`scipy.stats.gamma` probability density function, distribution or cumulative density function, etc.

Notes

The probability density for the Gamma distribution is

$$p(x) = x^{k-1}\frac{e^{-x/\theta}}{\theta^k \Gamma(k)},$$

where k is the shape and θ the scale, and Γ is the Gamma function.

The Gamma distribution is often used to model the times to failure of electronic components, and arises naturally in processes for which the waiting times between Poisson distributed events are relevant.

References

[R159], *[R160]*

Examples

Draw samples from the distribution:

```
>>> shape, scale = 2., 2.  # mean=4, std=2*sqrt(2)
>>> s = np.random.gamma(shape, scale, 1000)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> import scipy.special as sps
>>> count, bins, ignored = plt.hist(s, 50, normed=True)
>>> y = bins**(shape-1)*(np.exp(-bins/scale) /
...                      (sps.gamma(shape)*scale**shape))
>>> plt.plot(bins, y, linewidth=2, color='r')
>>> plt.show()
```

RandomState.**geometric**(*p*, *size=None*)

Draw samples from the geometric distribution.

Bernoulli trials are experiments with one of two outcomes: success or failure (an example of such an experiment is flipping a coin). The geometric distribution models the number of trials that must be run in order to achieve success. It is therefore supported on the positive integers, `k = 1, 2, ...`.

The probability mass function of the geometric distribution is

$$f(k) = (1-p)^{k-1}p$$

where p is the probability of success of an individual trial.

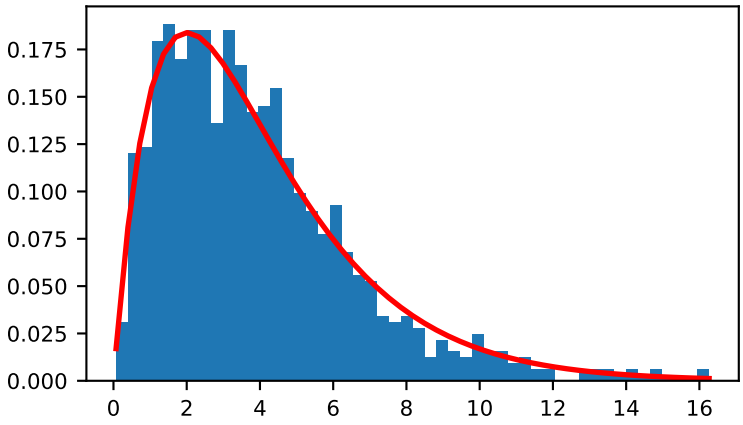

Parameters **p** : float or array_like of floats

The probability of success of an individual trial.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `p` is a scalar. Otherwise, `np.array(p).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized geometric distribution.

Examples

Draw ten thousand values from the geometric distribution, with the probability of an individual success equal to 0.35:

```
>>> z = np.random.geometric(p=0.35, size=10000)
```

How many trials succeeded after a single run?

```
>>> (z == 1).sum() / 10000.
0.34889999999999999 #random
```

`RandomState.`**`get_state`**`()`

Return a tuple representing the internal state of the generator.

For more details, see *`set_state`*.

Returns **out** : tuple(str, ndarray of 624 uints, int, int, float)

The returned tuple has the following items:

1. the string ‘MT19937’.
2. a 1-D array of 624 unsigned integer keys.

3. an integer `pos`.
4. an integer `has_gauss`.
5. a float `cached_gaussian`.

See also:

set_state

Notes

set_state and *get_state* are not needed to work with any of the random distributions in NumPy. If the internal state is manually altered, the user should know exactly what he/she is doing.

`RandomState.`**`gumbel`**(*loc=0.0*, *scale=1.0*, *size=None*)

Draw samples from a Gumbel distribution.

Draw samples from a Gumbel distribution with specified location and scale. For more information on the Gumbel distribution, see Notes and References below.

Parameters **loc** : float or array_like of floats, optional

The location of the mode of the distribution. Default is 0.

scale : float or array_like of floats, optional

The scale parameter of the distribution. Default is 1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `loc` and `scale` are both scalars. Otherwise, `np.broadcast(loc, scale).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Gumbel distribution.

See also:

`scipy.stats.gumbel_l`, `scipy.stats.gumbel_r`, `scipy.stats.genextreme`, *weibull*

Notes

The Gumbel (or Smallest Extreme Value (SEV) or the Smallest Extreme Value Type I) distribution is one of a class of Generalized Extreme Value (GEV) distributions used in modeling extreme value problems. The Gumbel is a special case of the Extreme Value Type I distribution for maximums from distributions with "exponential-like" tails.

The probability density for the Gumbel distribution is

$$p(x) = \frac{e^{-(x-\mu)/\beta}}{\beta} e^{-e^{-(x-\mu)/\beta}},$$

where μ is the mode, a location parameter, and β is the scale parameter.

The Gumbel (named for German mathematician Emil Julius Gumbel) was used very early in the hydrology literature, for modeling the occurrence of flood events. It is also used for modeling maximum wind speed and rainfall rates. It is a "fat-tailed" distribution - the probability of an event in the tail of the distribution is

larger than if one used a Gaussian, hence the surprisingly frequent occurrence of 100-year floods. Floods were initially modeled as a Gaussian process, which underestimated the frequency of extreme events.

It is one of a class of extreme value distributions, the Generalized Extreme Value (GEV) distributions, which also includes the Weibull and Frechet.

The function has a mean of $\mu + 0.57721\beta$ and a variance of $\frac{\pi^2}{6}\beta^2$.

References

[R161], *[R162]*

Examples

Draw samples from the distribution:

```
>>> mu, beta = 0, 0.1 # location and scale
>>> s = np.random.gumbel(mu, beta, 1000)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, ignored = plt.hist(s, 30, normed=True)
>>> plt.plot(bins, (1/beta)*np.exp(-(bins - mu)/beta)
...           * np.exp( -np.exp( -(bins - mu) /beta) ),
...           linewidth=2, color='r')
>>> plt.show()
```

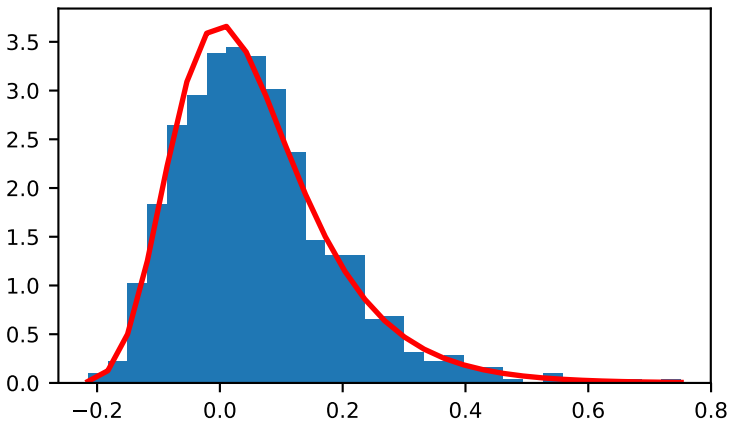

Show how an extreme value distribution can arise from a Gaussian process and compare to a Gaussian:

```
>>> means = []
>>> maxima = []
>>> for i in range(0,1000) :
...     a = np.random.normal(mu, beta, 1000)
```

(continues on next page)

(continued from previous page)

```
...     means.append(a.mean())
...     maxima.append(a.max())
>>> count, bins, ignored = plt.hist(maxima, 30, normed=True)
>>> beta = np.std(maxima) * np.sqrt(6) / np.pi
>>> mu = np.mean(maxima) - 0.57721*beta
>>> plt.plot(bins, (1/beta)*np.exp(-(bins - mu)/beta)
...           * np.exp(-np.exp(-(bins - mu)/beta)),
...           linewidth=2, color='r')
>>> plt.plot(bins, 1/(beta * np.sqrt(2 * np.pi))
...           * np.exp(-(bins - mu)**2 / (2 * beta**2)),
...           linewidth=2, color='g')
>>> plt.show()
```

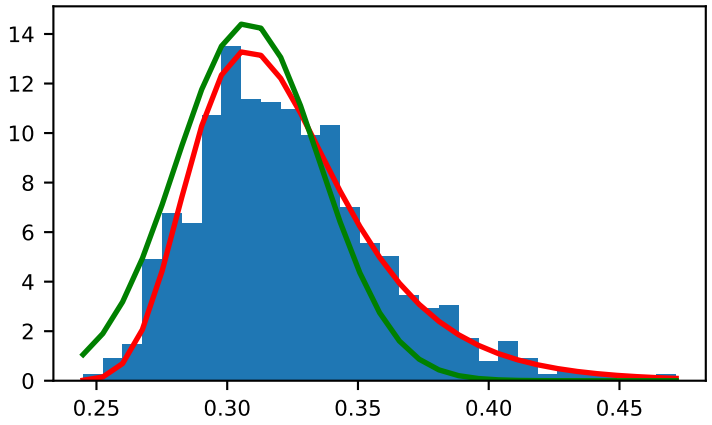

`RandomState.`**`hypergeometric`**(*ngood*, *nbad*, *nsample*, *size=None*)

Draw samples from a Hypergeometric distribution.

Samples are drawn from a hypergeometric distribution with specified parameters, ngood (ways to make a good selection), nbad (ways to make a bad selection), and nsample = number of items sampled, which is less than or equal to the sum ngood + nbad.

Parameters **ngood** : int or array_like of ints

Number of ways to make a good selection. Must be nonnegative.

nbad : int or array_like of ints

Number of ways to make a bad selection. Must be nonnegative.

nsample : int or array_like of ints

Number of items sampled. Must be at least 1 and at most `ngood + nbad`.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `ngood`, `nbad`, and `nsample` are all scalars. Otherwise, `np.broadcast(ngood, nbad, nsample).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized hypergeometric distribution.

See also:

`scipy.stats.hypergeom` probability density function, distribution or cumulative density function, etc.

Notes

The probability density for the Hypergeometric distribution is

$$P(x) = \frac{\binom{m}{n}\binom{N-m}{n-x}}{\binom{N}{n}},$$

where $0 \leq x \leq m$ and $n + m - N \leq x \leq n$

for P(x) the probability of x successes, n = ngood, m = nbad, and N = number of samples.

Consider an urn with black and white marbles in it, ngood of them black and nbad are white. If you draw nsample balls without replacement, then the hypergeometric distribution describes the distribution of black balls in the drawn sample.

Note that this distribution is very similar to the binomial distribution, except that in this case, samples are drawn without replacement, whereas in the Binomial case samples are drawn with replacement (or the sample space is infinite). As the sample space becomes large, this distribution approaches the binomial.

References

[R163], *[R164]*, *[R165]*

Examples

Draw samples from the distribution:

```
>>> ngood, nbad, nsamp = 100, 2, 10
# number of good, number of bad, and number of samples
>>> s = np.random.hypergeometric(ngood, nbad, nsamp, 1000)
>>> hist(s)
#   note that it is very unlikely to grab both bad items
```

Suppose you have an urn with 15 white and 15 black marbles. If you pull 15 marbles at random, how likely is it that 12 or more of them are one color?

```
>>> s = np.random.hypergeometric(15, 15, 15, 100000)
>>> sum(s>=12)/100000. + sum(s<=3)/100000.
#   answer = 0.003 ... pretty unlikely!
```

RandomState.**laplace**(*loc=0.0*, *scale=1.0*, *size=None*)

Draw samples from the Laplace or double exponential distribution with specified location (or mean) and scale (decay).

The Laplace distribution is similar to the Gaussian/normal distribution, but is sharper at the peak and has fatter tails. It represents the difference between two independent, identically distributed exponential random variables.

Parameters **loc** : float or array_like of floats, optional

The position, μ, of the distribution peak. Default is 0.

scale : float or array_like of floats, optional

λ, the exponential decay. Default is 1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `loc` and `scale` are both scalars. Otherwise, `np.broadcast(loc, scale).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Laplace distribution.

Notes

It has the probability density function

$$f(x; \mu, \lambda) = \frac{1}{2\lambda} \exp\left(-\frac{|x-\mu|}{\lambda}\right).$$

The first law of Laplace, from 1774, states that the frequency of an error can be expressed as an exponential function of the absolute magnitude of the error, which leads to the Laplace distribution. For many problems in economics and health sciences, this distribution seems to model the data better than the standard Gaussian distribution.

References

[R166], *[R167]*, *[R168]*, *[R169]*

Examples

Draw samples from the distribution

```
>>> loc, scale = 0., 1.
>>> s = np.random.laplace(loc, scale, 1000)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, ignored = plt.hist(s, 30, normed=True)
>>> x = np.arange(-8., 8., .01)
>>> pdf = np.exp(-abs(x-loc)/scale)/(2.*scale)
>>> plt.plot(x, pdf)
```

Plot Gaussian for comparison:

```
>>> g = (1/(scale * np.sqrt(2 * np.pi)) *
...      np.exp(-(x - loc)**2 / (2 * scale**2)))
>>> plt.plot(x,g)
```

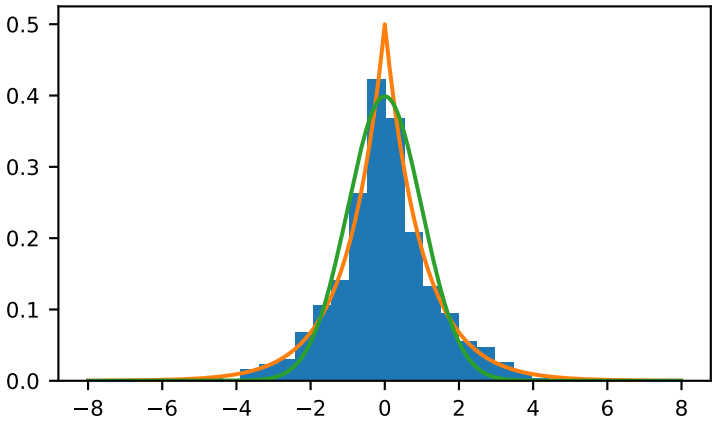

RandomState.**logistic**(*loc=0.0*, *scale=1.0*, *size=None*)

Draw samples from a logistic distribution.

Samples are drawn from a logistic distribution with specified parameters, loc (location or mean, also median), and scale (>0).

Parameters **loc** : float or array_like of floats, optional

Parameter of the distribution. Default is 0.

scale : float or array_like of floats, optional

Parameter of the distribution. Should be greater than zero. Default is 1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `loc` and `scale` are both scalars. Otherwise, `np.broadcast(loc, scale).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized logistic distribution.

See also:

`scipy.stats.logistic` probability density function, distribution or cumulative density function, etc.

Notes

The probability density for the Logistic distribution is

$$P(x) = P(x) = \frac{e^{-(x-\mu)/s}}{s(1+e^{-(x-\mu)/s})^2},$$

where μ = location and s = scale.

The Logistic distribution is used in Extreme Value problems where it can act as a mixture of Gumbel distributions, in Epidemiology, and by the World Chess Federation (FIDE) where it is used in the Elo ranking system, assuming the performance of each player is a logistically distributed random variable.

References

[R170], *[R171]*, *[R172]*

Examples

Draw samples from the distribution:

```
>>> loc, scale = 10, 1
>>> s = np.random.logistic(loc, scale, 10000)
>>> count, bins, ignored = plt.hist(s, bins=50)
```

plot against distribution

```
>>> def logist(x, loc, scale):
...     return exp((loc-x)/scale)/(scale*(1+exp((loc-x)/scale))**2)
>>> plt.plot(bins, logist(bins, loc, scale)*count.max()/\
... logist(bins, loc, scale).max())
>>> plt.show()
```

RandomState.**lognormal**(*mean=0.0*, *sigma=1.0*, *size=None*)

Draw samples from a log-normal distribution.

Draw samples from a log-normal distribution with specified mean, standard deviation, and array shape. Note that the mean and standard deviation are not the values for the distribution itself, but of the underlying normal distribution it is derived from.

Parameters **mean** : float or array_like of floats, optional

Mean value of the underlying normal distribution. Default is 0.

sigma : float or array_like of floats, optional

Standard deviation of the underlying normal distribution. Should be greater than zero. Default is 1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `mean` and `sigma` are both scalars. Otherwise, `np.broadcast(mean, sigma).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized log-normal distribution.

See also:

`scipy.stats.lognorm` probability density function, distribution, cumulative density function, etc.

Notes

A variable *x* has a log-normal distribution if *log(x)* is normally distributed. The probability density function for the log-normal distribution is:

$$p(x) = \frac{1}{\sigma x\sqrt{2\pi}} e^{(-\frac{(ln(x)-\mu)^2}{2\sigma^2})}$$

where μ is the mean and σ is the standard deviation of the normally distributed logarithm of the variable. A log-normal distribution results if a random variable is the *product* of a large number of independent, identically-distributed variables in the same way that a normal distribution results if the variable is the *sum* of a large number of independent, identically-distributed variables.

References

[R173], *[R174]*

Examples

Draw samples from the distribution:

```
>>> mu, sigma = 3., 1. # mean and standard deviation
>>> s = np.random.lognormal(mu, sigma, 1000)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, ignored = plt.hist(s, 100, normed=True, align='mid')
```

```
>>> x = np.linspace(min(bins), max(bins), 10000)
>>> pdf = (np.exp(-(np.log(x) - mu)**2 / (2 * sigma**2))
...        / (x * sigma * np.sqrt(2 * np.pi)))
```

```
>>> plt.plot(x, pdf, linewidth=2, color='r')
>>> plt.axis('tight')
>>> plt.show()
```

Demonstrate that taking the products of random samples from a uniform distribution can be fit well by a log-normal probability density function.

```
>>> # Generate a thousand samples: each is the product of 100 random
>>> # values, drawn from a normal distribution.
>>> b = []
>>> for i in range(1000):
...     a = 10. + np.random.random(100)
...     b.append(np.product(a))
```

```
>>> b = np.array(b) / np.min(b) # scale values to be positive
>>> count, bins, ignored = plt.hist(b, 100, normed=True, align='mid')
>>> sigma = np.std(np.log(b))
>>> mu = np.mean(np.log(b))
```

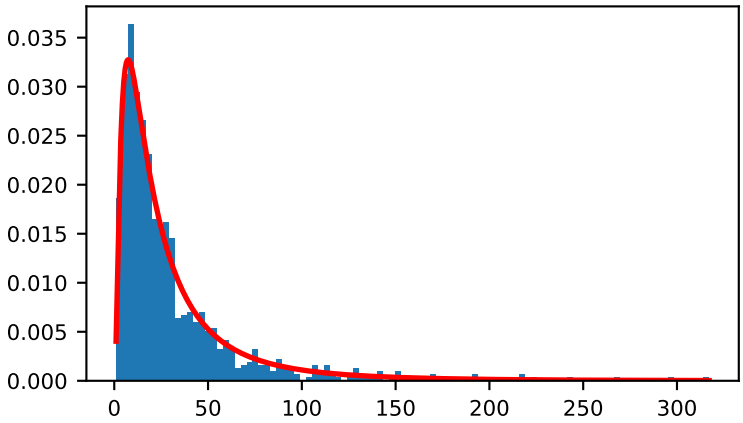


```
>>> x = np.linspace(min(bins), max(bins), 10000)
>>> pdf = (np.exp(-(np.log(x) - mu)**2 / (2 * sigma**2))
...         / (x * sigma * np.sqrt(2 * np.pi)))
```

```
>>> plt.plot(x, pdf, color='r', linewidth=2)
>>> plt.show()
```

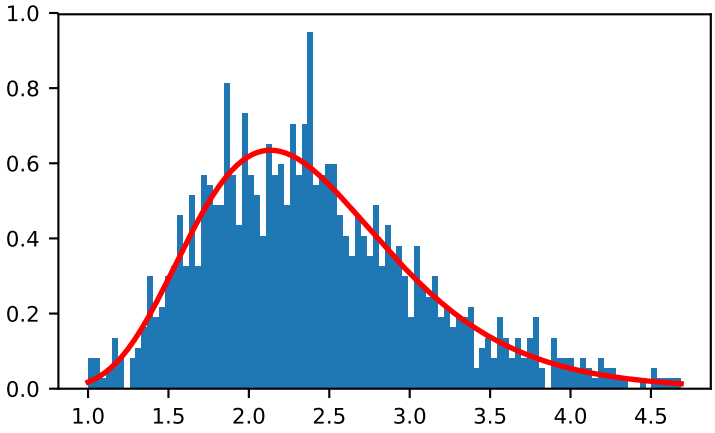

`RandomState.`**`logseries`**(*p*, *size=None*)

Draw samples from a logarithmic series distribution.

Samples are drawn from a log series distribution with specified shape parameter, $0 < p < 1$.

Parameters **p** : float or array_like of floats

Shape parameter for the distribution. Must be in the range (0, 1).

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `p` is a scalar. Otherwise, `np.array(p).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized logarithmic series distribution.

See also:

`scipy.stats.logser` probability density function, distribution or cumulative density function, etc.

Notes

The probability density for the Log Series distribution is

$$P(k) = \frac{-p^k}{k \ln(1-p)},$$

where p = probability.

The log series distribution is frequently used to represent species richness and occurrence, first proposed by Fisher, Corbet, and Williams in 1943 [2]. It may also be used to model the numbers of occupants seen in cars [3].

References

[R175], *[R176]*, *[R177]*, *[R178]*

Examples

Draw samples from the distribution:

```
>>> a = .6
>>> s = np.random.logseries(a, 10000)
>>> count, bins, ignored = plt.hist(s)
```

plot against distribution

```
>>> def logseries(k, p):
...     return -p**k/(k*log(1-p))
>>> plt.plot(bins, logseries(bins, a)*count.max()/
             logseries(bins, a).max(), 'r')
>>> plt.show()
```

`RandomState.`**`multinomial`**(*n*, *pvals*, *size=None*)

Draw samples from a multinomial distribution.

The multinomial distribution is a multivariate generalisation of the binomial distribution. Take an experiment with one of `p` possible outcomes. An example of such an experiment is throwing a dice, where the outcome can be 1 through 6. Each sample drawn from the distribution represents *n* such experiments. Its values, `X_i = [X_0, X_1, ..., X_p]`, represent the number of times the outcome was `i`.

Parameters **n** : int

Number of experiments.

pvals : sequence of floats, length p

Probabilities of each of the `p` different outcomes. These should sum to 1 (however, the last element is always assumed to account for the remaining probability, as long as `sum(pvals[:-1]) <= 1)`.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **out** : ndarray

The drawn samples, of shape *size*, if that was provided. If not, the shape is `(N,)`.

In other words, each entry `out[i,j,...,:]` is an N-dimensional value drawn from the distribution.

Examples

Throw a dice 20 times:

```
>>> np.random.multinomial(20, [1/6.]*6, size=1)
array([[4, 1, 7, 5, 2, 1]])
```

It landed 4 times on 1, once on 2, etc.

Now, throw the dice 20 times, and 20 times again:

```
>>> np.random.multinomial(20, [1/6.]*6, size=2)
array([[3, 4, 3, 3, 4, 3],
       [2, 4, 3, 4, 0, 7]])
```

For the first run, we threw 3 times 1, 4 times 2, etc. For the second, we threw 2 times 1, 4 times 2, etc.

A loaded die is more likely to land on number 6:

```
>>> np.random.multinomial(100, [1/7.]*5 + [2/7.])
array([11, 16, 14, 17, 16, 26])
```

The probability inputs should be normalized. As an implementation detail, the value of the last entry is ignored and assumed to take up any leftover probability mass, but this should not be relied on. A biased coin which has twice as much weight on one side as on the other should be sampled like so:

```
>>> np.random.multinomial(100, [1.0 / 3, 2.0 / 3])  # RIGHT
array([38, 62])
```

not like:

```
>>> np.random.multinomial(100, [1.0, 2.0])  # WRONG
array([100,   0])
```

`RandomState.`**`multivariate_normal`**(*mean*, *cov*[, *size*, *check_valid*, *tol*])

Draw random samples from a multivariate normal distribution.

The multivariate normal, multinormal or Gaussian distribution is a generalization of the one-dimensional normal distribution to higher dimensions. Such a distribution is specified by its mean and covariance matrix. These parameters are analogous to the mean (average or "center") and variance (standard deviation, or "width," squared) of the one-dimensional normal distribution.

Parameters **mean** : 1-D array_like, of length N

Mean of the N-dimensional distribution.

cov : 2-D array_like, of shape (N, N)

Covariance matrix of the distribution. It must be symmetric and positive-semidefinite for proper sampling.

size : int or tuple of ints, optional

Given a shape of, for example, `(m,n,k)`, `m*n*k` samples are generated, and packed in an *m*-by-*n*-by-*k* arrangement. Because each sample is *N*-dimensional, the output shape is `(m,n,k,N)`. If no shape is specified, a single (*N*-D) sample is returned.

check_valid : { 'warn', 'raise', 'ignore' }, optional

Behavior when the covariance matrix is not positive semidefinite.

tol : float, optional

Tolerance when checking the singular values in covariance matrix.

Returns **out** : ndarray

The drawn samples, of shape *size*, if that was provided. If not, the shape is `(N,)`.

In other words, each entry `out[i,j,...,:]` is an N-dimensional value drawn from the distribution.

Notes

The mean is a coordinate in N-dimensional space, which represents the location where samples are most likely to be generated. This is analogous to the peak of the bell curve for the one-dimensional or univariate normal distribution.

Covariance indicates the level to which two variables vary together. From the multivariate normal distribution, we draw N-dimensional samples, $X = [x_1, x_2, ...x_N]$. The covariance matrix element C_{ij} is the covariance of x_i and x_j. The element C_{ii} is the variance of x_i (i.e. its "spread").

Instead of specifying the full covariance matrix, popular approximations include:

- Spherical covariance (*cov* is a multiple of the identity matrix)
- Diagonal covariance (*cov* has non-negative elements, and only on the diagonal)

This geometrical property can be seen in two dimensions by plotting generated data-points:

```
>>> mean = [0, 0]
>>> cov = [[1, 0], [0, 100]]  # diagonal covariance
```

Diagonal covariance means that points are oriented along x or y-axis:

```
>>> import matplotlib.pyplot as plt
>>> x, y = np.random.multivariate_normal(mean, cov, 5000).T
>>> plt.plot(x, y, 'x')
>>> plt.axis('equal')
>>> plt.show()
```

Note that the covariance matrix must be positive semidefinite (a.k.a. nonnegative-definite). Otherwise, the behavior of this method is undefined and backwards compatibility is not guaranteed.

References

[R179], *[R180]*

Examples

```
>>> mean = (1, 2)
>>> cov = [[1, 0], [0, 1]]
>>> x = np.random.multivariate_normal(mean, cov, (3, 3))
>>> x.shape
(3, 3, 2)
```

The following is probably true, given that 0.6 is roughly twice the standard deviation:

```
>>> list((x[0,0,:] - mean) < 0.6)
[True, True]
```

RandomState.**negative_binomial**(*n*, *p*, *size=None*)

Draw samples from a negative binomial distribution.

Samples are drawn from a negative binomial distribution with specified parameters, *n* trials and *p* probability of success where *n* is an integer > 0 and *p* is in the interval [0, 1].

Parameters **n** : int or array_like of ints

Parameter of the distribution, > 0. Floats are also accepted, but they will be truncated to integers.

p : float or array_like of floats

Parameter of the distribution, >= 0 and <=1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `n` and `p` are both scalars. Otherwise, `np.broadcast(n, p).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized negative binomial distribution, where each sample is equal to N, the number of trials it took to achieve n - 1 successes, N - (n - 1) failures, and a success on the, (N + n)th trial.

Notes

The probability density for the negative binomial distribution is

$$P(N;n,p) = \binom{N+n-1}{n-1} p^n (1-p)^N,$$

where $n-1$ is the number of successes, p is the probability of success, and $N+n-1$ is the number of trials. The negative binomial distribution gives the probability of n-1 successes and N failures in N+n-1 trials, and success on the (N+n)th trial.

If one throws a die repeatedly until the third time a “1” appears, then the probability distribution of the number of non-“1”s that appear before the third “1” is a negative binomial distribution.

References

[R181], *[R182]*

Examples

Draw samples from the distribution:

A real world example. A company drills wild-cat oil exploration wells, each with an estimated probability of success of 0.1. What is the probability of having one success for each successive well, that is what is the probability of a single success after drilling 5 wells, after 6 wells, etc.?

```
>>> s = np.random.negative_binomial(1, 0.1, 100000)
>>> for i in range(1, 11):
...    probability = sum(s<i) / 100000.
...    print i, "wells drilled, probability of one success =", probability
```

RandomState.**noncentral_chisquare**(*df*, *nonc*, *size=None*)

Draw samples from a noncentral chi-square distribution.

The noncentral χ^2 distribution is a generalisation of the χ^2 distribution.

Parameters **df** : float or array_like of floats

Degrees of freedom, should be > 0.

Changed in version 1.10.0: Earlier NumPy versions required dfnum > 1.

nonc : float or array_like of floats

Non-centrality, should be non-negative.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `df` and `nonc` are both scalars. Otherwise, `np.broadcast(df, nonc).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized noncentral chi-square distribution.

Notes

The probability density function for the noncentral Chi-square distribution is

$$P(x;df,nonc) = \sum_{i=0}^{\infty} \frac{e^{-nonc/2}(nonc/2)^i}{i!} \P_{Y_{df+2i}}(x),$$

where Y_q is the Chi-square with q degrees of freedom.

In Delhi (2007), it is noted that the noncentral chi-square is useful in bombing and coverage problems, the probability of killing the point target given by the noncentral chi-squared distribution.

References

[R183], *[R184]*

Examples

Draw values from the distribution and plot the histogram

```
>>> import matplotlib.pyplot as plt
>>> values = plt.hist(np.random.noncentral_chisquare(3, 20, 100000),
...                   bins=200, normed=True)
>>> plt.show()
```

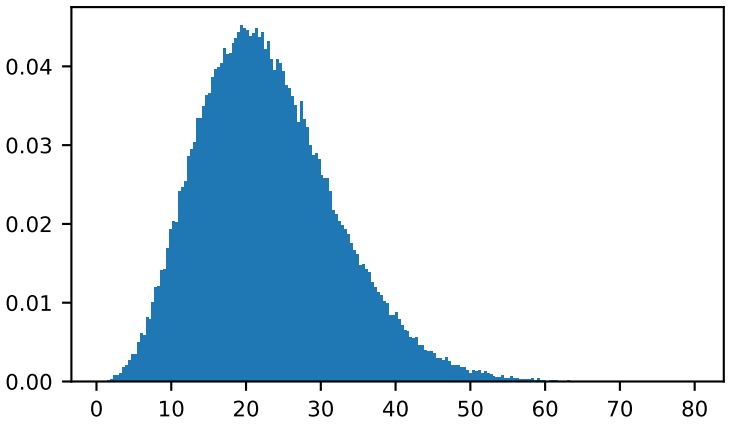

Draw values from a noncentral chisquare with very small noncentrality, and compare to a chisquare.

```
>>> plt.figure()
>>> values = plt.hist(np.random.noncentral_chisquare(3, .0000001, 100000),
...                   bins=np.arange(0., 25, .1), normed=True)
>>> values2 = plt.hist(np.random.chisquare(3, 100000),
...                    bins=np.arange(0., 25, .1), normed=True)
>>> plt.plot(values[1][0:-1], values[0]-values2[0], 'ob')
>>> plt.show()
```

Demonstrate how large values of non-centrality lead to a more symmetric distribution.

```
>>> plt.figure()
>>> values = plt.hist(np.random.noncentral_chisquare(3, 20, 100000),
...                   bins=200, normed=True)
>>> plt.show()
```

RandomState.**noncentral_f**(*dfnum*, *dfden*, *nonc*, *size=None*)

Draw samples from the noncentral F distribution.

Samples are drawn from an F distribution with specified parameters, *dfnum* (degrees of freedom in numerator) and *dfden* (degrees of freedom in denominator), where both parameters > 1. *nonc* is the non-centrality parameter.

Parameters **dfnum** : float or array_like of floats

Numerator degrees of freedom, should be > 0.

Changed in version 1.14.0: Earlier NumPy versions required dfnum > 1.

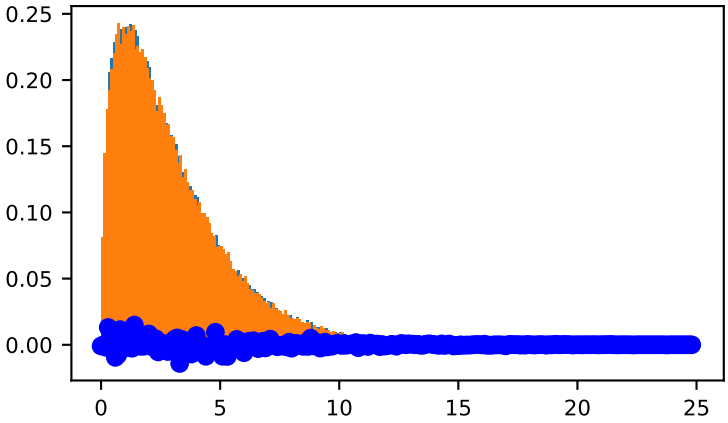
0.25
0.20
0.15
0.10
0.05
0.00
0
5
10
15
20
25

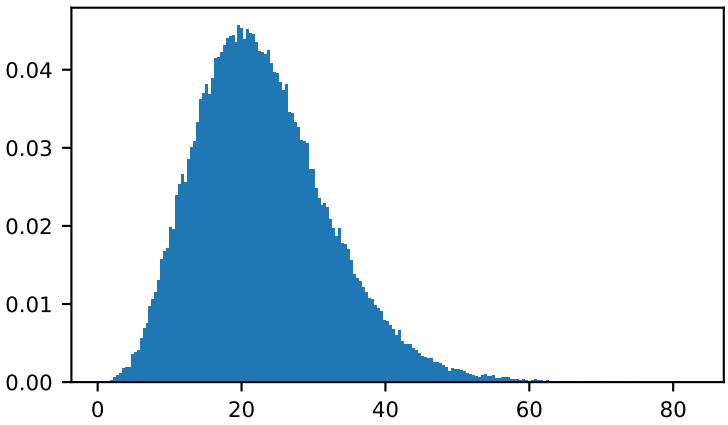
0.04
0.03
0.02
0.01
0.00
0
20
40
60
80

dfden : float or array_like of floats

Denominator degrees of freedom, should be > 0.

nonc : float or array_like of floats

Non-centrality parameter, the sum of the squares of the numerator means, should be >= 0.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `dfnum`, `dfden`, and `nonc` are all scalars. Otherwise, `np.broadcast(dfnum, dfden, nonc).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized noncentral Fisher distribution.

Notes

When calculating the power of an experiment (power = probability of rejecting the null hypothesis when a specific alternative is true) the non-central F statistic becomes important. When the null hypothesis is true, the F statistic follows a central F distribution. When the null hypothesis is not true, then it follows a non-central F statistic.

References

[R185], *[R186]*

Examples

In a study, testing for a specific alternative to the null hypothesis requires use of the Noncentral F distribution. We need to calculate the area in the tail of the distribution that exceeds the value of the F distribution for the null hypothesis. We'll plot the two probability distributions for comparison.

```
>>> dfnum = 3 # between group deg of freedom
>>> dfden = 20 # within groups degrees of freedom
>>> nonc = 3.0
>>> nc_vals = np.random.noncentral_f(dfnum, dfden, nonc, 1000000)
>>> NF = np.histogram(nc_vals, bins=50, normed=True)
>>> c_vals = np.random.f(dfnum, dfden, 1000000)
>>> F = np.histogram(c_vals, bins=50, normed=True)
>>> plt.plot(F[1][1:], F[0])
>>> plt.plot(NF[1][1:], NF[0])
>>> plt.show()
```

`RandomState.`**`normal`**(*loc=0.0*, *scale=1.0*, *size=None*)

Draw random samples from a normal (Gaussian) distribution.

The probability density function of the normal distribution, first derived by De Moivre and 200 years later by both Gauss and Laplace independently *[R188]*, is often called the bell curve because of its characteristic shape (see the example below).

The normal distributions occurs often in nature. For example, it describes the commonly occurring distribution of samples influenced by a large number of tiny, random disturbances, each with its own unique distribution *[R188]*.

Parameters **loc** : float or array_like of floats

Mean ("centre") of the distribution.

scale : float or array_like of floats

Standard deviation (spread or "width") of the distribution.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `loc` and `scale` are both scalars. Otherwise, `np.broadcast(loc, scale).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized normal distribution.

See also:

`scipy.stats.norm` probability density function, distribution or cumulative density function, etc.

Notes

The probability density for the Gaussian distribution is

$$p(x) = \frac{1}{\sqrt{2\pi\sigma^2}} e^{-\frac{(x-\mu)^2}{2\sigma^2}},$$

where μ is the mean and σ the standard deviation. The square of the standard deviation, σ^2, is called the variance.

The function has its peak at the mean, and its "spread" increases with the standard deviation (the function reaches 0.607 times its maximum at $x+\sigma$ and $x-\sigma$ *[R188]*). This implies that *numpy.random.normal* is more likely to return samples lying close to the mean, rather than those far away.

References

[R187], *[R188]*

Examples

Draw samples from the distribution:

```
>>> mu, sigma = 0, 0.1 # mean and standard deviation
>>> s = np.random.normal(mu, sigma, 1000)
```

Verify the mean and the variance:

```
>>> abs(mu - np.mean(s)) < 0.01
True
```

```
>>> abs(sigma - np.std(s, ddof=1)) < 0.01
True
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, ignored = plt.hist(s, 30, normed=True)
>>> plt.plot(bins, 1/(sigma * np.sqrt(2 * np.pi)) *
...                np.exp( - (bins - mu)**2 / (2 * sigma**2) ),
...          linewidth=2, color='r')
>>> plt.show()
```

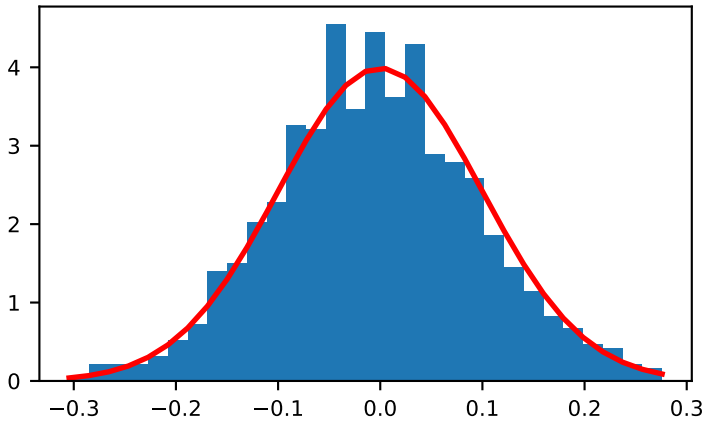

RandomState.**pareto**(*a*, *size=None*)

Draw samples from a Pareto II or Lomax distribution with specified shape.

The Lomax or Pareto II distribution is a shifted Pareto distribution. The classical Pareto distribution can be obtained from the Lomax distribution by adding 1 and multiplying by the scale parameter `m` (see Notes). The smallest value of the Lomax distribution is zero while for the classical Pareto distribution it is `mu`, where the standard Pareto distribution has location `mu = 1`. Lomax can also be considered as a simplified version of the Generalized Pareto distribution (available in SciPy), with the scale set to one and the location set to zero.

The Pareto distribution must be greater than zero, and is unbounded above. It is also known as the "80-20 rule". In this distribution, 80 percent of the weights are in the lowest 20 percent of the range, while the other 20 percent fill the remaining 80 percent of the range.

Parameters **a** : float or array_like of floats

Shape of the distribution. Should be greater than zero.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `a` is a scalar. Otherwise, `np.array(a).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Pareto distribution.

See also:

`scipy.stats.lomax` probability density function, distribution or cumulative density function, etc.

`scipy.stats.genpareto` probability density function, distribution or cumulative density function, etc.

Notes

The probability density for the Pareto distribution is

$$p(x) = \frac{am^a}{x^{a+1}}$$

where a is the shape and m the scale.

The Pareto distribution, named after the Italian economist Vilfredo Pareto, is a power law probability distribution useful in many real world problems. Outside the field of economics it is generally referred to as the Bradford distribution. Pareto developed the distribution to describe the distribution of wealth in an economy. It has also found use in insurance, web page access statistics, oil field sizes, and many other problems, including the download frequency for projects in Sourceforge *[R189]*. It is one of the so-called "fat-tailed" distributions.

References

[R189], *[R190]*, *[R191]*, *[R192]*

Examples

Draw samples from the distribution:

```
>>> a, m = 3., 2.  # shape and mode
>>> s = (np.random.pareto(a, 1000) + 1) * m
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, _ = plt.hist(s, 100, normed=True)
>>> fit = a*m**a / bins**(a+1)
>>> plt.plot(bins, max(count)*fit/max(fit), linewidth=2, color='r')
>>> plt.show()
```

RandomState.**permutation**(*x*)

Randomly permute a sequence, or return a permuted range.

If *x* is a multi-dimensional array, it is only shuffled along its first index.

Parameters **x** : int or array_like

If *x* is an integer, randomly permute `np.arange(x)`. If *x* is an array, make a copy and shuffle the elements randomly.

Returns **out** : ndarray

Permuted sequence or array range.

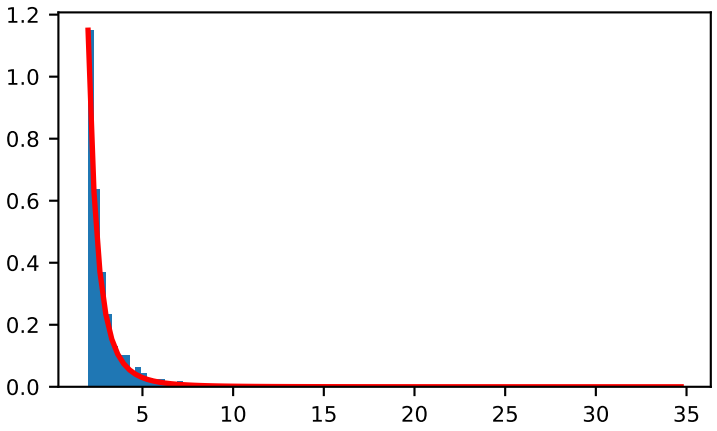

Examples

```
>>> np.random.permutation(10)
array([1, 7, 4, 3, 0, 9, 2, 5, 8, 6])
```

```
>>> np.random.permutation([1, 4, 9, 12, 15])
array([15,  1,  9,  4, 12])
```

```
>>> arr = np.arange(9).reshape((3, 3))
>>> np.random.permutation(arr)
array([[6, 7, 8],
       [0, 1, 2],
       [3, 4, 5]])
```

RandomState.**poisson**(*lam=1.0*, *size=None*)

Draw samples from a Poisson distribution.

The Poisson distribution is the limit of the binomial distribution for large N.

Parameters **lam** : float or array_like of floats

Expectation of interval, should be >= 0. A sequence of expectation intervals must be broadcastable over the requested size.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `lam` is a scalar. Otherwise, `np.array(lam).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Poisson distribution.

Notes

The Poisson distribution

$$f(k; \lambda) = \frac{\lambda^k e^{-\lambda}}{k!}$$

For events with an expected separation λ the Poisson distribution $f(k; \lambda)$ describes the probability of k events occurring within the observed interval λ.

Because the output is limited to the range of the C long type, a ValueError is raised when *lam* is within 10 sigma of the maximum representable value.

References

[R193], *[R194]*

Examples

Draw samples from the distribution:

```
>>> import numpy as np
>>> s = np.random.poisson(5, 10000)
```

Display histogram of the sample:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, ignored = plt.hist(s, 14, normed=True)
>>> plt.show()
```

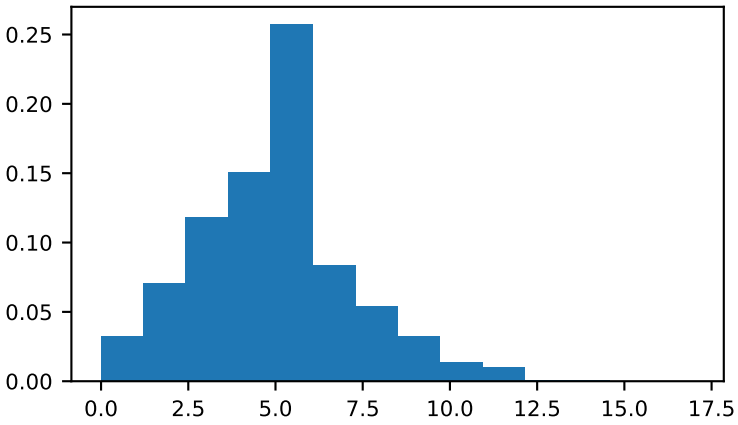

Draw each 100 values for lambda 100 and 500:

```
>>> s = np.random.poisson(lam=(100., 500.), size=(100, 2))
```

RandomState.**power**(*a*, *size=None*)

Draws samples in [0, 1] from a power distribution with positive exponent a - 1.

Also known as the power function distribution.

Parameters **a** : float or array_like of floats

Parameter of the distribution. Should be greater than zero.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `a` is a scalar. Otherwise, `np.array(a).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized power distribution.

Raises **ValueError**

If a < 1.

Notes

The probability density function is

$$P(x; a) = ax^{a-1}, 0 \leq x \leq 1, a > 0.$$

The power function distribution is just the inverse of the Pareto distribution. It may also be seen as a special case of the Beta distribution.

It is used, for example, in modeling the over-reporting of insurance claims.

References

[R195], *[R196]*

Examples

Draw samples from the distribution:

```
>>> a = 5. # shape
>>> samples = 1000
>>> s = np.random.power(a, samples)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, ignored = plt.hist(s, bins=30)
>>> x = np.linspace(0, 1, 100)
>>> y = a*x**(a-1.)
>>> normed_y = samples*np.diff(bins)[0]*y
>>> plt.plot(x, normed_y)
>>> plt.show()
```

Compare the power function distribution to the inverse of the Pareto.

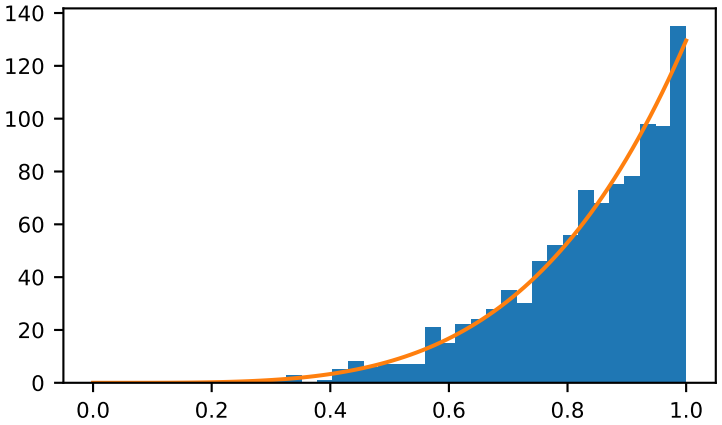


```
>>> from scipy import stats
>>> rvs = np.random.power(5, 1000000)
>>> rvsp = np.random.pareto(5, 1000000)
>>> xx = np.linspace(0,1,100)
>>> powpdf = stats.powerlaw.pdf(xx,5)
```

```
>>> plt.figure()
>>> plt.hist(rvs, bins=50, normed=True)
>>> plt.plot(xx,powpdf,'r-')
>>> plt.title('np.random.power(5)')
```

```
>>> plt.figure()
>>> plt.hist(1./(1.+rvsp), bins=50, normed=True)
>>> plt.plot(xx,powpdf,'r-')
>>> plt.title('inverse of 1 + np.random.pareto(5)')
```

```
>>> plt.figure()
>>> plt.hist(1./(1.+rvsp), bins=50, normed=True)
>>> plt.plot(xx,powpdf,'r-')
>>> plt.title('inverse of stats.pareto(5)')
```

`RandomState.`**`rand`**(*d0*, *d1*, ..., *dn*)

Random values in a given shape.

Create an array of the given shape and populate it with random samples from a uniform distribution over `[0, 1)`.

Parameters **d0, d1, ..., dn** : int, optional

The dimensions of the returned array, should all be positive. If no argument is given a single Python float is returned.

Returns **out** : ndarray, shape `(d0, d1, ..., dn)`

Random values.

See also:

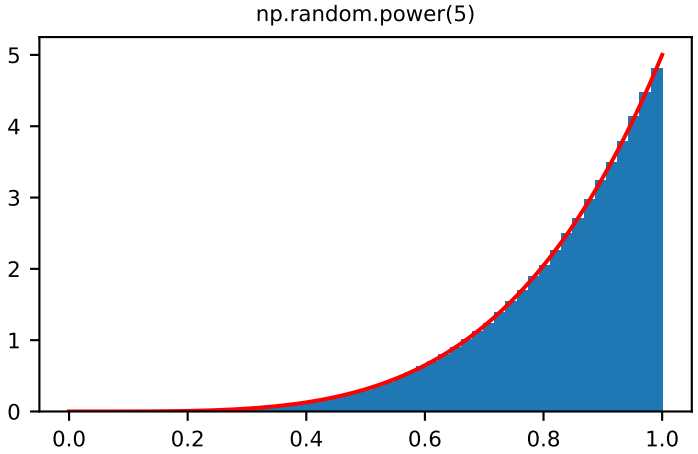
np.random.power(5)
0
1
2
3
4
5
0.0
0.2
0.4
0.6
0.8
1.0

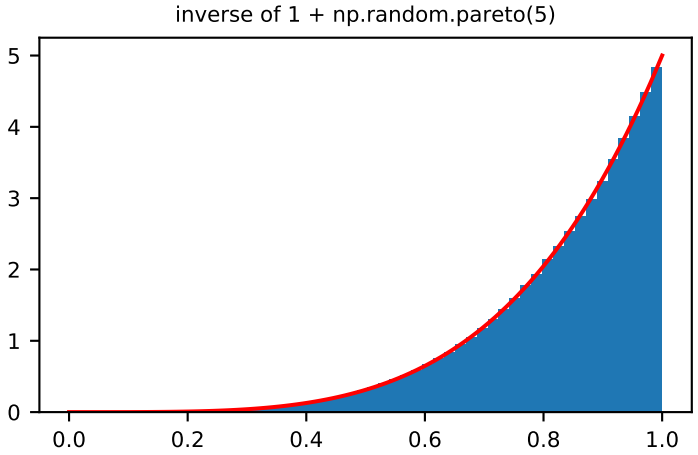
inverse of 1 + np.random.pareto(5)
0
1
2
3
4
5
0.0
0.2
0.4
0.6
0.8
1.0

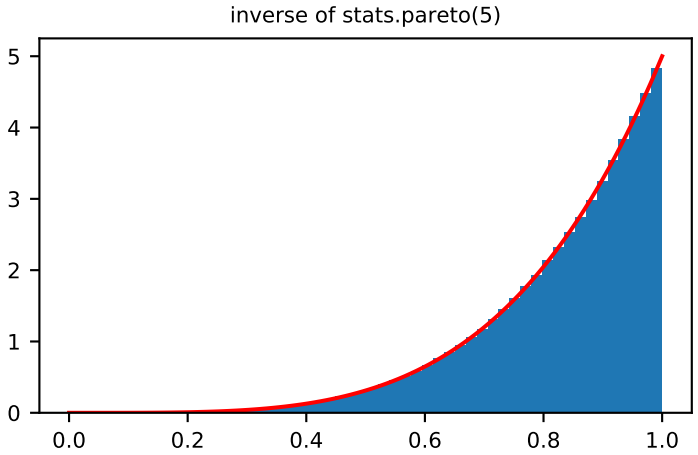

random

Notes

This is a convenience function. If you want an interface that takes a shape-tuple as the first argument, refer to np.random.random_sample .

Examples

```
>>> np.random.rand(3,2)
array([[ 0.14022471,  0.96360618],  #random
       [ 0.37601032,  0.25528411],  #random
       [ 0.49313049,  0.94909878]]) #random
```

`RandomState.`**`randint`**(*low*, *high=None*, *size=None*, *dtype='l'*)

Return random integers from *low* (inclusive) to *high* (exclusive).

Return random integers from the "discrete uniform" distribution of the specified dtype in the "half-open" interval [*low*, *high*). If *high* is None (the default), then results are from [0, *low*).

Parameters **low** : int

Lowest (signed) integer to be drawn from the distribution (unless `high=None`, in which case this parameter is one above the *highest* such integer).

high : int, optional

If provided, one above the largest (signed) integer to be drawn from the distribution (see above for behavior if `high=None`).

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

dtype : dtype, optional

Desired dtype of the result. All dtypes are determined by their name, i.e., 'int64', 'int', etc, so byteorder is not available and a specific precision may have different C types depending on the platform. The default value is 'np.int'.

New in version 1.11.0.

Returns **out** : int or ndarray of ints

size-shaped array of random integers from the appropriate distribution, or a single such random int if *size* not provided.

See also:

random.random_integers similar to *randint*, only for the closed interval [*low*, *high*], and 1 is the lowest value if *high* is omitted. In particular, this other one is the one to use to generate uniformly distributed discrete non-integers.

Examples

```
>>> np.random.randint(2, size=10)
array([1, 0, 0, 0, 1, 1, 0, 0, 1, 0])
>>> np.random.randint(1, size=10)
array([0, 0, 0, 0, 0, 0, 0, 0, 0, 0])
```

Generate a 2 x 4 array of ints between 0 and 4, inclusive:

```
>>> np.random.randint(5, size=(2, 4))
array([[4, 0, 2, 1],
       [3, 2, 2, 0]])
```

RandomState.**randn**(*d0*, *d1*, ..., *dn*)

Return a sample (or samples) from the "standard normal" distribution.

If positive, int_like or int-convertible arguments are provided, *randn* generates an array of shape `(d0, d1, ..., dn)`, filled with random floats sampled from a univariate "normal" (Gaussian) distribution of mean 0 and variance 1 (if any of the d_i are floats, they are first converted to integers by truncation). A single float randomly sampled from the distribution is returned if no argument is provided.

This is a convenience function. If you want an interface that takes a tuple as the first argument, use *numpy.random.standard_normal* instead.

Parameters **d0, d1, ..., dn** : int, optional

The dimensions of the returned array, should be all positive. If no argument is given a single Python float is returned.

Returns **Z** : ndarray or float

A `(d0, d1, ..., dn)`-shaped array of floating-point samples from the standard normal distribution, or a single such float if no parameters were supplied.

See also:

random.standard_normal Similar, but takes a tuple as its argument.

Notes

For random samples from $N(\mu, \sigma^2)$, use:

```
sigma * np.random.randn(...) + mu
```

Examples

```
>>> np.random.randn()
2.1923875335537315 #random
```

Two-by-four array of samples from N(3, 6.25):

```
>>> 2.5 * np.random.randn(2, 4) + 3
array([[-4.49401501,  4.00950034, -1.81814867,  7.29718677],  #random
       [ 0.39924804,  4.68456316,  4.99394529,  4.84057254]]) #random
```

RandomState.**random_integers**(*low*, *high=None*, *size=None*)

Random integers of type np.int between *low* and *high*, inclusive.

Return random integers of type np.int from the "discrete uniform" distribution in the closed interval [*low*, *high*]. If *high* is None (the default), then results are from [1, *low*]. The np.int type translates to the C long type used by Python 2 for "short" integers and its precision is platform dependent.

This function has been deprecated. Use randint instead.

Deprecated since version 1.11.0.

Parameters **low** : int

Lowest (signed) integer to be drawn from the distribution (unless `high=None`, in which case this parameter is the *highest* such integer).

high : int, optional

If provided, the largest (signed) integer to be drawn from the distribution (see above for behavior if `high=None`).

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **out** : int or ndarray of ints

size-shaped array of random integers from the appropriate distribution, or a single such random int if *size* not provided.

See also:

random.randint Similar to *random_integers*, only for the half-open interval [*low*, *high*), and 0 is the lowest value if *high* is omitted.

Notes

To sample from N evenly spaced floating-point numbers between a and b, use:

```
a + (b - a) * (np.random.random_integers(N) - 1) / (N - 1.)
```

Examples

```
>>> np.random.random_integers(5)
4
>>> type(np.random.random_integers(5))
<type 'int'>
>>> np.random.random_integers(5, size=(3,2))
array([[5, 4],
       [3, 3],
       [4, 5]])
```

Choose five random numbers from the set of five evenly-spaced numbers between 0 and 2.5, inclusive (*i.e.*, from the set $0, 5/8, 10/8, 15/8, 20/8$):

```
>>> 2.5 * (np.random.random_integers(5, size=(5,)) - 1) / 4.
array([ 0.625,  1.25 ,  0.625,  0.625,  2.5  ])
```

Roll two six sided dice 1000 times and sum the results:

```
>>> d1 = np.random.random_integers(1, 6, 1000)
>>> d2 = np.random.random_integers(1, 6, 1000)
>>> dsums = d1 + d2
```

Display results as a histogram:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, ignored = plt.hist(dsums, 11, normed=True)
>>> plt.show()
```

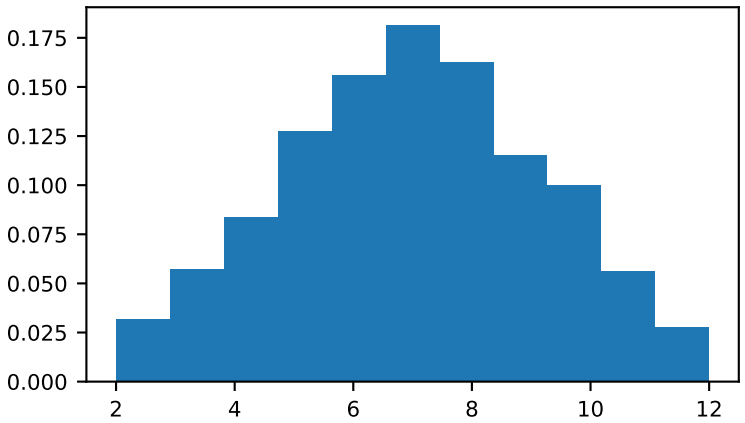

RandomState.**random_sample**(*size=None*)

Return random floats in the half-open interval [0.0, 1.0).

Results are from the "continuous uniform" distribution over the stated interval. To sample $Unif[a, b), b > a$ multiply the output of `random_sample` by *(b-a)* and add a:

```
(b - a) * random_sample() + a
```

Parameters **size** : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **out** : float or ndarray of floats

Array of random floats of shape *size* (unless `size=None`, in which case a single float is returned).

Examples

```
>>> np.random.random_sample()
0.47108547995356098
>>> type(np.random.random_sample())
<type 'float'>
>>> np.random.random_sample((5,))
array([ 0.30220482,  0.86820401,  0.1654503 ,  0.11659149,  0.54323428])
```

Three-by-two array of random numbers from [-5, 0):

```
>>> 5 * np.random.random_sample((3, 2)) - 5
array([[-3.99149989, -0.52338984],
       [-2.99091858, -0.79479508],
       [-1.23204345, -1.75224494]])
```

`RandomState.`**`rayleigh`**(*scale=1.0*, *size=None*)

Draw samples from a Rayleigh distribution.

The χ and Weibull distributions are generalizations of the Rayleigh.

Parameters **scale** : float or array_like of floats, optional

Scale, also equals the mode. Should be >= 0. Default is 1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `scale` is a scalar. Otherwise, `np.array(scale).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Rayleigh distribution.

Notes

The probability density function for the Rayleigh distribution is

$$P(x;scale) = \frac{x}{scale^2}e^{\frac{-x^2}{2\cdot scale^2}}$$

The Rayleigh distribution would arise, for example, if the East and North components of the wind velocity had identical zero-mean Gaussian distributions. Then the wind speed would have a Rayleigh distribution.

References

[R197], *[R198]*

Examples

Draw values from the distribution and plot the histogram

```
>>> values = hist(np.random.rayleigh(3, 100000), bins=200, normed=True)
```

Wave heights tend to follow a Rayleigh distribution. If the mean wave height is 1 meter, what fraction of waves are likely to be larger than 3 meters?

```
>>> meanvalue = 1
>>> modevalue = np.sqrt(2 / np.pi) * meanvalue
>>> s = np.random.rayleigh(modevalue, 1000000)
```

The percentage of waves larger than 3 meters is:

```
>>> 100.*sum(s>3)/1000000.
0.087300000000000003
```

RandomState.**seed**(*seed=None*)

Seed the generator.

This method is called when *RandomState* is initialized. It can be called again to re-seed the generator. For details, see *RandomState*.

Parameters **seed** : int or 1-d array_like, optional

Seed for *RandomState*. Must be convertible to 32 bit unsigned integers.

See also:

RandomState

RandomState.**set_state**(*state*)

Set the internal state of the generator from a tuple.

For use if one has reason to manually (re-)set the internal state of the "Mersenne Twister"*[R199]* pseudo-random number generating algorithm.

Parameters **state** : tuple(str, ndarray of 624 uints, int, int, float)

The *state* tuple has the following items:

1. the string 'MT19937', specifying the Mersenne Twister algorithm.
2. a 1-D array of 624 unsigned integers `keys`.
3. an integer `pos`.
4. an integer `has_gauss`.
5. a float `cached_gaussian`.

Returns **out** : None

Returns 'None' on success.

See also:

get_state

Notes

set_state and *get_state* are not needed to work with any of the random distributions in NumPy. If the internal state is manually altered, the user should know exactly what he/she is doing.

For backwards compatibility, the form (str, array of 624 uints, int) is also accepted although it is missing some information about the cached Gaussian value: `state = ('MT19937', keys, pos)`.

References

[R199]

RandomState.**shuffle**(*x*)

Modify a sequence in-place by shuffling its contents.

This function only shuffles the array along the first axis of a multi-dimensional array. The order of sub-arrays is changed but their contents remains the same.

Parameters **x** : array_like

The array or list to be shuffled.

Returns None

Examples

```
>>> arr = np.arange(10)
>>> np.random.shuffle(arr)
>>> arr
[1 7 5 2 9 4 3 6 0 8]
```

Multi-dimensional arrays are only shuffled along the first axis:

```
>>> arr = np.arange(9).reshape((3, 3))
>>> np.random.shuffle(arr)
>>> arr
array([[3, 4, 5],
       [6, 7, 8],
       [0, 1, 2]])
```

RandomState.**standard_cauchy**(*size=None*)

Draw samples from a standard Cauchy distribution with mode = 0.

Also known as the Lorentz distribution.

Parameters **size** : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **samples** : ndarray or scalar

The drawn samples.

Notes

The probability density function for the full Cauchy distribution is

$$P(x; x_0, \gamma) = \frac{1}{\pi\gamma\left[1 + (\frac{x-x_0}{\gamma})^2\right]}$$

and the Standard Cauchy distribution just sets $x_0 = 0$ and $\gamma = 1$

The Cauchy distribution arises in the solution to the driven harmonic oscillator problem, and also describes spectral line broadening. It also describes the distribution of values at which a line tilted at a random angle will cut the x axis.

When studying hypothesis tests that assume normality, seeing how the tests perform on data from a Cauchy distribution is a good indicator of their sensitivity to a heavy-tailed distribution, since the Cauchy looks very much like a Gaussian distribution, but with heavier tails.

References

[R200], *[R201]*, *[R202]*

Examples

Draw samples and plot the distribution:

```
>>> s = np.random.standard_cauchy(1000000)
>>> s = s[(s>-25) & (s<25)]  # truncate distribution so it plots well
>>> plt.hist(s, bins=100)
>>> plt.show()
```

RandomState.**standard_exponential**(*size=None*)

Draw samples from the standard exponential distribution.

standard_exponential is identical to the exponential distribution with a scale parameter of 1.

Parameters **size** : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **out** : float or ndarray

Drawn samples.

Examples

Output a 3x8000 array:

```
>>> n = np.random.standard_exponential((3, 8000))
```

RandomState.**standard_gamma**(*shape*, *size=None*)

Draw samples from a standard Gamma distribution.

Samples are drawn from a Gamma distribution with specified parameters, shape (sometimes designated "k") and scale=1.

Parameters **shape** : float or array_like of floats

Parameter, should be > 0.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `shape` is a scalar. Otherwise, `np.array(shape).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized standard gamma distribution.

See also:

`scipy.stats.gamma` probability density function, distribution or cumulative density function, etc.

Notes

The probability density for the Gamma distribution is

$$p(x) = x^{k-1}\frac{e^{-x/\theta}}{\theta^k\Gamma(k)},$$

where k is the shape and θ the scale, and Γ is the Gamma function.

The Gamma distribution is often used to model the times to failure of electronic components, and arises naturally in processes for which the waiting times between Poisson distributed events are relevant.

References

[R203], *[R204]*

Examples

Draw samples from the distribution:

```
>>> shape, scale = 2., 1. # mean and width
>>> s = np.random.standard_gamma(shape, 1000000)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> import scipy.special as sps
>>> count, bins, ignored = plt.hist(s, 50, normed=True)
>>> y = bins**(shape-1) * ((np.exp(-bins/scale))/ \
...                       (sps.gamma(shape) * scale**shape))
>>> plt.plot(bins, y, linewidth=2, color='r')
>>> plt.show()
```

`RandomState.`**`standard_normal`**(*size=None*)

Draw samples from a standard Normal distribution (mean=0, stdev=1).

Parameters **size** : int or tuple of ints, optional

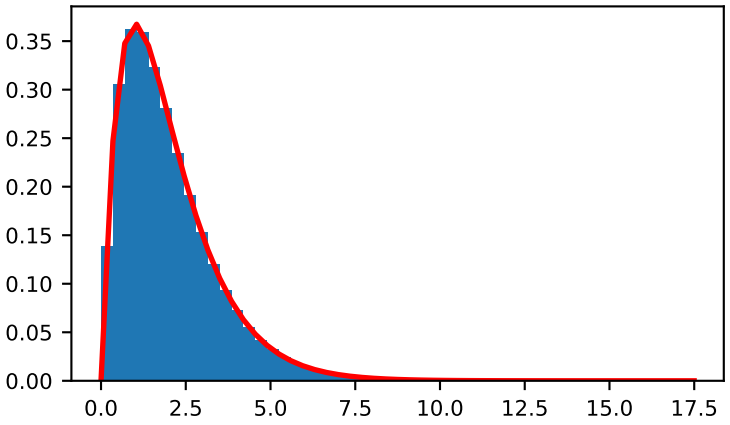

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **out** : float or ndarray

Drawn samples.

Examples

```
>>> s = np.random.standard_normal(8000)
>>> s
array([ 0.6888893 ,  0.78096262, -0.89086505, ...,  0.49876311, #random
       -0.38672696, -0.4685006 ])                               #random
>>> s.shape
(8000,)
>>> s = np.random.standard_normal(size=(3, 4, 2))
>>> s.shape
(3, 4, 2)
```

`RandomState.`**`standard_t`**(*df*, *size=None*)

Draw samples from a standard Student's t distribution with *df* degrees of freedom.

A special case of the hyperbolic distribution. As *df* gets large, the result resembles that of the standard normal distribution (*`standard_normal`*).

Parameters **df** : float or array_like of floats

Degrees of freedom, should be > 0.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `df` is a scalar. Otherwise, `np.array(df).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized standard Student's t distribution.

Notes

The probability density function for the t distribution is

$$P(x, df) = \frac{\Gamma(\frac{df+1}{2})}{\sqrt{\pi df}\,\Gamma(\frac{df}{2})}\left(1+\frac{x^2}{df}\right)^{-(df+1)/2}$$

The t test is based on an assumption that the data come from a Normal distribution. The t test provides a way to test whether the sample mean (that is the mean calculated from the data) is a good estimate of the true mean.

The derivation of the t-distribution was first published in 1908 by William Gosset while working for the Guinness Brewery in Dublin. Due to proprietary issues, he had to publish under a pseudonym, and so he used the name Student.

References

[R205], *[R206]*

Examples

From Dalgaard page 83 *[R205]*, suppose the daily energy intake for 11 women in Kj is:

```
>>> intake = np.array([5260., 5470, 5640, 6180, 6390, 6515, 6805, 7515, \
...                    7515, 8230, 8770])
```

Does their energy intake deviate systematically from the recommended value of 7725 kJ?

We have 10 degrees of freedom, so is the sample mean within 95% of the recommended value?

```
>>> s = np.random.standard_t(10, size=100000)
>>> np.mean(intake)
6753.636363636364
>>> intake.std(ddof=1)
1142.1232221373727
```

Calculate the t statistic, setting the ddof parameter to the unbiased value so the divisor in the standard deviation will be degrees of freedom, N-1.

```
>>> t = (np.mean(intake)-7725)/(intake.std(ddof=1)/np.sqrt(len(intake)))
>>> import matplotlib.pyplot as plt
>>> h = plt.hist(s, bins=100, normed=True)
```

For a one-sided t-test, how far out in the distribution does the t statistic appear?

```
>>> np.sum(s<t) / float(len(s))
0.0090699999999999999  #random
```

So the p-value is about 0.009, which says the null hypothesis has a probability of about 99% of being true.

`RandomState.`**`tomaxint`**(*size=None*)

Random integers between 0 and `sys.maxint`, inclusive.

Return a sample of uniformly distributed random integers in the interval [0, `sys.maxint`].

Parameters **size** : int or tuple of ints, optional

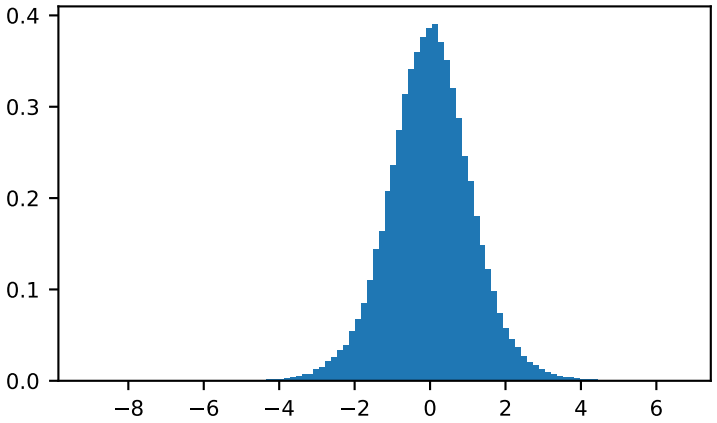

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. Default is None, in which case a single value is returned.

Returns **out** : ndarray

Drawn samples, with shape *size*.

See also:

randint Uniform sampling over a given half-open interval of integers.

random_integers Uniform sampling over a given closed interval of integers.

Examples

```
>>> RS = np.random.mtrand.RandomState() # need a RandomState object
>>> RS.tomaxint((2,2,2))
array([[[1170048599, 1600360186],
        [ 739731006, 1947757578]],
       [[1871712945,  752307660],
        [1601631370, 1479324245]]])
>>> import sys
>>> sys.maxint
2147483647
>>> RS.tomaxint((2,2,2)) < sys.maxint
array([[[ True,  True],
        [ True,  True]],
       [[ True,  True],
        [ True,  True]]])
```

RandomState.**triangular**(*left*, *mode*, *right*, *size=None*)

Draw samples from the triangular distribution over the interval `[left, right]`.

The triangular distribution is a continuous probability distribution with lower limit left, peak at mode, and upper limit right. Unlike the other distributions, these parameters directly define the shape of the pdf.

Parameters **left** : float or array_like of floats

Lower limit.

mode : float or array_like of floats

The value where the peak of the distribution occurs. The value should fulfill the condition `left <= mode <= right`.

right : float or array_like of floats

Upper limit, should be larger than *left*.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `left`, `mode`, and `right` are all scalars. Otherwise, `np.broadcast(left, mode, right).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized triangular distribution.

Notes

The probability density function for the triangular distribution is

$$P(x;l,m,r) = \begin{cases} \frac{2(x-l)}{(r-l)(m-l)} & \text{for } l \leq x \leq m, \\ \frac{2(r-x)}{(r-l)(r-m)} & \text{for } m \leq x \leq r, \\ 0 & \text{otherwise.} \end{cases}$$

The triangular distribution is often used in ill-defined problems where the underlying distribution is not known, but some knowledge of the limits and mode exists. Often it is used in simulations.

References

[R207]

Examples

Draw values from the distribution and plot the histogram:

```
>>> import matplotlib.pyplot as plt
>>> h = plt.hist(np.random.triangular(-3, 0, 8, 100000), bins=200,
...              normed=True)
>>> plt.show()
```

`RandomState.`**`uniform`**(*low=0.0*, *high=1.0*, *size=None*)

Draw samples from a uniform distribution.

Samples are uniformly distributed over the half-open interval `[low, high)` (includes low, but excludes high). In other words, any value within the given interval is equally likely to be drawn by *`uniform`*.

Parameters **low** : float or array_like of floats, optional

Lower boundary of the output interval. All values generated will be greater than or equal to low. The default value is 0.

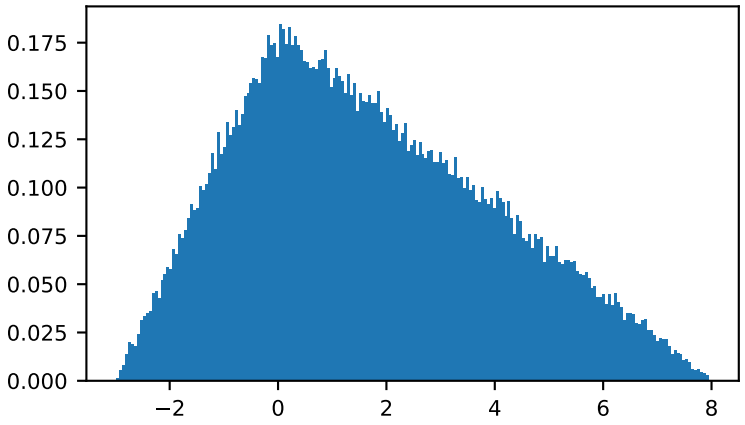

high : float or array_like of floats

Upper boundary of the output interval. All values generated will be less than high. The default value is 1.0.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `low` and `high` are both scalars. Otherwise, `np.broadcast(low, high).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized uniform distribution.

See also:

randint Discrete uniform distribution, yielding integers.

random_integers Discrete uniform distribution over the closed interval `[low, high]`.

random_sample Floats uniformly distributed over `[0, 1)`.

random Alias for *random_sample*.

rand Convenience function that accepts dimensions as input, e.g., `rand(2,2)` would generate a 2-by-2 array of floats, uniformly distributed over `[0, 1)`.

Notes

The probability density function of the uniform distribution is

$$p(x) = \frac{1}{b - a}$$

anywhere within the interval `[a, b)`, and zero elsewhere.

When `high` == `low`, values of `low` will be returned. If `high` < `low`, the results are officially undefined and may eventually raise an error, i.e. do not rely on this function to behave when passed arguments satisfying that inequality condition.

Examples

Draw samples from the distribution:

```
>>> s = np.random.uniform(-1,0,1000)
```

All values are within the given interval:

```
>>> np.all(s >= -1)
True
>>> np.all(s < 0)
True
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> count, bins, ignored = plt.hist(s, 15, normed=True)
>>> plt.plot(bins, np.ones_like(bins), linewidth=2, color='r')
>>> plt.show()
```

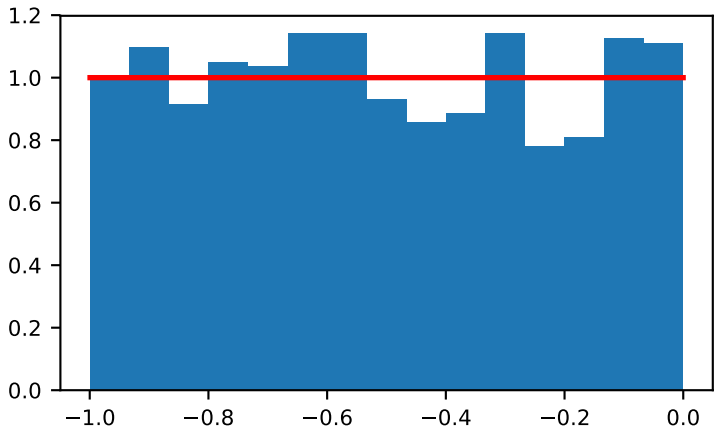

RandomState.**vonmises**(*mu*, *kappa*, *size=None*)

Draw samples from a von Mises distribution.

Samples are drawn from a von Mises distribution with specified mode (mu) and dispersion (kappa), on the interval [-pi, pi].

The von Mises distribution (also known as the circular normal distribution) is a continuous probability distribution on the unit circle. It may be thought of as the circular analogue of the normal distribution.

Parameters **mu** : float or array_like of floats

Mode (“center”) of the distribution.

kappa : float or array_like of floats

Dispersion of the distribution, has to be >=0.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `mu` and `kappa` are both scalars. Otherwise, `np.broadcast(mu, kappa).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized von Mises distribution.

See also:

`scipy.stats.vonmises` probability density function, distribution, or cumulative density function, etc.

Notes

The probability density for the von Mises distribution is

$$p(x) = \frac{e^{\kappa cos(x-\mu)}}{2\pi I_0(\kappa)},$$

where μ is the mode and κ the dispersion, and $I_0(\kappa)$ is the modified Bessel function of order 0.

The von Mises is named for Richard Edler von Mises, who was born in Austria-Hungary, in what is now the Ukraine. He fled to the United States in 1939 and became a professor at Harvard. He worked in probability theory, aerodynamics, fluid mechanics, and philosophy of science.

References

[R208], *[R209]*

Examples

Draw samples from the distribution:

```
>>> mu, kappa = 0.0, 4.0 # mean and dispersion
>>> s = np.random.vonmises(mu, kappa, 1000)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> from scipy.special import i0
>>> plt.hist(s, 50, normed=True)
>>> x = np.linspace(-np.pi, np.pi, num=51)
>>> y = np.exp(kappa*np.cos(x-mu))/(2*np.pi*i0(kappa))
>>> plt.plot(x, y, linewidth=2, color='r')
>>> plt.show()
```

RandomState.**wald**(*mean*, *scale*, *size=None*)

Draw samples from a Wald, or inverse Gaussian, distribution.

As the scale approaches infinity, the distribution becomes more like a Gaussian. Some references claim that the Wald is an inverse Gaussian with mean equal to 1, but this is by no means universal.

The inverse Gaussian distribution was first studied in relationship to Brownian motion. In 1956 M.C.K. Tweedie used the name inverse Gaussian because there is an inverse relationship between the time to cover a unit distance and distance covered in unit time.

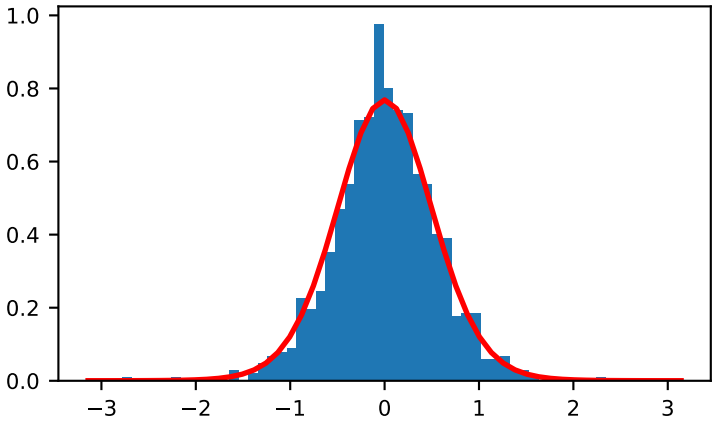

Parameters **mean** : float or array_like of floats

Distribution mean, should be > 0.

scale : float or array_like of floats

Scale parameter, should be >= 0.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `mean` and `scale` are both scalars. Otherwise, `np.broadcast(mean, scale).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Wald distribution.

Notes

The probability density function for the Wald distribution is

$$P(x; mean, scale) = \sqrt{\frac{scale}{2\pi x^3}} e^{\frac{-scale(x-mean)^2}{2 \cdot mean^2 x}}$$

As noted above the inverse Gaussian distribution first arise from attempts to model Brownian motion. It is also a competitor to the Weibull for use in reliability modeling and modeling stock returns and interest rate processes.

References

[R210], *[R211]*, *[R212]*

Examples

Draw values from the distribution and plot the histogram:

```
>>> import matplotlib.pyplot as plt
>>> h = plt.hist(np.random.wald(3, 2, 100000), bins=200, normed=True)
>>> plt.show()
```

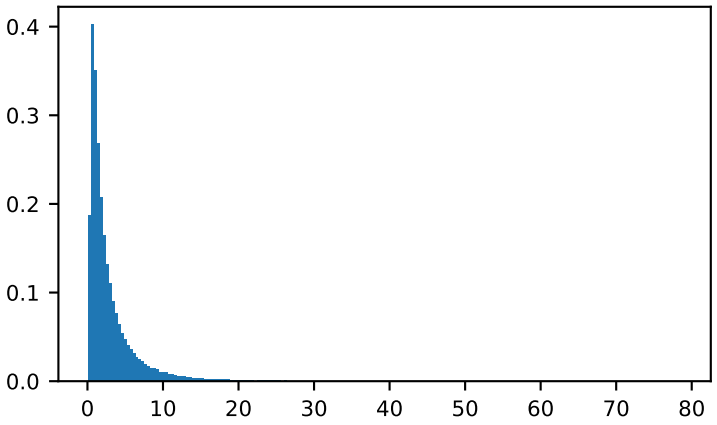

RandomState.**weibull**(*a*, *size=None*)

Draw samples from a Weibull distribution.

Draw samples from a 1-parameter Weibull distribution with the given shape parameter a.

$$X = (-ln(U))^{1/a}$$

Here, U is drawn from the uniform distribution over (0,1].

The more common 2-parameter Weibull, including a scale parameter λ is just $X = \lambda(-ln(U))^{1/a}$.

Parameters **a** : float or array_like of floats

Shape of the distribution. Should be greater than zero.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `a` is a scalar. Otherwise, `np.array(a).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Weibull distribution.

See also:

`scipy.stats.weibull_max`, `scipy.stats.weibull_min`, `scipy.stats.genextreme`, *gumbel*

Notes

The Weibull (or Type III asymptotic extreme value distribution for smallest values, SEV Type III, or Rosin-Rammler distribution) is one of a class of Generalized Extreme Value (GEV) distributions used in modeling extreme value problems. This class includes the Gumbel and Frechet distributions.

The probability density for the Weibull distribution is

$$p(x) = \frac{a}{\lambda}(\frac{x}{\lambda})^{a-1}e^{-(x/\lambda)^a},$$

where a is the shape and λ the scale.

The function has its peak (the mode) at $\lambda(\frac{a-1}{a})^{1/a}$.

When `a = 1`, the Weibull distribution reduces to the exponential distribution.

References

[R213], *[R214]*, *[R215]*

Examples

Draw samples from the distribution:

```
>>> a = 5. # shape
>>> s = np.random.weibull(a, 1000)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> x = np.arange(1,100.)/50.
>>> def weib(x,n,a):
...     return (a / n) * (x / n)**(a - 1) * np.exp(-(x / n)**a)
```

```
>>> count, bins, ignored = plt.hist(np.random.weibull(5.,1000))
>>> x = np.arange(1,100.)/50.
>>> scale = count.max()/weib(x, 1., 5.).max()
>>> plt.plot(x, weib(x, 1., 5.)*scale)
>>> plt.show()
```

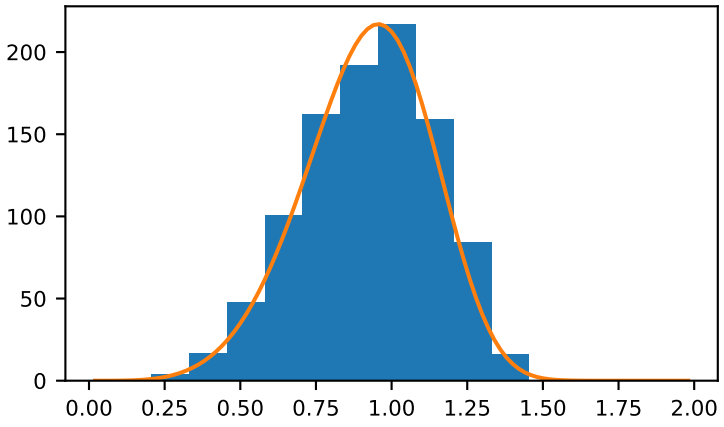

RandomState.**zipf**(*a*, *size=None*)

Draw samples from a Zipf distribution.

Samples are drawn from a Zipf distribution with specified parameter $a > 1$.

The Zipf distribution (also known as the zeta distribution) is a continuous probability distribution that satisfies Zipf's law: the frequency of an item is inversely proportional to its rank in a frequency table.

Parameters **a** : float or array_like of floats

Distribution parameter. Should be greater than 1.

size : int or tuple of ints, optional

Output shape. If the given shape is, e.g., `(m, n, k)`, then `m * n * k` samples are drawn. If size is `None` (default), a single value is returned if `a` is a scalar. Otherwise, `np.array(a).size` samples are drawn.

Returns **out** : ndarray or scalar

Drawn samples from the parameterized Zipf distribution.

See also:

scipy.stats.zipf probability density function, distribution, or cumulative density function, etc.

Notes

The probability density for the Zipf distribution is

$$p(x) = \frac{x^{-a}}{\zeta(a)},$$

where ζ is the Riemann Zeta function.

It is named for the American linguist George Kingsley Zipf, who noted that the frequency of any word in a sample of a language is inversely proportional to its rank in the frequency table.

References

[R216]

Examples

Draw samples from the distribution:

```
>>> a = 2. # parameter
>>> s = np.random.zipf(a, 1000)
```

Display the histogram of the samples, along with the probability density function:

```
>>> import matplotlib.pyplot as plt
>>> from scipy import special
```

Truncate s values at 50 so plot is interesting:

```
>>> count, bins, ignored = plt.hist(s[s<50], 50, normed=True)
>>> x = np.arange(1., 50.)
>>> y = x**(-a) / special.zetac(a)
>>> plt.plot(x, y/max(y), linewidth=2, color='r')
>>> plt.show()
```

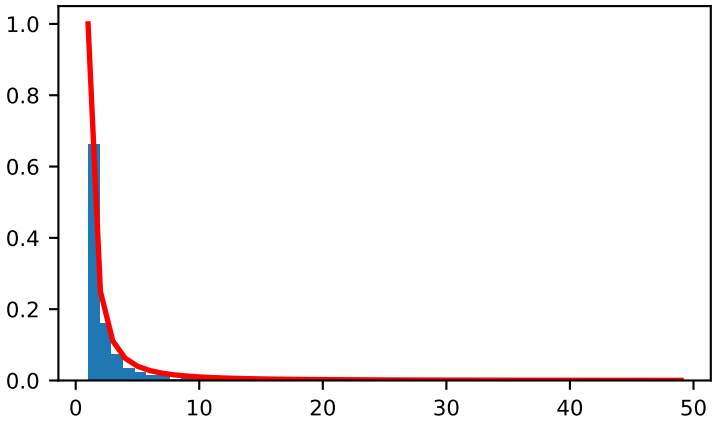

numpy.random.**seed**(*seed=None*)

Seed the generator.

This method is called when *RandomState* is initialized. It can be called again to re-seed the generator. For details, see *RandomState*.

Parameters **seed** : int or 1-d array_like, optional

Seed for *RandomState*. Must be convertible to 32 bit unsigned integers.

See also:

RandomState

numpy.random.**get_state**()

Return a tuple representing the internal state of the generator.

For more details, see *set_state*.

Returns **out** : tuple(str, ndarray of 624 uints, int, int, float)

The returned tuple has the following items:

1. the string 'MT19937'.
2. a 1-D array of 624 unsigned integer keys.
3. an integer `pos`.
4. an integer `has_gauss`.
5. a float `cached_gaussian`.

See also:

set_state

Notes

set_state and *get_state* are not needed to work with any of the random distributions in NumPy. If the internal state is manually altered, the user should know exactly what he/she is doing.

numpy.random.**set_state**(*state*)
Set the internal state of the generator from a tuple.

For use if one has reason to manually (re-)set the internal state of the "Mersenne Twister"*[R270]* pseudo-random number generating algorithm.

Parameters **state** : tuple(str, ndarray of 624 uints, int, int, float)

The *state* tuple has the following items:

1. the string 'MT19937', specifying the Mersenne Twister algorithm.
2. a 1-D array of 624 unsigned integers `keys`.
3. an integer `pos`.
4. an integer `has_gauss`.
5. a float `cached_gaussian`.

Returns **out** : None

Returns 'None' on success.

See also:

get_state

Notes

set_state and *get_state* are not needed to work with any of the random distributions in NumPy. If the internal state is manually altered, the user should know exactly what he/she is doing.

For backwards compatibility, the form (str, array of 624 uints, int) is also accepted although it is missing some information about the cached Gaussian value: `state = ('MT19937', keys, pos)`.

References

[R270]

3.25 Set routines

3.25.1 Making proper sets

unique(ar[, return_index, return_inverse, ...])	Find the unique elements of an array.

3.25.2 Boolean operations

in1d(ar1, ar2[, assume_unique, invert])	Test whether each element of a 1-D array is also present in a second array.
intersect1d(ar1, ar2[, assume_unique])	Find the intersection of two arrays.
isin(element, test_elements[, ...])	Calculates *element in test_elements*, broadcasting over *element* only.
setdiff1d(ar1, ar2[, assume_unique])	Find the set difference of two arrays.
setxor1d(ar1, ar2[, assume_unique])	Find the set exclusive-or of two arrays.
union1d(ar1, ar2)	Find the union of two arrays.

numpy.**in1d**(*ar1*, *ar2*, *assume_unique=False*, *invert=False*)

Test whether each element of a 1-D array is also present in a second array.

Returns a boolean array the same length as *ar1* that is True where an element of *ar1* is in *ar2* and False otherwise.

We recommend using *isin* instead of *in1d* for new code.

Parameters **ar1** : (M,) array_like

Input array.

ar2 : array_like

The values against which to test each value of *ar1*.

assume_unique : bool, optional

If True, the input arrays are both assumed to be unique, which can speed up the calculation. Default is False.

invert : bool, optional

If True, the values in the returned array are inverted (that is, False where an element of *ar1* is in *ar2* and True otherwise). Default is False. `np.in1d(a, b, invert=True)` is equivalent to (but is faster than) `np.invert(in1d(a, b))`.

New in version 1.8.0.

Returns **in1d** : (M,) ndarray, bool

The values *ar1[in1d]* are in *ar2*.

See also:

isin Version of this function that preserves the shape of ar1.

numpy.lib.arraysetops Module with a number of other functions for performing set operations on arrays.

Notes

in1d can be considered as an element-wise function version of the python keyword *in*, for 1-D sequences. `in1d(a, b)` is roughly equivalent to `np.array([item in b for item in a])`. However, this idea fails if *ar2* is a set, or similar (non-sequence) container: As `ar2` is converted to an array, in those cases `asarray(ar2)` is an object array rather than the expected array of contained values.

New in version 1.4.0.

Examples

```
>>> test = np.array([0, 1, 2, 5, 0])
>>> states = [0, 2]
>>> mask = np.in1d(test, states)
>>> mask
array([ True, False,  True, False,  True])
>>> test[mask]
array([0, 2, 0])
>>> mask = np.in1d(test, states, invert=True)
>>> mask
array([False,  True, False,  True, False])
>>> test[mask]
array([1, 5])
```

numpy.**intersect1d**(*ar1*, *ar2*, *assume_unique=False*)

Find the intersection of two arrays.

Return the sorted, unique values that are in both of the input arrays.

Parameters **ar1, ar2** : array_like

Input arrays.

assume_unique : bool

If True, the input arrays are both assumed to be unique, which can speed up the calculation. Default is False.

Returns **intersect1d** : ndarray

Sorted 1D array of common and unique elements.

See also:

numpy.lib.arraysetops Module with a number of other functions for performing set operations on arrays.

Examples

```
>>> np.intersect1d([1, 3, 4, 3], [3, 1, 2, 1])
array([1, 3])
```

To intersect more than two arrays, use functools.reduce:

```
>>> from functools import reduce
>>> reduce(np.intersect1d, ([1, 3, 4, 3], [3, 1, 2, 1], [6, 3, 4, 2]))
array([3])
```

numpy.**isin**(*element*, *test_elements*, *assume_unique=False*, *invert=False*)

Calculates *element in test_elements*, broadcasting over *element* only. Returns a boolean array of the same shape as *element* that is True where an element of *element* is in *test_elements* and False otherwise.

Parameters **element** : array_like

Input array.

test_elements : array_like

The values against which to test each value of *element*. This argument is flattened if it is an array or array_like. See notes for behavior with non-array-like parameters.

assume_unique : bool, optional

If True, the input arrays are both assumed to be unique, which can speed up the calculation. Default is False.

invert : bool, optional

If True, the values in the returned array are inverted, as if calculating *element not in test_elements*. Default is False. `np.isin(a, b, invert=True)` is equivalent to (but faster than) `np.invert(np.isin(a, b))`.

Returns **isin** : ndarray, bool

Has the same shape as *element*. The values *element[isin]* are in *test_elements*.

See also:

in1d Flattened version of this function.

numpy.lib.arraysetops Module with a number of other functions for performing set operations on arrays.

Notes

isin is an element-wise function version of the python keyword *in*. `isin(a, b)` is roughly equivalent to `np.array([item in b for item in a])` if *a* and *b* are 1-D sequences.

element and *test_elements* are converted to arrays if they are not already. If *test_elements* is a set (or other non-sequence collection) it will be converted to an object array with one element, rather than an array of the values contained in *test_elements*. This is a consequence of the *array* constructor's way of handling non-sequence collections. Converting the set to a list usually gives the desired behavior.

New in version 1.13.0.

Examples

```
>>> element = 2*np.arange(4).reshape((2, 2))
>>> element
array([[0, 2],
       [4, 6]])
>>> test_elements = [1, 2, 4, 8]
>>> mask = np.isin(element, test_elements)
>>> mask
array([[ False,  True],
       [ True,  False]])
>>> element[mask]
array([2, 4])
>>> mask = np.isin(element, test_elements, invert=True)
>>> mask
array([[ True, False],
       [ False, True]])
>>> element[mask]
array([0, 6])
```

Because of how *array* handles sets, the following does not work as expected:

```
>>> test_set = {1, 2, 4, 8}
>>> np.isin(element, test_set)
array([[ False, False],
       [ False, False]])
```

Casting the set to a list gives the expected result:

```
>>> np.isin(element, list(test_set))
array([[ False,  True],
       [ True,  False]])
```

numpy.**setdiff1d**(*ar1*, *ar2*, *assume_unique=False*)

Find the set difference of two arrays.

Return the sorted, unique values in *ar1* that are not in *ar2*.

Parameters **ar1** : array_like

Input array.

ar2 : array_like

Input comparison array.

assume_unique : bool

If True, the input arrays are both assumed to be unique, which can speed up the calculation. Default is False.

Returns **setdiff1d** : ndarray

Sorted 1D array of values in *ar1* that are not in *ar2*.

See also:

numpy.lib.arraysetops Module with a number of other functions for performing set operations on arrays.

Examples

```
>>> a = np.array([1, 2, 3, 2, 4, 1])
>>> b = np.array([3, 4, 5, 6])
>>> np.setdiff1d(a, b)
array([1, 2])
```

numpy.**setxor1d**(*ar1*, *ar2*, *assume_unique=False*)

Find the set exclusive-or of two arrays.

Return the sorted, unique values that are in only one (not both) of the input arrays.

Parameters **ar1, ar2** : array_like

Input arrays.

assume_unique : bool

If True, the input arrays are both assumed to be unique, which can speed up the calculation. Default is False.

Returns **setxor1d** : ndarray

Sorted 1D array of unique values that are in only one of the input arrays.

Examples

```
>>> a = np.array([1, 2, 3, 2, 4])
>>> b = np.array([2, 3, 5, 7, 5])
>>> np.setxor1d(a,b)
array([1, 4, 5, 7])
```

numpy.**union1d**(*ar1*, *ar2*)

Find the union of two arrays.

Return the unique, sorted array of values that are in either of the two input arrays.

Parameters **ar1, ar2** : array_like

Input arrays. They are flattened if they are not already 1D.

Returns **union1d** : ndarray

Unique, sorted union of the input arrays.

See also:

numpy.lib.arraysetops Module with a number of other functions for performing set operations on arrays.

Examples

```
>>> np.union1d([-1, 0, 1], [-2, 0, 2])
array([-2, -1,  0,  1,  2])
```

To find the union of more than two arrays, use functools.reduce:

```
>>> from functools import reduce
>>> reduce(np.union1d, ([1, 3, 4, 3], [3, 1, 2, 1], [6, 3, 4, 2]))
array([1, 2, 3, 4, 6])
```

3.26 Sorting, searching, and counting

3.26.1 Sorting

sort(a[, axis, kind, order])	Return a sorted copy of an array.
lexsort(keys[, axis])	Perform an indirect sort using a sequence of keys.
argsort(a[, axis, kind, order])	Returns the indices that would sort an array.
ndarray.sort([axis, kind, order])	Sort an array, in-place.
msort(a)	Return a copy of an array sorted along the first axis.
sort_complex(a)	Sort a complex array using the real part first, then the imaginary part.
partition(a, kth[, axis, kind, order])	Return a partitioned copy of an array.
argpartition(a, kth[, axis, kind, order])	Perform an indirect partition along the given axis using the algorithm specified by the *kind* keyword.

numpy.**sort**(*a*, *axis=-1*, *kind='quicksort'*, *order=None*)

Return a sorted copy of an array.

Parameters **a** : array_like

Array to be sorted.

axis : int or None, optional

Axis along which to sort. If None, the array is flattened before sorting. The default is -1, which sorts along the last axis.

kind : {'quicksort', 'mergesort', 'heapsort'}, optional

Sorting algorithm. Default is 'quicksort'.

order : str or list of str, optional

When *a* is an array with fields defined, this argument specifies which fields to compare first, second, etc. A single field can be specified as a string, and not all fields need be specified, but unspecified fields will still be used, in the order in which they come up in the dtype, to break ties.

Returns **sorted_array** : ndarray

Array of the same type and shape as *a*.

See also:

ndarray.sort Method to sort an array in-place.

argsort Indirect sort.

lexsort Indirect stable sort on multiple keys.

searchsorted Find elements in a sorted array.

partition Partial sort.

Notes

The various sorting algorithms are characterized by their average speed, worst case performance, work space size, and whether they are stable. A stable sort keeps items with the same key in the same relative order. The three available algorithms have the following properties:

kind	speed	worst case	work space	stable
'quicksort'	1	O(n^2)	0	no
'mergesort'	2	O(n*log(n))	~n/2	yes
'heapsort'	3	O(n*log(n))	0	no

All the sort algorithms make temporary copies of the data when sorting along any but the last axis. Consequently, sorting along the last axis is faster and uses less space than sorting along any other axis.

The sort order for complex numbers is lexicographic. If both the real and imaginary parts are non-nan then the order is determined by the real parts except when they are equal, in which case the order is determined by the imaginary parts.

Previous to numpy 1.4.0 sorting real and complex arrays containing nan values led to undefined behaviour. In numpy versions >= 1.4.0 nan values are sorted to the end. The extended sort order is:

- Real: [R, nan]

- Complex: [R + Rj, R + nanj, nan + Rj, nan + nanj]

where R is a non-nan real value. Complex values with the same nan placements are sorted according to the non-nan part if it exists. Non-nan values are sorted as before.

New in version 1.12.0.

quicksort has been changed to an introsort which will switch heapsort when it does not make enough progress. This makes its worst case O(n*log(n)).

Examples

```
>>> a = np.array([[1,4],[3,1]])
>>> np.sort(a)                # sort along the last axis
array([[1, 4],
       [1, 3]])
>>> np.sort(a, axis=None)     # sort the flattened array
array([1, 1, 3, 4])
>>> np.sort(a, axis=0)        # sort along the first axis
array([[1, 1],
       [3, 4]])
```

Use the *order* keyword to specify a field to use when sorting a structured array:

```
>>> dtype = [('name', 'S10'), ('height', float), ('age', int)]
>>> values = [('Arthur', 1.8, 41), ('Lancelot', 1.9, 38),
...           ('Galahad', 1.7, 38)]
>>> a = np.array(values, dtype=dtype)       # create a structured array
>>> np.sort(a, order='height')
array([('Galahad', 1.7, 38), ('Arthur', 1.8, 41),
       ('Lancelot', 1.8999999999999999, 38)],
      dtype=[('name', '|S10'), ('height', '<f8'), ('age', '<i4')])
```

Sort by age, then height if ages are equal:

```
>>> np.sort(a, order=['age', 'height'])
array([('Galahad', 1.7, 38), ('Lancelot', 1.8999999999999999, 38),
       ('Arthur', 1.8, 41)],
      dtype=[('name', '|S10'), ('height', '<f8'), ('age', '<i4')])
```

numpy.**lexsort**(*keys*, *axis=-1*)

Perform an indirect sort using a sequence of keys.

Given multiple sorting keys, which can be interpreted as columns in a spreadsheet, lexsort returns an array of integer indices that describes the sort order by multiple columns. The last key in the sequence is used for the primary sort order, the second-to-last key for the secondary sort order, and so on. The keys argument must be a sequence of objects that can be converted to arrays of the same shape. If a 2D array is provided for the keys argument, it's rows are interpreted as the sorting keys and sorting is according to the last row, second last row etc.

Parameters **keys** : (k, N) array or tuple containing k (N,)-shaped sequences

The *k* different "columns" to be sorted. The last column (or row if *keys* is a 2D array) is the primary sort key.

axis : int, optional

Axis to be indirectly sorted. By default, sort over the last axis.

Returns **indices** : (N,) ndarray of ints

Array of indices that sort the keys along the specified axis.

See also:

argsort Indirect sort.

ndarray.sort In-place sort.

sort Return a sorted copy of an array.

Examples

Sort names: first by surname, then by name.

```
>>> surnames =    ('Hertz',    'Galilei', 'Hertz')
>>> first_names = ('Heinrich', 'Galileo', 'Gustav')
>>> ind = np.lexsort((first_names, surnames))
>>> ind
array([1, 2, 0])
```

```
>>> [surnames[i] + ", " + first_names[i] for i in ind]
['Galilei, Galileo', 'Hertz, Gustav', 'Hertz, Heinrich']
```

Sort two columns of numbers:

```
>>> a = [1,5,1,4,3,4,4] # First column
>>> b = [9,4,0,4,0,2,1] # Second column
>>> ind = np.lexsort((b,a)) # Sort by a, then by b
>>> print(ind)
[2 0 4 6 5 3 1]
```

```
>>> [(a[i],b[i]) for i in ind]
[(1, 0), (1, 9), (3, 0), (4, 1), (4, 2), (4, 4), (5, 4)]
```

Note that sorting is first according to the elements of `a`. Secondary sorting is according to the elements of `b`.

A normal `argsort` would have yielded:

```
>>> [(a[i],b[i]) for i in np.argsort(a)]
[(1, 9), (1, 0), (3, 0), (4, 4), (4, 2), (4, 1), (5, 4)]
```

Structured arrays are sorted lexically by `argsort`:

```
>>> x = np.array([(1,9), (5,4), (1,0), (4,4), (3,0), (4,2), (4,1)],
...              dtype=np.dtype([('x', int), ('y', int)]))
```

```
>>> np.argsort(x) # or np.argsort(x, order=('x', 'y'))
array([2, 0, 4, 6, 5, 3, 1])
```

numpy.**argsort**(*a*, *axis=-1*, *kind='quicksort'*, *order=None*)

Returns the indices that would sort an array.

Perform an indirect sort along the given axis using the algorithm specified by the *kind* keyword. It returns an array of indices of the same shape as *a* that index data along the given axis in sorted order.

Parameters **a** : array_like

Array to sort.

axis : int or None, optional

Axis along which to sort. The default is -1 (the last axis). If None, the flattened array is used.

kind : {'quicksort', 'mergesort', 'heapsort'}, optional

Sorting algorithm.

order : str or list of str, optional

When *a* is an array with fields defined, this argument specifies which fields to compare first, second, etc. A single field can be specified as a string, and not all fields need be specified, but unspecified fields will still be used, in the order in which they come up in the dtype, to break ties.

Returns **index_array** : ndarray, int

Array of indices that sort *a* along the specified axis. If *a* is one-dimensional, `a[index_array]` yields a sorted *a*.

See also:

sort Describes sorting algorithms used.

lexsort Indirect stable sort with multiple keys.

ndarray.sort Inplace sort.

argpartition Indirect partial sort.

Notes

See *sort* for notes on the different sorting algorithms.

As of NumPy 1.4.0 *argsort* works with real/complex arrays containing nan values. The enhanced sort order is documented in *sort*.

Examples

One dimensional array:

```
>>> x = np.array([3, 1, 2])
>>> np.argsort(x)
array([1, 2, 0])
```

Two-dimensional array:

```
>>> x = np.array([[0, 3], [2, 2]])
>>> x
array([[0, 3],
       [2, 2]])
```

```
>>> np.argsort(x, axis=0)  # sorts along first axis (down)
array([[0, 1],
       [1, 0]])
```

```
>>> np.argsort(x, axis=1)  # sorts along last axis (across)
array([[0, 1],
       [0, 1]])
```

Indices of the sorted elements of a N-dimensional array:

```
>>> ind = np.unravel_index(np.argsort(x, axis=None), x.shape)
>>> ind
(array([0, 1, 1, 0]), array([0, 0, 1, 1]))
>>> x[ind]  # same as np.sort(x, axis=None)
array([0, 2, 2, 3])
```

Sorting with keys:

```
>>> x = np.array([(1, 0), (0, 1)], dtype=[('x', '<i4'), ('y', '<i4')])
>>> x
array([(1, 0), (0, 1)],
      dtype=[('x', '<i4'), ('y', '<i4')])
```

```
>>> np.argsort(x, order=('x','y'))
array([1, 0])
```

```
>>> np.argsort(x, order=('y','x'))
array([0, 1])
```

numpy.**msort**(*a*)

Return a copy of an array sorted along the first axis.

Parameters **a** : array_like

Array to be sorted.

Returns **sorted_array** : ndarray

Array of the same type and shape as *a*.

See also:

sort

Notes

`np.msort(a)` is equivalent to `np.sort(a, axis=0)`.

numpy.**sort_complex**(*a*)

Sort a complex array using the real part first, then the imaginary part.

Parameters **a** : array_like

Input array

Returns **out** : complex ndarray

Always returns a sorted complex array.

Examples

```
>>> np.sort_complex([5, 3, 6, 2, 1])
array([ 1.+0.j,  2.+0.j,  3.+0.j,  5.+0.j,  6.+0.j])
```

```
>>> np.sort_complex([1 + 2j, 2 - 1j, 3 - 2j, 3 - 3j, 3 + 5j])
array([ 1.+2.j,  2.-1.j,  3.-3.j,  3.-2.j,  3.+5.j])
```

numpy.**partition**(*a*, *kth*, *axis=-1*, *kind='introselect'*, *order=None*)

Return a partitioned copy of an array.

Creates a copy of the array with its elements rearranged in such a way that the value of the element in k-th position is in the position it would be in a sorted array. All elements smaller than the k-th element are moved before this element and all equal or greater are moved behind it. The ordering of the elements in the two partitions is undefined.

New in version 1.8.0.

Parameters **a** : array_like

Array to be sorted.

kth : int or sequence of ints

Element index to partition by. The k-th value of the element will be in its final sorted position and all smaller elements will be moved before it and all equal or greater elements behind it. The order all elements in the partitions is undefined. If provided with a sequence of k-th it will partition all elements indexed by k-th of them into their sorted position at once.

axis : int or None, optional

Axis along which to sort. If None, the array is flattened before sorting. The default is -1, which sorts along the last axis.

kind : {'introselect'}, optional

Selection algorithm. Default is 'introselect'.

order : str or list of str, optional

When *a* is an array with fields defined, this argument specifies which fields to compare first, second, etc. A single field can be specified as a string. Not all fields need be specified, but unspecified fields will still be used, in the order in which they come up in the dtype, to break ties.

Returns **partitioned_array** : ndarray

Array of the same type and shape as *a*.

See also:

ndarray.partition Method to sort an array in-place.

argpartition Indirect partition.

sort Full sorting

Notes

The various selection algorithms are characterized by their average speed, worst case performance, work space size, and whether they are stable. A stable sort keeps items with the same key in the same relative order. The available algorithms have the following properties:

kind	speed	worst case	work space	stable
'introselect'	1	O(n)	0	no

All the partition algorithms make temporary copies of the data when partitioning along any but the last axis. Consequently, partitioning along the last axis is faster and uses less space than partitioning along any other axis.

The sort order for complex numbers is lexicographic. If both the real and imaginary parts are non-nan then the order is determined by the real parts except when they are equal, in which case the order is determined by the imaginary parts.

Examples

```
>>> a = np.array([3, 4, 2, 1])
>>> np.partition(a, 3)
array([2, 1, 3, 4])
```

```
>>> np.partition(a, (1, 3))
array([1, 2, 3, 4])
```

numpy.**argpartition**(*a*, *kth*, *axis=-1*, *kind='introselect'*, *order=None*)

Perform an indirect partition along the given axis using the algorithm specified by the *kind* keyword. It returns an array of indices of the same shape as *a* that index data along the given axis in partitioned order.

New in version 1.8.0.

Parameters **a** : array_like

Array to sort.

kth : int or sequence of ints

Element index to partition by. The k-th element will be in its final sorted position and all smaller elements will be moved before it and all larger elements behind it. The order all elements in the partitions is undefined. If provided with a sequence of k-th it will partition all of them into their sorted position at once.

axis : int or None, optional

Axis along which to sort. The default is -1 (the last axis). If None, the flattened array is used.

kind : {'introselect'}, optional

Selection algorithm. Default is 'introselect'

order : str or list of str, optional

When *a* is an array with fields defined, this argument specifies which fields to compare first, second, etc. A single field can be specified as a string, and not all fields need be specified, but unspecified fields will still be used, in the order in which they come up in the dtype, to break ties.

Returns **index_array** : ndarray, int

Array of indices that partition *a* along the specified axis. In other words, `a[index_array]` yields a partitioned *a*.

See also:

partition Describes partition algorithms used.

ndarray.partition Inplace partition.

argsort Full indirect sort

Notes

See *partition* for notes on the different selection algorithms.

Examples

One dimensional array:

```
>>> x = np.array([3, 4, 2, 1])
>>> x[np.argpartition(x, 3)]
array([2, 1, 3, 4])
>>> x[np.argpartition(x, (1, 3))]
array([1, 2, 3, 4])
```

```
>>> x = [3, 4, 2, 1]
>>> np.array(x)[np.argpartition(x, 3)]
array([2, 1, 3, 4])
```

3.26.2 Searching

argmax(a[, axis, out])	Returns the indices of the maximum values along an axis.
nanargmax(a[, axis])	Return the indices of the maximum values in the specified axis ignoring NaNs.
argmin(a[, axis, out])	Returns the indices of the minimum values along an axis.
nanargmin(a[, axis])	Return the indices of the minimum values in the specified axis ignoring NaNs.
argwhere(a)	Find the indices of array elements that are non-zero, grouped by element.
nonzero(a)	Return the indices of the elements that are non-zero.
flatnonzero(a)	Return indices that are non-zero in the flattened version of a.
where(condition, [x, y])	Return elements, either from *x* or *y*, depending on *condition*.
searchsorted(a, v[, side, sorter])	Find indices where elements should be inserted to maintain order.
extract(condition, arr)	Return the elements of an array that satisfy some condition.

numpy.**argmax**(*a*, *axis=None*, *out=None*)

Returns the indices of the maximum values along an axis.

Parameters **a** : array_like

Input array.

axis : int, optional

By default, the index is into the flattened array, otherwise along the specified axis.

out : array, optional

If provided, the result will be inserted into this array. It should be of the appropriate shape and dtype.

Returns **index_array** : ndarray of ints

Array of indices into the array. It has the same shape as *a.shape* with the dimension along *axis* removed.

See also:

ndarray.argmax, *argmin*

amax The maximum value along a given axis.

unravel_index Convert a flat index into an index tuple.

Notes

In case of multiple occurrences of the maximum values, the indices corresponding to the first occurrence are returned.

Examples

```
>>> a = np.arange(6).reshape(2,3)
>>> a
array([[0, 1, 2],
       [3, 4, 5]])
>>> np.argmax(a)
5
>>> np.argmax(a, axis=0)
array([1, 1, 1])
>>> np.argmax(a, axis=1)
array([2, 2])
```

Indexes of the maximal elements of a N-dimensional array:

```
>>> ind = np.unravel_index(np.argmax(a, axis=None), a.shape)
>>> ind
(1, 2)
>>> a[ind]
5
```

```
>>> b = np.arange(6)
>>> b[1] = 5
>>> b
array([0, 5, 2, 3, 4, 5])
>>> np.argmax(b)  # Only the first occurrence is returned.
1
```

numpy.**nanargmax**(*a*, *axis=None*)

Return the indices of the maximum values in the specified axis ignoring NaNs. For all-NaN slices `ValueError` is raised. Warning: the results cannot be trusted if a slice contains only NaNs and -Infs.

Parameters **a** : array_like

Input data.

axis : int, optional

Axis along which to operate. By default flattened input is used.

Returns **index_array** : ndarray

An array of indices or a single index value.

See also:

argmax, *nanargmin*

Examples

```
>>> a = np.array([[np.nan, 4], [2, 3]])
>>> np.argmax(a)
0
>>> np.nanargmax(a)
1
>>> np.nanargmax(a, axis=0)
array([1, 0])
>>> np.nanargmax(a, axis=1)
array([1, 1])
```

numpy.**argmin**(*a*, *axis=None*, *out=None*)

Returns the indices of the minimum values along an axis.

Parameters **a** : array_like

Input array.

axis : int, optional

By default, the index is into the flattened array, otherwise along the specified axis.

out : array, optional

If provided, the result will be inserted into this array. It should be of the appropriate shape and dtype.

Returns **index_array** : ndarray of ints

Array of indices into the array. It has the same shape as *a.shape* with the dimension along *axis* removed.

See also:

ndarray.argmin, *argmax*

amin The minimum value along a given axis.

unravel_index Convert a flat index into an index tuple.

Notes

In case of multiple occurrences of the minimum values, the indices corresponding to the first occurrence are returned.

Examples

```
>>> a = np.arange(6).reshape(2,3)
>>> a
array([[0, 1, 2],
       [3, 4, 5]])
>>> np.argmin(a)
0
>>> np.argmin(a, axis=0)
array([0, 0, 0])
>>> np.argmin(a, axis=1)
array([0, 0])
```

Indices of the minimum elements of a N-dimensional array:

```
>>> ind = np.unravel_index(np.argmin(a, axis=None), a.shape)
>>> ind
(0, 0)
>>> a[ind]
0
```

```
>>> b = np.arange(6)
>>> b[4] = 0
>>> b
array([0, 1, 2, 3, 0, 5])
>>> np.argmin(b)  # Only the first occurrence is returned.
0
```

numpy.**nanargmin**(*a*, *axis=None*)

Return the indices of the minimum values in the specified axis ignoring NaNs. For all-NaN slices `ValueError` is raised. Warning: the results cannot be trusted if a slice contains only NaNs and Infs.

Parameters **a** : array_like

Input data.

axis : int, optional

Axis along which to operate. By default flattened input is used.

Returns **index_array** : ndarray

An array of indices or a single index value.

See also:

argmin, *nanargmax*

Examples

```
>>> a = np.array([[np.nan, 4], [2, 3]])
>>> np.argmin(a)
0
>>> np.nanargmin(a)
2
>>> np.nanargmin(a, axis=0)
array([1, 1])
>>> np.nanargmin(a, axis=1)
array([1, 0])
```

numpy.**argwhere**(*a*)

Find the indices of array elements that are non-zero, grouped by element.

Parameters **a** : array_like

Input data.

Returns **index_array** : ndarray

Indices of elements that are non-zero. Indices are grouped by element.

See also:

where, *nonzero*

Notes

`np.argwhere(a)` is the same as `np.transpose(np.nonzero(a))`.

The output of `argwhere` is not suitable for indexing arrays. For this purpose use `nonzero(a)` instead.

Examples

```
>>> x = np.arange(6).reshape(2,3)
>>> x
array([[0, 1, 2],
       [3, 4, 5]])
>>> np.argwhere(x>1)
array([[0, 2],
       [1, 0],
       [1, 1],
       [1, 2]])
```

numpy.**flatnonzero**(*a*)

Return indices that are non-zero in the flattened version of a.

This is equivalent to a.ravel().nonzero()[0].

Parameters **a** : ndarray

Input array.

Returns **res** : ndarray

Output array, containing the indices of the elements of *a.ravel()* that are non-zero.

See also:

nonzero Return the indices of the non-zero elements of the input array.

ravel Return a 1-D array containing the elements of the input array.

Examples

```
>>> x = np.arange(-2, 3)
>>> x
array([-2, -1,  0,  1,  2])
>>> np.flatnonzero(x)
array([0, 1, 3, 4])
```

Use the indices of the non-zero elements as an index array to extract these elements:

```
>>> x.ravel()[np.flatnonzero(x)]
array([-2, -1,  1,  2])
```

numpy.**searchsorted**(*a*, *v*, *side='left'*, *sorter=None*)

Find indices where elements should be inserted to maintain order.

Find the indices into a sorted array *a* such that, if the corresponding elements in *v* were inserted before the indices, the order of *a* would be preserved.

Parameters **a** : 1-D array_like

Input array. If *sorter* is None, then it must be sorted in ascending order, otherwise *sorter* must be an array of indices that sort it.

v : array_like

Values to insert into *a*.

side : {'left', 'right'}, optional

If 'left', the index of the first suitable location found is given. If 'right', return the last such index. If there is no suitable index, return either 0 or N (where N is the length of *a*).

sorter : 1-D array_like, optional

Optional array of integer indices that sort array a into ascending order. They are typically the result of argsort.

New in version 1.7.0.

Returns **indices** : array of ints

Array of insertion points with the same shape as *v*.

See also:

sort Return a sorted copy of an array.

histogram Produce histogram from 1-D data.

Notes

Binary search is used to find the required insertion points.

As of NumPy 1.4.0 *searchsorted* works with real/complex arrays containing `nan` values. The enhanced sort order is documented in *sort*.

Examples

```
>>> np.searchsorted([1,2,3,4,5], 3)
2
>>> np.searchsorted([1,2,3,4,5], 3, side='right')
3
>>> np.searchsorted([1,2,3,4,5], [-10, 10, 2, 3])
array([0, 5, 1, 2])
```

numpy.**extract**(*condition*, *arr*)

Return the elements of an array that satisfy some condition.

This is equivalent to `np.compress(ravel(condition), ravel(arr))`. If *condition* is boolean `np.extract` is equivalent to `arr[condition]`.

Note that *place* does the exact opposite of *extract*.

Parameters **condition** : array_like

An array whose nonzero or True entries indicate the elements of *arr* to extract.

arr : array_like

Input array of the same size as *condition*.

Returns **extract** : ndarray

Rank 1 array of values from *arr* where *condition* is True.

See also:

take, *put*, *copyto*, *compress*, *place*

Examples

```
>>> arr = np.arange(12).reshape((3, 4))
>>> arr
array([[ 0,  1,  2,  3],
       [ 4,  5,  6,  7],
       [ 8,  9, 10, 11]])
>>> condition = np.mod(arr, 3)==0
>>> condition
array([[ True, False, False,  True],
       [False, False,  True, False],
       [False,  True, False, False]])
>>> np.extract(condition, arr)
array([0, 3, 6, 9])
```

If *condition* is boolean:

```
>>> arr[condition]
array([0, 3, 6, 9])
```

3.26.3 Counting

count_nonzero(a[, axis])	Counts the number of non-zero values in the array a.

numpy.**count_nonzero**(*a*, *axis=None*)

Counts the number of non-zero values in the array a.

The word "non-zero" is in reference to the Python 2.x built-in method __nonzero__() (renamed __bool__() in Python 3.x) of Python objects that tests an object's "truthfulness". For example, any number is considered truthful if it is nonzero, whereas any string is considered truthful if it is not the empty string. Thus, this function (recursively) counts how many elements in a (and in sub-arrays thereof) have their __nonzero__() or __bool__() method evaluated to True.

Parameters **a** : array_like

The array for which to count non-zeros.

axis : int or tuple, optional

Axis or tuple of axes along which to count non-zeros. Default is None, meaning that non-zeros will be counted along a flattened version of a.

New in version 1.12.0.

Returns **count** : int or array of int

Number of non-zero values in the array along a given axis. Otherwise, the total number of non-zero values in the array is returned.

See also:

nonzero Return the coordinates of all the non-zero values.

Examples

```
>>> np.count_nonzero(np.eye(4))
4
>>> np.count_nonzero([[0,1,7,0,0],[3,0,0,2,19]])
5
>>> np.count_nonzero([[0,1,7,0,0],[3,0,0,2,19]], axis=0)
array([1, 1, 1, 1, 1])
>>> np.count_nonzero([[0,1,7,0,0],[3,0,0,2,19]], axis=1)
array([2, 3])
```

3.27 Statistics

3.27.1 Order statistics

amin(a[, axis, out, keepdims])	Return the minimum of an array or minimum along an axis.
amax(a[, axis, out, keepdims])	Return the maximum of an array or maximum along an axis.
nanmin(a[, axis, out, keepdims])	Return minimum of an array or minimum along an axis, ignoring any NaNs.
nanmax(a[, axis, out, keepdims])	Return the maximum of an array or maximum along an axis, ignoring any NaNs.

Continued on next page

Table 166 – continued from previous page

ptp(a[, axis, out])	Range of values (maximum - minimum) along an axis.
percentile(a, q[, axis, out, ...])	Compute the qth percentile of the data along the specified axis.
nanpercentile(a, q[, axis, out, ...])	Compute the qth percentile of the data along the specified axis, while ignoring nan values.

numpy.**amin**(*a*, *axis=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Return the minimum of an array or minimum along an axis.

Parameters **a** : array_like

Input data.

axis : None or int or tuple of ints, optional

Axis or axes along which to operate. By default, flattened input is used.

New in version 1.7.0.

If this is a tuple of ints, the minimum is selected over multiple axes, instead of a single axis or all the axes as before.

out : ndarray, optional

Alternative output array in which to place the result. Must be of the same shape and buffer length as the expected output. See `doc.ufuncs` (Section "Output arguments") for more details.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the input array.

If the default value is passed, then *keepdims* will not be passed through to the *amin* method of sub-classes of *ndarray*, however any non-default value will be. If the sub-classes *sum* method does not implement *keepdims* any exceptions will be raised.

Returns **amin** : ndarray or scalar

Minimum of *a*. If *axis* is None, the result is a scalar value. If *axis* is given, the result is an array of dimension `a.ndim - 1`.

See also:

amax The maximum value of an array along a given axis, propagating any NaNs.

nanmin The minimum value of an array along a given axis, ignoring any NaNs.

minimum Element-wise minimum of two arrays, propagating any NaNs.

fmin Element-wise minimum of two arrays, ignoring any NaNs.

argmin Return the indices of the minimum values.

nanmax, *maximum*, *fmax*

Notes

NaN values are propagated, that is if at least one item is NaN, the corresponding min value will be NaN as well. To ignore NaN values (MATLAB behavior), please use nanmin.

Don't use *amin* for element-wise comparison of 2 arrays; when `a.shape[0]` is 2, `minimum(a[0], a[1])` is faster than `amin(a, axis=0)`.

Examples

```
>>> a = np.arange(4).reshape((2,2))
>>> a
array([[0, 1],
       [2, 3]])
>>> np.amin(a)           # Minimum of the flattened array
0
>>> np.amin(a, axis=0)   # Minima along the first axis
array([0, 1])
>>> np.amin(a, axis=1)   # Minima along the second axis
array([0, 2])
```

```
>>> b = np.arange(5, dtype=float)
>>> b[2] = np.NaN
>>> np.amin(b)
nan
>>> np.nanmin(b)
0.0
```

numpy.**amax**(*a*, *axis=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Return the maximum of an array or maximum along an axis.

Parameters **a** : array_like

Input data.

axis : None or int or tuple of ints, optional

Axis or axes along which to operate. By default, flattened input is used.

New in version 1.7.0.

If this is a tuple of ints, the maximum is selected over multiple axes, instead of a single axis or all the axes as before.

out : ndarray, optional

Alternative output array in which to place the result. Must be of the same shape and buffer length as the expected output. See `doc.ufuncs` (Section "Output arguments") for more details.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the input array.

If the default value is passed, then *keepdims* will not be passed through to the *amax* method of sub-classes of *ndarray*, however any non-default value will be. If the sub-classes *sum* method does not implement *keepdims* any exceptions will be raised.

Returns **amax** : ndarray or scalar

Maximum of *a*. If *axis* is None, the result is a scalar value. If *axis* is given, the result is an array of dimension `a.ndim - 1`.

See also:

amin The minimum value of an array along a given axis, propagating any NaNs.

nanmax The maximum value of an array along a given axis, ignoring any NaNs.

maximum Element-wise maximum of two arrays, propagating any NaNs.

fmax Element-wise maximum of two arrays, ignoring any NaNs.

argmax Return the indices of the maximum values.

nanmin, *minimum*, *fmin*

Notes

NaN values are propagated, that is if at least one item is NaN, the corresponding max value will be NaN as well. To ignore NaN values (MATLAB behavior), please use nanmax.

Don't use *amax* for element-wise comparison of 2 arrays; when `a.shape[0]` is 2, `maximum(a[0], a[1])` is faster than `amax(a, axis=0)`.

Examples

```
>>> a = np.arange(4).reshape((2,2))
>>> a
array([[0, 1],
       [2, 3]])
>>> np.amax(a)           # Maximum of the flattened array
3
>>> np.amax(a, axis=0)   # Maxima along the first axis
array([2, 3])
>>> np.amax(a, axis=1)   # Maxima along the second axis
array([1, 3])
```

```
>>> b = np.arange(5, dtype=float)
>>> b[2] = np.NaN
>>> np.amax(b)
nan
>>> np.nanmax(b)
4.0
```

numpy.**nanmin**(*a*, *axis=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Return minimum of an array or minimum along an axis, ignoring any NaNs. When all-NaN slices are encountered a `RuntimeWarning` is raised and Nan is returned for that slice.

Parameters **a** : array_like

Array containing numbers whose minimum is desired. If *a* is not an array, a conversion is attempted.

axis : int, optional

Axis along which the minimum is computed. The default is to compute the minimum of the flattened array.

out : ndarray, optional

Alternate output array in which to place the result. The default is `None`; if provided, it must have the same shape as the expected output, but the type will be cast if necessary. See `doc.ufuncs` for details.

New in version 1.8.0.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the original *a*.

If the value is anything but the default, then *keepdims* will be passed through to the `min` method of sub-classes of *ndarray*. If the sub-classes methods does not implement *keepdims* any exceptions will be raised.

New in version 1.8.0.

Returns **nanmin** : ndarray

An array with the same shape as *a*, with the specified axis removed. If *a* is a 0-d array, or if axis is None, an ndarray scalar is returned. The same dtype as *a* is returned.

See also:

nanmax The maximum value of an array along a given axis, ignoring any NaNs.

amin The minimum value of an array along a given axis, propagating any NaNs.

fmin Element-wise minimum of two arrays, ignoring any NaNs.

minimum Element-wise minimum of two arrays, propagating any NaNs.

isnan Shows which elements are Not a Number (NaN).

isfinite Shows which elements are neither NaN nor infinity.

amax, *fmax*, *maximum*

Notes

NumPy uses the IEEE Standard for Binary Floating-Point for Arithmetic (IEEE 754). This means that Not a Number is not equivalent to infinity. Positive infinity is treated as a very large number and negative infinity is treated as a very small (i.e. negative) number.

If the input has a integer type the function is equivalent to np.min.

Examples

```
>>> a = np.array([[1, 2], [3, np.nan]])
>>> np.nanmin(a)
1.0
>>> np.nanmin(a, axis=0)
array([ 1.,  2.])
>>> np.nanmin(a, axis=1)
array([ 1.,  3.])
```

When positive infinity and negative infinity are present:

```
>>> np.nanmin([1, 2, np.nan, np.inf])
1.0
>>> np.nanmin([1, 2, np.nan, np.NINF])
-inf
```

numpy.**nanmax**(*a*, *axis=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Return the maximum of an array or maximum along an axis, ignoring any NaNs. When all-NaN slices are encountered a `RuntimeWarning` is raised and NaN is returned for that slice.

Parameters **a** : array_like

Array containing numbers whose maximum is desired. If *a* is not an array, a conversion is attempted.

axis : int, optional

Axis along which the maximum is computed. The default is to compute the maximum of the flattened array.

out : ndarray, optional

Alternate output array in which to place the result. The default is `None`; if provided, it must have the same shape as the expected output, but the type will be cast if necessary. See `doc.ufuncs` for details.

New in version 1.8.0.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the original *a*.

If the value is anything but the default, then *keepdims* will be passed through to the `max` method of sub-classes of *ndarray*. If the sub-classes methods does not implement *keepdims* any exceptions will be raised.

New in version 1.8.0.

Returns **nanmax** : ndarray

An array with the same shape as *a*, with the specified axis removed. If *a* is a 0-d array, or if axis is None, an ndarray scalar is returned. The same dtype as *a* is returned.

See also:

nanmin The minimum value of an array along a given axis, ignoring any NaNs.

amax The maximum value of an array along a given axis, propagating any NaNs.

fmax Element-wise maximum of two arrays, ignoring any NaNs.

maximum Element-wise maximum of two arrays, propagating any NaNs.

isnan Shows which elements are Not a Number (NaN).

isfinite Shows which elements are neither NaN nor infinity.

amin, *fmin*, *minimum*

Notes

NumPy uses the IEEE Standard for Binary Floating-Point for Arithmetic (IEEE 754). This means that Not a Number is not equivalent to infinity. Positive infinity is treated as a very large number and negative infinity is treated as a very small (i.e. negative) number.

If the input has a integer type the function is equivalent to np.max.

Examples

```
>>> a = np.array([[1, 2], [3, np.nan]])
>>> np.nanmax(a)
3.0
>>> np.nanmax(a, axis=0)
array([ 3.,  2.])
>>> np.nanmax(a, axis=1)
array([ 2.,  3.])
```

When positive infinity and negative infinity are present:

```
>>> np.nanmax([1, 2, np.nan, np.NINF])
2.0
>>> np.nanmax([1, 2, np.nan, np.inf])
inf
```

numpy.**ptp**(*a*, *axis=None*, *out=None*)

Range of values (maximum - minimum) along an axis.

The name of the function comes from the acronym for 'peak to peak'.

Parameters **a** : array_like

Input values.

axis : int, optional

Axis along which to find the peaks. By default, flatten the array.

out : array_like

Alternative output array in which to place the result. It must have the same shape and buffer length as the expected output, but the type of the output values will be cast if necessary.

Returns **ptp** : ndarray

A new array holding the result, unless *out* was specified, in which case a reference to *out* is returned.

Examples

```
>>> x = np.arange(4).reshape((2,2))
>>> x
array([[0, 1],
       [2, 3]])
```

```
>>> np.ptp(x, axis=0)
array([2, 2])
```

```
>>> np.ptp(x, axis=1)
array([1, 1])
```

numpy.**percentile**(*a*, *q*, *axis=None*, *out=None*, *overwrite_input=False*, *interpolation='linear'*, *keepdims=False*)

Compute the qth percentile of the data along the specified axis.

Returns the qth percentile(s) of the array elements.

Parameters **a** : array_like

Input array or object that can be converted to an array.

q : float in range of [0,100] (or sequence of floats)

Percentile to compute, which must be between 0 and 100 inclusive.

axis : {int, sequence of int, None}, optional

Axis or axes along which the percentiles are computed. The default is to compute the percentile(s) along a flattened version of the array. A sequence of axes is supported since version 1.9.0.

out : ndarray, optional

Alternative output array in which to place the result. It must have the same shape and buffer length as the expected output, but the type (of the output) will be cast if necessary.

overwrite_input : bool, optional

If True, then allow use of memory of input array *a* calculations. The input array will be modified by the call to *percentile*. This will save memory when you do not need to preserve the contents of the input array. In this case you should not make any assumptions about the contents of the input *a* after this function completes – treat it as undefined. Default is False. If *a* is not already an array, this parameter will have no effect as *a* will be converted to an array internally regardless of the value of this parameter.

interpolation : {'linear', 'lower', 'higher', 'midpoint', 'nearest'}

This optional parameter specifies the interpolation method to use when the desired quantile lies between two data points `i < j`:

- linear: `i + (j - i) * fraction`, where `fraction` is the fractional part of the index surrounded by `i` and `j`.
- lower: `i`.
- higher: `j`.
- nearest: `i` or `j`, whichever is nearest.
- midpoint: `(i + j) / 2`.

New in version 1.9.0.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the original array *a*.

New in version 1.9.0.

Returns **percentile** : scalar or ndarray

If *q* is a single percentile and *axis=None*, then the result is a scalar. If multiple percentiles are given, first axis of the result corresponds to the percentiles. The other axes are the axes that remain after the reduction of *a*. If the input contains integers or floats smaller than `float64`, the output data-type is `float64`. Otherwise, the output data-type is the same as that of the input. If *out* is specified, that array is returned instead.

See also:

mean, *median*, *nanpercentile*

Notes

Given a vector `V` of length `N`, the `q`-th percentile of `V` is the value `q/100` of the way from the minimum to the maximum in a sorted copy of `V`. The values and distances of the two nearest neighbors as well as the *interpolation* parameter will determine the percentile if the normalized ranking does not match the location of `q` exactly. This function is the same as the median if `q=50`, the same as the minimum if `q=0` and the same as the maximum if `q=100`.

Examples

```
>>> a = np.array([[10, 7, 4], [3, 2, 1]])
>>> a
array([[10,  7,  4],
       [ 3,  2,  1]])
>>> np.percentile(a, 50)
3.5
>>> np.percentile(a, 50, axis=0)
array([[ 6.5,  4.5,  2.5]])
>>> np.percentile(a, 50, axis=1)
array([ 7.,  2.])
>>> np.percentile(a, 50, axis=1, keepdims=True)
array([[ 7.],
       [ 2.]])
```

```
>>> m = np.percentile(a, 50, axis=0)
>>> out = np.zeros_like(m)
>>> np.percentile(a, 50, axis=0, out=out)
array([[ 6.5,  4.5,  2.5]])
>>> m
array([[ 6.5,  4.5,  2.5]])
```

```
>>> b = a.copy()
>>> np.percentile(b, 50, axis=1, overwrite_input=True)
array([ 7.,  2.])
>>> assert not np.all(a == b)
```

numpy.**nanpercentile**(*a*, *q*, *axis=None*, *out=None*, *overwrite_input=False*, *interpolation='linear'*, *keepdims=<class 'numpy._globals._NoValue'>*)

Compute the qth percentile of the data along the specified axis, while ignoring nan values.

Returns the qth percentile(s) of the array elements.

New in version 1.9.0.

Parameters **a** : array_like

Input array or object that can be converted to an array.

q : float in range of [0,100] (or sequence of floats)

Percentile to compute, which must be between 0 and 100 inclusive.

axis : {int, sequence of int, None}, optional

Axis or axes along which the percentiles are computed. The default is to compute the percentile(s) along a flattened version of the array. A sequence of axes is supported since version 1.9.0.

out : ndarray, optional

Alternative output array in which to place the result. It must have the same shape and buffer length as the expected output, but the type (of the output) will be cast if necessary.

overwrite_input : bool, optional

If True, then allow use of memory of input array *a* for calculations. The input array will be modified by the call to *percentile*. This will save memory when you do not need to preserve the contents of the input array. In this case you should not make any assumptions about the contents of the input *a* after this function completes – treat it as undefined. Default is False. If *a* is not already an array, this parameter will have no effect as *a* will be converted to an array internally regardless of the value of this parameter.

interpolation : {'linear', 'lower', 'higher', 'midpoint', 'nearest'}

This optional parameter specifies the interpolation method to use when the desired quantile lies between two data points `i < j`:

- linear: `i + (j - i) * fraction`, where `fraction` is the fractional part of the index surrounded by `i` and `j`.
- lower: `i`.
- higher: `j`.
- nearest: `i` or `j`, whichever is nearest.
- midpoint: `(i + j) / 2`.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the original array *a*.

If this is anything but the default value it will be passed through (in the special case of an empty array) to the *mean* function of the underlying array. If the array is a sub-class and *mean* does not have the kwarg *keepdims* this will raise a RuntimeError.

Returns **percentile** : scalar or ndarray

If *q* is a single percentile and *axis=None*, then the result is a scalar. If multiple percentiles are given, first axis of the result corresponds to the percentiles. The other axes are the axes that remain after the reduction of *a*. If the input contains integers or floats smaller than `float64`, the output data-type is `float64`. Otherwise, the output data-type is the same as that of the input. If *out* is specified, that array is returned instead.

See also:

nanmean, *nanmedian*, *percentile*, *median*, *mean*

Notes

Given a vector `V` of length `N`, the `q`-th percentile of `V` is the value `q/100` of the way from the minimum to the maximum in a sorted copy of `V`. The values and distances of the two nearest neighbors as well as the *interpolation* parameter will determine the percentile if the normalized ranking does not match the location of `q` exactly. This function is the same as the median if `q=50`, the same as the minimum if `q=0` and the same as the maximum if `q=100`.

Examples

```
>>> a = np.array([[10., 7., 4.], [3., 2., 1.]])
>>> a[0][1] = np.nan
>>> a
array([[ 10.,  nan,   4.],
       [  3.,   2.,   1.]])
>>> np.percentile(a, 50)
nan
>>> np.nanpercentile(a, 50)
3.5
>>> np.nanpercentile(a, 50, axis=0)
array([ 6.5,  2.,   2.5])
>>> np.nanpercentile(a, 50, axis=1, keepdims=True)
array([[ 7.],
       [ 2.]])
>>> m = np.nanpercentile(a, 50, axis=0)
>>> out = np.zeros_like(m)
>>> np.nanpercentile(a, 50, axis=0, out=out)
array([ 6.5,  2.,   2.5])
>>> m
array([ 6.5,  2. ,  2.5])
```

```
>>> b = a.copy()
>>> np.nanpercentile(b, 50, axis=1, overwrite_input=True)
array([  7.,  2.])
>>> assert not np.all(a==b)
```

3.27.2 Averages and variances

median(a[, axis, out, overwrite_input, keepdims])	Compute the median along the specified axis.
average(a[, axis, weights, returned])	Compute the weighted average along the specified axis.
mean(a[, axis, dtype, out, keepdims])	Compute the arithmetic mean along the specified axis.
std(a[, axis, dtype, out, ddof, keepdims])	Compute the standard deviation along the specified axis.
var(a[, axis, dtype, out, ddof, keepdims])	Compute the variance along the specified axis.
nanmedian(a[, axis, out, overwrite_input, ...])	Compute the median along the specified axis, while ignoring NaNs.
nanmean(a[, axis, dtype, out, keepdims])	Compute the arithmetic mean along the specified axis, ignoring NaNs.

Continued on next page

Table 167 – continued from previous page

nanstd(a[, axis, dtype, out, ddof, keepdims])	Compute the standard deviation along the specified axis, while ignoring NaNs.
nanvar(a[, axis, dtype, out, ddof, keepdims])	Compute the variance along the specified axis, while ignoring NaNs.

numpy.**median**(*a*, *axis=None*, *out=None*, *overwrite_input=False*, *keepdims=False*)

Compute the median along the specified axis.

Returns the median of the array elements.

Parameters **a** : array_like

Input array or object that can be converted to an array.

axis : {int, sequence of int, None}, optional

Axis or axes along which the medians are computed. The default is to compute the median along a flattened version of the array. A sequence of axes is supported since version 1.9.0.

out : ndarray, optional

Alternative output array in which to place the result. It must have the same shape and buffer length as the expected output, but the type (of the output) will be cast if necessary.

overwrite_input : bool, optional

If True, then allow use of memory of input array *a* for calculations. The input array will be modified by the call to *median*. This will save memory when you do not need to preserve the contents of the input array. Treat the input as undefined, but it will probably be fully or partially sorted. Default is False. If *overwrite_input* is `True` and *a* is not already an *ndarray*, an error will be raised.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the original *arr*.

New in version 1.9.0.

Returns **median** : ndarray

A new array holding the result. If the input contains integers or floats smaller than `float64`, then the output data-type is `np.float64`. Otherwise, the data-type of the output is the same as that of the input. If *out* is specified, that array is returned instead.

See also:

mean, *percentile*

Notes

Given a vector `V` of length `N`, the median of `V` is the middle value of a sorted copy of `V`, `V_sorted` - i e., `V_sorted[(N-1)/2]`, when `N` is odd, and the average of the two middle values of `V_sorted` when `N` is even.

Examples

```
>>> a = np.array([[10, 7, 4], [3, 2, 1]])
>>> a
array([[10,  7,  4],
       [ 3,  2,  1]])
>>> np.median(a)
3.5
>>> np.median(a, axis=0)
array([ 6.5,  4.5,  2.5])
>>> np.median(a, axis=1)
array([ 7.,  2.])
>>> m = np.median(a, axis=0)
>>> out = np.zeros_like(m)
>>> np.median(a, axis=0, out=m)
array([ 6.5,  4.5,  2.5])
>>> m
array([ 6.5,  4.5,  2.5])
>>> b = a.copy()
>>> np.median(b, axis=1, overwrite_input=True)
array([ 7.,  2.])
>>> assert not np.all(a==b)
>>> b = a.copy()
>>> np.median(b, axis=None, overwrite_input=True)
3.5
>>> assert not np.all(a==b)
```

numpy.**average**(*a*, *axis=None*, *weights=None*, *returned=False*)

Compute the weighted average along the specified axis.

Parameters **a** : array_like

Array containing data to be averaged. If *a* is not an array, a conversion is attempted.

axis : None or int or tuple of ints, optional

Axis or axes along which to average *a*. The default, axis=None, will average over all of the elements of the input array. If axis is negative it counts from the last to the first axis.

New in version 1.7.0.

If axis is a tuple of ints, averaging is performed on all of the axes specified in the tuple instead of a single axis or all the axes as before.

weights : array_like, optional

An array of weights associated with the values in *a*. Each value in *a* contributes to the average according to its associated weight. The weights array can either be 1-D (in which case its length must be the size of *a* along the given axis) or of the same shape as *a*. If *weights=None*, then all data in *a* are assumed to have a weight equal to one.

returned : bool, optional

Default is *False*. If *True*, the tuple (`average`, *sum_of_weights*) is returned, otherwise only the average is returned. If *weights=None*, *sum_of_weights* is equivalent to the number of elements over which the average is taken.

Returns **average, [sum_of_weights]** : array_type or double

Return the average along the specified axis. When returned is *True*, return a tuple with the average as the first element and the sum of the weights as the second element.

The return type is *Float* if *a* is of integer type, otherwise it is of the same type as *a*. *sum_of_weights* is of the same type as *average*.

Raises **ZeroDivisionError**

When all weights along axis are zero. See *numpy.ma.average* for a version robust to this type of error.

TypeError

When the length of 1D *weights* is not the same as the shape of *a* along axis.

See also:

mean

ma.average average for masked arrays – useful if your data contains "missing" values

Examples

```
>>> data = range(1,5)
>>> data
[1, 2, 3, 4]
>>> np.average(data)
2.5
>>> np.average(range(1,11), weights=range(10,0,-1))
4.0
```

```
>>> data = np.arange(6).reshape((3,2))
>>> data
array([[0, 1],
       [2, 3],
       [4, 5]])
>>> np.average(data, axis=1, weights=[1./4, 3./4])
array([ 0.75,  2.75,  4.75])
>>> np.average(data, weights=[1./4, 3./4])
Traceback (most recent call last):
...
TypeError: Axis must be specified when shapes of a and weights differ.
```

numpy.**mean**(*a*, *axis=None*, *dtype=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Compute the arithmetic mean along the specified axis.

Returns the average of the array elements. The average is taken over the flattened array by default, otherwise over the specified axis. `float64` intermediate and return values are used for integer inputs.

Parameters **a** : array_like

Array containing numbers whose mean is desired. If *a* is not an array, a conversion is attempted.

axis : None or int or tuple of ints, optional

Axis or axes along which the means are computed. The default is to compute the mean of the flattened array.

New in version 1.7.0.

If this is a tuple of ints, a mean is performed over multiple axes, instead of a single axis or all the axes as before.

dtype : data-type, optional

Type to use in computing the mean. For integer inputs, the default is `float64`; for floating point inputs, it is the same as the input dtype.

out : ndarray, optional

Alternate output array in which to place the result. The default is `None`; if provided, it must have the same shape as the expected output, but the type will be cast if necessary. See `doc.ufuncs` for details.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the input array.

If the default value is passed, then *keepdims* will not be passed through to the *mean* method of sub-classes of *ndarray*, however any non-default value will be. If the sub-classes *sum* method does not implement *keepdims* any exceptions will be raised.

Returns **m** : ndarray, see dtype parameter above

If *out=None*, returns a new array containing the mean values, otherwise a reference to the output array is returned.

See also:

average Weighted average

std, *var*, *nanmean*, *nanstd*, *nanvar*

Notes

The arithmetic mean is the sum of the elements along the axis divided by the number of elements.

Note that for floating-point input, the mean is computed using the same precision the input has. Depending on the input data, this can cause the results to be inaccurate, especially for `float32` (see example below). Specifying a higher-precision accumulator using the *dtype* keyword can alleviate this issue.

By default, `float16` results are computed using `float32` intermediates for extra precision.

Examples

```
>>> a = np.array([[1, 2], [3, 4]])
>>> np.mean(a)
2.5
>>> np.mean(a, axis=0)
array([ 2.,  3.])
>>> np.mean(a, axis=1)
array([ 1.5,  3.5])
```

In single precision, *mean* can be inaccurate:

```
>>> a = np.zeros((2, 512*512), dtype=np.float32)
>>> a[0, :] = 1.0
>>> a[1, :] = 0.1
>>> np.mean(a)
0.54999924
```

Computing the mean in float64 is more accurate:

```
>>> np.mean(a, dtype=np.float64)
0.55000000074505806
```

numpy.**std**(*a*, *axis=None*, *dtype=None*, *out=None*, *ddof=0*, *keepdims=<class 'numpy._globals._NoValue'>*)

Compute the standard deviation along the specified axis.

Returns the standard deviation, a measure of the spread of a distribution, of the array elements. The standard deviation is computed for the flattened array by default, otherwise over the specified axis.

Parameters **a** : array_like

Calculate the standard deviation of these values.

axis : None or int or tuple of ints, optional

Axis or axes along which the standard deviation is computed. The default is to compute the standard deviation of the flattened array.

New in version 1.7.0.

If this is a tuple of ints, a standard deviation is performed over multiple axes, instead of a single axis or all the axes as before.

dtype : dtype, optional

Type to use in computing the standard deviation. For arrays of integer type the default is float64, for arrays of float types it is the same as the array type.

out : ndarray, optional

Alternative output array in which to place the result. It must have the same shape as the expected output but the type (of the calculated values) will be cast if necessary.

ddof : int, optional

Means Delta Degrees of Freedom. The divisor used in calculations is `N - ddof`, where `N` represents the number of elements. By default *ddof* is zero.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the input array.

If the default value is passed, then *keepdims* will not be passed through to the *std* method of sub-classes of *ndarray*, however any non-default value will be. If the sub-classes *sum* method does not implement *keepdims* any exceptions will be raised.

Returns **standard_deviation** : ndarray, see dtype parameter above.

If *out* is None, return a new array containing the standard deviation, otherwise return a reference to the output array.

See also:

var, *mean*, *nanmean*, *nanstd*, *nanvar*

numpy.doc.ufuncs Section "Output arguments"

Notes

The standard deviation is the square root of the average of the squared deviations from the mean, i.e., `std = sqrt(mean(abs(x - x.mean())**2))`.

The average squared deviation is normally calculated as `x.sum() / N`, where `N = len(x)`. If, however, *ddof* is specified, the divisor `N - ddof` is used instead. In standard statistical practice, `ddof=1` provides an unbiased estimator of the variance of the infinite population. `ddof=0` provides a maximum likelihood estimate of the variance for normally distributed variables. The standard deviation computed in this function is the square root of the estimated variance, so even with `ddof=1`, it will not be an unbiased estimate of the standard deviation per se.

Note that, for complex numbers, *std* takes the absolute value before squaring, so that the result is always real and nonnegative.

For floating-point input, the *std* is computed using the same precision the input has. Depending on the input data, this can cause the results to be inaccurate, especially for float32 (see example below). Specifying a higher-accuracy accumulator using the *dtype* keyword can alleviate this issue.

Examples

```
>>> a = np.array([[1, 2], [3, 4]])
>>> np.std(a)
1.1180339887498949
>>> np.std(a, axis=0)
array([ 1.,  1.])
>>> np.std(a, axis=1)
array([ 0.5,  0.5])
```

In single precision, std() can be inaccurate:

```
>>> a = np.zeros((2, 512*512), dtype=np.float32)
>>> a[0, :] = 1.0
>>> a[1, :] = 0.1
>>> np.std(a)
0.45000005
```

Computing the standard deviation in float64 is more accurate:

```
>>> np.std(a, dtype=np.float64)
0.44999999925494177
```

numpy.**var**(*a*, *axis=None*, *dtype=None*, *out=None*, *ddof=0*, *keepdims=<class 'numpy._globals._NoValue'>*)

Compute the variance along the specified axis.

Returns the variance of the array elements, a measure of the spread of a distribution. The variance is computed for the flattened array by default, otherwise over the specified axis.

Parameters **a** : array_like

Array containing numbers whose variance is desired. If *a* is not an array, a conversion is attempted.

axis : None or int or tuple of ints, optional

Axis or axes along which the variance is computed. The default is to compute the variance of the flattened array.

New in version 1.7.0.

If this is a tuple of ints, a variance is performed over multiple axes, instead of a single axis or all the axes as before.

dtype : data-type, optional

Type to use in computing the variance. For arrays of integer type the default is `float32`; for arrays of float types it is the same as the array type.

out : ndarray, optional

Alternate output array in which to place the result. It must have the same shape as the expected output, but the type is cast if necessary.

ddof : int, optional

"Delta Degrees of Freedom": the divisor used in the calculation is `N - ddof`, where `N` represents the number of elements. By default *ddof* is zero.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the input array.

If the default value is passed, then *keepdims* will not be passed through to the *var* method of sub-classes of *ndarray*, however any non-default value will be. If the sub-classes *sum* method does not implement *keepdims* any exceptions will be raised.

Returns **variance** : ndarray, see dtype parameter above

If `out=None`, returns a new array containing the variance; otherwise, a reference to the output array is returned.

See also:

std, *mean*, *nanmean*, *nanstd*, *nanvar*

numpy.doc.ufuncs Section "Output arguments"

Notes

The variance is the average of the squared deviations from the mean, i.e., `var = mean(abs(x - x.mean())**2)`.

The mean is normally calculated as `x.sum() / N`, where `N = len(x)`. If, however, *ddof* is specified, the divisor `N - ddof` is used instead. In standard statistical practice, `ddof=1` provides an unbiased estimator of the variance of a hypothetical infinite population. `ddof=0` provides a maximum likelihood estimate of the variance for normally distributed variables.

Note that for complex numbers, the absolute value is taken before squaring, so that the result is always real and nonnegative.

For floating-point input, the variance is computed using the same precision the input has. Depending on the input data, this can cause the results to be inaccurate, especially for `float32` (see example below). Specifying a higher-accuracy accumulator using the `dtype` keyword can alleviate this issue.

Examples

```
>>> a = np.array([[1, 2], [3, 4]])
>>> np.var(a)
1.25
>>> np.var(a, axis=0)
array([ 1.,  1.])
>>> np.var(a, axis=1)
array([ 0.25,  0.25])
```

In single precision, var() can be inaccurate:

```
>>> a = np.zeros((2, 512*512), dtype=np.float32)
>>> a[0, :] = 1.0
>>> a[1, :] = 0.1
>>> np.var(a)
0.20250003
```

Computing the variance in float64 is more accurate:

```
>>> np.var(a, dtype=np.float64)
0.20249999932944759
>>> ((1-0.55)**2 + (0.1-0.55)**2)/2
0.2025
```

numpy.**nanmedian**(*a*, *axis=None*, *out=None*, *overwrite_input=False*, *keepdims=<class 'numpy._globals._NoValue'>*)

Compute the median along the specified axis, while ignoring NaNs.

Returns the median of the array elements.

New in version 1.9.0.

Parameters **a** : array_like

Input array or object that can be converted to an array.

axis : {int, sequence of int, None}, optional

Axis or axes along which the medians are computed. The default is to compute the median along a flattened version of the array. A sequence of axes is supported since version 1.9.0.

out : ndarray, optional

Alternative output array in which to place the result. It must have the same shape and buffer length as the expected output, but the type (of the output) will be cast if necessary.

overwrite_input : bool, optional

If True, then allow use of memory of input array *a* for calculations. The input array will be modified by the call to *median*. This will save memory when you do not need to preserve the contents of the input array. Treat the input as undefined, but it will probably be fully or partially sorted. Default is False. If *overwrite_input* is `True` and *a* is not already an *ndarray*, an error will be raised.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the original *a*.

If this is anything but the default value it will be passed through (in the special case of an empty array) to the *mean* function of the underlying array. If the array is a sub-class and *mean* does not have the kwarg *keepdims* this will raise a RuntimeError.

Returns **median** : ndarray

A new array holding the result. If the input contains integers or floats smaller than `float64`, then the output data-type is `np.float64`. Otherwise, the data-type of the output is the same as that of the input. If *out* is specified, that array is returned instead.

See also:

mean, *median*, *percentile*

Notes

Given a vector `V` of length `N`, the median of `V` is the middle value of a sorted copy of `V`, `V_sorted` - i.e., `V_sorted[(N-1)/2]`, when `N` is odd and the average of the two middle values of `V_sorted` when `N` is even.

Examples

```
>>> a = np.array([[10.0, 7, 4], [3, 2, 1]])
>>> a[0, 1] = np.nan
>>> a
array([[ 10.,  nan,   4.],
   [  3.,   2.,   1.]])
>>> np.median(a)
nan
>>> np.nanmedian(a)
3.0
>>> np.nanmedian(a, axis=0)
array([ 6.5,  2.,  2.5])
>>> np.median(a, axis=1)
array([ 7.,  2.])
>>> b = a.copy()
>>> np.nanmedian(b, axis=1, overwrite_input=True)
array([ 7.,  2.])
>>> assert not np.all(a==b)
>>> b = a.copy()
>>> np.nanmedian(b, axis=None, overwrite_input=True)
3.0
>>> assert not np.all(a==b)
```

numpy.**nanmean**(*a*, *axis=None*, *dtype=None*, *out=None*, *keepdims=<class 'numpy._globals._NoValue'>*)

Compute the arithmetic mean along the specified axis, ignoring NaNs.

Returns the average of the array elements. The average is taken over the flattened array by default, otherwise over the specified axis. `float64` intermediate and return values are used for integer inputs.

For all-NaN slices, NaN is returned and a *RuntimeWarning* is raised.

New in version 1.8.0.

Parameters **a** : array_like

Array containing numbers whose mean is desired. If *a* is not an array, a conversion is attempted.

axis : int, optional

Axis along which the means are computed. The default is to compute the mean of the flattened array.

dtype : data-type, optional

Type to use in computing the mean. For integer inputs, the default is `float64`; for inexact inputs, it is the same as the input dtype.

out : ndarray, optional

Alternate output array in which to place the result. The default is `None`; if provided, it must have the same shape as the expected output, but the type will be cast if necessary. See `doc.ufuncs` for details.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the original *a*.

If the value is anything but the default, then *keepdims* will be passed through to the *mean* or *sum* methods of sub-classes of *ndarray*. If the sub-classes methods does not implement *keepdims* any exceptions will be raised.

Returns **m** : ndarray, see dtype parameter above

If *out=None*, returns a new array containing the mean values, otherwise a reference to the output array is returned. Nan is returned for slices that contain only NaNs.

See also:

average Weighted average

mean Arithmetic mean taken while not ignoring NaNs

var, *nanvar*

Notes

The arithmetic mean is the sum of the non-NaN elements along the axis divided by the number of non-NaN elements.

Note that for floating-point input, the mean is computed using the same precision the input has. Depending on the input data, this can cause the results to be inaccurate, especially for `float32`. Specifying a higher-precision accumulator using the *dtype* keyword can alleviate this issue.

Examples

```
>>> a = np.array([[1, np.nan], [3, 4]])
>>> np.nanmean(a)
2.6666666666666665
>>> np.nanmean(a, axis=0)
array([ 2.,  4.])
>>> np.nanmean(a, axis=1)
array([ 1.,  3.5])
```

numpy.**nanstd**(*a*, *axis=None*, *dtype=None*, *out=None*, *ddof=0*, *keepdims=<class 'numpy._globals._NoValue'>*)

Compute the standard deviation along the specified axis, while ignoring NaNs.

Returns the standard deviation, a measure of the spread of a distribution, of the non-NaN array elements. The standard deviation is computed for the flattened array by default, otherwise over the specified axis.

For all-NaN slices or slices with zero degrees of freedom, NaN is returned and a *RuntimeWarning* is raised.

New in version 1.8.0.

Parameters **a** : array_like

Calculate the standard deviation of the non-NaN values.

axis : int, optional

Axis along which the standard deviation is computed. The default is to compute the standard deviation of the flattened array.

dtype : dtype, optional

Type to use in computing the standard deviation. For arrays of integer type the default is float64, for arrays of float types it is the same as the array type.

out : ndarray, optional

Alternative output array in which to place the result. It must have the same shape as the expected output but the type (of the calculated values) will be cast if necessary.

ddof : int, optional

Means Delta Degrees of Freedom. The divisor used in calculations is `N - ddof`, where `N` represents the number of non-NaN elements. By default *ddof* is zero.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the original *a*.

If this value is anything but the default it is passed through as-is to the relevant functions of the sub-classes. If these functions do not have a *keepdims* kwarg, a RuntimeError will be raised.

Returns **standard_deviation** : ndarray, see dtype parameter above.

If *out* is None, return a new array containing the standard deviation, otherwise return a reference to the output array. If ddof is >= the number of non-NaN elements in a slice or the slice contains only NaNs, then the result for that slice is NaN.

See also:

var, *mean*, *std*, *nanvar*, *nanmean*

numpy.doc.ufuncs Section "Output arguments"

Notes

The standard deviation is the square root of the average of the squared deviations from the mean: `std = sqrt(mean(abs(x - x.mean())**2))`.

The average squared deviation is normally calculated as `x.sum() / N`, where `N = len(x)`. If, however, *ddof* is specified, the divisor `N - ddof` is used instead. In standard statistical practice, `ddof=1` provides an unbiased estimator of the variance of the infinite population. `ddof=0` provides a maximum likelihood estimate

of the variance for normally distributed variables. The standard deviation computed in this function is the square root of the estimated variance, so even with `ddof=1`, it will not be an unbiased estimate of the standard deviation per se.

Note that, for complex numbers, *std* takes the absolute value before squaring, so that the result is always real and nonnegative.

For floating-point input, the *std* is computed using the same precision the input has. Depending on the input data, this can cause the results to be inaccurate, especially for float32 (see example below). Specifying a higher-accuracy accumulator using the *dtype* keyword can alleviate this issue.

Examples

```
>>> a = np.array([[1, np.nan], [3, 4]])
>>> np.nanstd(a)
1.247219128924647
>>> np.nanstd(a, axis=0)
array([ 1.,  0.])
>>> np.nanstd(a, axis=1)
array([ 0.,  0.5])
```

numpy.**nanvar**(*a*, *axis=None*, *dtype=None*, *out=None*, *ddof=0*, *keepdims=<class 'numpy._globals._NoValue'>*)

Compute the variance along the specified axis, while ignoring NaNs.

Returns the variance of the array elements, a measure of the spread of a distribution. The variance is computed for the flattened array by default, otherwise over the specified axis.

For all-NaN slices or slices with zero degrees of freedom, NaN is returned and a *RuntimeWarning* is raised.

New in version 1.8.0.

Parameters **a** : array_like

Array containing numbers whose variance is desired. If *a* is not an array, a conversion is attempted.

axis : int, optional

Axis along which the variance is computed. The default is to compute the variance of the flattened array.

dtype : data-type, optional

Type to use in computing the variance. For arrays of integer type the default is `float32`; for arrays of float types it is the same as the array type.

out : ndarray, optional

Alternate output array in which to place the result. It must have the same shape as the expected output, but the type is cast if necessary.

ddof : int, optional

"Delta Degrees of Freedom": the divisor used in the calculation is `N - ddof`, where `N` represents the number of non-NaN elements. By default *ddof* is zero.

keepdims : bool, optional

If this is set to True, the axes which are reduced are left in the result as dimensions with size one. With this option, the result will broadcast correctly against the original *a*.

Returns **variance** : ndarray, see dtype parameter above

If *out* is None, return a new array containing the variance, otherwise return a reference to the output array. If ddof is >= the number of non-NaN elements in a slice or the slice contains only NaNs, then the result for that slice is NaN.

See also:

std Standard deviation

mean Average

var Variance while not ignoring NaNs

nanstd, *nanmean*

numpy.doc.ufuncs Section "Output arguments"

Notes

The variance is the average of the squared deviations from the mean, i.e., `var = mean(abs(x - x.mean())**2)`.

The mean is normally calculated as `x.sum() / N`, where `N = len(x)`. If, however, *ddof* is specified, the divisor `N - ddof` is used instead. In standard statistical practice, `ddof=1` provides an unbiased estimator of the variance of a hypothetical infinite population. `ddof=0` provides a maximum likelihood estimate of the variance for normally distributed variables.

Note that for complex numbers, the absolute value is taken before squaring, so that the result is always real and nonnegative.

For floating-point input, the variance is computed using the same precision the input has. Depending on the input data, this can cause the results to be inaccurate, especially for `float32` (see example below). Specifying a higher-accuracy accumulator using the `dtype` keyword can alleviate this issue.

For this function to work on sub-classes of ndarray, they must define *sum* with the kwarg *keepdims*

Examples

```
>>> a = np.array([[1, np.nan], [3, 4]])
>>> np.var(a)
1.5555555555555554
>>> np.nanvar(a, axis=0)
array([ 1.,  0.])
>>> np.nanvar(a, axis=1)
array([ 0.,  0.25])
```

3.27.3 Correlating

corrcoef(x[, y, rowvar, bias, ddof])	Return Pearson product-moment correlation coefficients.
correlate(a, v[, mode])	Cross-correlation of two 1-dimensional sequences.
cov(m[, y, rowvar, bias, ddof, fweights, ...])	Estimate a covariance matrix, given data and weights.

numpy.**corrcoef**(*x*, *y=None*, *rowvar=True*, *bias=<class 'numpy._globals._NoValue'>*, *ddof=<class 'numpy._globals._NoValue'>*)

Return Pearson product-moment correlation coefficients.

Please refer to the documentation for *cov* for more detail. The relationship between the correlation coefficient matrix, *R*, and the covariance matrix, *C*, is

$$R_{ij} = \frac{C_{ij}}{\sqrt{C_{ii} * C_{jj}}}$$

The values of *R* are between -1 and 1, inclusive.

Parameters **x** : array_like

A 1-D or 2-D array containing multiple variables and observations. Each row of *x* represents a variable, and each column a single observation of all those variables. Also see *rowvar* below.

y : array_like, optional

An additional set of variables and observations. *y* has the same shape as *x*.

rowvar : bool, optional

If *rowvar* is True (default), then each row represents a variable, with observations in the columns. Otherwise, the relationship is transposed: each column represents a variable, while the rows contain observations.

bias : _NoValue, optional

Has no effect, do not use.

Deprecated since version 1.10.0.

ddof : _NoValue, optional

Has no effect, do not use.

Deprecated since version 1.10.0.

Returns **R** : ndarray

The correlation coefficient matrix of the variables.

See also:

cov Covariance matrix

Notes

Due to floating point rounding the resulting array may not be Hermitian, the diagonal elements may not be 1, and the elements may not satisfy the inequality abs(a) <= 1. The real and imaginary parts are clipped to the interval [-1, 1] in an attempt to improve on that situation but is not much help in the complex case.

This function accepts but discards arguments *bias* and *ddof*. This is for backwards compatibility with previous versions of this function. These arguments had no effect on the return values of the function and can be safely ignored in this and previous versions of numpy.

numpy.**correlate**(*a*, *v*, *mode='valid'*)

Cross-correlation of two 1-dimensional sequences.

This function computes the correlation as generally defined in signal processing texts:

```
c_{av}[k] = sum_n a[n+k] * conj(v[n])
```

with a and v sequences being zero-padded where necessary and conj being the conjugate.

Parameters **a, v** : array_like

Input sequences.

mode : {'valid', 'same', 'full'}, optional

Refer to the *convolve* docstring. Note that the default is 'valid', unlike *convolve*, which uses 'full'.

old_behavior : bool

old_behavior was removed in NumPy 1.10. If you need the old behavior, use *multiarray.correlate*.

Returns **out** : ndarray

Discrete cross-correlation of *a* and *v*.

See also:

convolve Discrete, linear convolution of two one-dimensional sequences.

multiarray.correlate Old, no conjugate, version of correlate.

Notes

The definition of correlation above is not unique and sometimes correlation may be defined differently. Another common definition is:

```
c'_{av}[k] = sum_n a[n] conj(v[n+k])
```

which is related to `c_{av}[k]` by `c'_{av}[k] = c_{av}[-k]`.

Examples

```
>>> np.correlate([1, 2, 3], [0, 1, 0.5])
array([ 3.5])
>>> np.correlate([1, 2, 3], [0, 1, 0.5], "same")
array([ 2. ,  3.5,  3. ])
>>> np.correlate([1, 2, 3], [0, 1, 0.5], "full")
array([ 0.5,  2. ,  3.5,  3. ,  0. ])
```

Using complex sequences:

```
>>> np.correlate([1+1j, 2, 3-1j], [0, 1, 0.5j], 'full')
array([ 0.5-0.5j,  1.0+0.j ,  1.5-1.5j,  3.0-1.j ,  0.0+0.j ])
```

Note that you get the time reversed, complex conjugated result when the two input sequences change places, i.e., `c_{va}[k] = c^{*}_{av}[-k]`:

```
>>> np.correlate([0, 1, 0.5j], [1+1j, 2, 3-1j], 'full')
array([ 0.0+0.j ,  3.0+1.j ,  1.5+1.5j,  1.0+0.j ,  0.5+0.5j])
```

numpy.**cov**(*m*, *y=None*, *rowvar=True*, *bias=False*, *ddof=None*, *fweights=None*, *aweights=None*)

Estimate a covariance matrix, given data and weights.

Covariance indicates the level to which two variables vary together. If we examine N-dimensional samples, $X = [x_1, x_2, ...x_N]^T$, then the covariance matrix element C_{ij} is the covariance of x_i and x_j. The element C_{ii} is the variance of x_i.

See the notes for an outline of the algorithm.

Parameters **m** : array_like

A 1-D or 2-D array containing multiple variables and observations. Each row of *m* represents a variable, and each column a single observation of all those variables. Also see *rowvar* below.

y : array_like, optional

An additional set of variables and observations. *y* has the same form as that of *m*.

rowvar : bool, optional

If *rowvar* is True (default), then each row represents a variable, with observations in the columns. Otherwise, the relationship is transposed: each column represents a variable, while the rows contain observations.

bias : bool, optional

Default normalization (False) is by `(N - 1)`, where `N` is the number of observations given (unbiased estimate). If *bias* is True, then normalization is by `N`. These values can be overridden by using the keyword `ddof` in numpy versions >= 1.5.

ddof : int, optional

If not `None` the default value implied by *bias* is overridden. Note that `ddof=1` will return the unbiased estimate, even if both *fweights* and *aweights* are specified, and `ddof=0` will return the simple average. See the notes for the details. The default value is `None`.

New in version 1.5.

fweights : array_like, int, optional

1-D array of integer freguency weights; the number of times each observation vector should be repeated.

New in version 1.10.

aweights : array_like, optional

1-D array of observation vector weights. These relative weights are typically large for observations considered "important" and smaller for observations considered less "important". If `ddof=0` the array of weights can be used to assign probabilities to observation vectors.

New in version 1.10.

Returns **out** : ndarray

The covariance matrix of the variables.

See also:

corrcoef Normalized covariance matrix

Notes

Assume that the observations are in the columns of the observation array *m* and let `f = fweights` and `a = aweights` for brevity. The steps to compute the weighted covariance are as follows:

```
>>> w = f * a
>>> v1 = np.sum(w)
>>> v2 = np.sum(w * a)
>>> m -= np.sum(m * w, axis=1, keepdims=True) / v1
>>> cov = np.dot(m * w, m.T) * v1 / (v1**2 - ddof * v2)
```

Note that when `a == 1`, the normalization factor `v1 / (v1**2 - ddof * v2)` goes over to `1 / (np.sum(f) - ddof)` as it should.

Examples

Consider two variables, x_0 and x_1, which correlate perfectly, but in opposite directions:

```
>>> x = np.array([[0, 2], [1, 1], [2, 0]]).T
>>> x
array([[0, 1, 2],
       [2, 1, 0]])
```

Note how x_0 increases while x_1 decreases. The covariance matrix shows this clearly:

```
>>> np.cov(x)
array([[ 1., -1.],
       [-1.,  1.]])
```

Note that element $C_{0,1}$, which shows the correlation between x_0 and x_1, is negative.

Further, note how *x* and *y* are combined:

```
>>> x = [-2.1, -1,  4.3]
>>> y = [3,  1.1,  0.12]
>>> X = np.stack((x, y), axis=0)
>>> print(np.cov(X))
[[ 11.71        -4.286     ]
 [ -4.286        2.14413333]]
>>> print(np.cov(x, y))
[[ 11.71        -4.286     ]
 [ -4.286        2.14413333]]
>>> print(np.cov(x))
11.71
```

3.27.4 Histograms

histogram(a[, bins, range, normed, weights, ...])	Compute the histogram of a set of data.
histogram2d(x, y[, bins, range, normed, weights])	Compute the bi-dimensional histogram of two data samples.
histogramdd(sample[, bins, range, normed, ...])	Compute the multidimensional histogram of some data.
bincount(x[, weights, minlength])	Count number of occurrences of each value in array of non-negative ints.

Continued on next page

Table 169 – continued from previous page

digitize(x, bins[, right])	Return the indices of the bins to which each value in input array belongs.

numpy.**histogram**(*a*, *bins=10*, *range=None*, *normed=False*, *weights=None*, *density=None*)

Compute the histogram of a set of data.

Parameters **a** : array_like

Input data. The histogram is computed over the flattened array.

bins : int or sequence of scalars or str, optional

If *bins* is an int, it defines the number of equal-width bins in the given range (10, by default). If *bins* is a sequence, it defines the bin edges, including the rightmost edge, allowing for non-uniform bin widths.

New in version 1.11.0.

If *bins* is a string from the list below, histogram will use the method chosen to calculate the optimal bin width and consequently the number of bins (see *Notes* for more detail on the estimators) from the data that falls within the requested range. While the bin width will be optimal for the actual data in the range, the number of bins will be computed to fill the entire range, including the empty portions. For visualisation, using the 'auto' option is suggested. Weighted data is not supported for automated bin size selection.

'auto' Maximum of the 'sturges' and 'fd' estimators. Provides good all around performance.

'fd' (Freedman Diaconis Estimator) Robust (resilient to outliers) estimator that takes into account data variability and data size.

'doane' An improved version of Sturges' estimator that works better with non-normal datasets.

'scott' Less robust estimator that that takes into account data variability and data size.

'rice' Estimator does not take variability into account, only data size. Commonly overestimates number of bins required.

'sturges' R's default method, only accounts for data size. Only optimal for gaussian data and underestimates number of bins for large non-gaussian datasets.

'sqrt' Square root (of data size) estimator, used by Excel and other programs for its speed and simplicity.

range : (float, float), optional

The lower and upper range of the bins. If not provided, range is simply `(a.min(), a.max())`. Values outside the range are ignored. The first element of the range must be less than or equal to the second. *range* affects the automatic bin computation as well. While bin width is computed to be optimal based on the actual data within *range*, the bin count will fill the entire range including portions containing no data.

normed : bool, optional

This keyword is deprecated in NumPy 1.6.0 due to confusing/buggy behavior. It will be removed in NumPy 2.0.0. Use the `density` keyword instead. If `False`, the result will contain the number of samples in each bin. If `True`, the result is the value of the probability *density* function at the bin, normalized such that the *integral* over the range

is 1. Note that this latter behavior is known to be buggy with unequal bin widths; use `density` instead.

weights : array_like, optional

An array of weights, of the same shape as a. Each value in a only contributes its associated weight towards the bin count (instead of 1). If *density* is True, the weights are normalized, so that the integral of the density over the range remains 1.

density : bool, optional

If `False`, the result will contain the number of samples in each bin. If `True`, the result is the value of the probability *density* function at the bin, normalized such that the *integral* over the range is 1. Note that the sum of the histogram values will not be equal to 1 unless bins of unity width are chosen; it is not a probability *mass* function.

Overrides the `normed` keyword if given.

Returns **hist** : array

The values of the histogram. See *density* and *weights* for a description of the possible semantics.

bin_edges : array of dtype float

Return the bin edges `(length(hist)+1)`.

See also:

histogramdd, *bincount*, *searchsorted*, *digitize*

Notes

All but the last (righthand-most) bin is half-open. In other words, if *bins* is:

```
[1, 2, 3, 4]
```

then the first bin is `[1, 2)` (including 1, but excluding 2) and the second `[2, 3)`. The last bin, however, is `[3, 4]`, which *includes* 4.

New in version 1.11.0.

The methods to estimate the optimal number of bins are well founded in literature, and are inspired by the choices R provides for histogram visualisation. Note that having the number of bins proportional to $n^{1/3}$ is asymptotically optimal, which is why it appears in most estimators. These are simply plug-in methods that give good starting points for number of bins. In the equations below, h is the binwidth and n_h is the number of bins. All estimators that compute bin counts are recast to bin width using the *ptp* of the data. The final bin count is obtained from ‘‘np.round(np.ceil(range / h))‘.

‘Auto’ (maximum of the ‘Sturges’ and ‘FD’ estimators) A compromise to get a good value. For small datasets the Sturges value will usually be chosen, while larger datasets will usually default to FD. Avoids the overly conservative behaviour of FD and Sturges for small and large datasets respectively. Switchover point is usually $a.size \approx 1000$.

‘FD’ (Freedman Diaconis Estimator)

$$h = 2\frac{IQR}{n^{1/3}}$$

The binwidth is proportional to the interquartile range (IQR) and inversely proportional to cube root of a.size. Can be too conservative for small datasets, but is quite good for large datasets. The IQR is very robust to outliers.

‘Scott’

$$h = \sigma \sqrt[3]{\frac{24 * \sqrt{\pi}}{n}}$$

The binwidth is proportional to the standard deviation of the data and inversely proportional to cube root of `x.size`. Can be too conservative for small datasets, but is quite good for large datasets. The standard deviation is not very robust to outliers. Values are very similar to the Freedman-Diaconis estimator in the absence of outliers.

‘Rice’

$$n_h = 2n^{1/3}$$

The number of bins is only proportional to cube root of `a.size`. It tends to overestimate the number of bins and it does not take into account data variability.

‘Sturges’

$$n_h = \log_2 n + 1$$

The number of bins is the base 2 log of `a.size`. This estimator assumes normality of data and is too conservative for larger, non-normal datasets. This is the default method in R’s `hist` method.

‘Doane’

$$n_h = 1 + \log_2(n) + \log_2(1 + \frac{|g_1|}{\sigma_{g_1}})$$

$$g_1 = mean[(\frac{x - \mu}{\sigma})^3]$$

$$\sigma_{g_1} = \sqrt{\frac{6(n-2)}{(n+1)(n+3)}}$$

An improved version of Sturges’ formula that produces better estimates for non-normal datasets. This estimator attempts to account for the skew of the data.

‘Sqrt’

$$n_h = \sqrt{n}$$

The simplest and fastest estimator. Only takes into account the data size.

Examples

```
>>> np.histogram([1, 2, 1], bins=[0, 1, 2, 3])
(array([0, 2, 1]), array([0, 1, 2, 3]))
>>> np.histogram(np.arange(4), bins=np.arange(5), density=True)
(array([ 0.25,  0.25,  0.25,  0.25]), array([0, 1, 2, 3, 4]))
>>> np.histogram([[1, 2, 1], [1, 0, 1]], bins=[0,1,2,3])
(array([1, 4, 1]), array([0, 1, 2, 3]))
```

```
>>> a = np.arange(5)
>>> hist, bin_edges = np.histogram(a, density=True)
>>> hist
array([ 0.5,  0. ,  0.5,  0. ,  0. ,  0.5,  0. ,  0.5,  0. ,  0.5])
>>> hist.sum()
2.4999999999999996
>>> np.sum(hist * np.diff(bin_edges))
1.0
```

New in version 1.11.0.

Automated Bin Selection Methods example, using 2 peak random data with 2000 points:

```
>>> import matplotlib.pyplot as plt
>>> rng = np.random.RandomState(10)  # deterministic random data
>>> a = np.hstack((rng.normal(size=1000),
...                rng.normal(loc=5, scale=2, size=1000)))
>>> plt.hist(a, bins='auto')  # arguments are passed to np.histogram
>>> plt.title("Histogram with 'auto' bins")
>>> plt.show()
```

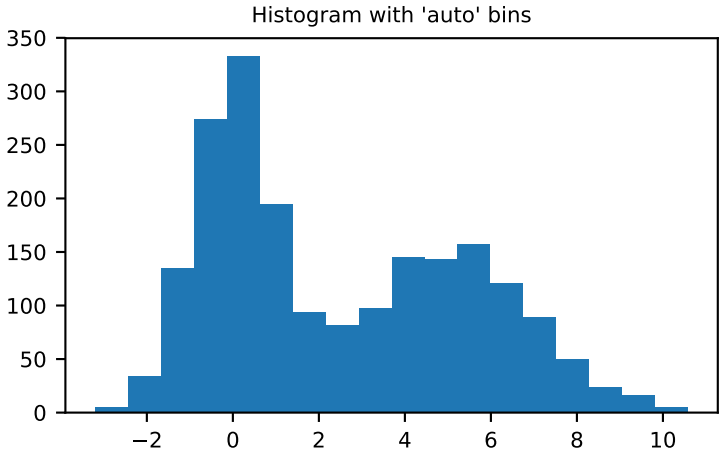

numpy.**histogram2d**(*x*, *y*, *bins=10*, *range=None*, *normed=False*, *weights=None*)

Compute the bi-dimensional histogram of two data samples.

Parameters **x** : array_like, shape (N,)

An array containing the x coordinates of the points to be histogrammed.

y : array_like, shape (N,)

An array containing the y coordinates of the points to be histogrammed.

bins : int or array_like or [int, int] or [array, array], optional

The bin specification:

- If int, the number of bins for the two dimensions (nx=ny=bins).
- If array_like, the bin edges for the two dimensions (x_edges=y_edges=bins).
- If [int, int], the number of bins in each dimension (nx, ny = bins).
- If [array, array], the bin edges in each dimension (x_edges, y_edges = bins).
- A combination [int, array] or [array, int], where int is the number of bins and array is the bin edges.

range : array_like, shape(2,2), optional

The leftmost and rightmost edges of the bins along each dimension (if not specified explicitly in the *bins* parameters): `[[xmin, xmax], [ymin, ymax]]`. All values outside of this range will be considered outliers and not tallied in the histogram.

normed : bool, optional

If False, returns the number of samples in each bin. If True, returns the bin density `bin_count / sample_count / bin_area`.

weights : array_like, shape(N,), optional

An array of values `w_i` weighing each sample `(x_i, y_i)`. Weights are normalized to 1 if *normed* is True. If *normed* is False, the values of the returned histogram are equal to the sum of the weights belonging to the samples falling into each bin.

Returns **H** : ndarray, shape(nx, ny)

The bi-dimensional histogram of samples *x* and *y*. Values in *x* are histogrammed along the first dimension and values in *y* are histogrammed along the second dimension.

xedges : ndarray, shape(nx+1,)

The bin edges along the first dimension.

yedges : ndarray, shape(ny+1,)

The bin edges along the second dimension.

See also:

histogram 1D histogram

histogramdd Multidimensional histogram

Notes

When *normed* is True, then the returned histogram is the sample density, defined such that the sum over bins of the product `bin_value * bin_area` is 1.

Please note that the histogram does not follow the Cartesian convention where *x* values are on the abscissa and *y* values on the ordinate axis. Rather, *x* is histogrammed along the first dimension of the array (vertical), and *y* along the second dimension of the array (horizontal). This ensures compatibility with *histogramdd*.

Examples

```
>>> import matplotlib as mpl
>>> import matplotlib.pyplot as plt
```

Construct a 2-D histogram with variable bin width. First define the bin edges:

```
>>> xedges = [0, 1, 3, 5]
>>> yedges = [0, 2, 3, 4, 6]
```

Next we create a histogram H with random bin content:

```
>>> x = np.random.normal(2, 1, 100)
>>> y = np.random.normal(1, 1, 100)
>>> H, xedges, yedges = np.histogram2d(x, y, bins=(xedges, yedges))
>>> H = H.T  # Let each row list bins with common y range.
```

`imshow` can only display square bins:

```
>>> fig = plt.figure(figsize=(7, 3))
>>> ax = fig.add_subplot(131, title='imshow: square bins')
>>> plt.imshow(H, interpolation='nearest', origin='low',
...         extent=[xedges[0], xedges[-1], yedges[0], yedges[-1]])
```

`pcolormesh` can display actual edges:

```
>>> ax = fig.add_subplot(132, title='pcolormesh: actual edges',
...         aspect='equal')
>>> X, Y = np.meshgrid(xedges, yedges)
>>> ax.pcolormesh(X, Y, H)
```

`NonUniformImage` can be used to display actual bin edges with interpolation:

```
>>> ax = fig.add_subplot(133, title='NonUniformImage: interpolated',
...         aspect='equal', xlim=xedges[[0, -1]], ylim=yedges[[0, -1]])
>>> im = mpl.image.NonUniformImage(ax, interpolation='bilinear')
>>> xcenters = (xedges[:-1] + xedges[1:]) / 2
>>> ycenters = (yedges[:-1] + yedges[1:]) / 2
>>> im.set_data(xcenters, ycenters, H)
>>> ax.images.append(im)
>>> plt.show()
```

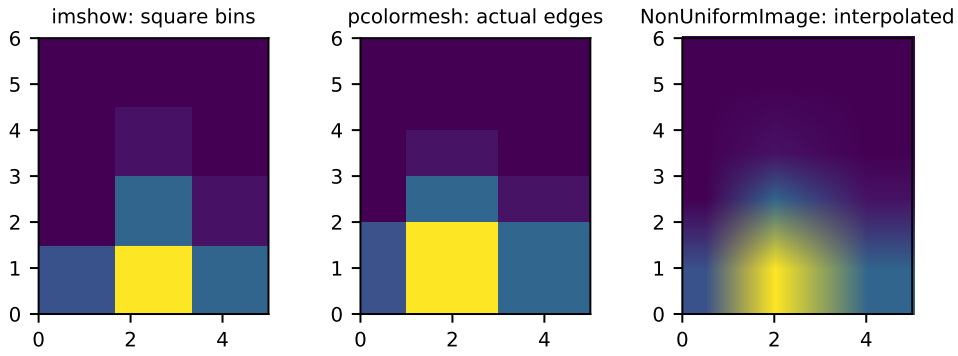

numpy.**histogramdd**(*sample*, *bins=10*, *range=None*, *normed=False*, *weights=None*)

Compute the multidimensional histogram of some data.

Parameters **sample** : array_like

The data to be histogrammed. It must be an (N,D) array or data that can be converted to such. The rows of the resulting array are the coordinates of points in a D dimensional polytope.

bins : sequence or int, optional

The bin specification:

- A sequence of arrays describing the bin edges along each dimension.
- The number of bins for each dimension (nx, ny, ... =bins)

- The number of bins for all dimensions (nx=ny=...=bins).

range : sequence, optional

A sequence of lower and upper bin edges to be used if the edges are not given explicitly in *bins*. Defaults to the minimum and maximum values along each dimension.

normed : bool, optional

If False, returns the number of samples in each bin. If True, returns the bin density `bin_count / sample_count / bin_volume`.

weights : (N,) array_like, optional

An array of values *w_i* weighing each sample *(x_i, y_i, z_i, ...)*. Weights are normalized to 1 if normed is True. If normed is False, the values of the returned histogram are equal to the sum of the weights belonging to the samples falling into each bin.

Returns **H** : ndarray

The multidimensional histogram of sample x. See normed and weights for the different possible semantics.

edges : list

A list of D arrays describing the bin edges for each dimension.

See also:

histogram 1-D histogram

histogram2d 2-D histogram

Examples

```
>>> r = np.random.randn(100,3)
>>> H, edges = np.histogramdd(r, bins = (5, 8, 4))
>>> H.shape, edges[0].size, edges[1].size, edges[2].size
((5, 8, 4), 6, 9, 5)
```

numpy.**bincount**(*x*, *weights=None*, *minlength=0*)

Count number of occurrences of each value in array of non-negative ints.

The number of bins (of size 1) is one larger than the largest value in *x*. If *minlength* is specified, there will be at least this number of bins in the output array (though it will be longer if necessary, depending on the contents of *x*). Each bin gives the number of occurrences of its index value in *x*. If *weights* is specified the input array is weighted by it, i.e. if a value `n` is found at position `i`, `out[n] += weight[i]` instead of `out[n] += 1`.

Parameters **x** : array_like, 1 dimension, nonnegative ints

Input array.

weights : array_like, optional

Weights, array of the same shape as *x*.

minlength : int, optional

A minimum number of bins for the output array.

New in version 1.6.0.

Returns **out** : ndarray of ints

The result of binning the input array. The length of *out* is equal to `np.amax(x)+1`.

Raises **ValueError**

If the input is not 1-dimensional, or contains elements with negative values, or if *minlength* is negative.

TypeError

If the type of the input is float or complex.

See also:

histogram, *digitize*, *unique*

Examples

```
>>> np.bincount(np.arange(5))
array([1, 1, 1, 1, 1])
>>> np.bincount(np.array([0, 1, 1, 3, 2, 1, 7]))
array([1, 3, 1, 1, 0, 0, 0, 1])
```

```
>>> x = np.array([0, 1, 1, 3, 2, 1, 7, 23])
>>> np.bincount(x).size == np.amax(x)+1
True
```

The input array needs to be of integer dtype, otherwise a TypeError is raised:

```
>>> np.bincount(np.arange(5, dtype=float))
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
TypeError: array cannot be safely cast to required type
```

A possible use of `bincount` is to perform sums over variable-size chunks of an array, using the `weights` keyword.

```
>>> w = np.array([0.3, 0.5, 0.2, 0.7, 1., -0.6]) # weights
>>> x = np.array([0, 1, 1, 2, 2, 2])
>>> np.bincount(x,  weights=w)
array([ 0.3,  0.7,  1.1])
```

numpy.**digitize**(*x*, *bins*, *right=False*)

Return the indices of the bins to which each value in input array belongs.

Each index `i` returned is such that `bins[i-1] <= x < bins[i]` if *bins* is monotonically increasing, or `bins[i-1] > x >= bins[i]` if *bins* is monotonically decreasing. If values in *x* are beyond the bounds of *bins*, 0 or `len(bins)` is returned as appropriate. If right is True, then the right bin is closed so that the index `i` is such that `bins[i-1] < x <= bins[i]` or `bins[i-1] >= x > bins[i]` if *bins* is monotonically increasing or decreasing, respectively.

Parameters **x** : array_like

Input array to be binned. Prior to NumPy 1.10.0, this array had to be 1-dimensional, but can now have any shape.

bins : array_like

Array of bins. It has to be 1-dimensional and monotonic.

right : bool, optional

Indicating whether the intervals include the right or the left bin edge. Default behavior is (right==False) indicating that the interval does not include the right edge. The left bin end is open in this case, i.e., bins[i-1] <= x < bins[i] is the default behavior for monotonically increasing bins.

Returns **out** : ndarray of ints

Output array of indices, of same shape as *x*.

Raises **ValueError**

If *bins* is not monotonic.

TypeError

If the type of the input is complex.

See also:

bincount, *histogram*, *unique*, *searchsorted*

Notes

If values in *x* are such that they fall outside the bin range, attempting to index *bins* with the indices that *digitize* returns will result in an IndexError.

New in version 1.10.0.

np.digitize is implemented in terms of *np.searchsorted*. This means that a binary search is used to bin the values, which scales much better for larger number of bins than the previous linear search. It also removes the requirement for the input array to be 1-dimensional.

Examples

```
>>> x = np.array([0.2, 6.4, 3.0, 1.6])
>>> bins = np.array([0.0, 1.0, 2.5, 4.0, 10.0])
>>> inds = np.digitize(x, bins)
>>> inds
array([1, 4, 3, 2])
>>> for n in range(x.size):
...   print(bins[inds[n]-1], "<=", x[n], "<", bins[inds[n]])
...
0.0 <= 0.2 < 1.0
4.0 <= 6.4 < 10.0
2.5 <= 3.0 < 4.0
1.0 <= 1.6 < 2.5
```

```
>>> x = np.array([1.2, 10.0, 12.4, 15.5, 20.])
>>> bins = np.array([0, 5, 10, 15, 20])
>>> np.digitize(x,bins,right=True)
array([1, 2, 3, 4, 4])
>>> np.digitize(x,bins,right=False)
array([1, 3, 3, 4, 5])
```

3.28 Test Support (numpy.testing)

Common test support for all numpy test scripts.

This single module should provide all the common functionality for numpy tests in a single location, so that test scripts can just import it and work right away.

3.28.1 Asserts

assert_almost_equal(actual, desired[, ...])	Raises an AssertionError if two items are not equal up to desired precision.
assert_approx_equal(actual, desired[, ...])	Raises an AssertionError if two items are not equal up to significant digits.
assert_array_almost_equal(x, y[, decimal, ...])	Raises an AssertionError if two objects are not equal up to desired precision.
assert_allclose(actual, desired[, rtol, ...])	Raises an AssertionError if two objects are not equal up to desired tolerance.
assert_array_almost_equal_nulp(x, y[, nulp])	Compare two arrays relatively to their spacing.
assert_array_max_ulp(a, b[, maxulp, dtype])	Check that all items of arrays differ in at most N Units in the Last Place.
assert_array_equal(x, y[, err_msg, verbose])	Raises an AssertionError if two array_like objects are not equal.
assert_array_less(x, y[, err_msg, verbose])	Raises an AssertionError if two array_like objects are not ordered by less than.
assert_equal(actual, desired[, err_msg, verbose])	Raises an AssertionError if two objects are not equal.
assert_raises(exception_class, callable, ...)	Fail unless an exception of class exception_class is thrown by callable when invoked with arguments args and keyword arguments kwargs.
assert_raises_regex(exception_class, ...)	Fail unless an exception of class exception_class and with message that matches expected_regexp is thrown by callable when invoked with arguments args and keyword arguments kwargs.
assert_warns(warning_class, *args, **kwargs)	Fail unless the given callable throws the specified warning.
assert_string_equal(actual, desired)	Test if two strings are equal.

numpy.testing.**assert_almost_equal**(*actual*, *desired*, *decimal=7*, *err_msg=''*, *verbose=True*)

Raises an AssertionError if two items are not equal up to desired precision.

> **Note:** It is recommended to use one of *assert_allclose*, *assert_array_almost_equal_nulp* or *assert_array_max_ulp* instead of this function for more consistent floating point comparisons.

The test verifies that the elements of `actual` and `desired` satisfy.

```
abs(desired-actual) < 1.5 * 10**(-decimal)
```

That is a looser test than originally documented, but agrees with what the actual implementation in *assert_array_almost_equal* did up to rounding vagaries. An exception is raised at conflicting values. For ndarrays this delegates to assert_array_almost_equal

Parameters **actual** : array_like

The object to check.

desired : array_like

The expected object.

decimal : int, optional

Desired precision, default is 7.

err_msg : str, optional

The error message to be printed in case of failure.

verbose : bool, optional

If True, the conflicting values are appended to the error message.

Raises **AssertionError**

If actual and desired are not equal up to specified precision.

See also:

assert_allclose Compare two array_like objects for equality with desired relative and/or absolute precision.

assert_array_almost_equal_nulp, *assert_array_max_ulp*, *assert_equal*

Examples

```
>>> import numpy.testing as npt
>>> npt.assert_almost_equal(2.3333333333333, 2.33333334)
>>> npt.assert_almost_equal(2.3333333333333, 2.33333334, decimal=10)
...
<type 'exceptions.AssertionError'>:
Items are not equal:
 ACTUAL: 2.3333333333333002
 DESIRED: 2.3333333399999998
```

```
>>> npt.assert_almost_equal(np.array([1.0,2.3333333333333]),
...                         np.array([1.0,2.33333334]), decimal=9)
...
<type 'exceptions.AssertionError'>:
Arrays are not almost equal

(mismatch 50.0%)
 x: array([ 1.        ,  2.33333333])
 y: array([ 1.        ,  2.33333334])
```

numpy.testing.**assert_approx_equal**(*actual*, *desired*, *significant=7*, *err_msg=''*, *verbose=True*)

Raises an AssertionError if two items are not equal up to significant digits.

Note: It is recommended to use one of *assert_allclose*, *assert_array_almost_equal_nulp* or *assert_array_max_ulp* instead of this function for more consistent floating point comparisons.

Given two numbers, check that they are approximately equal. Approximately equal is defined as the number of significant digits that agree.

Parameters **actual** : scalar

The object to check.

desired : scalar

The expected object.

significant : int, optional

Desired precision, default is 7.

err_msg : str, optional

The error message to be printed in case of failure.

verbose : bool, optional

If True, the conflicting values are appended to the error message.

Raises **AssertionError**

If actual and desired are not equal up to specified precision.

See also:

assert_allclose Compare two array_like objects for equality with desired relative and/or absolute precision.

assert_array_almost_equal_nulp, *assert_array_max_ulp*, *assert_equal*

Examples

```
>>> np.testing.assert_approx_equal(0.12345677777777e-20, 0.1234567e-20)
>>> np.testing.assert_approx_equal(0.12345670e-20, 0.12345671e-20,
                                   significant=8)
>>> np.testing.assert_approx_equal(0.12345670e-20, 0.12345672e-20,
                                   significant=8)
...
<type 'exceptions.AssertionError'>:
Items are not equal to 8 significant digits:
 ACTUAL: 1.234567e-021
 DESIRED: 1.2345672000000001e-021
```

the evaluated condition that raises the exception is

```
>>> abs(0.12345670e-20/1e-21 - 0.12345672e-20/1e-21) >= 10**-(8-1)
True
```

numpy.testing.**assert_array_almost_equal**(*x*, *y*, *decimal=6*, *err_msg=''*, *verbose=True*)

Raises an AssertionError if two objects are not equal up to desired precision.

Note: It is recommended to use one of *assert_allclose*, *assert_array_almost_equal_nulp* or *assert_array_max_ulp* instead of this function for more consistent floating point comparisons.

The test verifies identical shapes and that the elements of `actual` and `desired` satisfy.

```
abs(desired-actual) < 1.5 * 10**(-decimal)
```

That is a looser test than originally documented, but agrees with what the actual implementation did up to rounding vagaries. An exception is raised at shape mismatch or conflicting values. In contrast to the standard usage in numpy, NaNs are compared like numbers, no assertion is raised if both objects have NaNs in the same positions.

Parameters **x** : array_like

The actual object to check.

y : array_like

The desired, expected object.

decimal : int, optional

Desired precision, default is 6.

err_msg : str, optional

The error message to be printed in case of failure.

verbose : bool, optional

If True, the conflicting values are appended to the error message.

Raises **AssertionError**

If actual and desired are not equal up to specified precision.

See also:

assert_allclose Compare two array_like objects for equality with desired relative and/or absolute precision.

assert_array_almost_equal_nulp, *assert_array_max_ulp*, *assert_equal*

Examples

the first assert does not raise an exception

```
>>> np.testing.assert_array_almost_equal([1.0,2.333,np.nan],
                                         [1.0,2.333,np.nan])
```

```
>>> np.testing.assert_array_almost_equal([1.0,2.33333,np.nan],
...                                      [1.0,2.33339,np.nan], decimal=5)
...
<type 'exceptions.AssertionError'>:
AssertionError:
Arrays are not almost equal

(mismatch 50.0%)
 x: array([ 1.     ,  2.33333,      NaN])
 y: array([ 1.     ,  2.33339,      NaN])
```

```
>>> np.testing.assert_array_almost_equal([1.0,2.33333,np.nan],
...                                      [1.0,2.33333, 5], decimal=5)
<type 'exceptions.ValueError'>:
ValueError:
Arrays are not almost equal
```

(continues on next page)

(continued from previous page)

```
 x: array([ 1.     ,  2.33333,      NaN])
 y: array([ 1.     ,  2.33333,  5.     ])
```

numpy.testing.**assert_allclose**(*actual*, *desired*, *rtol=1e-07*, *atol=0*, *equal_nan=True*, *err_msg=''*, *verbose=True*)

Raises an AssertionError if two objects are not equal up to desired tolerance.

The test is equivalent to `allclose(actual, desired, rtol, atol)`. It compares the difference between *actual* and *desired* to `atol + rtol * abs(desired)`.

New in version 1.5.0.

Parameters **actual** : array_like

Array obtained.

desired : array_like

Array desired.

rtol : float, optional

Relative tolerance.

atol : float, optional

Absolute tolerance.

equal_nan : bool, optional.

If True, NaNs will compare equal.

err_msg : str, optional

The error message to be printed in case of failure.

verbose : bool, optional

If True, the conflicting values are appended to the error message.

Raises **AssertionError**

If actual and desired are not equal up to specified precision.

See also:

assert_array_almost_equal_nulp, *assert_array_max_ulp*

Examples

```
>>> x = [1e-5, 1e-3, 1e-1]
>>> y = np.arccos(np.cos(x))
>>> assert_allclose(x, y, rtol=1e-5, atol=0)
```

numpy.testing.**assert_array_almost_equal_nulp**(*x*, *y*, *nulp=1*)

Compare two arrays relatively to their spacing.

This is a relatively robust method to compare two arrays whose amplitude is variable.

Parameters **x, y** : array_like

Input arrays.

nulp : int, optional

The maximum number of unit in the last place for tolerance (see Notes). Default is 1.

Returns None

Raises **AssertionError**

If the spacing between *x* and *y* for one or more elements is larger than *nulp*.

See also:

assert_array_max_ulp Check that all items of arrays differ in at most N Units in the Last Place.

spacing Return the distance between x and the nearest adjacent number.

Notes

An assertion is raised if the following condition is not met:

```
abs(x - y) <= nulps * spacing(maximum(abs(x), abs(y)))
```

Examples

```
>>> x = np.array([1., 1e-10, 1e-20])
>>> eps = np.finfo(x.dtype).eps
>>> np.testing.assert_array_almost_equal_nulp(x, x*eps/2 + x)
```

```
>>> np.testing.assert_array_almost_equal_nulp(x, x*eps + x)
Traceback (most recent call last):
  ...
AssertionError: X and Y are not equal to 1 ULP (max is 2)
```

numpy.testing.**assert_array_max_ulp**(*a*, *b*, *maxulp=1*, *dtype=None*)

Check that all items of arrays differ in at most N Units in the Last Place.

Parameters **a, b** : array_like

Input arrays to be compared.

maxulp : int, optional

The maximum number of units in the last place that elements of *a* and *b* can differ. Default is 1.

dtype : dtype, optional

Data-type to convert *a* and *b* to if given. Default is None.

Returns **ret** : ndarray

Array containing number of representable floating point numbers between items in *a* and *b*.

Raises **AssertionError**

If one or more elements differ by more than *maxulp*.

See also:

assert_array_almost_equal_nulp Compare two arrays relatively to their spacing.

Examples

```
>>> a = np.linspace(0., 1., 100)
>>> res = np.testing.assert_array_max_ulp(a, np.arcsin(np.sin(a)))
```

numpy.testing.**assert_array_equal**(*x*, *y*, *err_msg=''*, *verbose=True*)

Raises an AssertionError if two array_like objects are not equal.

Given two array_like objects, check that the shape is equal and all elements of these objects are equal. An exception is raised at shape mismatch or conflicting values. In contrast to the standard usage in numpy, NaNs are compared like numbers, no assertion is raised if both objects have NaNs in the same positions.

The usual caution for verifying equality with floating point numbers is advised.

Parameters **x** : array_like

The actual object to check.

y : array_like

The desired, expected object.

err_msg : str, optional

The error message to be printed in case of failure.

verbose : bool, optional

If True, the conflicting values are appended to the error message.

Raises **AssertionError**

If actual and desired objects are not equal.

See also:

assert_allclose Compare two array_like objects for equality with desired relative and/or absolute precision.

assert_array_almost_equal_nulp, *assert_array_max_ulp*, *assert_equal*

Examples

The first assert does not raise an exception:

```
>>> np.testing.assert_array_equal([1.0,2.33333,np.nan],
...                               [np.exp(0),2.33333, np.nan])
```

Assert fails with numerical inprecision with floats:

```
>>> np.testing.assert_array_equal([1.0,np.pi,np.nan],
...                               [1, np.sqrt(np.pi)**2, np.nan])
...
<type 'exceptions.ValueError'>:
AssertionError:
Arrays are not equal

(mismatch 50.0%)
 x: array([ 1.        ,  3.14159265,         NaN])
 y: array([ 1.        ,  3.14159265,         NaN])
```

Use *assert_allclose* or one of the nulp (number of floating point values) functions for these cases instead:

```
>>> np.testing.assert_allclose([1.0,np.pi,np.nan],
...                            [1, np.sqrt(np.pi)**2, np.nan],
...                            rtol=1e-10, atol=0)
```

numpy.testing.**assert_array_less**(*x*, *y*, *err_msg=''*, *verbose=True*)

Raises an AssertionError if two array_like objects are not ordered by less than.

Given two array_like objects, check that the shape is equal and all elements of the first object are strictly smaller than those of the second object. An exception is raised at shape mismatch or incorrectly ordered values. Shape mismatch does not raise if an object has zero dimension. In contrast to the standard usage in numpy, NaNs are compared, no assertion is raised if both objects have NaNs in the same positions.

Parameters **x** : array_like

The smaller object to check.

y : array_like

The larger object to compare.

err_msg : string

The error message to be printed in case of failure.

verbose : bool

If True, the conflicting values are appended to the error message.

Raises **AssertionError**

If actual and desired objects are not equal.

See also:

assert_array_equal tests objects for equality

assert_array_almost_equal test objects for equality up to precision

Examples

```
>>> np.testing.assert_array_less([1.0, 1.0, np.nan], [1.1, 2.0, np.nan])
>>> np.testing.assert_array_less([1.0, 1.0, np.nan], [1, 2.0, np.nan])
...
<type 'exceptions.ValueError'>:
Arrays are not less-ordered
(mismatch 50.0%)
 x: array([  1.,   1.,  NaN])
 y: array([  1.,   2.,  NaN])
```

```
>>> np.testing.assert_array_less([1.0, 4.0], 3)
...
<type 'exceptions.ValueError'>:
Arrays are not less-ordered
(mismatch 50.0%)
 x: array([ 1.,  4.])
 y: array(3)
```

```
>>> np.testing.assert_array_less([1.0, 2.0, 3.0], [4])
...
<type 'exceptions.ValueError'>:
Arrays are not less-ordered
(shapes (3,), (1,) mismatch)
 x: array([ 1.,  2.,  3.])
 y: array([4])
```

numpy.testing.**assert_equal**(*actual*, *desired*, *err_msg=''*, *verbose=True*)

Raises an AssertionError if two objects are not equal.

Given two objects (scalars, lists, tuples, dictionaries or numpy arrays), check that all elements of these objects are equal. An exception is raised at the first conflicting values.

Parameters **actual** : array_like

The object to check.

desired : array_like

The expected object.

err_msg : str, optional

The error message to be printed in case of failure.

verbose : bool, optional

If True, the conflicting values are appended to the error message.

Raises **AssertionError**

If actual and desired are not equal.

Examples

```
>>> np.testing.assert_equal([4,5], [4,6])
...
<type 'exceptions.AssertionError'>:
Items are not equal:
item=1
 ACTUAL: 5
 DESIRED: 6
```

numpy.testing.**assert_raises**(*exception_class*, *callable*, **args*, ***kwargs*) *assert_raises(exception_class)*

Fail unless an exception of class exception_class is thrown by callable when invoked with arguments args and keyword arguments kwargs. If a different type of exception is thrown, it will not be caught, and the test case will be deemed to have suffered an error, exactly as for an unexpected exception.

Alternatively, *assert_raises* can be used as a context manager:

```
>>> from numpy.testing import assert_raises
>>> with assert_raises(ZeroDivisionError):
...     1 / 0
```

is equivalent to

```
>>> def div(x, y):
...     return x / y
>>> assert_raises(ZeroDivisionError, div, 1, 0)
```

numpy.testing.**assert_raises_regex**(*exception_class*, *expected_regexp*, *callable*, **args*, ***kwargs)* *assert_raises_regex(exception_class*, *expected_regexp*)

Fail unless an exception of class exception_class and with message that matches expected_regexp is thrown by callable when invoked with arguments args and keyword arguments kwargs.

Alternatively, can be used as a context manager like *assert_raises*.

Name of this function adheres to Python 3.2+ reference, but should work in all versions down to 2.6.

Notes

New in version 1.9.0.

numpy.testing.**assert_warns**(*warning_class*, **args*, ***kwargs*)

Fail unless the given callable throws the specified warning.

A warning of class warning_class should be thrown by the callable when invoked with arguments args and keyword arguments kwargs. If a different type of warning is thrown, it will not be caught.

If called with all arguments other than the warning class omitted, may be used as a context manager:

with assert_warns(SomeWarning): do_something()

The ability to be used as a context manager is new in NumPy v1.11.0.

New in version 1.4.0.

Parameters **warning_class** : class

The class defining the warning that *func* is expected to throw.

func : callable

The callable to test.

***args** : Arguments

Arguments passed to *func*.

****kwargs** : Kwargs

Keyword arguments passed to *func*.

Returns The value returned by *func*.

numpy.testing.**assert_string_equal**(*actual*, *desired*)

Test if two strings are equal.

If the given strings are equal, *assert_string_equal* does nothing. If they are not equal, an AssertionError is raised, and the diff between the strings is shown.

Parameters **actual** : str

The string to test for equality against the expected string.

desired : str

The expected string.

Examples

```
>>> np.testing.assert_string_equal('abc', 'abc')
>>> np.testing.assert_string_equal('abc', 'abcd')
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
...
AssertionError: Differences in strings:
- abc+ abcd?    +
```

3.28.2 Decorators

decorators.deprecated([conditional])	Filter deprecation warnings while running the test suite.
decorators.knownfailureif(fail_condition[, msg])	Make function raise KnownFailureException exception if given condition is true.
decorators.setastest([tf])	Signals to nose that this function is or is not a test.
decorators.skipif(skip_condition[, msg])	Make function raise SkipTest exception if a given condition is true.
decorators.slow(t)	Label a test as 'slow'.
decorate_methods(cls, decorator[, testmatch])	Apply a decorator to all methods in a class matching a regular expression.

numpy.testing.decorators.**deprecated**(*conditional=True*)

Filter deprecation warnings while running the test suite.

This decorator can be used to filter DeprecationWarning's, to avoid printing them during the test suite run, while checking that the test actually raises a DeprecationWarning.

Parameters **conditional** : bool or callable, optional

Flag to determine whether to mark test as deprecated or not. If the condition is a callable, it is used at runtime to dynamically make the decision. Default is True.

Returns **decorator** : function

The *deprecated* decorator itself.

Notes

New in version 1.4.0.

numpy.testing.decorators.**knownfailureif**(*fail_condition*, *msg=None*)

Make function raise KnownFailureException exception if given condition is true.

If the condition is a callable, it is used at runtime to dynamically make the decision. This is useful for tests that may require costly imports, to delay the cost until the test suite is actually executed.

Parameters **fail_condition** : bool or callable

Flag to determine whether to mark the decorated test as a known failure (if True) or not (if False).

msg : str, optional

Message to give on raising a KnownFailureException exception. Default is None.

Returns **decorator** : function

Decorator, which, when applied to a function, causes KnownFailureException to be raised when *fail_condition* is True, and the function to be called normally otherwise.

Notes

The decorator itself is decorated with the `nose.tools.make_decorator` function in order to transmit function name, and various other metadata.

`numpy.testing.decorators.`**`setastest`**(*tf=True*)

Signals to nose that this function is or is not a test.

Parameters **tf** : bool

If True, specifies that the decorated callable is a test. If False, specifies that the decorated callable is not a test. Default is True.

Notes

This decorator can't use the nose namespace, because it can be called from a non-test module. See also `istest` and `nottest` in `nose.tools`.

Examples

`setastest` can be used in the following way:

```
from numpy.testing import dec

@dec.setastest(False)
def func_with_test_in_name(arg1, arg2):
    pass
```

`numpy.testing.decorators.`**`skipif`**(*skip_condition*, *msg=None*)

Make function raise SkipTest exception if a given condition is true.

If the condition is a callable, it is used at runtime to dynamically make the decision. This is useful for tests that may require costly imports, to delay the cost until the test suite is actually executed.

Parameters **skip_condition** : bool or callable

Flag to determine whether to skip the decorated test.

msg : str, optional

Message to give on raising a SkipTest exception. Default is None.

Returns **decorator** : function

Decorator which, when applied to a function, causes SkipTest to be raised when *skip_condition* is True, and the function to be called normally otherwise.

Notes

The decorator itself is decorated with the `nose.tools.make_decorator` function in order to transmit function name, and various other metadata.

numpy.testing.decorators.**slow**(*t*)
Label a test as 'slow'.

The exact definition of a slow test is obviously both subjective and hardware-dependent, but in general any individual test that requires more than a second or two should be labeled as slow (the whole suite consits of thousands of tests, so even a second is significant).

Parameters **t** : callable

The test to label as slow.

Returns **t** : callable

The decorated test *t*.

Examples

The `numpy.testing` module includes `import decorators as dec`. A test can be decorated as slow like this:

```
from numpy.testing import *

@dec.slow
def test_big(self):
    print('Big, slow test')
```

numpy.testing.**decorate_methods**(*cls*, *decorator*, *testmatch=None*)
Apply a decorator to all methods in a class matching a regular expression.

The given decorator is applied to all public methods of *cls* that are matched by the regular expression *testmatch* (`testmatch.search(methodname)`). Methods that are private, i.e. start with an underscore, are ignored.

Parameters **cls** : class

Class whose methods to decorate.

decorator : function

Decorator to apply to methods

testmatch : compiled regexp or str, optional

The regular expression. Default value is None, in which case the nose default (`re.compile(r'(?:^|[\b_\.%s-])[Tt]est' % os.sep)`) is used. If *testmatch* is a string, it is compiled to a regular expression first.

3.28.3 Test Running

Tester	alias of `numpy.testing.nose_tools.nosetester.NoseTester`
run_module_suite([file_to_run, argv])	Run a test module.
rundocs([filename, raise_on_error])	Run doctests found in the given file.
suppress_warnings([forwarding_rule])	Context manager and decorator doing much the same as `warnings.catch_warnings`.

numpy.testing.**Tester**
alias of `numpy.testing.nose_tools.nosetester.NoseTester`

numpy.testing.**run_module_suite**(*file_to_run=None*, *argv=None*)
Run a test module.

Equivalent to calling `$ nosetests <argv> <file_to_run>` from the command line

Parameters **file_to_run** : str, optional

Path to test module, or None. By default, run the module from which this function is called.

argv : list of strings

Arguments to be passed to the nose test runner. `argv[0]` is ignored. All command line arguments accepted by `nosetests` will work. If it is the default value None, sys.argv is used.

New in version 1.9.0.

Examples

Adding the following:

```
if __name__ == "__main__" :
    run_module_suite(argv=sys.argv)
```

at the end of a test module will run the tests when that module is called in the python interpreter.

Alternatively, calling:

```
>>> run_module_suite(file_to_run="numpy/tests/test_matlib.py")
```

from an interpreter will run all the test routine in 'test_matlib.py'.

numpy.testing.**rundocs**(*filename=None*, *raise_on_error=True*)
Run doctests found in the given file.

By default *rundocs* raises an AssertionError on failure.

Parameters **filename** : str

The path to the file for which the doctests are run.

raise_on_error : bool

Whether to raise an AssertionError when a doctest fails. Default is True.

Notes

The doctests can be run by the user/developer by adding the `doctests` argument to the `test()` call. For example, to run all tests (including doctests) for `numpy.lib`:

```
>>> np.lib.test(doctests=True)
```

class numpy.testing.**suppress_warnings**(*forwarding_rule='always'*)
Context manager and decorator doing much the same as `warnings.catch_warnings`.

However, it also provides a filter mechanism to work around http://bugs.python.org/issue4180.

This bug causes Python before 3.4 to not reliably show warnings again after they have been ignored once (even within catch_warnings). It means that no "ignore" filter can be used easily, since following tests might need to see the warning. Additionally it allows easier specificity for testing warnings and can be nested.

Parameters **forwarding_rule** : str, optional

One of “always”, “once”, “module”, or “location”. Analogous to the usual warnings module filter mode, it is useful to reduce noise mostly on the outmost level. Unsuppressed and unrecorded warnings will be forwarded based on this rule. Defaults to “always”. “location” is equivalent to the warnings “default”, match by exact location the warning warning originated from.

Notes

Filters added inside the context manager will be discarded again when leaving it. Upon entering all filters defined outside a context will be applied automatically.

When a recording filter is added, matching warnings are stored in the `log` attribute as well as in the list returned by `record`.

If filters are added and the `module` keyword is given, the warning registry of this module will additionally be cleared when applying it, entering the context, or exiting it. This could cause warnings to appear a second time after leaving the context if they were configured to be printed once (default) and were already printed before the context was entered.

Nesting this context manager will work as expected when the forwarding rule is “always” (default). Unfiltered and unrecorded warnings will be passed out and be matched by the outer level. On the outmost level they will be printed (or caught by another warnings context). The forwarding rule argument can modify this behaviour.

Like `catch_warnings` this context manager is not threadsafe.

Examples

```
>>> with suppress_warnings() as sup:
...     sup.filter(DeprecationWarning, "Some text")
...     sup.filter(module=np.ma.core)
...     log = sup.record(FutureWarning, "Does this occur?")
...     command_giving_warnings()
...     # The FutureWarning was given once, the filtered warnings were
...     # ignored. All other warnings abide outside settings (may be
...     # printed/error)
...     assert_(len(log) == 1)
...     assert_(len(sup.log) == 1)  # also stored in log attribute
```

Or as a decorator:

```
>>> sup = suppress_warnings()
>>> sup.filter(module=np.ma.core)  # module must match exact
>>> @sup
>>> def some_function():
...     # do something which causes a warning in np.ma.core
...     pass
```

Methods

__call__(func)	Function decorator to apply certain suppressions to a whole function.
filter([category, message, module])	Add a new suppressing filter or apply it if the state is entered.
record([category, message, module])	Append a new recording filter or apply it if the state is entered.

suppress_warnings.**__call__**(*func*)
Function decorator to apply certain suppressions to a whole function.

suppress_warnings.**filter**(*category=<class 'Warning'>*, *message=''*, *module=None*)
Add a new suppressing filter or apply it if the state is entered.

Parameters **category** : class, optional

Warning class to filter

message : string, optional

Regular expression matching the warning message.

module : module, optional

Module to filter for. Note that the module (and its file) must match exactly and cannot be a submodule. This may make it unreliable for external modules.

Notes

When added within a context, filters are only added inside the context and will be forgotten when the context is exited.

suppress_warnings.**record**(*category=<class 'Warning'>*, *message=''*, *module=None*)
Append a new recording filter or apply it if the state is entered.

All warnings matching will be appended to the `log` attribute.

Parameters **category** : class, optional

Warning class to filter

message : string, optional

Regular expression matching the warning message.

module : module, optional

Module to filter for. Note that the module (and its file) must match exactly and cannot be a submodule. This may make it unreliable for external modules.

Returns **log** : list

A list which will be filled with all matched warnings.

Notes

When added within a context, filters are only added inside the context and will be forgotten when the context is exited.

3.29 Window functions

3.29.1 Various windows

bartlett(M)	Return the Bartlett window.
blackman(M)	Return the Blackman window.
hamming(M)	Return the Hamming window.
hanning(M)	Return the Hanning window.
kaiser(M, beta)	Return the Kaiser window.

numpy.**bartlett**(*M*)

Return the Bartlett window.

The Bartlett window is very similar to a triangular window, except that the end points are at zero. It is often used in signal processing for tapering a signal, without generating too much ripple in the frequency domain.

Parameters **M** : int

Number of points in the output window. If zero or less, an empty array is returned.

Returns **out** : array

The triangular window, with the maximum value normalized to one (the value one appears only if the number of samples is odd), with the first and last samples equal to zero.

See also:

blackman, *hamming*, *hanning*, *kaiser*

Notes

The Bartlett window is defined as

$$w(n) = \frac{2}{M-1}\left(\frac{M-1}{2} - \left|n - \frac{M-1}{2}\right|\right)$$

Most references to the Bartlett window come from the signal processing literature, where it is used as one of many windowing functions for smoothing values. Note that convolution with this window produces linear interpolation. It is also known as an apodization (which means"removing the foot", i.e. smoothing discontinuities at the beginning and end of the sampled signal) or tapering function. The fourier transform of the Bartlett is the product of two sinc functions. Note the excellent discussion in Kanasewich.

References

[R11], *[R12]*, *[R13]*, *[R14]*, *[R15]*

Examples

```
>>> np.bartlett(12)
array([ 0.        ,  0.18181818,  0.36363636,  0.54545455,  0.72727273,
        0.90909091,  0.90909091,  0.72727273,  0.54545455,  0.36363636,
        0.18181818,  0.        ])
```

Plot the window and its frequency response (requires SciPy and matplotlib):

```
>>> from numpy.fft import fft, fftshift
>>> window = np.bartlett(51)
>>> plt.plot(window)
[<matplotlib.lines.Line2D object at 0x...>]
>>> plt.title("Bartlett window")
<matplotlib.text.Text object at 0x...>
>>> plt.ylabel("Amplitude")
<matplotlib.text.Text object at 0x...>
>>> plt.xlabel("Sample")
<matplotlib.text.Text object at 0x...>
>>> plt.show()
```

```
>>> plt.figure()
<matplotlib.figure.Figure object at 0x...>
>>> A = fft(window, 2048) / 25.5
>>> mag = np.abs(fftshift(A))
>>> freq = np.linspace(-0.5, 0.5, len(A))
>>> response = 20 * np.log10(mag)
>>> response = np.clip(response, -100, 100)
>>> plt.plot(freq, response)
[<matplotlib.lines.Line2D object at 0x...>]
>>> plt.title("Frequency response of Bartlett window")
<matplotlib.text.Text object at 0x...>
>>> plt.ylabel("Magnitude [dB]")
<matplotlib.text.Text object at 0x...>
>>> plt.xlabel("Normalized frequency [cycles per sample]")
<matplotlib.text.Text object at 0x...>
>>> plt.axis('tight')
(-0.5, 0.5, -100.0, ...)
>>> plt.show()
```

numpy.**blackman**(*M*)

Return the Blackman window.

The Blackman window is a taper formed by using the first three terms of a summation of cosines. It was designed to have close to the minimal leakage possible. It is close to optimal, only slightly worse than a Kaiser window.

Parameters **M** : int

Number of points in the output window. If zero or less, an empty array is returned.

Returns **out** : ndarray

The window, with the maximum value normalized to one (the value one appears only if the number of samples is odd).

See also:

bartlett, *hamming*, *hanning*, *kaiser*

Notes

The Blackman window is defined as

$$w(n) = 0.42 - 0.5\cos(2\pi n/M) + 0.08\cos(4\pi n/M)$$

Most references to the Blackman window come from the signal processing literature, where it is used as one of many windowing functions for smoothing values. It is also known as an apodization (which means "removing

the foot", i.e. smoothing discontinuities at the beginning and end of the sampled signal) or tapering function. It is known as a "near optimal" tapering function, almost as good (by some measures) as the kaiser window.

References

Blackman, R.B. and Tukey, J.W., (1958) The measurement of power spectra, Dover Publications, New York.

Oppenheim, A.V., and R.W. Schafer. Discrete-Time Signal Processing. Upper Saddle River, NJ: Prentice-Hall, 1999, pp. 468-471.

Examples

```
>>> np.blackman(12)
array([ -1.38777878e-17,   3.26064346e-02,   1.59903635e-01,
         4.14397981e-01,   7.36045180e-01,   9.67046769e-01,
         9.67046769e-01,   7.36045180e-01,   4.14397981e-01,
         1.59903635e-01,   3.26064346e-02,  -1.38777878e-17])
```

Plot the window and the frequency response:

```
>>> from numpy.fft import fft, fftshift
>>> window = np.blackman(51)
>>> plt.plot(window)
[<matplotlib.lines.Line2D object at 0x...>]
>>> plt.title("Blackman window")
<matplotlib.text.Text object at 0x...>
>>> plt.ylabel("Amplitude")
<matplotlib.text.Text object at 0x...>
>>> plt.xlabel("Sample")
<matplotlib.text.Text object at 0x...>
>>> plt.show()
```

```
>>> plt.figure()
<matplotlib.figure.Figure object at 0x...>
>>> A = fft(window, 2048) / 25.5
>>> mag = np.abs(fftshift(A))
>>> freq = np.linspace(-0.5, 0.5, len(A))
>>> response = 20 * np.log10(mag)
>>> response = np.clip(response, -100, 100)
>>> plt.plot(freq, response)
[<matplotlib.lines.Line2D object at 0x...>]
>>> plt.title("Frequency response of Blackman window")
<matplotlib.text.Text object at 0x...>
>>> plt.ylabel("Magnitude [dB]")
<matplotlib.text.Text object at 0x...>
>>> plt.xlabel("Normalized frequency [cycles per sample]")
<matplotlib.text.Text object at 0x...>
>>> plt.axis('tight')
(-0.5, 0.5, -100.0, ...)
>>> plt.show()
```

numpy.**hamming**(*M*)

Return the Hamming window.

The Hamming window is a taper formed by using a weighted cosine.

Parameters **M** : int

Number of points in the output window. If zero or less, an empty array is returned.

Returns **out** : ndarray

The window, with the maximum value normalized to one (the value one appears only if the number of samples is odd).

See also:

bartlett, *blackman*, *hanning*, *kaiser*

Notes

The Hamming window is defined as

$$w(n) = 0.54 - 0.46cos\left(\frac{2\pi n}{M-1}\right) \qquad 0 \leq n \leq M-1$$

The Hamming was named for R. W. Hamming, an associate of J. W. Tukey and is described in Blackman and Tukey. It was recommended for smoothing the truncated autocovariance function in the time domain. Most references to the Hamming window come from the signal processing literature, where it is used as one of many windowing functions for smoothing values. It is also known as an apodization (which means "removing the foot", i.e. smoothing discontinuities at the beginning and end of the sampled signal) or tapering function.

References

[R26], *[R27]*, *[R28]*, *[R29]*

Examples

```
>>> np.hamming(12)
array([ 0.08      ,  0.15302337,  0.34890909,  0.60546483,  0.84123594,
        0.98136677,  0.98136677,  0.84123594,  0.60546483,  0.34890909,
        0.15302337,  0.08      ])
```

Plot the window and the frequency response:

```
>>> from numpy.fft import fft, fftshift
>>> window = np.hamming(51)
>>> plt.plot(window)
[<matplotlib.lines.Line2D object at 0x...>]
>>> plt.title("Hamming window")
<matplotlib.text.Text object at 0x...>
>>> plt.ylabel("Amplitude")
<matplotlib.text.Text object at 0x...>
>>> plt.xlabel("Sample")
<matplotlib.text.Text object at 0x...>
>>> plt.show()
```

```
>>> plt.figure()
<matplotlib.figure.Figure object at 0x...>
>>> A = fft(window, 2048) / 25.5
```

(continues on next page)

(continued from previous page)

```
>>> mag = np.abs(fftshift(A))
>>> freq = np.linspace(-0.5, 0.5, len(A))
>>> response = 20 * np.log10(mag)
>>> response = np.clip(response, -100, 100)
>>> plt.plot(freq, response)
[<matplotlib.lines.Line2D object at 0x...>]
>>> plt.title("Frequency response of Hamming window")
<matplotlib.text.Text object at 0x...>
>>> plt.ylabel("Magnitude [dB]")
<matplotlib.text.Text object at 0x...>
>>> plt.xlabel("Normalized frequency [cycles per sample]")
<matplotlib.text.Text object at 0x...>
>>> plt.axis('tight')
(-0.5, 0.5, -100.0, ...)
>>> plt.show()
```

numpy.**hanning**(*M*)

Return the Hanning window.

The Hanning window is a taper formed by using a weighted cosine.

Parameters **M** : int

Number of points in the output window. If zero or less, an empty array is returned.

Returns **out** : ndarray, shape(M,)

The window, with the maximum value normalized to one (the value one appears only if *M* is odd).

See also:

bartlett, *blackman*, *hamming*, *kaiser*

Notes

The Hanning window is defined as

$$w(n) = 0.5 - 0.5cos\left(\frac{2\pi n}{M-1}\right) \qquad 0 \leq n \leq M-1$$

The Hanning was named for Julius von Hann, an Austrian meteorologist. It is also known as the Cosine Bell. Some authors prefer that it be called a Hann window, to help avoid confusion with the very similar Hamming window.

Most references to the Hanning window come from the signal processing literature, where it is used as one of many windowing functions for smoothing values. It is also known as an apodization (which means "removing the foot", i.e. smoothing discontinuities at the beginning and end of the sampled signal) or tapering function.

References

[R30], *[R31]*, *[R32]*, *[R33]*

Examples

```
>>> np.hanning(12)
array([ 0.        ,  0.07937323,  0.29229249,  0.57115742,  0.82743037,
        0.97974649,  0.97974649,  0.82743037,  0.57115742,  0.29229249,
        0.07937323,  0.        ])
```

Plot the window and its frequency response:

```
>>> from numpy.fft import fft, fftshift
>>> window = np.hanning(51)
>>> plt.plot(window)
[<matplotlib.lines.Line2D object at 0x...>]
>>> plt.title("Hann window")
<matplotlib.text.Text object at 0x...>
>>> plt.ylabel("Amplitude")
<matplotlib.text.Text object at 0x...>
>>> plt.xlabel("Sample")
<matplotlib.text.Text object at 0x...>
>>> plt.show()
```

```
>>> plt.figure()
<matplotlib.figure.Figure object at 0x...>
>>> A = fft(window, 2048) / 25.5
>>> mag = np.abs(fftshift(A))
>>> freq = np.linspace(-0.5, 0.5, len(A))
>>> response = 20 * np.log10(mag)
>>> response = np.clip(response, -100, 100)
>>> plt.plot(freq, response)
[<matplotlib.lines.Line2D object at 0x...>]
>>> plt.title("Frequency response of the Hann window")
<matplotlib.text.Text object at 0x...>
>>> plt.ylabel("Magnitude [dB]")
<matplotlib.text.Text object at 0x...>
>>> plt.xlabel("Normalized frequency [cycles per sample]")
<matplotlib.text.Text object at 0x...>
>>> plt.axis('tight')
(-0.5, 0.5, -100.0, ...)
>>> plt.show()
```

numpy.**kaiser**(*M*, *beta*)

Return the Kaiser window.

The Kaiser window is a taper formed by using a Bessel function.

Parameters **M** : int

Number of points in the output window. If zero or less, an empty array is returned.

beta : float

Shape parameter for window.

Returns **out** : array

The window, with the maximum value normalized to one (the value one appears only if the number of samples is odd).

See also:

bartlett, *blackman*, *hamming*, *hanning*

Notes

The Kaiser window is defined as

$$w(n) = I_0\left(\beta\sqrt{1-\frac{4n^2}{(M-1)^2}}\right)/I_0(\beta)$$

with

$$-\frac{M-1}{2} \leq n \leq \frac{M-1}{2},$$

where I_0 is the modified zeroth-order Bessel function.

The Kaiser was named for Jim Kaiser, who discovered a simple approximation to the DPSS window based on Bessel functions. The Kaiser window is a very good approximation to the Digital Prolate Spheroidal Sequence, or Slepian window, which is the transform which maximizes the energy in the main lobe of the window relative to total energy.

The Kaiser can approximate many other windows by varying the beta parameter.

beta	Window shape
0	Rectangular
5	Similar to a Hamming
6	Similar to a Hanning
8.6	Similar to a Blackman

A beta value of 14 is probably a good starting point. Note that as beta gets large, the window narrows, and so the number of samples needs to be large enough to sample the increasingly narrow spike, otherwise NaNs will get returned.

Most references to the Kaiser window come from the signal processing literature, where it is used as one of many windowing functions for smoothing values. It is also known as an apodization (which means "removing the foot", i.e. smoothing discontinuities at the beginning and end of the sampled signal) or tapering function.

References

[R39], *[R40]*, *[R41]*

Examples

```
>>> np.kaiser(12, 14)
array([  7.72686684e-06,   3.46009194e-03,   4.65200189e-02,
         2.29737120e-01,   5.99885316e-01,   9.45674898e-01,
         9.45674898e-01,   5.99885316e-01,   2.29737120e-01,
         4.65200189e-02,   3.46009194e-03,   7.72686684e-06])
```

Plot the window and the frequency response:

```
>>> from numpy.fft import fft, fftshift
>>> window = np.kaiser(51, 14)
>>> plt.plot(window)
[<matplotlib.lines.Line2D object at 0x...>]
```

(continues on next page)

(continued from previous page)

```
>>> plt.title("Kaiser window")
<matplotlib.text.Text object at 0x...>
>>> plt.ylabel("Amplitude")
<matplotlib.text.Text object at 0x...>
>>> plt.xlabel("Sample")
<matplotlib.text.Text object at 0x...>
>>> plt.show()
```

```
>>> plt.figure()
<matplotlib.figure.Figure object at 0x...>
>>> A = fft(window, 2048) / 25.5
>>> mag = np.abs(fftshift(A))
>>> freq = np.linspace(-0.5, 0.5, len(A))
>>> response = 20 * np.log10(mag)
>>> response = np.clip(response, -100, 100)
>>> plt.plot(freq, response)
[<matplotlib.lines.Line2D object at 0x...>]
>>> plt.title("Frequency response of Kaiser window")
<matplotlib.text.Text object at 0x...>
>>> plt.ylabel("Magnitude [dB]")
<matplotlib.text.Text object at 0x...>
>>> plt.xlabel("Normalized frequency [cycles per sample]")
<matplotlib.text.Text object at 0x...>
>>> plt.axis('tight')
(-0.5, 0.5, -100.0, ...)
>>> plt.show()
```

CHAPTER

FOUR

PACKAGING (NUMPY.DISTUTILS)

NumPy provides enhanced distutils functionality to make it easier to build and install sub-packages, auto-generate code, and extension modules that use Fortran-compiled libraries. To use features of NumPy distutils, use the `setup` command from `numpy.distutils.core`. A useful *Configuration* class is also provided in *numpy.distutils.misc_util* that can make it easier to construct keyword arguments to pass to the setup function (by passing the dictionary obtained from the todict() method of the class). More information is available in the NumPy Distutils Users Guide in `<site-packages>/numpy/doc/DISTUTILS.txt`.

4.1 Modules in numpy.distutils

4.1.1 misc_util

get_numpy_include_dirs()	
dict_append(d, **kws)	
appendpath(prefix, path)	
allpath(name)	Convert a /-separated pathname to one using the OS's path separator.
dot_join(*args)	
generate_config_py(target)	Generate config.py file containing system_info information used during building the package.
get_cmd(cmdname[, _cache])	
terminal_has_colors()	
red_text(s)	
green_text(s)	
yellow_text(s)	
blue_text(s)	
cyan_text(s)	
cyg2win32(path)	
all_strings(lst)	Return True if all items in lst are string objects.
has_f_sources(sources)	Return True if sources contains Fortran files
has_cxx_sources(sources)	Return True if sources contains C++ files
filter_sources(sources)	Return four lists of filenames containing C, C++, Fortran, and Fortran 90 module sources, respectively.
get_dependencies(sources)	
is_local_src_dir(directory)	Return true if directory is local directory.
get_ext_source_files(ext)	
get_script_files(scripts)	

numpy.distutils.misc_util.**get_numpy_include_dirs**()

numpy.distutils.misc_util.**dict_append**(*d*, ***kws*)

numpy.distutils.misc_util.**appendpath**(*prefix*, *path*)

numpy.distutils.misc_util.**allpath**(*name*)
Convert a /-separated pathname to one using the OS's path separator.

numpy.distutils.misc_util.**dot_join**(**args*)

numpy.distutils.misc_util.**generate_config_py**(*target*)
Generate config.py file containing system_info information used during building the package.

Usage: config['py_modules'].append((packagename, '__config__',generate_config_py))

numpy.distutils.misc_util.**get_cmd**(*cmdname*, *_cache={}*)

numpy.distutils.misc_util.**terminal_has_colors**()

numpy.distutils.misc_util.**red_text**(*s*)

numpy.distutils.misc_util.**green_text**(*s*)

numpy.distutils.misc_util.**yellow_text**(*s*)

numpy.distutils.misc_util.**blue_text**(*s*)

numpy.distutils.misc_util.**cyan_text**(*s*)

numpy.distutils.misc_util.**cyg2win32**(*path*)

numpy.distutils.misc_util.**all_strings**(*lst*)
Return True if all items in lst are string objects.

numpy.distutils.misc_util.**has_f_sources**(*sources*)
Return True if sources contains Fortran files

numpy.distutils.misc_util.**has_cxx_sources**(*sources*)
Return True if sources contains C++ files

numpy.distutils.misc_util.**filter_sources**(*sources*)
Return four lists of filenames containing C, C++, Fortran, and Fortran 90 module sources, respectively.

numpy.distutils.misc_util.**get_dependencies**(*sources*)

numpy.distutils.misc_util.**is_local_src_dir**(*directory*)
Return true if directory is local directory.

numpy.distutils.misc_util.**get_ext_source_files**(*ext*)

numpy.distutils.misc_util.**get_script_files**(*scripts*)

class numpy.distutils.misc_util.**Configuration**(*package_name=None*, *parent_name=None*, *top_path=None*, *package_path=None*, ***attrs*)
Construct a configuration instance for the given package name. If *parent_name* is not None, then construct the package as a sub-package of the *parent_name* package. If *top_path* and *package_path* are None then they are assumed equal to the path of the file this instance was created in. The setup.py files in the numpy distribution are good examples of how to use the *Configuration* instance.

todict()
Return a dictionary compatible with the keyword arguments of distutils setup function.

Examples

```
>>> setup(**config.todict())
```

get_distribution()
Return the distutils distribution object for self.

get_subpackage(*subpackage_name*, *subpackage_path=None*, *parent_name=None*, *caller_level=1*)
Return list of subpackage configurations.

Parameters **subpackage_name** : str or None

Name of the subpackage to get the configuration. '*' in subpackage_name is handled as a wildcard.

subpackage_path : str

If None, then the path is assumed to be the local path plus the subpackage_name. If a setup.py file is not found in the subpackage_path, then a default configuration is used.

parent_name : str

Parent name.

add_subpackage(*subpackage_name*, *subpackage_path=None*, *standalone=False*)
Add a sub-package to the current Configuration instance.

This is useful in a setup.py script for adding sub-packages to a package.

Parameters **subpackage_name** : str

name of the subpackage

subpackage_path : str

if given, the subpackage path such as the subpackage is in subpackage_path / subpackage_name. If None,the subpackage is assumed to be located in the local path / subpackage_name.

standalone : bool

add_data_files(**files*)
Add data files to configuration data_files.

Parameters **files** : sequence

Argument(s) can be either

- 2-sequence (<datadir prefix>,<path to data file(s)>)
- paths to data files where python datadir prefix defaults to package dir.

Notes

The form of each element of the files sequence is very flexible allowing many combinations of where to get the files from the package and where they should ultimately be installed on the system. The most basic usage is for an element of the files argument sequence to be a simple filename. This will cause that file from the local path to be installed to the installation path of the self.name package (package path). The file argument can also be a relative path in which case the entire relative path will be installed into the package directory. Finally, the file can be an absolute path name in which case the file will be found at the absolute path name but installed to the package path.

This basic behavior can be augmented by passing a 2-tuple in as the file argument. The first element of the tuple should specify the relative path (under the package install directory) where the remaining sequence of files should be installed to (it has nothing to do with the file-names in the source distribution). The second element of the tuple is the sequence of files that should be installed. The files in this sequence can be filenames, relative paths, or absolute paths. For absolute paths the file will be installed in the top-level package installation directory (regardless of the first argument). Filenames and relative path names will be installed in the package install directory under the path name given as the first element of the tuple.

Rules for installation paths:

1. file.txt -> (., file.txt)-> parent/file.txt
2. foo/file.txt -> (foo, foo/file.txt) -> parent/foo/file.txt
3. /foo/bar/file.txt -> (., /foo/bar/file.txt) -> parent/file.txt
4. *.txt -> parent/a.txt, parent/b.txt
5. foo/*.txt -> parent/foo/a.txt, parent/foo/b.txt
6. */.txt -> (*, */.txt) -> parent/c/a.txt, parent/d/b.txt
7. (sun, file.txt) -> parent/sun/file.txt
8. (sun, bar/file.txt) -> parent/sun/file.txt
9. (sun, /foo/bar/file.txt) -> parent/sun/file.txt
10. (sun, *.txt) -> parent/sun/a.txt, parent/sun/b.txt
11. (sun, bar/*.txt) -> parent/sun/a.txt, parent/sun/b.txt
12. (sun/*, */.txt) -> parent/sun/c/a.txt, parent/d/b.txt

An additional feature is that the path to a data-file can actually be a function that takes no arguments and returns the actual path(s) to the data-files. This is useful when the data files are generated while building the package.

Examples

Add files to the list of data_files to be included with the package.

```
>>> self.add_data_files('foo.dat',
...     ('fun', ['gun.dat', 'nun/pun.dat', '/tmp/sun.dat']),
...     'bar/cat.dat',
...     '/full/path/to/can.dat')
```

will install these data files to:

```
<package install directory>/
 foo.dat
 fun/
   gun.dat
   nun/
     pun.dat
 sun.dat
 bar/
   car.dat
 can.dat
```

where <package install directory> is the package (or sub-package) directory such as '/usr/lib/python2.4/site-packages/mypackage' ('C: Python2.4 Lib site-packages mypackage') or '/usr/lib/python2.4/site- packages/mypackage/mysubpackage' ('C: Python2.4 Lib site-packages mypackage mysubpackage').

add_data_dir(*data_path*)

Recursively add files under data_path to data_files list.

Recursively add files under data_path to the list of data_files to be installed (and distributed). The data_path can be either a relative path-name, or an absolute path-name, or a 2-tuple where the first argument shows where in the install directory the data directory should be installed to.

Parameters **data_path** : seq or str

Argument can be either

- 2-sequence (<datadir suffix>, <path to data directory>)
- path to data directory where python datadir suffix defaults to package dir.

Notes

Rules for installation paths:

```
foo/bar -> (foo/bar, foo/bar) -> parent/foo/bar
(gun, foo/bar) -> parent/gun
foo/* -> (foo/a, foo/a), (foo/b, foo/b) -> parent/foo/a, parent/foo/b
(gun, foo/*) -> (gun, foo/a), (gun, foo/b) -> gun
(gun/*, foo/*) -> parent/gun/a, parent/gun/b
/foo/bar -> (bar, /foo/bar) -> parent/bar
(gun, /foo/bar) -> parent/gun
(fun/*/gun/*, sun/foo/bar) -> parent/fun/foo/gun/bar
```

Examples

For example suppose the source directory contains fun/foo.dat and fun/bar/car.dat:

```
>>> self.add_data_dir('fun')
>>> self.add_data_dir(('sun', 'fun'))
>>> self.add_data_dir(('gun', '/full/path/to/fun'))
```

Will install data-files to the locations:

```
<package install directory>/
  fun/
    foo.dat
    bar/
      car.dat
  sun/
    foo.dat
    bar/
      car.dat
  gun/
    foo.dat
    car.dat
```

add_include_dirs(**paths*)
Add paths to configuration include directories.

Add the given sequence of paths to the beginning of the include_dirs list. This list will be visible to all extension modules of the current package.

add_headers(**files*)
Add installable headers to configuration.

Add the given sequence of files to the beginning of the headers list. By default, headers will be installed under <python- include>/<self.name.replace('.','/')>/ directory. If an item of files is a tuple, then its first argument specifies the actual installation location relative to the <python-include> path.

Parameters **files** : str or seq

Argument(s) can be either:

- 2-sequence (<includedir suffix>,<path to header file(s)>)
- path(s) to header file(s) where python includedir suffix will default to package name.

add_extension(*name*, *sources*, ***kw*)
Add extension to configuration.

Create and add an Extension instance to the ext_modules list. This method also takes the following optional keyword arguments that are passed on to the Extension constructor.

Parameters **name** : str

name of the extension

sources : seq

list of the sources. The list of sources may contain functions (called source generators) which must take an extension instance and a build directory as inputs and return a source file or list of source files or None. If None is returned then no sources are generated. If the Extension instance has no sources after processing all source generators, then no extension module is built.

include_dirs :

define_macros :

undef_macros :

library_dirs :

libraries :

runtime_library_dirs :

extra_objects :

extra_compile_args :

extra_link_args :

extra_f77_compile_args :

extra_f90_compile_args :

export_symbols :

swig_opts :

depends :

The depends list contains paths to files or directories that the sources of the extension module depend on. If any path in the depends list is newer than the extension module, then the module will be rebuilt.

language :

f2py_options :

module_dirs :

extra_info : dict or list

dict or list of dict of keywords to be appended to keywords.

Notes

The self.paths(...) method is applied to all lists that may contain paths.

add_library(*name*, *sources*, ***build_info*)
Add library to configuration.

Parameters **name** : str

Name of the extension.

sources : sequence

List of the sources. The list of sources may contain functions (called source generators) which must take an extension instance and a build directory as inputs and return a source file or list of source files or None. If None is returned then no sources are generated. If the Extension instance has no sources after processing all source generators, then no extension module is built.

build_info : dict, optional

The following keys are allowed:

- depends
- macros
- include_dirs
- extra_compiler_args
- extra_f77_compile_args
- extra_f90_compile_args
- f2py_options
- language

add_scripts(**files*)
Add scripts to configuration.

Add the sequence of files to the beginning of the scripts list. Scripts will be installed under the <prefix>/bin/ directory.

add_installed_library(*name*, *sources*, *install_dir*, *build_info=None*)
Similar to add_library, but the specified library is installed.

Most C libraries used with `distutils` are only used to build python extensions, but libraries built through this method will be installed so that they can be reused by third-party packages.

Parameters **name** : str

Name of the installed library.

sources : sequence

List of the library's source files. See *add_library* for details.

install_dir : str

Path to install the library, relative to the current sub-package.

build_info : dict, optional

The following keys are allowed:

- depends
- macros
- include_dirs
- extra_compiler_args
- extra_f77_compile_args
- extra_f90_compile_args
- f2py_options
- language

Returns None

See also:

add_library, *add_npy_pkg_config*, *get_info*

Notes

The best way to encode the options required to link against the specified C libraries is to use a "libname.ini" file, and use *get_info* to retrieve the required options (see *add_npy_pkg_config* for more information).

add_npy_pkg_config(*template*, *install_dir*, *subst_dict=None*)

Generate and install a npy-pkg config file from a template.

The config file generated from *template* is installed in the given install directory, using *subst_dict* for variable substitution.

Parameters **template** : str

The path of the template, relatively to the current package path.

install_dir : str

Where to install the npy-pkg config file, relatively to the current package path.

subst_dict : dict, optional

If given, any string of the form `@key@` will be replaced by `subst_dict[key]` in the template file when installed. The install prefix is always available through the variable `@prefix@`, since the install prefix is not easy to get reliably from setup.py.

See also:

add_installed_library, *get_info*

Notes

This works for both standard installs and in-place builds, i.e. the `@prefix@` refer to the source directory for in-place builds.

Examples

```
config.add_npy_pkg_config('foo.ini.in', 'lib', {'foo': bar})
```

Assuming the foo.ini.in file has the following content:

```
[meta]
Name=@foo@
Version=1.0
Description=dummy description

[default]
Cflags=-I@prefix@/include
Libs=
```

The generated file will have the following content:

```
[meta]
Name=bar
Version=1.0
Description=dummy description

[default]
Cflags=-Iprefix_dir/include
Libs=
```

and will be installed as foo.ini in the 'lib' subpath.

paths(**paths*, ***kws*)
Apply glob to paths and prepend local_path if needed.

Applies glob.glob(...) to each path in the sequence (if needed) and pre-pends the local_path if needed. Because this is called on all source lists, this allows wildcard characters to be specified in lists of sources for extension modules and libraries and scripts and allows path-names be relative to the source directory.

get_config_cmd()
Returns the numpy.distutils config command instance.

get_build_temp_dir()
Return a path to a temporary directory where temporary files should be placed.

have_f77c()
Check for availability of Fortran 77 compiler.

Use it inside source generating function to ensure that setup distribution instance has been initialized.

Notes

True if a Fortran 77 compiler is available (because a simple Fortran 77 code was able to be compiled successfully).

have_f90c()
Check for availability of Fortran 90 compiler.

Use it inside source generating function to ensure that setup distribution instance has been initialized.

Notes

True if a Fortran 90 compiler is available (because a simple Fortran 90 code was able to be compiled successfully)

get_version(*version_file=None*, *version_variable=None*)
Try to get version string of a package.

Return a version string of the current package or None if the version information could not be detected.

Notes

This method scans files named __version__.py, <packagename>_version.py, version.py, and __svn_version__.py for string variables version, __version__, and <packagename>_version, until a version number is found.

make_svn_version_py(*delete=True*)
Appends a data function to the data_files list that will generate __svn_version__.py file to the current package directory.

Generate package __svn_version__.py file from SVN revision number, it will be removed after python exits but will be available when sdist, etc commands are executed.

Notes

If __svn_version__.py existed before, nothing is done.

This is intended for working with source directories that are in an SVN repository.

make_config_py(*name='__config__'*)
Generate package __config__.py file containing system_info information used during building the package.

This file is installed to the package installation directory.

get_info(**names*)
Get resources information.

Return information (from system_info.get_info) for all of the names in the argument list in a single dictionary.

4.1.2 Other modules

system_info.get_info(name[, notfound_action])	notfound_action: 0 - do nothing 1 - display warning message 2 - raise error
system_info.get_standard_file(fname)	Returns a list of files named 'fname' from 1) System-wide directory (directory-location of this module) 2) Users HOME directory (os.environ['HOME']) 3) Local directory

Continued on next page

Table 2 – continued from previous page

cpuinfo.cpu	
log.set_verbosity(v[, force])	
exec_command	exec_command

numpy.distutils.system_info.**get_info**(*name*, *notfound_action=0*)

notfound_action: 0 - do nothing 1 - display warning message 2 - raise error

numpy.distutils.system_info.**get_standard_file**(*fname*)

Returns a list of files named 'fname' from 1) System-wide directory (directory-location of this module) 2) Users HOME directory (os.environ['HOME']) 3) Local directory

numpy.distutils.cpuinfo.**cpu = <numpy.distutils.cpuinfo.LinuxCPUInfo object>**

numpy.distutils.log.**set_verbosity**(*v*, *force=False*)

exec_command

Implements exec_command function that is (almost) equivalent to commands.getstatusoutput function but on NT, DOS systems the returned status is actually correct (though, the returned status values may be different by a factor). In addition, exec_command takes keyword arguments for (re-)defining environment variables.

Provides functions:

exec_command — execute command in a specified directory and in the modified environment.

find_executable — locate a command using info from environment variable PATH. Equivalent to posix *which* command.

Author: Pearu Peterson <pearu@cens.ioc.ee> Created: 11 January 2003

Requires: Python 2.x

Successfully tested on:

os.name	sys.platform	comments
posix	linux2	Debian (sid) Linux, Python 2.1.3+, 2.2.3+, 2.3.3 PyCrust 0.9.3, Idle 1.0.2
posix	linux2	Red Hat 9 Linux, Python 2.1.3, 2.2.2, 2.3.2
posix	sunos5	SunOS 5.9, Python 2.2, 2.3.2
posix	darwin	Darwin 7.2.0, Python 2.3
nt	win32	Windows Me Python 2.3(EE), Idle 1.0, PyCrust 0.7.2 Python 2.1.1 Idle 0.8
nt	win32	Windows 98, Python 2.1.1. Idle 0.8
nt	win32	Cygwin 98-4.10, Python 2.1.1(MSC) - echo tests fail i.e. redefining environment variables may not work. FIXED: don't use cygwin echo! Comment: also *cmd /c echo* will not work but redefining environment variables do work.
posix	cygwin	Cygwin 98-4.10, Python 2.3.3(cygming special)
nt	win32	Windows XP, Python 2.3.3

Known bugs:

- Tests, that send messages to stderr, fail when executed from MSYS prompt because the messages are lost at some point.

Functions

exec_command(command[, execute_in, ...])	Return (status,output) of executed command.
find_executable(exe[, path, _cache])	Return full path of a executable or None.
get_pythonexe()	
temp_file_name()	

4.2 Building Installable C libraries

Conventional C libraries (installed through *add_library*) are not installed, and are just used during the build (they are statically linked). An installable C library is a pure C library, which does not depend on the python C runtime, and is installed such that it may be used by third-party packages. To build and install the C library, you just use the method *add_installed_library* instead of *add_library*, which takes the same arguments except for an additional `install_dir` argument:

```
>>> config.add_installed_library('foo', sources=['foo.c'], install_dir='lib')
```

4.2.1 npy-pkg-config files

To make the necessary build options available to third parties, you could use the *npy-pkg-config* mechanism implemented in *numpy.distutils*. This mechanism is based on a .ini file which contains all the options. A .ini file is very similar to .pc files as used by the pkg-config unix utility:

```
[meta]
Name: foo
Version: 1.0
Description: foo library

[variables]
prefix = /home/user/local
libdir = ${prefix}/lib
includedir = ${prefix}/include

[default]
cflags = -I${includedir}
libs = -L${libdir} -lfoo
```

Generally, the file needs to be generated during the build, since it needs some information known at build time only (e.g. prefix). This is mostly automatic if one uses the *Configuration* method *add_npy_pkg_config*. Assuming we have a template file foo.ini.in as follows:

```
[meta]
Name: foo
Version: @version@
Description: foo library

[variables]
prefix = @prefix@
libdir = ${prefix}/lib
includedir = ${prefix}/include

[default]
cflags = -I${includedir}
libs = -L${libdir} -lfoo
```

and the following code in setup.py:

```
>>> config.add_installed_library('foo', sources=['foo.c'], install_dir='lib')
>>> subst = {'version': '1.0'}
>>> config.add_npy_pkg_config('foo.ini.in', 'lib', subst_dict=subst)
```

This will install the file foo.ini into the directory package_dir/lib, and the foo.ini file will be generated from foo.ini.in, where each `@version@` will be replaced by `subst_dict['version']`. The dictionary has an additional prefix substitution rule automatically added, which contains the install prefix (since this is not easy to get from setup.py). npy-pkg-config files can also be installed at the same location as used for numpy, using the path returned from *get_npy_pkg_dir* function.

4.2.2 Reusing a C library from another package

Info are easily retrieved from the *get_info* function in *numpy.distutils.misc_util*:

```
>>> info = get_info('npymath')
>>> config.add_extension('foo', sources=['foo.c'], extra_info=**info)
```

An additional list of paths to look for .ini files can be given to *get_info*.

4.3 Conversion of `.src` files

NumPy distutils supports automatic conversion of source files named <somefile>.src. This facility can be used to maintain very similar code blocks requiring only simple changes between blocks. During the build phase of setup, if a template file named <somefile>.src is encountered, a new file named <somefile> is constructed from the template and placed in the build directory to be used instead. Two forms of template conversion are supported. The first form occurs for files named <file>.ext.src where ext is a recognized Fortran extension (f, f90, f95, f77, for, ftn, pyf). The second form is used for all other cases.

4.3.1 Fortran files

This template converter will replicate all **function** and **subroutine** blocks in the file with names that contain '<...>' according to the rules in '<...>'. The number of comma-separated words in '<...>' determines the number of times the block is repeated. What these words are indicates what that repeat rule, '<...>', should be replaced with in each block. All of the repeat rules in a block must contain the same number of comma-separated words indicating the number of times that block should be repeated. If the word in the repeat rule needs a comma, leftarrow, or rightarrow, then prepend it with a backslash ' '. If a word in the repeat rule matches ' \<index>' then it will be replaced with the <index>-th word in the same repeat specification. There are two forms for the repeat rule: named and short.

Named repeat rule

A named repeat rule is useful when the same set of repeats must be used several times in a block. It is specified using <rule1=item1, item2, item3,..., itemN>, where N is the number of times the block should be repeated. On each repeat of the block, the entire expression, '<...>' will be replaced first with item1, and then with item2, and so forth until N repeats are accomplished. Once a named repeat specification has been introduced, the same repeat rule may be used **in the current block** by referring only to the name (i.e. <rule1>.

Short repeat rule

A short repeat rule looks like <item1, item2, item3, ..., itemN>. The rule specifies that the entire expression, '<...>' should be replaced first with item1, and then with item2, and so forth until N repeats are accomplished.

Pre-defined names

The following predefined named repeat rules are available:

- <prefix=s,d,c,z>
- <_c=s,d,c,z>
- <_t=real, double precision, complex, double complex>
- <ftype=real, double precision, complex, double complex>
- <ctype=float, double, complex_float, complex_double>
- <ftypereal=float, double precision, \0, \1>
- <ctypereal=float, double, \0, \1>

4.3.2 Other files

Non-Fortran files use a separate syntax for defining template blocks that should be repeated using a variable expansion similar to the named repeat rules of the Fortran-specific repeats. The template rules for these files are:

1. "/**begin repeat "on a line by itself marks the beginning of a segment that should be repeated.
2. Named variable expansions are defined using #name=item1, item2, item3, . . . , itemN# and placed on successive lines. These variables are replaced in each repeat block with corresponding word. All named variables in the same repeat block must define the same number of words.
3. In specifying the repeat rule for a named variable, item*N is short- hand for item, item, . . . , item repeated N times. In addition, parenthesis in combination with *N can be used for grouping several items that should be repeated. Thus, #name=(item1, item2)*4# is equivalent to #name=item1, item2, item1, item2, item1, item2, item1, item2#
4. "*/ "on a line by itself marks the end of the variable expansion naming. The next line is the first line that will be repeated using the named rules.
5. Inside the block to be repeated, the variables that should be expanded are specified as @name@.
6. "/**end repeat**/ "on a line by itself marks the previous line as the last line of the block to be repeated.

CHAPTER

FIVE

NUMPY C-API

Beware of the man who won't be bothered with details.
— *William Feather, Sr.*

The truth is out there.
— *Chris Carter, The X Files*

NumPy provides a C-API to enable users to extend the system and get access to the array object for use in other routines. The best way to truly understand the C-API is to read the source code. If you are unfamiliar with (C) source code, however, this can be a daunting experience at first. Be assured that the task becomes easier with practice, and you may be surprised at how simple the C-code can be to understand. Even if you don't think you can write C-code from scratch, it is much easier to understand and modify already-written source code then create it *de novo*.

Python extensions are especially straightforward to understand because they all have a very similar structure. Admittedly, NumPy is not a trivial extension to Python, and may take a little more snooping to grasp. This is especially true because of the code-generation techniques, which simplify maintenance of very similar code, but can make the code a little less readable to beginners. Still, with a little persistence, the code can be opened to your understanding. It is my hope, that this guide to the C-API can assist in the process of becoming familiar with the compiled-level work that can be done with NumPy in order to squeeze that last bit of necessary speed out of your code.

5.1 Python Types and C-Structures

Several new types are defined in the C-code. Most of these are accessible from Python, but a few are not exposed due to their limited use. Every new Python type has an associated `PyObject *` with an internal structure that includes a pointer to a "method table" that defines how the new object behaves in Python. When you receive a Python object into C code, you always get a pointer to a `PyObject` structure. Because a `PyObject` structure is very generic and defines only `PyObject_HEAD`, by itself it is not very interesting. However, different objects contain more details after the `PyObject_HEAD` (but you have to cast to the correct type to access them — or use accessor functions or macros).

5.1.1 New Python Types Defined

Python types are the functional equivalent in C of classes in Python. By constructing a new Python type you make available a new object for Python. The ndarray object is an example of a new type defined in C. New types are defined in C by two basic steps:

1. creating a C-structure (usually named `Py{Name}Object`) that is binary- compatible with the `PyObject` structure itself but holds the additional information needed for that particular object;

2. populating the PyTypeObject table (pointed to by the ob_type member of the PyObject structure) with pointers to functions that implement the desired behavior for the type.

Instead of special method names which define behavior for Python classes, there are "function tables" which point to functions that implement the desired results. Since Python 2.2, the PyTypeObject itself has become dynamic which allows C types that can be "sub-typed "from other C-types in C, and sub-classed in Python. The children types inherit the attributes and methods from their parent(s).

There are two major new types: the ndarray (*PyArray_Type*) and the ufunc (*PyUFunc_Type*). Additional types play a supportive role: the *PyArrayIter_Type*, the *PyArrayMultiIter_Type*, and the *PyArrayDescr_Type* . The *PyArrayIter_Type* is the type for a flat iterator for an ndarray (the object that is returned when getting the flat attribute). The *PyArrayMultiIter_Type* is the type of the object returned when calling broadcast (). It handles iteration and broadcasting over a collection of nested sequences. Also, the *PyArrayDescr_Type* is the data-type-descriptor type whose instances describe the data. Finally, there are 21 new scalar-array types which are new Python scalars corresponding to each of the fundamental data types available for arrays. An additional 10 other types are place holders that allow the array scalars to fit into a hierarchy of actual Python types.

PyArray_Type

PyArray_Type
The Python type of the ndarray is *PyArray_Type*. In C, every ndarray is a pointer to a *PyArrayObject* structure. The ob_type member of this structure contains a pointer to the *PyArray_Type* typeobject.

PyArrayObject
The *PyArrayObject* C-structure contains all of the required information for an array. All instances of an ndarray (and its subclasses) will have this structure. For future compatibility, these structure members should normally be accessed using the provided macros. If you need a shorter name, then you can make use of NPY_AO which is defined to be equivalent to *PyArrayObject*.

```
typedef struct PyArrayObject {
    PyObject_HEAD
    char *data;
    int nd;
    npy_intp *dimensions;
    npy_intp *strides;
    PyObject *base;
    PyArray_Descr *descr;
    int flags;
    PyObject *weakreflist;
} PyArrayObject;
```

char ***PyArrayObject.data**
A pointer to the first element of the array. This pointer can (and normally should) be recast to the data type of the array.

int **PyArrayObject.nd**
An integer providing the number of dimensions for this array. When nd is 0, the array is sometimes called a rank-0 array. Such arrays have undefined dimensions and strides and cannot be accessed. *NPY_MAXDIMS* is the largest number of dimensions for any array.

npy_intp **PyArrayObject.dimensions**
An array of integers providing the shape in each dimension as long as nd $\geq$ 1. The integer is always large enough to hold a pointer on the platform, so the dimension size is only limited by memory.

npy_intp ***PyArrayObject.strides**
An array of integers providing for each dimension the number of bytes that must be skipped to get to the next

element in that dimension.

PyObject ***PyArrayObject.base**
This member is used to hold a pointer to another Python object that is related to this array. There are two use cases: 1) If this array does not own its own memory, then base points to the Python object that owns it (perhaps another array object), 2) If this array has the (deprecated) *NPY_ARRAY_UPDATEIFCOPY* or :c:data:NPY_ARRAY_WRITEBACKIFCOPY‘: flag set, then this array is a working copy of a “misbehaved” array. When `PyArray_ResolveWritebackIfCopy` is called, the array pointed to by base will be updated with the contents of this array.

PyArray_Descr ***PyArrayObject.descr**
A pointer to a data-type descriptor object (see below). The data-type descriptor object is an instance of a new built-in type which allows a generic description of memory. There is a descriptor structure for each data type supported. This descriptor structure contains useful information about the type as well as a pointer to a table of function pointers to implement specific functionality.

int **PyArrayObject.flags**
Flags indicating how the memory pointed to by data is to be interpreted. Possible flags are *NPY_ARRAY_C_CONTIGUOUS*, *NPY_ARRAY_F_CONTIGUOUS*, *NPY_ARRAY_OWNDATA*, *NPY_ARRAY_ALIGNED*, *NPY_ARRAY_WRITEABLE*, *NPY_ARRAY_WRITEBACKIFCOPY*, and *NPY_ARRAY_UPDATEIFCOPY*.

PyObject ***PyArrayObject.weakreflist**
This member allows array objects to have weak references (using the weakref module).

PyArrayDescr_Type

PyArrayDescr_Type
The *PyArrayDescr_Type* is the built-in type of the data-type-descriptor objects used to describe how the bytes comprising the array are to be interpreted. There are 21 statically-defined *PyArray_Descr* objects for the built-in data-types. While these participate in reference counting, their reference count should never reach zero. There is also a dynamic table of user-defined *PyArray_Descr* objects that is also maintained. Once a data-type-descriptor object is “registered” it should never be deallocated either. The function *PyArray_DescrFromType*(...) can be used to retrieve a *PyArray_Descr* object from an enumerated type-number (either built-in or user- defined).

PyArray_Descr
The format of the *PyArray_Descr* structure that lies at the heart of the *PyArrayDescr_Type* is

```
typedef struct {
    PyObject_HEAD
    PyTypeObject *typeobj;
    char kind;
    char type;
    char byteorder;
    char unused;
    int flags;
    int type_num;
    int elsize;
    int alignment;
    PyArray_ArrayDescr *subarray;
    PyObject *fields;
    PyArray_ArrFuncs *f;
} PyArray_Descr;
```

PyTypeObject ***PyArray_Descr.typeobj**
Pointer to a typeobject that is the corresponding Python type for the elements of this array. For the builtin

types, this points to the corresponding array scalar. For user-defined types, this should point to a user-defined typeobject. This typeobject can either inherit from array scalars or not. If it does not inherit from array scalars, then the *NPY_USE_GETITEM* and *NPY_USE_SETITEM* flags should be set in the `flags` member.

char **PyArray_Descr.kind**
A character code indicating the kind of array (using the array interface typestring notation). A 'b' represents Boolean, a 'i' represents signed integer, a 'u' represents unsigned integer, 'f' represents floating point, 'c' represents complex floating point, 'S' represents 8-bit zero-terminated bytes, 'U' represents 32-bit/character unicode string, and 'V' represents arbitrary.

char **PyArray_Descr.type**
A traditional character code indicating the data type.

char **PyArray_Descr.byteorder**
A character indicating the byte-order: '>' (big-endian), '<' (little- endian), '=' (native), '|' (irrelevant, ignore). All builtin data- types have byteorder '='.

int **PyArray_Descr.flags**
A data-type bit-flag that determines if the data-type exhibits object- array like behavior. Each bit in this member is a flag which are named as:

NPY_ITEM_REFCOUNT

NPY_ITEM_HASOBJECT
Indicates that items of this data-type must be reference counted (using `Py_INCREF` and `Py_DECREF`).

NPY_LIST_PICKLE
Indicates arrays of this data-type must be converted to a list before pickling.

NPY_ITEM_IS_POINTER
Indicates the item is a pointer to some other data-type

NPY_NEEDS_INIT
Indicates memory for this data-type must be initialized (set to 0) on creation.

NPY_NEEDS_PYAPI
Indicates this data-type requires the Python C-API during access (so don't give up the GIL if array access is going to be needed).

NPY_USE_GETITEM
On array access use the `f->getitem` function pointer instead of the standard conversion to an array scalar. Must use if you don't define an array scalar to go along with the data-type.

NPY_USE_SETITEM
When creating a 0-d array from an array scalar use `f->setitem` instead of the standard copy from an array scalar. Must use if you don't define an array scalar to go along with the data-type.

NPY_FROM_FIELDS
The bits that are inherited for the parent data-type if these bits are set in any field of the data-type. Currently (*NPY_NEEDS_INIT* | *NPY_LIST_PICKLE* | *NPY_ITEM_REFCOUNT* | *NPY_NEEDS_PYAPI*).

NPY_OBJECT_DTYPE_FLAGS
Bits set for the object data-type: (*NPY_LIST_PICKLE* | *NPY_USE_GETITEM* | *NPY_ITEM_IS_POINTER* | NPY_REFCOUNT | *NPY_NEEDS_INIT* | *NPY_NEEDS_PYAPI*).

PyDataType_FLAGCHK(*PyArray_Descr* *dtype, int flags)
Return true if all the given flags are set for the data-type object.

PyDataType_REFCHK(*PyArray_Descr* *dtype)
Equivalent to *PyDataType_FLAGCHK* (*dtype*, *NPY_ITEM_REFCOUNT*).

int **PyArray_Descr.type_num**
: A number that uniquely identifies the data type. For new data-types, this number is assigned when the data-type is registered.

int **PyArray_Descr.elsize**
: For data types that are always the same size (such as long), this holds the size of the data type. For flexible data types where different arrays can have a different elementsize, this should be 0.

int **PyArray_Descr.alignment**
: A number providing alignment information for this data type. Specifically, it shows how far from the start of a 2-element structure (whose first element is a `char`), the compiler places an item of this type: `offsetof(struct {char c; type v;}, v)`

PyArray_ArrayDescr ***PyArray_Descr.subarray**
: If this is non- `NULL`, then this data-type descriptor is a C-style contiguous array of another data-type descriptor. In other-words, each element that this descriptor describes is actually an array of some other base descriptor. This is most useful as the data-type descriptor for a field in another data-type descriptor. The fields member should be `NULL` if this is non- `NULL` (the fields member of the base descriptor can be non- `NULL` however). The `PyArray_ArrayDescr` structure is defined using

```
typedef struct {
    PyArray_Descr *base;
    PyObject *shape;
} PyArray_ArrayDescr;
```

The elements of this structure are:

PyArray_Descr ***PyArray_ArrayDescr.base**
: The data-type-descriptor object of the base-type.

PyObject ***PyArray_ArrayDescr.shape**
: The shape (always C-style contiguous) of the sub-array as a Python tuple.

PyObject ***PyArray_Descr.fields**
: If this is non-NULL, then this data-type-descriptor has fields described by a Python dictionary whose keys are names (and also titles if given) and whose values are tuples that describe the fields. Recall that a data-type-descriptor always describes a fixed-length set of bytes. A field is a named sub-region of that total, fixed-length collection. A field is described by a tuple composed of another data- type-descriptor and a byte offset. Optionally, the tuple may contain a title which is normally a Python string. These tuples are placed in this dictionary keyed by name (and also title if given).

PyArray_ArrFuncs ***PyArray_Descr.f**
: A pointer to a structure containing functions that the type needs to implement internal features. These functions are not the same thing as the universal functions (ufuncs) described later. Their signatures can vary arbitrarily.

PyArray_ArrFuncs
: Functions implementing internal features. Not all of these function pointers must be defined for a given type. The required members are `nonzero`, `copyswap`, `copyswapn`, `setitem`, `getitem`, and `cast`. These are assumed to be non- `NULL` and `NULL` entries will cause a program crash. The other functions may be `NULL` which will just mean reduced functionality for that data-type. (Also, the nonzero function will be filled in with a default function if it is `NULL` when you register a user-defined data-type).

```
typedef struct {
    PyArray_VectorUnaryFunc *cast[NPY_NTYPES];
    PyArray_GetItemFunc *getitem;
    PyArray_SetItemFunc *setitem;
    PyArray_CopySwapNFunc *copyswapn;
    PyArray_CopySwapFunc *copyswap;
```

(continues on next page)

(continued from previous page)

```
    PyArray_CompareFunc *compare;
    PyArray_ArgFunc *argmax;
    PyArray_DotFunc *dotfunc;
    PyArray_ScanFunc *scanfunc;
    PyArray_FromStrFunc *fromstr;
    PyArray_NonzeroFunc *nonzero;
    PyArray_FillFunc *fill;
    PyArray_FillWithScalarFunc *fillwithscalar;
    PyArray_SortFunc *sort[NPY_NSORTS];
    PyArray_ArgSortFunc *argsort[NPY_NSORTS];
    PyObject *castdict;
    PyArray_ScalarKindFunc *scalarkind;
    int **cancastscalarkindto;
    int *cancastto;
    PyArray_FastClipFunc *fastclip;
    PyArray_FastPutmaskFunc *fastputmask;
    PyArray_FastTakeFunc *fasttake;
    PyArray_ArgFunc *argmin;
} PyArray_ArrFuncs;
```

The concept of a behaved segment is used in the description of the function pointers. A behaved segment is one that is aligned and in native machine byte-order for the data-type. The `nonzero`, `copyswap`, `copyswapn`, `getitem`, and `setitem` functions can (and must) deal with mis-behaved arrays. The other functions require behaved memory segments.

void **cast**(void **from*, void **to*, npy_intp *n*, void **fromarr*, void **toarr*)
: An array of function pointers to cast from the current type to all of the other builtin types. Each function casts a contiguous, aligned, and notswapped buffer pointed at by *from* to a contiguous, aligned, and notswapped buffer pointed at by *to* The number of items to cast is given by *n*, and the arguments *fromarr* and *toarr* are interpreted as PyArrayObjects for flexible arrays to get itemsize information.

PyObject ***getitem**(void **data*, void **arr*)
: A pointer to a function that returns a standard Python object from a single element of the array object *arr* pointed to by *data*. This function must be able to deal with "misbehaved "(misaligned and/or swapped) arrays correctly.

int **setitem**(PyObject **item*, void **data*, void **arr*)
: A pointer to a function that sets the Python object *item* into the array, *arr*, at the position pointed to by *data* . This function deals with "misbehaved" arrays. If successful, a zero is returned, otherwise, a negative one is returned (and a Python error set).

void **copyswapn**(void **dest*, npy_intp *dstride*, void **src*, npy_intp *sstride*, npy_intp *n*, int *swap*, void **arr*)

void **copyswap**(void **dest*, void **src*, int *swap*, void **arr*)
: These members are both pointers to functions to copy data from *src* to *dest* and *swap* if indicated. The value of arr is only used for flexible (*NPY_STRING*, *NPY_UNICODE*, and *NPY_VOID*) arrays (and is obtained from `arr->descr->elsize`). The second function copies a single value, while the first loops over n values with the provided strides. These functions can deal with misbehaved *src* data. If *src* is NULL then no copy is performed. If *swap* is 0, then no byteswapping occurs. It is assumed that *dest* and *src* do not overlap. If they overlap, then use `memmove(...)` first followed by `copyswap(n)` with NULL valued `src`.

int **compare**(const void* *d1*, const void* *d2*, void* *arr*)
: A pointer to a function that compares two elements of the array, `arr`, pointed to by `d1` and `d2`. This function requires behaved (aligned and not swapped) arrays. The return value is 1 if * `d1` > * `d2`, 0 if * `d1` == * `d2`, and -1 if * `d1` < * `d2`. The array object `arr` is used to retrieve itemsize and field information

for flexible arrays.

int **argmax** (void* *data*, npy_intp *n*, npy_intp* *max_ind*, void* *arr*)
A pointer to a function that retrieves the index of the largest of `n` elements in `arr` beginning at the element pointed to by `data`. This function requires that the memory segment be contiguous and behaved. The return value is always 0. The index of the largest element is returned in `max_ind`.

void **dotfunc** (void* *ip1*, npy_intp *is1*, void* *ip2*, npy_intp *is2*, void* *op*, npy_intp *n*, void* *arr*)
A pointer to a function that multiplies two `n` -length sequences together, adds them, and places the result in element pointed to by `op` of `arr`. The start of the two sequences are pointed to by `ip1` and `ip2`. To get to the next element in each sequence requires a jump of `is1` and `is2` *bytes*, respectively. This function requires behaved (though not necessarily contiguous) memory.

int **scanfunc** (FILE* *fd*, void* *ip*, void* *sep*, void* *arr*)
A pointer to a function that scans (scanf style) one element of the corresponding type from the file descriptor `fd` into the array memory pointed to by `ip`. The array is assumed to be behaved. If `sep` is not NULL, then a separator string is also scanned from the file before returning. The last argument `arr` is the array to be scanned into. A 0 is returned if the scan is successful. A negative number indicates something went wrong: -1 means the end of file was reached before the separator string could be scanned, -4 means that the end of file was reached before the element could be scanned, and -3 means that the element could not be interpreted from the format string. Requires a behaved array.

int **fromstr** (char* *str*, void* *ip*, char** *endptr*, void* *arr*)
A pointer to a function that converts the string pointed to by `str` to one element of the corresponding type and places it in the memory location pointed to by `ip`. After the conversion is completed, `*endptr` points to the rest of the string. The last argument `arr` is the array into which ip points (needed for variable-size data- types). Returns 0 on success or -1 on failure. Requires a behaved array.

Bool **nonzero** (void* *data*, void* *arr*)
A pointer to a function that returns TRUE if the item of `arr` pointed to by `data` is nonzero. This function can deal with misbehaved arrays.

void **fill** (void* *data*, npy_intp *length*, void* *arr*)
A pointer to a function that fills a contiguous array of given length with data. The first two elements of the array must already be filled- in. From these two values, a delta will be computed and the values from item 3 to the end will be computed by repeatedly adding this computed delta. The data buffer must be well-behaved.

void **fillwithscalar** (void* *buffer*, npy_intp *length*, void* *value*, void* *arr*)
A pointer to a function that fills a contiguous `buffer` of the given `length` with a single scalar `value` whose address is given. The final argument is the array which is needed to get the itemsize for variable-length arrays.

int **sort** (void* *start*, npy_intp *length*, void* *arr*)
An array of function pointers to a particular sorting algorithms. A particular sorting algorithm is obtained using a key (so far `NPY_QUICKSORT`, `NPY_HEAPSORT`, and `NPY_MERGESORT` are defined). These sorts are done in-place assuming contiguous and aligned data.

int **argsort** (void* *start*, npy_intp* *result*, npy_intp *length*, void **arr*)
An array of function pointers to sorting algorithms for this data type. The same sorting algorithms as for sort are available. The indices producing the sort are returned in `result` (which must be initialized with indices 0 to `length-1` inclusive).

PyObject ***castdict**
Either `NULL` or a dictionary containing low-level casting functions for user- defined data-types. Each function is wrapped in a `PyCObject *` and keyed by the data-type number.

NPY_SCALARKIND **scalarkind** (*PyArrayObject** *arr*)
A function to determine how scalars of this type should be interpreted. The argument is `NULL` or a 0-

dimensional array containing the data (if that is needed to determine the kind of scalar). The return value must be of type *NPY_SCALARKIND*.

int ***cancastscalarkindto**
Either NULL or an array of *NPY_NSCALARKINDS* pointers. These pointers should each be either NULL or a pointer to an array of integers (terminated by *NPY_NOTYPE*) indicating data-types that a scalar of this data-type of the specified kind can be cast to safely (this usually means without losing precision).

int ***cancastto**
Either NULL or an array of integers (terminated by *NPY_NOTYPE*) indicated data-types that this data-type can be cast to safely (this usually means without losing precision).

void **fastclip**(void **in*, npy_intp *n_in*, void **min*, void **max*, void **out*)
A function that reads n_in items from in, and writes to out the read value if it is within the limits pointed to by min and max, or the corresponding limit if outside. The memory segments must be contiguous and behaved, and either min or max may be NULL, but not both.

void **fastputmask**(void **in*, void **mask*, npy_intp *n_in*, void **values*, npy_intp *nv*)
A function that takes a pointer in to an array of n_in items, a pointer mask to an array of n_in boolean values, and a pointer vals to an array of nv items. Items from vals are copied into in wherever the value in mask is non-zero, tiling vals as needed if nv < n_in. All arrays must be contiguous and behaved.

void **fasttake**(void **dest*, void **src*, npy_intp **indarray*, npy_intp *nindarray*, npy_intp *n_outer*, npy_intp *m_middle*, npy_intp *nelem*, *NPY_CLIPMODE clipmode*)
A function that takes a pointer src to a C contiguous, behaved segment, interpreted as a 3-dimensional array of shape (n_outer, nindarray, nelem), a pointer indarray to a contiguous, behaved segment of m_middle integer indices, and a pointer dest to a C contiguous, behaved segment, interpreted as a 3-dimensional array of shape (n_outer, m_middle, nelem). The indices in indarray are used to index src along the second dimension, and copy the corresponding chunks of nelem items into dest. clipmode (which can take on the values *NPY_RAISE*, *NPY_WRAP* or *NPY_CLIP*) determines how will indices smaller than 0 or larger than nindarray will be handled.

int **argmin**(void* *data*, npy_intp *n*, npy_intp* *min_ind*, void* *arr*)
A pointer to a function that retrieves the index of the smallest of n elements in arr beginning at the element pointed to by data. This function requires that the memory segment be contiguous and behaved. The return value is always 0. The index of the smallest element is returned in min_ind.

The *PyArray_Type* typeobject implements many of the features of Python objects including the tp_as_number, tp_as_sequence, tp_as_mapping, and tp_as_buffer interfaces. The rich comparison (tp_richcompare) is also used along with new-style attribute lookup for methods (tp_methods) and properties (tp_getset). The *PyArray_Type* can also be sub-typed.

Tip: The tp_as_number methods use a generic approach to call whatever function has been registered for handling the operation. The function PyNumeric_SetOps(..) can be used to register functions to handle particular mathematical operations (for all arrays). When the umath module is imported, it sets the numeric operations for all arrays to the corresponding ufuncs. The tp_str and tp_repr methods can also be altered using PyString_SetStringFunction(...).

PyUFunc_Type

PyUFunc_Type
The ufunc object is implemented by creation of the *PyUFunc_Type*. It is a very simple type that implements only basic getattribute behavior, printing behavior, and has call behavior which allows these objects to act like functions. The basic idea behind the ufunc is to hold a reference to fast 1-dimensional (vector) loops for each data type that supports the operation. These one-dimensional loops all have the same signature and are the

key to creating a new ufunc. They are called by the generic looping code as appropriate to implement the N-dimensional function. There are also some generic 1-d loops defined for floating and complexfloating arrays that allow you to define a ufunc using a single scalar function (*e.g.* atanh).

PyUFuncObject

The core of the ufunc is the *PyUFuncObject* which contains all the information needed to call the underlying C-code loops that perform the actual work. It has the following structure:

```
typedef struct {
    PyObject_HEAD
    int nin;
    int nout;
    int nargs;
    int identity;
    PyUFuncGenericFunction *functions;
    void **data;
    int ntypes;
    int reserved1;
    const char *name;
    char *types;
    const char *doc;
    void *ptr;
    PyObject *obj;
    PyObject *userloops;
    npy_uint32 *op_flags;
    npy_uint32 *iter_flags;
} PyUFuncObject;
```

int **PyUFuncObject.nin**

The number of input arguments.

int **PyUFuncObject.nout**

The number of output arguments.

int **PyUFuncObject.nargs**

The total number of arguments (*nin* + *nout*). This must be less than `NPY_MAXARGS`.

int **PyUFuncObject.identity**

Either `PyUFunc_One`, `PyUFunc_Zero`, `PyUFunc_None` or `PyUFunc_AllOnes` to indicate the identity for this operation. It is only used for a reduce-like call on an empty array.

void PyUFuncObject.functions(char args, npy_intp* dims, npy_intp* steps, void* extradata)**

An array of function pointers — one for each data type supported by the ufunc. This is the vector loop that is called to implement the underlying function *dims* [0] times. The first argument, *args*, is an array of *nargs* pointers to behaved memory. Pointers to the data for the input arguments are first, followed by the pointers to the data for the output arguments. How many bytes must be skipped to get to the next element in the sequence is specified by the corresponding entry in the *steps* array. The last argument allows the loop to receive extra information. This is commonly used so that a single, generic vector loop can be used for multiple functions. In this case, the actual scalar function to call is passed in as *extradata*. The size of this function pointer array is ntypes.

void ***PyUFuncObject.data**

Extra data to be passed to the 1-d vector loops or `NULL` if no extra-data is needed. This C-array must be the same size (*i.e.* ntypes) as the functions array. `NULL` is used if extra_data is not needed. Several C-API calls for UFuncs are just 1-d vector loops that make use of this extra data to receive a pointer to the actual function to call.

int **PyUFuncObject.ntypes**
The number of supported data types for the ufunc. This number specifies how many different 1-d loops (of the builtin data types) are available.

char ***PyUFuncObject.name**
A string name for the ufunc. This is used dynamically to build the __doc__ attribute of ufuncs.

char ***PyUFuncObject.types**
An array of $nargs \times ntypes$ 8-bit type_numbers which contains the type signature for the function for each of the supported (builtin) data types. For each of the *ntypes* functions, the corresponding set of type numbers in this array shows how the *args* argument should be interpreted in the 1-d vector loop. These type numbers do not have to be the same type and mixed-type ufuncs are supported.

char ***PyUFuncObject.doc**
Documentation for the ufunc. Should not contain the function signature as this is generated dynamically when __doc__ is retrieved.

void ***PyUFuncObject.ptr**
Any dynamically allocated memory. Currently, this is used for dynamic ufuncs created from a python function to store room for the types, data, and name members.

PyObject ***PyUFuncObject.obj**
For ufuncs dynamically created from python functions, this member holds a reference to the underlying Python function.

PyObject ***PyUFuncObject.userloops**
A dictionary of user-defined 1-d vector loops (stored as CObject ptrs) for user-defined types. A loop may be registered by the user for any user-defined type. It is retrieved by type number. User defined type numbers are always larger than *NPY_USERDEF*.

npy_uint32 **PyUFuncObject.op_flags**
Override the default operand flags for each ufunc operand.

npy_uint32 **PyUFuncObject.iter_flags**
Override the default nditer flags for the ufunc.

PyArrayIter_Type

PyArrayIter_Type
This is an iterator object that makes it easy to loop over an N-dimensional array. It is the object returned from the flat attribute of an ndarray. It is also used extensively throughout the implementation internals to loop over an N-dimensional array. The tp_as_mapping interface is implemented so that the iterator object can be indexed (using 1-d indexing), and a few methods are implemented through the tp_methods table. This object implements the next method and can be used anywhere an iterator can be used in Python.

PyArrayIterObject
The C-structure corresponding to an object of *PyArrayIter_Type* is the *PyArrayIterObject*. The *PyArrayIterObject* is used to keep track of a pointer into an N-dimensional array. It contains associated information used to quickly march through the array. The pointer can be adjusted in three basic ways: 1) advance to the "next" position in the array in a C-style contiguous fashion, 2) advance to an arbitrary N-dimensional coordinate in the array, and 3) advance to an arbitrary one-dimensional index into the array. The members of the *PyArrayIterObject* structure are used in these calculations. Iterator objects keep their own dimension and strides information about an array. This can be adjusted as needed for "broadcasting," or to loop over only specific dimensions.

```
typedef struct {
    PyObject_HEAD
```

(continues on next page)

(continued from previous page)

```
    int   nd_m1;
    npy_intp  index;
    npy_intp  size;
    npy_intp  coordinates[NPY_MAXDIMS];
    npy_intp  dims_m1[NPY_MAXDIMS];
    npy_intp  strides[NPY_MAXDIMS];
    npy_intp  backstrides[NPY_MAXDIMS];
    npy_intp  factors[NPY_MAXDIMS];
    PyArrayObject *ao;
    char  *dataptr;
    Bool  contiguous;
} PyArrayIterObject;
```

int **PyArrayIterObject.nd_m1**
: $N-1$ where N is the number of dimensions in the underlying array.

npy_intp **PyArrayIterObject.index**
: The current 1-d index into the array.

npy_intp **PyArrayIterObject.size**
: The total size of the underlying array.

npy_intp ***PyArrayIterObject.coordinates**
: An N -dimensional index into the array.

npy_intp ***PyArrayIterObject.dims_m1**
: The size of the array minus 1 in each dimension.

npy_intp ***PyArrayIterObject.strides**
: The strides of the array. How many bytes needed to jump to the next element in each dimension.

npy_intp ***PyArrayIterObject.backstrides**
: How many bytes needed to jump from the end of a dimension back to its beginning. Note that `backstrides[k] == strides[k] * dims_m1[k]`, but it is stored here as an optimization.

npy_intp ***PyArrayIterObject.factors**
: This array is used in computing an N-d index from a 1-d index. It contains needed products of the dimensions.

PyArrayObject ***PyArrayIterObject.ao**
: A pointer to the underlying ndarray this iterator was created to represent.

char ***PyArrayIterObject.dataptr**
: This member points to an element in the ndarray indicated by the index.

Bool **PyArrayIterObject.contiguous**
: This flag is true if the underlying array is *NPY_ARRAY_C_CONTIGUOUS*. It is used to simplify calculations when possible.

How to use an array iterator on a C-level is explained more fully in later sections. Typically, you do not need to concern yourself with the internal structure of the iterator object, and merely interact with it through the use of the macros *PyArray_ITER_NEXT* (it), *PyArray_ITER_GOTO* (it, dest), or *PyArray_ITER_GOTO1D* (it, index). All of these macros require the argument *it* to be a *PyArrayIterObject **.

PyArrayMultiIter_Type

PyArrayMultiIter_Type
: This type provides an iterator that encapsulates the concept of broadcasting. It allows N arrays to be broadcast

together so that the loop progresses in C-style contiguous fashion over the broadcasted array. The corresponding C-structure is the *PyArrayMultiIterObject* whose memory layout must begin any object, *obj*, passed in to the *PyArray_Broadcast* (obj) function. Broadcasting is performed by adjusting array iterators so that each iterator represents the broadcasted shape and size, but has its strides adjusted so that the correct element from the array is used at each iteration.

PyArrayMultiIterObject

```
typedef struct {
    PyObject_HEAD
    int numiter;
    npy_intp size;
    npy_intp index;
    int nd;
    npy_intp dimensions[NPY_MAXDIMS];
    PyArrayIterObject *iters[NPY_MAXDIMS];
} PyArrayMultiIterObject;
```

int **PyArrayMultiIterObject.numiter**
The number of arrays that need to be broadcast to the same shape.

npy_intp **PyArrayMultiIterObject.size**
The total broadcasted size.

npy_intp **PyArrayMultiIterObject.index**
The current (1-d) index into the broadcasted result.

int **PyArrayMultiIterObject.nd**
The number of dimensions in the broadcasted result.

npy_intp ***PyArrayMultiIterObject.dimensions**
The shape of the broadcasted result (only `nd` slots are used).

PyArrayIterObject ****PyArrayMultiIterObject.iters**
An array of iterator objects that holds the iterators for the arrays to be broadcast together. On return, the iterators are adjusted for broadcasting.

PyArrayNeighborhoodIter_Type

PyArrayNeighborhoodIter_Type
This is an iterator object that makes it easy to loop over an N-dimensional neighborhood.

PyArrayNeighborhoodIterObject
The C-structure corresponding to an object of *PyArrayNeighborhoodIter_Type* is the *PyArrayNeighborhoodIterObject*.

PyArrayFlags_Type

PyArrayFlags_Type
When the flags attribute is retrieved from Python, a special builtin object of this type is constructed. This special type makes it easier to work with the different flags by accessing them as attributes or by accessing them as if the object were a dictionary with the flag names as entries.

ScalarArrayTypes

There is a Python type for each of the different built-in data types that can be present in the array Most of these are simple wrappers around the corresponding data type in C. The C-names for these types are `Py{TYPE}ArrType_Type` where `{TYPE}` can be

> **Bool**, **Byte**, **Short**, **Int**, **Long**, **LongLong**, **UByte**, **UShort**, **UInt**, **ULong**, **ULongLong**, **Half**, **Float**, **Double**, **LongDouble**, **CFloat**, **CDouble**, **CLongDouble**, **String**, **Unicode**, **Void**, and **Object**.

These type names are part of the C-API and can therefore be created in extension C-code. There is also a `PyIntpArrType_Type` and a `PyUIntpArrType_Type` that are simple substitutes for one of the integer types that can hold a pointer on the platform. The structure of these scalar objects is not exposed to C-code. The function *PyArray_ScalarAsCtype* (..) can be used to extract the C-type value from the array scalar and the function *PyArray_Scalar* (...) can be used to construct an array scalar from a C-value.

5.1.2 Other C-Structures

A few new C-structures were found to be useful in the development of NumPy. These C-structures are used in at least one C-API call and are therefore documented here. The main reason these structures were defined is to make it easy to use the Python ParseTuple C-API to convert from Python objects to a useful C-Object.

PyArray_Dims

PyArray_Dims

This structure is very useful when shape and/or strides information is supposed to be interpreted. The structure is:

```
typedef struct {
    npy_intp *ptr;
    int len;
} PyArray_Dims;
```

The members of this structure are

npy_intp ***PyArray_Dims.ptr***
: A pointer to a list of (`npy_intp`) integers which usually represent array shape or array strides.

int **PyArray_Dims.len**
: The length of the list of integers. It is assumed safe to access *ptr* [0] to *ptr* [len-1].

PyArray_Chunk

PyArray_Chunk

This is equivalent to the buffer object structure in Python up to the ptr member. On 32-bit platforms (*i.e.* if *NPY_SIZEOF_INT* == `NPY_SIZEOF_INTP`), the len member also matches an equivalent member of the buffer object. It is useful to represent a generic single-segment chunk of memory.

```
typedef struct {
    PyObject_HEAD
    PyObject *base;
    void *ptr;
    npy_intp len;
    int flags;
} PyArray_Chunk;
```

The members are

PyObject ***PyArray_Chunk.base**
: The Python object this chunk of memory comes from. Needed so that memory can be accounted for properly.

void ***PyArray_Chunk.ptr**
: A pointer to the start of the single-segment chunk of memory.

npy_intp **PyArray_Chunk.len**
: The length of the segment in bytes.

int **PyArray_Chunk.flags**
: Any data flags (*e.g.* *NPY_ARRAY_WRITEABLE*) that should be used to interpret the memory.

PyArrayInterface

See also:

The Array Interface

PyArrayInterface
: The *PyArrayInterface* structure is defined so that NumPy and other extension modules can use the rapid array interface protocol. The `__array_struct__` method of an object that supports the rapid array interface protocol should return a `PyCObject` that contains a pointer to a *PyArrayInterface* structure with the relevant details of the array. After the new array is created, the attribute should be `DECREF`'d which will free the *PyArrayInterface* structure. Remember to `INCREF` the object (whose `__array_struct__` attribute was retrieved) and point the base member of the new *PyArrayObject* to this same object. In this way the memory for the array will be managed correctly.

```
typedef struct {
    int two;
    int nd;
    char typekind;
    int itemsize;
    int flags;
    npy_intp *shape;
    npy_intp *strides;
    void *data;
    PyObject *descr;
} PyArrayInterface;
```

int **PyArrayInterface.two**
: the integer 2 as a sanity check.

int **PyArrayInterface.nd**
: the number of dimensions in the array.

char **PyArrayInterface.typekind**
: A character indicating what kind of array is present according to the typestring convention with 't' -> bitfield, 'b' -> Boolean, 'i' -> signed integer, 'u' -> unsigned integer, 'f' -> floating point, 'c' -> complex floating point, 'O' -> object, 'S' -> (byte-)string, 'U' -> unicode, 'V' -> void.

int **PyArrayInterface.itemsize**
: The number of bytes each item in the array requires.

int **PyArrayInterface.flags**
: Any of the bits *NPY_ARRAY_C_CONTIGUOUS* (1), *NPY_ARRAY_F_CONTIGUOUS* (2), *NPY_ARRAY_ALIGNED* (0x100), *NPY_ARRAY_NOTSWAPPED* (0x200), or

NPY_ARRAY_WRITEABLE (0x400) to indicate something about the data. The *NPY_ARRAY_ALIGNED*, *NPY_ARRAY_C_CONTIGUOUS*, and *NPY_ARRAY_F_CONTIGUOUS* flags can actually be determined from the other parameters. The flag NPY_ARR_HAS_DESCR (0x800) can also be set to indicate to objects consuming the version 3 array interface that the descr member of the structure is present (it will be ignored by objects consuming version 2 of the array interface).

npy_intp ***PyArrayInterface.shape**
An array containing the size of the array in each dimension.

npy_intp ***PyArrayInterface.strides**
An array containing the number of bytes to jump to get to the next element in each dimension.

void ***PyArrayInterface.data**
A pointer *to* the first element of the array.

PyObject ***PyArrayInterface.descr**
A Python object describing the data-type in more detail (same as the *descr* key in *__array_interface__*). This can be NULL if *typekind* and *itemsize* provide enough information. This field is also ignored unless ARR_HAS_DESCR flag is on in *flags*.

Internally used structures

Internally, the code uses some additional Python objects primarily for memory management. These types are not accessible directly from Python, and are not exposed to the C-API. They are included here only for completeness and assistance in understanding the code.

PyUFuncLoopObject
A loose wrapper for a C-structure that contains the information needed for looping. This is useful if you are trying to understand the ufunc looping code. The *PyUFuncLoopObject* is the associated C-structure. It is defined in the ufuncobject.h header.

PyUFuncReduceObject
A loose wrapper for the C-structure that contains the information needed for reduce-like methods of ufuncs. This is useful if you are trying to understand the reduce, accumulate, and reduce-at code. The *PyUFuncReduceObject* is the associated C-structure. It is defined in the ufuncobject.h header.

PyUFunc_Loop1d
A simple linked-list of C-structures containing the information needed to define a 1-d loop for a ufunc for every defined signature of a user-defined data-type.

PyArrayMapIter_Type
Advanced indexing is handled with this Python type. It is simply a loose wrapper around the C-structure containing the variables needed for advanced array indexing. The associated C-structure, PyArrayMapIterObject, is useful if you are trying to understand the advanced-index mapping code. It is defined in the arrayobject.h header. This type is not exposed to Python and could be replaced with a C-structure. As a Python type it takes advantage of reference- counted memory management.

5.2 System configuration

When NumPy is built, information about system configuration is recorded, and is made available for extension modules using NumPy's C API. These are mostly defined in numpyconfig.h (included in ndarrayobject.h). The public symbols are prefixed by NPY_*. NumPy also offers some functions for querying information about the platform in use.

For private use, NumPy also constructs a config.h in the NumPy include directory, which is not exported by NumPy (that is a python extension which use the numpy C API will not see those symbols), to avoid namespace pollution.

5.2.1 Data type sizes

The `NPY_SIZEOF_{CTYPE}` constants are defined so that sizeof information is available to the pre-processor.

NPY_SIZEOF_SHORT
sizeof(short)

NPY_SIZEOF_INT
sizeof(int)

NPY_SIZEOF_LONG
sizeof(long)

NPY_SIZEOF_LONGLONG
sizeof(longlong) where longlong is defined appropriately on the platform.

NPY_SIZEOF_PY_LONG_LONG

NPY_SIZEOF_FLOAT
sizeof(float)

NPY_SIZEOF_DOUBLE
sizeof(double)

NPY_SIZEOF_LONG_DOUBLE
sizeof(longdouble) (A macro defines **NPY_SIZEOF_LONGDOUBLE** as well.)

NPY_SIZEOF_PY_INTPTR_T
Size of a pointer on this platform (sizeof(void *)) (A macro defines NPY_SIZEOF_INTP as well.)

5.2.2 Platform information

NPY_CPU_X86

NPY_CPU_AMD64

NPY_CPU_IA64

NPY_CPU_PPC

NPY_CPU_PPC64

NPY_CPU_SPARC

NPY_CPU_SPARC64

NPY_CPU_S390

NPY_CPU_PARISC
New in version 1.3.0.

CPU architecture of the platform; only one of the above is defined.

Defined in `numpy/npy_cpu.h`

NPY_LITTLE_ENDIAN

NPY_BIG_ENDIAN

NPY_BYTE_ORDER
New in version 1.3.0.

Portable alternatives to the `endian.h` macros of GNU Libc. If big endian, *NPY_BYTE_ORDER* == *NPY_BIG_ENDIAN*, and similarly for little endian architectures.

Defined in `numpy/npy_endian.h`.

PyArray_GetEndianness()
New in version 1.3.0.

Returns the endianness of the current platform. One of `NPY_CPU_BIG`, `NPY_CPU_LITTLE`, or `NPY_CPU_UNKNOWN_ENDIAN`.

5.3 Data Type API

The standard array can have 24 different data types (and has some support for adding your own types). These data types all have an enumerated type, an enumerated type-character, and a corresponding array scalar Python type object (placed in a hierarchy). There are also standard C typedefs to make it easier to manipulate elements of the given data type. For the numeric types, there are also bit-width equivalent C typedefs and named typenumbers that make it easier to select the precision desired.

Warning: The names for the types in c code follows c naming conventions more closely. The Python names for these types follow Python conventions. Thus, *NPY_FLOAT* picks up a 32-bit float in C, but `numpy.float_` in Python corresponds to a 64-bit double. The bit-width names can be used in both Python and C for clarity.

5.3.1 Enumerated Types

There is a list of enumerated types defined providing the basic 24 data types plus some useful generic names. Whenever the code requires a type number, one of these enumerated types is requested. The types are all called `NPY_{NAME}`:

NPY_BOOL
The enumeration value for the boolean type, stored as one byte. It may only be set to the values 0 and 1.

NPY_BYTE

NPY_INT8
The enumeration value for an 8-bit/1-byte signed integer.

NPY_SHORT

NPY_INT16
The enumeration value for a 16-bit/2-byte signed integer.

NPY_INT

NPY_INT32
The enumeration value for a 32-bit/4-byte signed integer.

NPY_LONG
Equivalent to either NPY_INT or NPY_LONGLONG, depending on the platform.

NPY_LONGLONG

NPY_INT64
The enumeration value for a 64-bit/8-byte signed integer.

NPY_UBYTE

NPY_UINT8
The enumeration value for an 8-bit/1-byte unsigned integer.

NPY_USHORT

NPY_UINT16
The enumeration value for a 16-bit/2-byte unsigned integer.

NPY_UINT

NPY_UINT32
The enumeration value for a 32-bit/4-byte unsigned integer.

NPY_ULONG
Equivalent to either NPY_UINT or NPY_ULONGLONG, depending on the platform.

NPY_ULONGLONG

NPY_UINT64
The enumeration value for a 64-bit/8-byte unsigned integer.

NPY_HALF

NPY_FLOAT16
The enumeration value for a 16-bit/2-byte IEEE 754-2008 compatible floating point type.

NPY_FLOAT

NPY_FLOAT32
The enumeration value for a 32-bit/4-byte IEEE 754 compatible floating point type.

NPY_DOUBLE

NPY_FLOAT64
The enumeration value for a 64-bit/8-byte IEEE 754 compatible floating point type.

NPY_LONGDOUBLE
The enumeration value for a platform-specific floating point type which is at least as large as NPY_DOUBLE, but larger on many platforms.

NPY_CFLOAT

NPY_COMPLEX64
The enumeration value for a 64-bit/8-byte complex type made up of two NPY_FLOAT values.

NPY_CDOUBLE

NPY_COMPLEX128
The enumeration value for a 128-bit/16-byte complex type made up of two NPY_DOUBLE values.

NPY_CLONGDOUBLE
The enumeration value for a platform-specific complex floating point type which is made up of two NPY_LONGDOUBLE values.

NPY_DATETIME
The enumeration value for a data type which holds dates or datetimes with a precision based on selectable date or time units.

NPY_TIMEDELTA
The enumeration value for a data type which holds lengths of times in integers of selectable date or time units.

NPY_STRING
The enumeration value for ASCII strings of a selectable size. The strings have a fixed maximum size within a given array.

NPY_UNICODE
The enumeration value for UCS4 strings of a selectable size. The strings have a fixed maximum size within a given array.

NPY_OBJECT
The enumeration value for references to arbitrary Python objects.

NPY_VOID
Primarily used to hold struct dtypes, but can contain arbitrary binary data.

Some useful aliases of the above types are

NPY_INTP
The enumeration value for a signed integer type which is the same size as a (void *) pointer. This is the type used by all arrays of indices.

NPY_UINTP
The enumeration value for an unsigned integer type which is the same size as a (void *) pointer.

NPY_MASK
The enumeration value of the type used for masks, such as with the *NPY_ITER_ARRAYMASK* iterator flag. This is equivalent to *NPY_UINT8*.

NPY_DEFAULT_TYPE
The default type to use when no dtype is explicitly specified, for example when calling np.zero(shape). This is equivalent to *NPY_DOUBLE*.

Other useful related constants are

NPY_NTYPES
The total number of built-in NumPy types. The enumeration covers the range from 0 to NPY_NTYPES-1.

NPY_NOTYPE
A signal value guaranteed not to be a valid type enumeration number.

NPY_USERDEF
The start of type numbers used for Custom Data types.

The various character codes indicating certain types are also part of an enumerated list. References to type characters (should they be needed at all) should always use these enumerations. The form of them is `NPY_{NAME}LTR` where `{NAME}` can be

BOOL, **BYTE**, **UBYTE**, **SHORT**, **USHORT**, **INT**, **UINT**, **LONG**, **ULONG**, **LONGLONG**, **ULONGLONG**, **HALF**, **FLOAT**, **DOUBLE**, **LONGDOUBLE**, **CFLOAT**, **CDOUBLE**, **CLONGDOUBLE**, **DATETIME**, **TIMEDELTA**, **OBJECT**, **STRING**, **VOID**

INTP, **UINTP**

GENBOOL, **SIGNED**, **UNSIGNED**, **FLOATING**, **COMPLEX**

The latter group of `{NAME}s` corresponds to letters used in the array interface typestring specification.

5.3.2 Defines

Max and min values for integers

NPY_MAX_INT{bits}

NPY_MAX_UINT{bits}

NPY_MIN_INT{bits}
These are defined for `{bits}` = 8, 16, 32, 64, 128, and 256 and provide the maximum (minimum) value of the corresponding (unsigned) integer type. Note: the actual integer type may not be available on all platforms (i.e. 128-bit and 256-bit integers are rare).

NPY_MIN_{type}
This is defined for `{type}` = **BYTE**, **SHORT**, **INT**, **LONG**, **LONGLONG**, **INTP**

NPY_MAX_{type}
This is defined for all defined for `{type}` = **BYTE**, **UBYTE**, **SHORT**, **USHORT**, **INT**, **UINT**, **LONG**, **ULONG**, **LONGLONG**, **ULONGLONG**, **INTP**, **UINTP**

Number of bits in data types

All `NPY_SIZEOF_{CTYPE}` constants have corresponding `NPY_BITSOF_{CTYPE}` constants defined. The `NPY_BITSOF_{CTYPE}` constants provide the number of bits in the data type. Specifically, the available `{CTYPE}s` are

BOOL, **CHAR**, **SHORT**, **INT**, **LONG**, **LONGLONG**, **FLOAT**, **DOUBLE**, **LONGDOUBLE**

Bit-width references to enumerated typenums

All of the numeric data types (integer, floating point, and complex) have constants that are defined to be a specific enumerated type number. Exactly which enumerated type a bit-width type refers to is platform dependent. In particular, the constants available are `PyArray_{NAME}{BITS}` where `{NAME}` is **INT**, **UINT**, **FLOAT**, **COMPLEX** and `{BITS}` can be 8, 16, 32, 64, 80, 96, 128, 160, 192, 256, and 512. Obviously not all bit-widths are available on all platforms for all the kinds of numeric types. Commonly 8-, 16-, 32-, 64-bit integers; 32-, 64-bit floats; and 64-, 128-bit complex types are available.

Integer that can hold a pointer

The constants **NPY_INTP** and **NPY_UINTP** refer to an enumerated integer type that is large enough to hold a pointer on the platform. Index arrays should always be converted to **NPY_INTP** , because the dimension of the array is of type npy_intp.

5.3.3 C-type names

There are standard variable types for each of the numeric data types and the bool data type. Some of these are already available in the C-specification. You can create variables in extension code with these types.

Boolean

npy_bool
unsigned char; The constants *NPY_FALSE* and *NPY_TRUE* are also defined.

(Un)Signed Integer

Unsigned versions of the integers can be defined by pre-pending a 'u' to the front of the integer name.

npy_(u)byte
(unsigned) char

npy_(u)short
(unsigned) short

npy_(u)int
(unsigned) int

npy_(u)long
(unsigned) long int

npy_(u)longlong
(unsigned long long int)

npy_(u)intp
(unsigned) Py_intptr_t (an integer that is the size of a pointer on the platform).

(Complex) Floating point

npy_(c)float
float

npy_(c)double
double

npy_(c)longdouble
long double

complex types are structures with **.real** and **.imag** members (in that order).

Bit-width names

There are also typedefs for signed integers, unsigned integers, floating point, and complex floating point types of specific bit- widths. The available type names are

`npy_int{bits}`, `npy_uint{bits}`, `npy_float{bits}`, and `npy_complex{bits}`

where `{bits}` is the number of bits in the type and can be **8**, **16**, **32**, **64**, 128, and 256 for integer types; 16, **32** , **64**, 80, 96, 128, and 256 for floating-point types; and 32, **64**, **128**, 160, 192, and 512 for complex-valued types. Which bit-widths are available is platform dependent. The bolded bit-widths are usually available on all platforms.

5.3.4 Printf Formatting

For help in printing, the following strings are defined as the correct format specifier in printf and related commands.

`NPY_LONGLONG_FMT`, `NPY_ULONGLONG_FMT`, `NPY_INTP_FMT`, `NPY_UINTP_FMT`, `NPY_LONGDOUBLE_FMT`

5.4 Array API

The test of a first-rate intelligence is the ability to hold two
opposed ideas in the mind at the same time, and still retain the
ability to function.
— *F. Scott Fitzgerald*

For a successful technology, reality must take precedence over public
relations, for Nature cannot be fooled.
— *Richard P. Feynman*

5.4.1 Array structure and data access

These macros all access the *PyArrayObject* structure members. The input argument, arr, can be any PyObject * that is directly interpretable as a *PyArrayObject* * (any instance of the *PyArray_Type* and its sub-types).

int **PyArray_NDIM**(*PyArrayObject* *arr)
The number of dimensions in the array.

npy_intp ***PyArray_DIMS**(*PyArrayObject* *arr)
Returns a pointer to the dimensions/shape of the array. The number of elements matches the number of dimensions of the array.

npy_intp ***PyArray_SHAPE**(*PyArrayObject* *arr)
New in version 1.7.

A synonym for PyArray_DIMS, named to be consistent with the 'shape' usage within Python.

void ***PyArray_DATA**(*PyArrayObject* *arr)

char ***PyArray_BYTES**(*PyArrayObject* *arr)
These two macros are similar and obtain the pointer to the data-buffer for the array. The first macro can (and should be) assigned to a particular pointer where the second is for generic processing. If you have not guaranteed a contiguous and/or aligned array then be sure you understand how to access the data in the array to avoid memory and/or alignment problems.

npy_intp ***PyArray_STRIDES**(*PyArrayObject** *arr*)
Returns a pointer to the strides of the array. The number of elements matches the number of dimensions of the array.

npy_intp **PyArray_DIM**(*PyArrayObject** *arr*, int *n*)
Return the shape in the n^{th} dimension.

npy_intp **PyArray_STRIDE**(*PyArrayObject** *arr*, int *n*)
Return the stride in the n^{th} dimension.

PyObject ***PyArray_BASE**(*PyArrayObject** *arr*)
This returns the base object of the array. In most cases, this means the object which owns the memory the array is pointing at.

If you are constructing an array using the C API, and specifying your own memory, you should use the function *PyArray_SetBaseObject* to set the base to an object which owns the memory.

If the (deprecated) *NPY_ARRAY_UPDATEIFCOPY* or the *NPY_ARRAY_WRITEBACKIFCOPY* flags are set, it has a different meaning, namely base is the array into which the current array will be copied upon copy resolution. This overloading of the base property for two functions is likely to change in a future version of NumPy.

PyArray_Descr ***PyArray_DESCR**(*PyArrayObject** *arr*)
Returns a borrowed reference to the dtype property of the array.

PyArray_Descr ***PyArray_DTYPE**(*PyArrayObject** *arr*)
New in version 1.7.

A synonym for PyArray_DESCR, named to be consistent with the 'dtype' usage within Python.

void **PyArray_ENABLEFLAGS**(*PyArrayObject** *arr*, int *flags*)
New in version 1.7.

Enables the specified array flags. This function does no validation, and assumes that you know what you're doing.

void **PyArray_CLEARFLAGS**(*PyArrayObject** *arr*, int *flags*)
New in version 1.7.

Clears the specified array flags. This function does no validation, and assumes that you know what you're doing.

int **PyArray_FLAGS** (*PyArrayObject* arr*)

npy_intp **PyArray_ITEMSIZE** (*PyArrayObject* arr*)
Return the itemsize for the elements of this array.

Note that, in the old API that was deprecated in version 1.7, this function had the return type `int`.

int **PyArray_TYPE** (*PyArrayObject* arr*)
Return the (builtin) typenumber for the elements of this array.

PyObject ***PyArray_GETITEM** (*PyArrayObject* arr*, void* *itemptr*)
Get a Python object from the ndarray, *arr*, at the location pointed to by itemptr. Return `NULL` on failure.

int **PyArray_SETITEM** (*PyArrayObject* arr*, void* *itemptr*, PyObject* *obj*)
Convert obj and place it in the ndarray, *arr*, at the place pointed to by itemptr. Return -1 if an error occurs or 0 on success.

npy_intp **PyArray_SIZE** (*PyArrayObject* arr*)
Returns the total size (in number of elements) of the array.

npy_intp **PyArray_Size** (*PyArrayObject* obj*)
Returns 0 if *obj* is not a sub-class of ndarray. Otherwise, returns the total number of elements in the array. Safer version of *PyArray_SIZE* (*obj*).

npy_intp **PyArray_NBYTES** (*PyArrayObject* arr*)
Returns the total number of bytes consumed by the array.

Data access

These functions and macros provide easy access to elements of the ndarray from C. These work for all arrays. You may need to take care when accessing the data in the array, however, if it is not in machine byte-order, misaligned, or not writeable. In other words, be sure to respect the state of the flags unless you know what you are doing, or have previously guaranteed an array that is writeable, aligned, and in machine byte-order using *PyArray_FromAny*. If you wish to handle all types of arrays, the copyswap function for each type is useful for handling misbehaved arrays. Some platforms (e.g. Solaris) do not like misaligned data and will crash if you de-reference a misaligned pointer. Other platforms (e.g. x86 Linux) will just work more slowly with misaligned data.

void* **PyArray_GetPtr** (*PyArrayObject* aobj*, npy_intp* *ind*)
Return a pointer to the data of the ndarray, *aobj*, at the N-dimensional index given by the c-array, *ind*, (which must be at least *aobj* ->nd in size). You may want to typecast the returned pointer to the data type of the ndarray.

void* **PyArray_GETPTR1** (*PyArrayObject* obj*, npy_intp *i*)

void* **PyArray_GETPTR2** (*PyArrayObject* obj*, npy_intp *i*, npy_intp *j*)

void* **PyArray_GETPTR3** (*PyArrayObject* obj*, npy_intp *i*, npy_intp *j*, npy_intp *k*)

void* **PyArray_GETPTR4** (*PyArrayObject* obj*, npy_intp *i*, npy_intp *j*, npy_intp *k*, npy_intp *l*)
Quick, inline access to the element at the given coordinates in the ndarray, *obj*, which must have respectively 1, 2, 3, or 4 dimensions (this is not checked). The corresponding *i*, *j*, *k*, and *l* coordinates can be any integer but will be interpreted as `npy_intp`. You may want to typecast the returned pointer to the data type of the ndarray.

5.4.2 Creating arrays

From scratch

PyObject* **PyArray_NewFromDescr**(PyTypeObject* *subtype*, *PyArray_Descr** *descr*, int *nd*, npy_intp* *dims*, npy_intp* *strides*, void* *data*, int *flags*, PyObject* *obj*)

This function steals a reference to *descr*.

This is the main array creation function. Most new arrays are created with this flexible function.

The returned object is an object of Python-type *subtype*, which must be a subtype of *PyArray_Type*. The array has *nd* dimensions, described by *dims*. The data-type descriptor of the new array is *descr*.

If *subtype* is of an array subclass instead of the base *&PyArray_Type*, then *obj* is the object to pass to the *__array_finalize__* method of the subclass.

If *data* is NULL, then new memory will be allocated and *flags* can be non-zero to indicate a Fortran-style contiguous array. If *data* is not NULL, then it is assumed to point to the memory to be used for the array and the *flags* argument is used as the new flags for the array (except the state of NPY_OWNDATA, *NPY_ARRAY_WRITEBACKIFCOPY* and *NPY_ARRAY_UPDATEIFCOPY* flags of the new array will be reset).

In addition, if *data* is non-NULL, then *strides* can also be provided. If *strides* is NULL, then the array strides are computed as C-style contiguous (default) or Fortran-style contiguous (*flags* is nonzero for *data* = NULL or *flags* & *NPY_ARRAY_F_CONTIGUOUS* is nonzero non-NULL *data*). Any provided *dims* and *strides* are copied into newly allocated dimension and strides arrays for the new array object.

PyObject* **PyArray_NewLikeArray**(*PyArrayObject** *prototype*, *NPY_ORDER* *order*, *PyArray_Descr** *descr*, int *subok*)

New in version 1.6.

This function steals a reference to *descr* if it is not NULL.

This array creation routine allows for the convenient creation of a new array matching an existing array's shapes and memory layout, possibly changing the layout and/or data type.

When *order* is *NPY_ANYORDER*, the result order is *NPY_FORTRANORDER* if *prototype* is a fortran array, *NPY_CORDER* otherwise. When *order* is *NPY_KEEPORDER*, the result order matches that of *prototype*, even when the axes of *prototype* aren't in C or Fortran order.

If *descr* is NULL, the data type of *prototype* is used.

If *subok* is 1, the newly created array will use the sub-type of *prototype* to create the new array, otherwise it will create a base-class array.

PyObject* **PyArray_New**(PyTypeObject* *subtype*, int *nd*, npy_intp* *dims*, int *type_num*, npy_intp* *strides*, void* *data*, int *itemsize*, int *flags*, PyObject* *obj*)

This is similar to *PyArray_NewFromDescr*(...) except you specify the data-type descriptor with *type_num* and *itemsize*, where *type_num* corresponds to a builtin (or user-defined) type. If the type always has the same number of bytes, then itemsize is ignored. Otherwise, itemsize specifies the particular size of this array.

Warning: If data is passed to *PyArray_NewFromDescr* or *PyArray_New*, this memory must not be deallocated until the new array is deleted. If this data came from another Python object, this can be accomplished using Py_INCREF on that object and setting the base member of the new array to point to that object. If strides are passed in they must be consistent with the dimensions, the itemsize, and the data of the array.

PyObject* **PyArray_SimpleNew**(int *nd*, npy_intp* *dims*, int *typenum*)

Create a new uninitialized array of type, *typenum*, whose size in each of *nd* dimensions is given by the integer array, *dims*. This function cannot be used to create a flexible-type array (no itemsize given).

PyObject* **PyArray_SimpleNewFromData**(int *nd*, npy_intp* *dims*, int *typenum*, void* *data*)
Create an array wrapper around *data* pointed to by the given pointer. The array flags will have a default that the data area is well-behaved and C-style contiguous. The shape of the array is given by the *dims* c-array of length *nd*. The data-type of the array is indicated by *typenum*.

PyObject* **PyArray_SimpleNewFromDescr**(int *nd*, npy_intp* *dims*, *PyArray_Descr** *descr*)
This function steals a reference to *descr* if it is not NULL.

Create a new array with the provided data-type descriptor, *descr* , of the shape determined by *nd* and *dims*.

PyArray_FILLWBYTE(PyObject* *obj*, int *val*)
Fill the array pointed to by *obj* —which must be a (subclass of) ndarray—with the contents of *val* (evaluated as a byte). This macro calls memset, so obj must be contiguous.

PyObject* **PyArray_Zeros**(int *nd*, npy_intp* *dims*, *PyArray_Descr** *dtype*, int *fortran*)
Construct a new *nd* -dimensional array with shape given by *dims* and data type given by *dtype*. If *fortran* is non-zero, then a Fortran-order array is created, otherwise a C-order array is created. Fill the memory with zeros (or the 0 object if *dtype* corresponds to *NPY_OBJECT*).

PyObject* **PyArray_ZEROS**(int *nd*, npy_intp* *dims*, int *type_num*, int *fortran*)
Macro form of *PyArray_Zeros* which takes a type-number instead of a data-type object.

PyObject* **PyArray_Empty**(int *nd*, npy_intp* *dims*, *PyArray_Descr** *dtype*, int *fortran*)
Construct a new *nd* -dimensional array with shape given by *dims* and data type given by *dtype*. If *fortran* is non-zero, then a Fortran-order array is created, otherwise a C-order array is created. The array is uninitialized unless the data type corresponds to *NPY_OBJECT* in which case the array is filled with `Py_None`.

PyObject* **PyArray_EMPTY**(int *nd*, npy_intp* *dims*, int *typenum*, int *fortran*)
Macro form of *PyArray_Empty* which takes a type-number, *typenum*, instead of a data-type object.

PyObject* **PyArray_Arange**(double *start*, double *stop*, double *step*, int *typenum*)
Construct a new 1-dimensional array of data-type, *typenum*, that ranges from *start* to *stop* (exclusive) in increments of *step* . Equivalent to **arange** (*start*, *stop*, *step*, dtype).

PyObject* **PyArray_ArangeObj**(PyObject* *start*, PyObject* *stop*, PyObject* *step*, *PyArray_Descr** *descr*)
Construct a new 1-dimensional array of data-type determined by `descr`, that ranges from `start` to `stop` (exclusive) in increments of `step`. Equivalent to arange(`start`, `stop`, `step`, `typenum`).

int **PyArray_SetBaseObject**(*PyArrayObject** *arr*, PyObject* *obj*)
New in version 1.7.

This function **steals a reference** to `obj` and sets it as the base property of `arr`.

If you construct an array by passing in your own memory buffer as a parameter, you need to set the array's *base* property to ensure the lifetime of the memory buffer is appropriate.

The return value is 0 on success, -1 on failure.

If the object provided is an array, this function traverses the chain of *base* pointers so that each array points to the owner of the memory directly. Once the base is set, it may not be changed to another value.

From other objects

PyObject* **PyArray_FromAny**(PyObject* *op*, *PyArray_Descr** *dtype*, int *min_depth*, int *max_depth*, int *requirements*, PyObject* *context*)
This is the main function used to obtain an array from any nested sequence, or object that exposes the array interface, *op*. The parameters allow specification of the required *dtype*, the minimum (*min_depth*) and maximum (*max_depth*) number of dimensions acceptable, and other *requirements* for the array. The *dtype* argument needs to be a *PyArray_Descr* structure indicating the desired data-type (including required byteorder). The *dtype* argument may be NULL, indicating that any data-type (and byteorder) is acceptable. Unless

NPY_ARRAY_FORCECAST is present in flags, this call will generate an error if the data type cannot be safely obtained from the object. If you want to use NULL for the *dtype* and ensure the array is notswapped then use *PyArray_CheckFromAny*. A value of 0 for either of the depth parameters causes the parameter to be ignored. Any of the following array flags can be added (*e.g.* using |) to get the *requirements* argument. If your code can handle general (*e.g.* strided, byte-swapped, or unaligned arrays) then *requirements* may be 0. Also, if *op* is not already an array (or does not expose the array interface), then a new array will be created (and filled from *op* using the sequence protocol). The new array will have *NPY_ARRAY_DEFAULT* as its flags member. The *context* argument is passed to the *__array__* method of *op* and is only used if the array is constructed that way. Almost always this parameter is NULL.

In versions 1.6 and earlier of NumPy, the following flags did not have the _ARRAY_ macro namespace in them. That form of the constant names is deprecated in 1.7.

NPY_ARRAY_C_CONTIGUOUS
Make sure the returned array is C-style contiguous

NPY_ARRAY_F_CONTIGUOUS
Make sure the returned array is Fortran-style contiguous.

NPY_ARRAY_ALIGNED
Make sure the returned array is aligned on proper boundaries for its data type. An aligned array has the data pointer and every strides factor as a multiple of the alignment factor for the data-type- descriptor.

NPY_ARRAY_WRITEABLE
Make sure the returned array can be written to.

NPY_ARRAY_ENSURECOPY
Make sure a copy is made of *op*. If this flag is not present, data is not copied if it can be avoided.

NPY_ARRAY_ENSUREARRAY
Make sure the result is a base-class ndarray. By default, if *op* is an instance of a subclass of ndarray, an instance of that same subclass is returned. If this flag is set, an ndarray object will be returned instead.

NPY_ARRAY_FORCECAST
Force a cast to the output type even if it cannot be done safely. Without this flag, a data cast will occur only if it can be done safely, otherwise an error is raised.

NPY_ARRAY_WRITEBACKIFCOPY
If *op* is already an array, but does not satisfy the requirements, then a copy is made (which will satisfy the requirements). If this flag is present and a copy (of an object that is already an array) must be made, then the corresponding *NPY_ARRAY_WRITEBACKIFCOPY* flag is set in the returned copy and *op* is made to be read-only. You must be sure to call *PyArray_ResolveWritebackIfCopy* to copy the contents back into *op* and the *op* array will be made writeable again. If *op* is not writeable to begin with, or if it is not already an array, then an error is raised.

NPY_ARRAY_UPDATEIFCOPY
Deprecated. Use *NPY_ARRAY_WRITEBACKIFCOPY*, which is similar. This flag "automatically" copies the data back when the returned array is deallocated, which is not supported in all python implementations.

NPY_ARRAY_BEHAVED
NPY_ARRAY_ALIGNED | *NPY_ARRAY_WRITEABLE*

NPY_ARRAY_CARRAY
NPY_ARRAY_C_CONTIGUOUS | *NPY_ARRAY_BEHAVED*

NPY_ARRAY_CARRAY_RO
NPY_ARRAY_C_CONTIGUOUS | *NPY_ARRAY_ALIGNED*

NPY_ARRAY_FARRAY
NPY_ARRAY_F_CONTIGUOUS | *NPY_ARRAY_BEHAVED*

NPY_ARRAY_FARRAY_RO
NPY_ARRAY_F_CONTIGUOUS | *NPY_ARRAY_ALIGNED*

NPY_ARRAY_DEFAULT
NPY_ARRAY_CARRAY

NPY_ARRAY_IN_ARRAY
NPY_ARRAY_C_CONTIGUOUS | *NPY_ARRAY_ALIGNED*

NPY_ARRAY_IN_FARRAY
NPY_ARRAY_F_CONTIGUOUS | *NPY_ARRAY_ALIGNED*

NPY_OUT_ARRAY
NPY_ARRAY_C_CONTIGUOUS | *NPY_ARRAY_WRITEABLE* | *NPY_ARRAY_ALIGNED*

NPY_ARRAY_OUT_FARRAY
NPY_ARRAY_F_CONTIGUOUS | *NPY_ARRAY_WRITEABLE* | *NPY_ARRAY_ALIGNED*

NPY_ARRAY_INOUT_ARRAY
NPY_ARRAY_C_CONTIGUOUS | *NPY_ARRAY_WRITEABLE* | *NPY_ARRAY_ALIGNED* | *NPY_ARRAY_WRITEBACKIFCOPY* | *NPY_ARRAY_UPDATEIFCOPY*

NPY_ARRAY_INOUT_FARRAY
NPY_ARRAY_F_CONTIGUOUS | *NPY_ARRAY_WRITEABLE* | *NPY_ARRAY_ALIGNED* | *NPY_ARRAY_WRITEBACKIFCOPY* | *NPY_ARRAY_UPDATEIFCOPY*

int **PyArray_GetArrayParamsFromObject**(PyObject* *op*, *PyArray_Descr** *requested_dtype*, *npy_bool* *writeable*, *PyArray_Descr*** *out_dtype*, int* *out_ndim*, npy_intp* *out_dims*, *PyArrayObject*** *out_arr*, PyObject* *context*)

New in version 1.6.

Retrieves the array parameters for viewing/converting an arbitrary PyObject* to a NumPy array. This allows the "innate type and shape" of Python list-of-lists to be discovered without actually converting to an array. PyArray_FromAny calls this function to analyze its input.

In some cases, such as structured arrays and the *__array__* interface, a data type needs to be used to make sense of the object. When this is needed, provide a Descr for 'requested_dtype', otherwise provide NULL. This reference is not stolen. Also, if the requested dtype doesn't modify the interpretation of the input, out_dtype will still get the "innate" dtype of the object, not the dtype passed in 'requested_dtype'.

If writing to the value in 'op' is desired, set the boolean 'writeable' to 1. This raises an error when 'op' is a scalar, list of lists, or other non-writeable 'op'. This differs from passing *NPY_ARRAY_WRITEABLE* to PyArray_FromAny, where the writeable array may be a copy of the input.

When success (0 return value) is returned, either out_arr is filled with a non-NULL PyArrayObject and the rest of the parameters are untouched, or out_arr is filled with NULL, and the rest of the parameters are filled.

Typical usage:

```
PyArrayObject *arr = NULL;
PyArray_Descr *dtype = NULL;
int ndim = 0;
npy_intp dims[NPY_MAXDIMS];

if (PyArray_GetArrayParamsFromObject(op, NULL, 1, &dtype,
                                     &ndim, &dims, &arr, NULL) < 0) {
    return NULL;
}
if (arr == NULL) {
    ... validate/change dtype, validate flags, ndim, etc ...
```

(continues on next page)

(continued from previous page)

```
    // Could make custom strides here too
    arr = PyArray_NewFromDescr(&PyArray_Type, dtype, ndim,
                               dims, NULL,
                               fortran ? NPY_ARRAY_F_CONTIGUOUS : 0,
                               NULL);
    if (arr == NULL) {
        return NULL;
    }
    if (PyArray_CopyObject(arr, op) < 0) {
        Py_DECREF(arr);
        return NULL;
    }
}
else {
    ... in this case the other parameters weren't filled, just
        validate and possibly copy arr itself ...
}
... use arr ...
```

PyObject* **PyArray_CheckFromAny**(PyObject* *op*, *PyArray_Descr** *dtype*, int *min_depth*, int *max_depth*, int *requirements*, PyObject* *context*)

Nearly identical to *PyArray_FromAny*(...) except *requirements* can contain *NPY_ARRAY_NOTSWAPPED* (over-riding the specification in *dtype*) and *NPY_ARRAY_ELEMENTSTRIDES* which indicates that the array should be aligned in the sense that the strides are multiples of the element size.

In versions 1.6 and earlier of NumPy, the following flags did not have the _ARRAY_ macro namespace in them. That form of the constant names is deprecated in 1.7.

NPY_ARRAY_NOTSWAPPED

Make sure the returned array has a data-type descriptor that is in machine byte-order, over-riding any specification in the *dtype* argument. Normally, the byte-order requirement is determined by the *dtype* argument. If this flag is set and the dtype argument does not indicate a machine byte-order descriptor (or is NULL and the object is already an array with a data-type descriptor that is not in machine byte- order), then a new data-type descriptor is created and used with its byte-order field set to native.

NPY_ARRAY_BEHAVED_NS

NPY_ARRAY_ALIGNED | *NPY_ARRAY_WRITEABLE* | *NPY_ARRAY_NOTSWAPPED*

NPY_ARRAY_ELEMENTSTRIDES

Make sure the returned array has strides that are multiples of the element size.

PyObject* **PyArray_FromArray**(*PyArrayObject** *op*, *PyArray_Descr** *newtype*, int *requirements*)

Special case of *PyArray_FromAny* for when *op* is already an array but it needs to be of a specific *newtype* (including byte-order) or has certain *requirements*.

PyObject* **PyArray_FromStructInterface**(PyObject* *op*)

Returns an ndarray object from a Python object that exposes the __array_struct__ attribute and follows the array interface protocol. If the object does not contain this attribute then a borrowed reference to Py_NotImplemented is returned.

PyObject* **PyArray_FromInterface**(PyObject* *op*)

Returns an ndarray object from a Python object that exposes the *__array_interface__* attribute following the array interface protocol. If the object does not contain this attribute then a borrowed reference to Py_NotImplemented is returned.

PyObject* **PyArray_FromArrayAttr**(PyObject* *op*, *PyArray_Descr** *dtype*, PyObject* *context*)

Return an ndarray object from a Python object that exposes the *__array__* method. The *__array__* method can take 0, 1, or 2 arguments ([dtype, context]) where *context* is used to pass information about where the

__array__ method is being called from (currently only used in ufuncs).

PyObject* **PyArray_ContiguousFromAny**(PyObject* *op*, int *typenum*, int *min_depth*, int *max_depth*)
This function returns a (C-style) contiguous and behaved function array from any nested sequence or array interface exporting object, *op*, of (non-flexible) type given by the enumerated *typenum*, of minimum depth *min_depth*, and of maximum depth *max_depth*. Equivalent to a call to *PyArray_FromAny* with requirements set to *NPY_ARRAY_DEFAULT* and the type_num member of the type argument set to *typenum*.

PyObject *__PyArray_FromObject__(PyObject *__op__, int *typenum*, int *min_depth*, int *max_depth*)
Return an aligned and in native-byteorder array from any nested sequence or array-interface exporting object, op, of a type given by the enumerated typenum. The minimum number of dimensions the array can have is given by min_depth while the maximum is max_depth. This is equivalent to a call to *PyArray_FromAny* with requirements set to BEHAVED.

PyObject* **PyArray_EnsureArray**(PyObject* *op*)
This function **steals a reference** to `op` and makes sure that `op` is a base-class ndarray. It special cases array scalars, but otherwise calls *PyArray_FromAny* (`op`, NULL, 0, 0, `NPY_ARRAY_ENSUREARRAY`, NULL).

PyObject* **PyArray_FromString**(char* *string*, npy_intp *slen*, *PyArray_Descr** *dtype*, npy_intp *num*, char* *sep*)
Construct a one-dimensional ndarray of a single type from a binary or (ASCII) text `string` of length `slen`. The data-type of the array to-be-created is given by `dtype`. If num is -1, then **copy** the entire string and return an appropriately sized array, otherwise, `num` is the number of items to **copy** from the string. If `sep` is NULL (or “”), then interpret the string as bytes of binary data, otherwise convert the sub-strings separated by `sep` to items of data-type `dtype`. Some data-types may not be readable in text mode and an error will be raised if that occurs. All errors return NULL.

PyObject* **PyArray_FromFile**(FILE* *fp*, *PyArray_Descr** *dtype*, npy_intp *num*, char* *sep*)
Construct a one-dimensional ndarray of a single type from a binary or text file. The open file pointer is `fp`, the data-type of the array to be created is given by `dtype`. This must match the data in the file. If `num` is -1, then read until the end of the file and return an appropriately sized array, otherwise, `num` is the number of items to read. If `sep` is NULL (or “”), then read from the file in binary mode, otherwise read from the file in text mode with `sep` providing the item separator. Some array types cannot be read in text mode in which case an error is raised.

PyObject* **PyArray_FromBuffer**(PyObject* *buf*, *PyArray_Descr** *dtype*, npy_intp *count*, npy_intp *offset*)
Construct a one-dimensional ndarray of a single type from an object, `buf`, that exports the (single-segment) buffer protocol (or has an attribute __buffer__ that returns an object that exports the buffer protocol). A writeable buffer will be tried first followed by a read- only buffer. The *NPY_ARRAY_WRITEABLE* flag of the returned array will reflect which one was successful. The data is assumed to start at `offset` bytes from the start of the memory location for the object. The type of the data in the buffer will be interpreted depending on the data-type descriptor, `dtype.` If `count` is negative then it will be determined from the size of the buffer and the requested itemsize, otherwise, `count` represents how many elements should be converted from the buffer.

int **PyArray_CopyInto**(*PyArrayObject** *dest*, *PyArrayObject** *src*)
Copy from the source array, `src`, into the destination array, `dest`, performing a data-type conversion if necessary. If an error occurs return -1 (otherwise 0). The shape of `src` must be broadcastable to the shape of `dest`. The data areas of dest and src must not overlap.

int **PyArray_MoveInto**(*PyArrayObject** *dest*, *PyArrayObject** *src*)
Move data from the source array, `src`, into the destination array, `dest`, performing a data-type conversion if necessary. If an error occurs return -1 (otherwise 0). The shape of `src` must be broadcastable to the shape of `dest`. The data areas of dest and src may overlap.

*PyArrayObject** **PyArray_GETCONTIGUOUS**(PyObject* *op*)
If `op` is already (C-style) contiguous and well-behaved then just return a reference, otherwise return a (contiguous and well-behaved) copy of the array. The parameter op must be a (sub-class of an) ndarray and no checking for that is done.

PyObject* **PyArray_FROM_O**(PyObject* *obj*)
Convert `obj` to an ndarray. The argument can be any nested sequence or object that exports the array interface. This is a macro form of *PyArray_FromAny* using `NULL`, 0, 0, 0 for the other arguments. Your code must be able to handle any data-type descriptor and any combination of data-flags to use this macro.

PyObject* **PyArray_FROM_OF**(PyObject* *obj*, int *requirements*)
Similar to *PyArray_FROM_O* except it can take an argument of *requirements* indicating properties the resulting array must have. Available requirements that can be enforced are *NPY_ARRAY_C_CONTIGUOUS*, *NPY_ARRAY_F_CONTIGUOUS*, *NPY_ARRAY_ALIGNED*, *NPY_ARRAY_WRITEABLE*, *NPY_ARRAY_NOTSWAPPED*, NPY_ARRAY_ENSURECOPY, *NPY_ARRAY_WRITEBACKIFCOPY*, *NPY_ARRAY_UPDATEIFCOPY*, NPY_ARRAY_FORCECAST, and NPY_ARRAY_ENSUREARRAY. Standard combinations of flags can also be used:

PyObject* **PyArray_FROM_OT**(PyObject* *obj*, int *typenum*)
Similar to *PyArray_FROM_O* except it can take an argument of *typenum* specifying the type-number the returned array.

PyObject* **PyArray_FROM_OTF**(PyObject* *obj*, int *typenum*, int *requirements*)
Combination of *PyArray_FROM_OF* and *PyArray_FROM_OT* allowing both a *typenum* and a *flags* argument to be provided..

PyObject* **PyArray_FROMANY**(PyObject* *obj*, int *typenum*, int *min*, int *max*, int *requirements*)
Similar to *PyArray_FromAny* except the data-type is specified using a typenumber. *PyArray_DescrFromType* (*typenum*) is passed directly to *PyArray_FromAny*. This macro also adds *NPY_ARRAY_DEFAULT* to requirements if NPY_ARRAY_ENSURECOPY is passed in as requirements.

PyObject ***PyArray_CheckAxis**(PyObject* *obj*, int* *axis*, int *requirements*)
Encapsulate the functionality of functions and methods that take the axis= keyword and work properly with None as the axis argument. The input array is `obj`, while `*axis` is a converted integer (so that >=MAXDIMS is the None value), and `requirements` gives the needed properties of `obj`. The output is a converted version of the input so that requirements are met and if needed a flattening has occurred. On output negative values of `*axis` are converted and the new value is checked to ensure consistency with the shape of `obj`.

5.4.3 Dealing with types

General check of Python Type

PyArray_Check(op)
Evaluates true if *op* is a Python object whose type is a sub-type of *PyArray_Type*.

PyArray_CheckExact(op)
Evaluates true if *op* is a Python object with type *PyArray_Type*.

PyArray_HasArrayInterface(op, out)
If `op` implements any part of the array interface, then `out` will contain a new reference to the newly created ndarray using the interface or `out` will contain `NULL` if an error during conversion occurs. Otherwise, out will contain a borrowed reference to `Py_NotImplemented` and no error condition is set.

PyArray_HasArrayInterfaceType(op, type, context, out)
If `op` implements any part of the array interface, then `out` will contain a new reference to the newly created ndarray using the interface or `out` will contain `NULL` if an error during conversion occurs. Otherwise, out will contain a borrowed reference to Py_NotImplemented and no error condition is set. This version allows setting of the type and context in the part of the array interface that looks for the *__array__* attribute.

PyArray_IsZeroDim(op)
Evaluates true if *op* is an instance of (a subclass of) *PyArray_Type* and has 0 dimensions.

PyArray_IsScalar(op, cls)
Evaluates true if *op* is an instance of `Py{cls}ArrType_Type`.

PyArray_CheckScalar(op)
Evaluates true if *op* is either an array scalar (an instance of a sub-type of `PyGenericArr_Type`), or an instance of (a sub-class of) *PyArray_Type* whose dimensionality is 0.

PyArray_IsPythonNumber(op)
Evaluates true if *op* is an instance of a builtin numeric type (int, float, complex, long, bool)

PyArray_IsPythonScalar(op)
Evaluates true if *op* is a builtin Python scalar object (int, float, complex, str, unicode, long, bool).

PyArray_IsAnyScalar(op)
Evaluates true if *op* is either a Python scalar object (see *PyArray_IsPythonScalar*) or an array scalar (an instance of a sub- type of `PyGenericArr_Type`).

PyArray_CheckAnyScalar(op)
Evaluates true if *op* is a Python scalar object (see *PyArray_IsPythonScalar*), an array scalar (an instance of a sub-type of `PyGenericArr_Type`) or an instance of a sub-type of *PyArray_Type* whose dimensionality is 0.

Data-type checking

For the typenum macros, the argument is an integer representing an enumerated array data type. For the array type checking macros the argument must be a `PyObject *` that can be directly interpreted as a *PyArrayObject **.

PyTypeNum_ISUNSIGNED(num)

PyDataType_ISUNSIGNED(descr)

PyArray_ISUNSIGNED(obj)
Type represents an unsigned integer.

PyTypeNum_ISSIGNED(num)

PyDataType_ISSIGNED(descr)

PyArray_ISSIGNED(obj)
Type represents a signed integer.

PyTypeNum_ISINTEGER(num)

PyDataType_ISINTEGER(descr)

PyArray_ISINTEGER(obj)
Type represents any integer.

PyTypeNum_ISFLOAT(num)

PyDataType_ISFLOAT(descr)

PyArray_ISFLOAT(obj)
Type represents any floating point number.

PyTypeNum_ISCOMPLEX(num)

PyDataType_ISCOMPLEX(descr)

PyArray_ISCOMPLEX(obj)
Type represents any complex floating point number.

PyTypeNum_ISNUMBER(num)

PyDataType_ISNUMBER(descr)

PyArray_ISNUMBER(obj)
Type represents any integer, floating point, or complex floating point number.

PyTypeNum_ISSTRING(num)

PyDataType_ISSTRING(descr)

PyArray_ISSTRING(obj)
Type represents a string data type.

PyTypeNum_ISPYTHON(num)

PyDataType_ISPYTHON(descr)

PyArray_ISPYTHON(obj)
Type represents an enumerated type corresponding to one of the standard Python scalar (bool, int, float, or complex).

PyTypeNum_ISFLEXIBLE(num)

PyDataType_ISFLEXIBLE(descr)

PyArray_ISFLEXIBLE(obj)
Type represents one of the flexible array types (*NPY_STRING*, *NPY_UNICODE*, or *NPY_VOID*).

PyDataType_ISUNSIZED(descr):
Type has no size information attached, and can be resized. Should only be called on flexible dtypes. Types that are attached to an array will always be sized, hence the array form of this macro not existing.

PyTypeNum_ISUSERDEF(num)

PyDataType_ISUSERDEF(descr)

PyArray_ISUSERDEF(obj)
Type represents a user-defined type.

PyTypeNum_ISEXTENDED(num)

PyDataType_ISEXTENDED(descr)

PyArray_ISEXTENDED(obj)
Type is either flexible or user-defined.

PyTypeNum_ISOBJECT(num)

PyDataType_ISOBJECT(descr)

PyArray_ISOBJECT(obj)
Type represents object data type.

PyTypeNum_ISBOOL(num)

PyDataType_ISBOOL(descr)

PyArray_ISBOOL(obj)
Type represents Boolean data type.

PyDataType_HASFIELDS(descr)

PyArray_HASFIELDS(obj)
Type has fields associated with it.

PyArray_ISNOTSWAPPED(m)
Evaluates true if the data area of the ndarray *m* is in machine byte-order according to the array's data-type descriptor.

PyArray_ISBYTESWAPPED (m)
Evaluates true if the data area of the ndarray *m* is **not** in machine byte-order according to the array's data-type descriptor.

Bool **PyArray_EquivTypes** (*PyArray_Descr** *type1*, *PyArray_Descr** *type2*)
Return *NPY_TRUE* if *type1* and *type2* actually represent equivalent types for this platform (the fortran member of each type is ignored). For example, on 32-bit platforms, *NPY_LONG* and *NPY_INT* are equivalent. Otherwise return *NPY_FALSE*.

Bool **PyArray_EquivArrTypes** (*PyArrayObject** *a1*, *PyArrayObject * a2*)
Return *NPY_TRUE* if *a1* and *a2* are arrays with equivalent types for this platform.

Bool **PyArray_EquivTypenums** (int *typenum1*, int *typenum2*)
Special case of *PyArray_EquivTypes* (...) that does not accept flexible data types but may be easier to call.

int **PyArray_EquivByteorders** ({byteorder} *b1*, {byteorder} *b2*)
True if byteorder characters (NPY_LITTLE, NPY_BIG, NPY_NATIVE, NPY_IGNORE) are either equal or equivalent as to their specification of a native byte order. Thus, on a little-endian machine NPY_LITTLE and NPY_NATIVE are equivalent where they are not equivalent on a big-endian machine.

Converting data types

PyObject* **PyArray_Cast** (*PyArrayObject** *arr*, int *typenum*)
Mainly for backwards compatibility to the Numeric C-API and for simple casts to non-flexible types. Return a new array object with the elements of *arr* cast to the data-type *typenum* which must be one of the enumerated types and not a flexible type.

PyObject* **PyArray_CastToType** (*PyArrayObject** *arr*, *PyArray_Descr** *type*, int *fortran*)
Return a new array of the *type* specified, casting the elements of *arr* as appropriate. The fortran argument specifies the ordering of the output array.

int **PyArray_CastTo** (*PyArrayObject** *out*, *PyArrayObject** *in*)
As of 1.6, this function simply calls *PyArray_CopyInto*, which handles the casting.

Cast the elements of the array *in* into the array *out*. The output array should be writeable, have an integer-multiple of the number of elements in the input array (more than one copy can be placed in out), and have a data type that is one of the builtin types. Returns 0 on success and -1 if an error occurs.

PyArray_VectorUnaryFunc* **PyArray_GetCastFunc** (*PyArray_Descr** *from*, int *totype*)
Return the low-level casting function to cast from the given descriptor to the builtin type number. If no casting function exists return NULL and set an error. Using this function instead of direct access to *from* ->f->cast will allow support of any user-defined casting functions added to a descriptors casting dictionary.

int **PyArray_CanCastSafely** (int *fromtype*, int *totype*)
Returns non-zero if an array of data type *fromtype* can be cast to an array of data type *totype* without losing information. An exception is that 64-bit integers are allowed to be cast to 64-bit floating point values even though this can lose precision on large integers so as not to proliferate the use of long doubles without explicit requests. Flexible array types are not checked according to their lengths with this function.

int **PyArray_CanCastTo** (*PyArray_Descr** *fromtype*, *PyArray_Descr** *totype*)
PyArray_CanCastTypeTo supersedes this function in NumPy 1.6 and later.

Equivalent to PyArray_CanCastTypeTo(fromtype, totype, NPY_SAFE_CASTING).

int **PyArray_CanCastTypeTo** (*PyArray_Descr** *fromtype*, *PyArray_Descr** *totype*, *NPY_CASTING casting*)
New in version 1.6.

Returns non-zero if an array of data type *fromtype* (which can include flexible types) can be cast safely to an array of data type *totype* (which can include flexible types) according to the casting rule *casting*. For simple types with `NPY_SAFE_CASTING`, this is basically a wrapper around `PyArray_CanCastSafely`, but for flexible types such as strings or unicode, it produces results taking into account their sizes. Integer and float types can only be cast to a string or unicode type using `NPY_SAFE_CASTING` if the string or unicode type is big enough to hold the max value of the integer/float type being cast from.

int **PyArray_CanCastArrayTo**(*PyArrayObject** *arr*, *PyArray_Descr** *totype*, *NPY_CASTING* *casting*)

New in version 1.6.

Returns non-zero if *arr* can be cast to *totype* according to the casting rule given in *casting*. If *arr* is an array scalar, its value is taken into account, and non-zero is also returned when the value will not overflow or be truncated to an integer when converting to a smaller type.

This is almost the same as the result of PyArray_CanCastTypeTo(PyArray_MinScalarType(arr), totype, casting), but it also handles a special case arising because the set of uint values is not a subset of the int values for types with the same number of bits.

*PyArray_Descr** **PyArray_MinScalarType**(*PyArrayObject** *arr*)

New in version 1.6.

If *arr* is an array, returns its data type descriptor, but if *arr* is an array scalar (has 0 dimensions), it finds the data type of smallest size to which the value may be converted without overflow or truncation to an integer.

This function will not demote complex to float or anything to boolean, but will demote a signed integer to an unsigned integer when the scalar value is positive.

*PyArray_Descr** **PyArray_PromoteTypes**(*PyArray_Descr** *type1*, *PyArray_Descr** *type2*)

New in version 1.6.

Finds the data type of smallest size and kind to which *type1* and *type2* may be safely converted. This function is symmetric and associative. A string or unicode result will be the proper size for storing the max value of the input types converted to a string or unicode.

*PyArray_Descr** **PyArray_ResultType**(npy_intp *narrs*, *PyArrayObject***arrs, npy_intp *ndtypes*, *PyArray_Descr***dtypes)

New in version 1.6.

This applies type promotion to all the inputs, using the NumPy rules for combining scalars and arrays, to determine the output type of a set of operands. This is the same result type that ufuncs produce. The specific algorithm used is as follows.

Categories are determined by first checking which of boolean, integer (int/uint), or floating point (float/complex) the maximum kind of all the arrays and the scalars are.

If there are only scalars or the maximum category of the scalars is higher than the maximum category of the arrays, the data types are combined with `PyArray_PromoteTypes` to produce the return value.

Otherwise, PyArray_MinScalarType is called on each array, and the resulting data types are all combined with `PyArray_PromoteTypes` to produce the return value.

The set of int values is not a subset of the uint values for types with the same number of bits, something not reflected in `PyArray_MinScalarType`, but handled as a special case in PyArray_ResultType.

int **PyArray_ObjectType**(PyObject* *op*, int *mintype*)

This function is superceded by `PyArray_MinScalarType` and/or `PyArray_ResultType`.

This function is useful for determining a common type that two or more arrays can be converted to. It only works for non-flexible array types as no itemsize information is passed. The *mintype* argument represents the minimum type acceptable, and *op* represents the object that will be converted to an array. The return value is the enumerated typenumber that represents the data-type that *op* should have.

void **PyArray_ArrayType**(PyObject* *op*, *PyArray_Descr** *mintype*, *PyArray_Descr** *outtype*)
This function is superceded by *PyArray_ResultType*.

This function works similarly to *PyArray_ObjectType*(...) except it handles flexible arrays. The *mintype* argument can have an itemsize member and the *outtype* argument will have an itemsize member at least as big but perhaps bigger depending on the object *op*.

*PyArrayObject*** **PyArray_ConvertToCommonType**(PyObject* *op*, int* *n*)
The functionality this provides is largely superceded by iterator *NpyIter* introduced in 1.6, with flag *NPY_ITER_COMMON_DTYPE* or with the same dtype parameter for all operands.

Convert a sequence of Python objects contained in *op* to an array of ndarrays each having the same data type. The type is selected based on the typenumber (larger type number is chosen over a smaller one) ignoring objects that are only scalars. The length of the sequence is returned in *n*, and an *n* -length array of *PyArrayObject* pointers is the return value (or NULL if an error occurs). The returned array must be freed by the caller of this routine (using *PyDataMem_FREE*) and all the array objects in it DECREF 'd or a memory-leak will occur. The example template-code below shows a typically usage:

```
mps = PyArray_ConvertToCommonType(obj, &n);
if (mps==NULL) return NULL;
{code}
<before return>
for (i=0; i<n; i++) Py_DECREF(mps[i]);
PyDataMem_FREE(mps);
{return}
```

char* **PyArray_Zero**(*PyArrayObject** *arr*)
A pointer to newly created memory of size *arr* ->itemsize that holds the representation of 0 for that type. The returned pointer, *ret*, **must be freed** using *PyDataMem_FREE* (ret) when it is not needed anymore.

char* **PyArray_One**(*PyArrayObject** *arr*)
A pointer to newly created memory of size *arr* ->itemsize that holds the representation of 1 for that type. The returned pointer, *ret*, **must be freed** using *PyDataMem_FREE* (ret) when it is not needed anymore.

int **PyArray_ValidType**(int *typenum*)
Returns *NPY_TRUE* if *typenum* represents a valid type-number (builtin or user-defined or character code). Otherwise, this function returns *NPY_FALSE*.

New data types

void **PyArray_InitArrFuncs**(*PyArray_ArrFuncs** *f*)
Initialize all function pointers and members to NULL.

int **PyArray_RegisterDataType**(*PyArray_Descr** *dtype*)
Register a data-type as a new user-defined data type for arrays. The type must have most of its entries filled in. This is not always checked and errors can produce segfaults. In particular, the typeobj member of the dtype structure must be filled with a Python type that has a fixed-size element-size that corresponds to the elsize member of *dtype*. Also the f member must have the required functions: nonzero, copyswap, copyswapn, getitem, setitem, and cast (some of the cast functions may be NULL if no support is desired). To avoid confusion, you should choose a unique character typecode but this is not enforced and not relied on internally.

A user-defined type number is returned that uniquely identifies the type. A pointer to the new structure can then be obtained from *PyArray_DescrFromType* using the returned type number. A -1 is returned if an error occurs. If this *dtype* has already been registered (checked only by the address of the pointer), then return the previously-assigned type-number.

int **PyArray_RegisterCastFunc**(*PyArray_Descr* descr*, int *totype*, PyArray_VectorUnaryFunc* *castfunc*)

Register a low-level casting function, *castfunc*, to convert from the data-type, *descr*, to the given data-type number, *totype*. Any old casting function is over-written. A `0` is returned on success or a `-1` on failure.

int **PyArray_RegisterCanCast**(*PyArray_Descr* descr*, int *totype*, *NPY_SCALARKIND scalar*)

Register the data-type number, *totype*, as castable from data-type object, *descr*, of the given *scalar* kind. Use *scalar* = `NPY_NOSCALAR` to register that an array of data-type *descr* can be cast safely to a data-type whose type_number is *totype*.

Special functions for NPY_OBJECT

int **PyArray_INCREF**(*PyArrayObject* op*)

Used for an array, *op*, that contains any Python objects. It increments the reference count of every object in the array according to the data-type of *op*. A -1 is returned if an error occurs, otherwise 0 is returned.

void **PyArray_Item_INCREF**(char* *ptr*, *PyArray_Descr* dtype*)

A function to INCREF all the objects at the location *ptr* according to the data-type *dtype*. If *ptr* is the start of a structured type with an object at any offset, then this will (recursively) increment the reference count of all object-like items in the structured type.

int **PyArray_XDECREF**(*PyArrayObject* op*)

Used for an array, *op*, that contains any Python objects. It decrements the reference count of every object in the array according to the data-type of *op*. Normal return value is 0. A -1 is returned if an error occurs.

void **PyArray_Item_XDECREF**(char* *ptr*, *PyArray_Descr* dtype*)

A function to XDECREF all the object-like items at the location *ptr* as recorded in the data-type, *dtype*. This works recursively so that if `dtype` itself has fields with data-types that contain object-like items, all the object-like fields will be XDECREF `'d`.

void **PyArray_FillObjectArray**(*PyArrayObject* arr*, PyObject* *obj*)

Fill a newly created array with a single value obj at all locations in the structure with object data-types. No checking is performed but *arr* must be of data-type *NPY_OBJECT* and be single-segment and uninitialized (no previous objects in position). Use `PyArray_DECREF` (*arr*) if you need to decrement all the items in the object array prior to calling this function.

int **PyArray_SetUpdateIfCopyBase**(*PyArrayObject* arr*, *PyArrayObject* base*)

Precondition: `arr` is a copy of `base` (though possibly with different strides, ordering, etc.) Set the UPDATEIFCOPY flag and `arr->base` so that when `arr` is destructed, it will copy any changes back to `base`. DEPRECATED, use `PyArray_SetWritebackIfCopyBase`.

Returns 0 for success, -1 for failure.

int **PyArray_SetWritebackIfCopyBase**(*PyArrayObject* arr*, *PyArrayObject* base*)

Precondition: `arr` is a copy of `base` (though possibly with different strides, ordering, etc.) Sets the *NPY_ARRAY_WRITEBACKIFCOPY* flag and `arr->base`, and set `base` to READONLY. Call *PyArray_ResolveWritebackIfCopy* before calling *Py_DECREF*‘ in order copy any changes back to `base` and reset the READONLY flag.

Returns 0 for success, -1 for failure.

5.4.4 Array flags

The `flags` attribute of the `PyArrayObject` structure contains important information about the memory used by the array (pointed to by the data member) This flag information must be kept accurate or strange results and even segfaults may result.

There are 6 (binary) flags that describe the memory area used by the data buffer. These constants are defined in `arrayobject.h` and determine the bit-position of the flag. Python exposes a nice attribute- based interface as well as a dictionary-like interface for getting (and, if appropriate, setting) these flags.

Memory areas of all kinds can be pointed to by an ndarray, necessitating these flags. If you get an arbitrary `PyArrayObject` in C-code, you need to be aware of the flags that are set. If you need to guarantee a certain kind of array (like *NPY_ARRAY_C_CONTIGUOUS* and *NPY_ARRAY_BEHAVED*), then pass these requirements into the PyArray_FromAny function.

Basic Array Flags

An ndarray can have a data segment that is not a simple contiguous chunk of well-behaved memory you can manipulate. It may not be aligned with word boundaries (very important on some platforms). It might have its data in a different byte-order than the machine recognizes. It might not be writeable. It might be in Fortan-contiguous order. The array flags are used to indicate what can be said about data associated with an array.

In versions 1.6 and earlier of NumPy, the following flags did not have the _ARRAY_ macro namespace in them. That form of the constant names is deprecated in 1.7.

NPY_ARRAY_C_CONTIGUOUS
: The data area is in C-style contiguous order (last index varies the fastest).

NPY_ARRAY_F_CONTIGUOUS
: The data area is in Fortran-style contiguous order (first index varies the fastest).

Note: Arrays can be both C-style and Fortran-style contiguous simultaneously. This is clear for 1-dimensional arrays, but can also be true for higher dimensional arrays.

Even for contiguous arrays a stride for a given dimension `arr.strides[dim]` may be *arbitrary* if `arr.shape[dim] == 1` or the array has no elements. It does *not* generally hold that `self.strides[-1] == self.itemsize` for C-style contiguous arrays or `self.strides[0] == self.itemsize` for Fortran-style contiguous arrays is true. The correct way to access the `itemsize` of an array from the C API is `PyArray_ITEMSIZE(arr)`.

See also:

Internal memory layout of an ndarray

NPY_ARRAY_OWNDATA
: The data area is owned by this array.

NPY_ARRAY_ALIGNED
: The data area and all array elements are aligned appropriately.

NPY_ARRAY_WRITEABLE
: The data area can be written to.

  Notice that the above 3 flags are defined so that a new, well- behaved array has these flags defined as true.

NPY_ARRAY_WRITEBACKIFCOPY
: The data area represents a (well-behaved) copy whose information should be transferred back to the original when *PyArray_ResolveWritebackIfCopy* is called.

  This is a special flag that is set if this array represents a copy made because a user required certain flags in *PyArray_FromAny* and a copy had to be made of some other array (and the user asked for this flag to be set in such a situation). The base attribute then points to the "misbehaved" array (which is set read_only). :c:func'PyArray_ResolveWritebackIfCopy' will copy its contents back to the "misbehaved" array (casting if necessary) and will reset the "misbehaved" array to *NPY_ARRAY_WRITEABLE*. If the "misbehaved" array

was not *NPY_ARRAY_WRITEABLE* to begin with then *PyArray_FromAny* would have returned an error because *NPY_ARRAY_WRITEBACKIFCOPY* would not have been possible.

NPY_ARRAY_UPDATEIFCOPY
A deprecated version of *NPY_ARRAY_WRITEBACKIFCOPY* which depends upon `dealloc` to trigger the writeback. For backwards compatibility, *PyArray_ResolveWritebackIfCopy* is called at `dealloc` but relying on that behavior is deprecated and not supported in PyPy.

PyArray_UpdateFlags (obj, flags) will update the `obj->flags` for `flags` which can be any of *NPY_ARRAY_C_CONTIGUOUS*, *NPY_ARRAY_F_CONTIGUOUS*, *NPY_ARRAY_ALIGNED*, or *NPY_ARRAY_WRITEABLE*.

Combinations of array flags

NPY_ARRAY_BEHAVED
NPY_ARRAY_ALIGNED | *NPY_ARRAY_WRITEABLE*

NPY_ARRAY_CARRAY
NPY_ARRAY_C_CONTIGUOUS | *NPY_ARRAY_BEHAVED*

NPY_ARRAY_CARRAY_RO
NPY_ARRAY_C_CONTIGUOUS | *NPY_ARRAY_ALIGNED*

NPY_ARRAY_FARRAY
NPY_ARRAY_F_CONTIGUOUS | *NPY_ARRAY_BEHAVED*

NPY_ARRAY_FARRAY_RO
NPY_ARRAY_F_CONTIGUOUS | *NPY_ARRAY_ALIGNED*

NPY_ARRAY_DEFAULT
NPY_ARRAY_CARRAY

NPY_ARRAY_UPDATE_ALL
NPY_ARRAY_C_CONTIGUOUS | *NPY_ARRAY_F_CONTIGUOUS* | *NPY_ARRAY_ALIGNED*

Flag-like constants

These constants are used in *PyArray_FromAny* (and its macro forms) to specify desired properties of the new array.

NPY_ARRAY_FORCECAST
Cast to the desired type, even if it can't be done without losing information.

NPY_ARRAY_ENSURECOPY
Make sure the resulting array is a copy of the original.

NPY_ARRAY_ENSUREARRAY
Make sure the resulting object is an actual ndarray, and not a sub-class.

NPY_ARRAY_NOTSWAPPED
Only used in *PyArray_CheckFromAny* to over-ride the byteorder of the data-type object passed in.

NPY_ARRAY_BEHAVED_NS
NPY_ARRAY_ALIGNED | *NPY_ARRAY_WRITEABLE* | *NPY_ARRAY_NOTSWAPPED*

Flag checking

For all of these macros *arr* must be an instance of a (subclass of) *PyArray_Type*, but no checking is done.

PyArray_CHKFLAGS(arr, flags)
The first parameter, arr, must be an ndarray or subclass. The parameter, *flags*, should be an integer consisting of bitwise combinations of the possible flags an array can have: *NPY_ARRAY_C_CONTIGUOUS*, *NPY_ARRAY_F_CONTIGUOUS*, *NPY_ARRAY_OWNDATA*, *NPY_ARRAY_ALIGNED*, *NPY_ARRAY_WRITEABLE*, *NPY_ARRAY_WRITEBACKIFCOPY*, *NPY_ARRAY_UPDATEIFCOPY*.

PyArray_IS_C_CONTIGUOUS(arr)
Evaluates true if *arr* is C-style contiguous.

PyArray_IS_F_CONTIGUOUS(arr)
Evaluates true if *arr* is Fortran-style contiguous.

PyArray_ISFORTRAN(arr)
Evaluates true if *arr* is Fortran-style contiguous and *not* C-style contiguous. *PyArray_IS_F_CONTIGUOUS* is the correct way to test for Fortran-style contiguity.

PyArray_ISWRITEABLE(arr)
Evaluates true if the data area of *arr* can be written to

PyArray_ISALIGNED(arr)
Evaluates true if the data area of *arr* is properly aligned on the machine.

PyArray_ISBEHAVED(arr)
Evaluates true if the data area of *arr* is aligned and writeable and in machine byte-order according to its descriptor.

PyArray_ISBEHAVED_RO(arr)
Evaluates true if the data area of *arr* is aligned and in machine byte-order.

PyArray_ISCARRAY(arr)
Evaluates true if the data area of *arr* is C-style contiguous, and *PyArray_ISBEHAVED* (*arr*) is true.

PyArray_ISFARRAY(arr)
Evaluates true if the data area of *arr* is Fortran-style contiguous and *PyArray_ISBEHAVED* (*arr*) is true.

PyArray_ISCARRAY_RO(arr)
Evaluates true if the data area of *arr* is C-style contiguous, aligned, and in machine byte-order.

PyArray_ISFARRAY_RO(arr)
Evaluates true if the data area of *arr* is Fortran-style contiguous, aligned, and in machine byte-order **.**

PyArray_ISONESEGMENT(arr)
Evaluates true if the data area of *arr* consists of a single (C-style or Fortran-style) contiguous segment.

void **PyArray_UpdateFlags**(*PyArrayObject** *arr*, int *flagmask*)
The *NPY_ARRAY_C_CONTIGUOUS*, *NPY_ARRAY_ALIGNED*, and *NPY_ARRAY_F_CONTIGUOUS* array flags can be "calculated" from the array object itself. This routine updates one or more of these flags of *arr* as specified in *flagmask* by performing the required calculation.

Warning: It is important to keep the flags updated (using *PyArray_UpdateFlags* can help) whenever a manipulation with an array is performed that might cause them to change. Later calculations in NumPy that rely on the state of these flags do not repeat the calculation to update them.

5.4.5 Array method alternative API

Conversion

PyObject* **PyArray_GetField**(*PyArrayObject* self*, *PyArray_Descr* dtype*, int *offset*)
Equivalent to `ndarray.getfield` (*self*, *dtype*, *offset*). Return a new array of the given *dtype* using the data in the current array at a specified *offset* in bytes. The *offset* plus the itemsize of the new array type must be less than *self* ->descr->elsize or an error is raised. The same shape and strides as the original array are used. Therefore, this function has the effect of returning a field from a structured array. But, it can also be used to select specific bytes or groups of bytes from any array type.

int **PyArray_SetField**(*PyArrayObject* self*, *PyArray_Descr* dtype*, int *offset*, PyObject* *val*)
Equivalent to `ndarray.setfield` (*self*, *val*, *dtype*, *offset*). Set the field starting at *offset* in bytes and of the given *dtype* to *val*. The *offset* plus *dtype* ->elsize must be less than *self* ->descr->elsize or an error is raised. Otherwise, the *val* argument is converted to an array and copied into the field pointed to. If necessary, the elements of *val* are repeated to fill the destination array, But, the number of elements in the destination must be an integer multiple of the number of elements in *val*.

PyObject* **PyArray_Byteswap**(*PyArrayObject* self*, Bool *inplace*)
Equivalent to `ndarray.byteswap` (*self*, *inplace*). Return an array whose data area is byteswapped. If *inplace* is non-zero, then do the byteswap inplace and return a reference to self. Otherwise, create a byteswapped copy and leave self unchanged.

PyObject* **PyArray_NewCopy**(*PyArrayObject* old*, *NPY_ORDER order*)
Equivalent to `ndarray.copy` (*self*, *fortran*). Make a copy of the *old* array. The returned array is always aligned and writeable with data interpreted the same as the old array. If *order* is `NPY_CORDER`, then a C-style contiguous array is returned. If *order* is `NPY_FORTRANORDER`, then a Fortran-style contiguous array is returned. If *order is* `NPY_ANYORDER`, then the array returned is Fortran-style contiguous only if the old one is; otherwise, it is C-style contiguous.

PyObject* **PyArray_ToList**(*PyArrayObject* self*)
Equivalent to `ndarray.tolist` (*self*). Return a nested Python list from *self*.

PyObject* **PyArray_ToString**(*PyArrayObject* self*, *NPY_ORDER order*)
Equivalent to `ndarray.tobytes` (*self*, *order*). Return the bytes of this array in a Python string.

PyObject* **PyArray_ToFile**(*PyArrayObject* self*, FILE* *fp*, char* *sep*, char* *format*)
Write the contents of *self* to the file pointer *fp* in C-style contiguous fashion. Write the data as binary bytes if *sep* is the string “”or `NULL`. Otherwise, write the contents of *self* as text using the *sep* string as the item separator. Each item will be printed to the file. If the *format* string is not `NULL` or “”, then it is a Python print statement format string showing how the items are to be written.

int **PyArray_Dump**(PyObject* *self*, PyObject* *file*, int *protocol*)
Pickle the object in *self* to the given *file* (either a string or a Python file object). If *file* is a Python string it is considered to be the name of a file which is then opened in binary mode. The given *protocol* is used (if *protocol* is negative, or the highest available is used). This is a simple wrapper around cPickle.dump(*self*, *file*, *protocol*).

PyObject* **PyArray_Dumps**(PyObject* *self*, int *protocol*)
Pickle the object in *self* to a Python string and return it. Use the Pickle *protocol* provided (or the highest available if *protocol* is negative).

int **PyArray_FillWithScalar**(*PyArrayObject* arr*, PyObject* *obj*)
Fill the array, *arr*, with the given scalar object, *obj*. The object is first converted to the data type of *arr*, and then copied into every location. A -1 is returned if an error occurs, otherwise 0 is returned.

PyObject* **PyArray_View**(*PyArrayObject* self*, *PyArray_Descr* dtype*, PyTypeObject *ptype*)
Equivalent to `ndarray.view` (*self*, *dtype*). Return a new view of the array *self* as possibly a different data-type, *dtype*, and different array subclass *ptype*.

If *dtype* is `NULL`, then the returned array will have the same data type as *self*. The new data-type must be consistent with the size of *self*. Either the itemsizes must be identical, or *self* must be single-segment and the

total number of bytes must be the same. In the latter case the dimensions of the returned array will be altered in the last (or first for Fortran-style contiguous arrays) dimension. The data area of the returned array and self is exactly the same.

Shape Manipulation

PyObject* **PyArray_Newshape** (*PyArrayObject* self*, *PyArray_Dims* newshape*, *NPY_ORDER order*)

Result will be a new array (pointing to the same memory location as *self* if possible), but having a shape given by *newshape*. If the new shape is not compatible with the strides of *self*, then a copy of the array with the new specified shape will be returned.

PyObject* **PyArray_Reshape** (*PyArrayObject* self*, PyObject* *shape*)

Equivalent to `ndarray.reshape` (*self*, *shape*) where *shape* is a sequence. Converts *shape* to a `PyArray_Dims` structure and calls `PyArray_Newshape` internally. For back-ward compatibility – Not recommended

PyObject* **PyArray_Squeeze** (*PyArrayObject* self*)

Equivalent to `ndarray.squeeze` (*self*). Return a new view of *self* with all of the dimensions of length 1 removed from the shape.

Warning: matrix objects are always 2-dimensional. Therefore, `PyArray_Squeeze` has no effect on arrays of matrix sub-class.

PyObject* **PyArray_SwapAxes** (*PyArrayObject* self*, int *a1*, int *a2*)

Equivalent to `ndarray.swapaxes` (*self*, *a1*, *a2*). The returned array is a new view of the data in *self* with the given axes, *a1* and *a2*, swapped.

PyObject* **PyArray_Resize** (*PyArrayObject* self*, *PyArray_Dims* newshape*, int *refcheck*, *NPY_ORDER fortran*)

Equivalent to `ndarray.resize` (*self*, *newshape*, refcheck = *refcheck*, order= fortran). This function only works on single-segment arrays. It changes the shape of *self* inplace and will reallocate the memory for *self* if *newshape* has a different total number of elements then the old shape. If reallocation is necessary, then *self* must own its data, have *self* - `>base==NULL`, have *self* - `>weakrefs==NULL`, and (unless refcheck is 0) not be referenced by any other array. The fortran argument can be `NPY_ANYORDER`, `NPY_CORDER`, or `NPY_FORTRANORDER`. It currently has no effect. Eventually it could be used to determine how the resize operation should view the data when constructing a differently-dimensioned array. Returns None on success and NULL on error.

PyObject* **PyArray_Transpose** (*PyArrayObject* self*, *PyArray_Dims* permute*)

Equivalent to `ndarray.transpose` (*self*, *permute*). Permute the axes of the ndarray object *self* according to the data structure *permute* and return the result. If *permute* is `NULL`, then the resulting array has its axes reversed. For example if *self* has shape $10 \times 20 \times 30$, and *permute* `.ptr` is (0,2,1) the shape of the result is $10 \times 30 \times 20$. If *permute* is `NULL`, the shape of the result is $30 \times 20 \times 10$.

PyObject* **PyArray_Flatten** (*PyArrayObject* self*, *NPY_ORDER order*)

Equivalent to `ndarray.flatten` (*self*, *order*). Return a 1-d copy of the array. If *order* is `NPY_FORTRANORDER` the elements are scanned out in Fortran order (first-dimension varies the fastest). If *order* is `NPY_CORDER`, the elements of `self` are scanned in C-order (last dimension varies the fastest). If *order* `NPY_ANYORDER`, then the result of `PyArray_ISFORTRAN` (*self*) is used to determine which order to flatten.

PyObject* **PyArray_Ravel** (*PyArrayObject* self*, *NPY_ORDER order*)

Equivalent to *self*.ravel(*order*). Same basic functionality as `PyArray_Flatten` (*self*, *order*) except if *order* is 0 and *self* is C-style contiguous, the shape is altered but no copy is performed.

Item selection and manipulation

PyObject* **PyArray_TakeFrom**(*PyArrayObject** *self*, PyObject* *indices*, int *axis*, *PyArrayObject** *ret*, *NPY_CLIPMODE* *clipmode*)

Equivalent to `ndarray.take` (*self*, *indices*, *axis*, *ret*, *clipmode*) except *axis* =None in Python is obtained by setting *axis* = `NPY_MAXDIMS` in C. Extract the items from self indicated by the integer-valued *indices* along the given *axis*. The clipmode argument can be `NPY_RAISE`, `NPY_WRAP`, or `NPY_CLIP` to indicate what to do with out-of-bound indices. The *ret* argument can specify an output array rather than having one created internally.

PyObject* **PyArray_PutTo**(*PyArrayObject** *self*, PyObject* *values*, PyObject* *indices*, *NPY_CLIPMODE* *clipmode*)

Equivalent to *self*.put(*values*, *indices*, *clipmode*). Put *values* into *self* at the corresponding (flattened) *indices*. If *values* is too small it will be repeated as necessary.

PyObject* **PyArray_PutMask**(*PyArrayObject** *self*, PyObject* *values*, PyObject* *mask*)

Place the *values* in *self* wherever corresponding positions (using a flattened context) in *mask* are true. The *mask* and *self* arrays must have the same total number of elements. If *values* is too small, it will be repeated as necessary.

PyObject* **PyArray_Repeat**(*PyArrayObject** *self*, PyObject* *op*, int *axis*)

Equivalent to `ndarray.repeat` (*self*, *op*, *axis*). Copy the elements of *self*, *op* times along the given *axis*. Either *op* is a scalar integer or a sequence of length *self* ->dimensions[*axis*] indicating how many times to repeat each item along the axis.

PyObject* **PyArray_Choose**(*PyArrayObject** *self*, PyObject* *op*, *PyArrayObject** *ret*, *NPY_CLIPMODE* *clipmode*)

Equivalent to `ndarray.choose` (*self*, *op*, *ret*, *clipmode*). Create a new array by selecting elements from the sequence of arrays in *op* based on the integer values in *self*. The arrays must all be broadcastable to the same shape and the entries in *self* should be between 0 and len(*op*). The output is placed in *ret* unless it is `NULL` in which case a new output is created. The *clipmode* argument determines behavior for when entries in *self* are not between 0 and len(*op*).

NPY_RAISE
: raise a ValueError;

NPY_WRAP
: wrap values < 0 by adding len(*op*) and values >=len(*op*) by subtracting len(*op*) until they are in range;

NPY_CLIP
: all values are clipped to the region [0, len(*op*)).

PyObject* **PyArray_Sort**(*PyArrayObject** *self*, int *axis*)

Equivalent to `ndarray.sort` (*self*, *axis*). Return an array with the items of *self* sorted along *axis*.

PyObject* **PyArray_ArgSort**(*PyArrayObject** *self*, int *axis*)

Equivalent to `ndarray.argsort` (*self*, *axis*). Return an array of indices such that selection of these indices along the given `axis` would return a sorted version of *self*. If *self* ->descr is a data-type with fields defined, then self->descr->names is used to determine the sort order. A comparison where the first field is equal will use the second field and so on. To alter the sort order of a structured array, create a new data-type with a different order of names and construct a view of the array with that new data-type.

PyObject* **PyArray_LexSort**(PyObject* *sort_keys*, int *axis*)

Given a sequence of arrays (*sort_keys*) of the same shape, return an array of indices (similar to `PyArray_ArgSort` (...)) that would sort the arrays lexicographically. A lexicographic sort specifies that when two keys are found to be equal, the order is based on comparison of subsequent keys. A merge sort (which leaves equal entries unmoved) is required to be defined for the types. The sort is accomplished by sorting the indices first using the first *sort_key* and then using the second *sort_key* and so forth. This is equivalent to the

lexsort(*sort_keys*, *axis*) Python command. Because of the way the merge-sort works, be sure to understand the order the *sort_keys* must be in (reversed from the order you would use when comparing two elements).

If these arrays are all collected in a structured array, then `PyArray_Sort` (...) can also be used to sort the array directly.

PyObject* **PyArray_SearchSorted**(*PyArrayObject** *self*, PyObject* *values*, NPY_SEARCHSIDE *side*, PyObject* *perm*)

Equivalent to `ndarray.searchsorted` (*self*, *values*, *side*, *perm*). Assuming *self* is a 1-d array in ascending order, then the output is an array of indices the same shape as *values* such that, if the elements in *values* were inserted before the indices, the order of *self* would be preserved. No checking is done on whether or not self is in ascending order.

The *side* argument indicates whether the index returned should be that of the first suitable location (if `NPY_SEARCHLEFT`) or of the last (if `NPY_SEARCHRIGHT`).

The *sorter* argument, if not `NULL`, must be a 1D array of integer indices the same length as *self*, that sorts it into ascending order. This is typically the result of a call to `PyArray_ArgSort` (...) Binary search is used to find the required insertion points.

int **PyArray_Partition**(*PyArrayObject *self*, *PyArrayObject * ktharray*, int *axis*, NPY_SELECTKIND *which*)

Equivalent to `ndarray.partition` (*self*, *ktharray*, *axis*, *kind*). Partitions the array so that the values of the element indexed by *ktharray* are in the positions they would be if the array is fully sorted and places all elements smaller than the kth before and all elements equal or greater after the kth element. The ordering of all elements within the partitions is undefined. If *self*->descr is a data-type with fields defined, then self->descr->names is used to determine the sort order. A comparison where the first field is equal will use the second field and so on. To alter the sort order of a structured array, create a new data-type with a different order of names and construct a view of the array with that new data-type. Returns zero on success and -1 on failure.

PyObject* **PyArray_ArgPartition**(*PyArrayObject *op*, *PyArrayObject * ktharray*, int *axis*, NPY_SELECTKIND *which*)

Equivalent to `ndarray.argpartition` (*self*, *ktharray*, *axis*, *kind*). Return an array of indices such that selection of these indices along the given `axis` would return a partitioned version of *self*.

PyObject* **PyArray_Diagonal**(*PyArrayObject* self*, int *offset*, int *axis1*, int *axis2*)

Equivalent to `ndarray.diagonal` (*self*, *offset*, *axis1*, *axis2*). Return the *offset* diagonals of the 2-d arrays defined by *axis1* and *axis2*.

npy_intp **PyArray_CountNonzero**(*PyArrayObject* self*)

New in version 1.6.

Counts the number of non-zero elements in the array object *self*.

PyObject* **PyArray_Nonzero**(*PyArrayObject* self*)

Equivalent to `ndarray.nonzero` (*self*). Returns a tuple of index arrays that select elements of *self* that are nonzero. If (nd= `PyArray_NDIM` (`self`))==1, then a single index array is returned. The index arrays have data type `NPY_INTP`. If a tuple is returned (nd $\neq$ 1), then its length is nd.

PyObject* **PyArray_Compress**(*PyArrayObject* self*, PyObject* *condition*, int *axis*, *PyArrayObject* out*)

Equivalent to `ndarray.compress` (*self*, *condition*, *axis*). Return the elements along *axis* corresponding to elements of *condition* that are true.

Calculation

Tip: Pass in `NPY_MAXDIMS` for axis in order to achieve the same effect that is obtained by passing in *axis* = `None` in Python (treating the array as a 1-d array).

PyObject* **PyArray_ArgMax**(*PyArrayObject* self*, int *axis*, *PyArrayObject* out*)
Equivalent to `ndarray.argmax` (*self*, *axis*). Return the index of the largest element of *self* along *axis*.

PyObject* **PyArray_ArgMin**(*PyArrayObject* self*, int *axis*, *PyArrayObject* out*)
Equivalent to `ndarray.argmin` (*self*, *axis*). Return the index of the smallest element of *self* along *axis*.

Note: The out argument specifies where to place the result. If out is NULL, then the output array is created, otherwise the output is placed in out which must be the correct size and type. A new reference to the output array is always returned even when out is not NULL. The caller of the routine has the responsibility to `DECREF` out if not NULL or a memory-leak will occur.

PyObject* **PyArray_Max**(*PyArrayObject* self*, int *axis*, *PyArrayObject* out*)
Equivalent to `ndarray.max` (*self*, *axis*). Returns the largest element of *self* along the given *axis*. When the result is a single element, returns a numpy scalar instead of an ndarray.

PyObject* **PyArray_Min**(*PyArrayObject* self*, int *axis*, *PyArrayObject* out*)
Equivalent to `ndarray.min` (*self*, *axis*). Return the smallest element of *self* along the given *axis*. When the result is a single element, returns a numpy scalar instead of an ndarray.

PyObject* **PyArray_Ptp**(*PyArrayObject* self*, int *axis*, *PyArrayObject* out*)
Equivalent to `ndarray.ptp` (*self*, *axis*). Return the difference between the largest element of *self* along *axis* and the smallest element of *self* along *axis*. When the result is a single element, returns a numpy scalar instead of an ndarray.

Note: The rtype argument specifies the data-type the reduction should take place over. This is important if the data-type of the array is not "large" enough to handle the output. By default, all integer data-types are made at least as large as `NPY_LONG` for the "add" and "multiply" ufuncs (which form the basis for mean, sum, cumsum, prod, and cumprod functions).

PyObject* **PyArray_Mean**(*PyArrayObject* self*, int *axis*, int *rtype*, *PyArrayObject* out*)
Equivalent to `ndarray.mean` (*self*, *axis*, *rtype*). Returns the mean of the elements along the given *axis*, using the enumerated type *rtype* as the data type to sum in. Default sum behavior is obtained using `NPY_NOTYPE` for *rtype*.

PyObject* **PyArray_Trace**(*PyArrayObject* self*, int *offset*, int *axis1*, int *axis2*, int *rtype*, *PyArrayObject* out*)
Equivalent to `ndarray.trace` (*self*, *offset*, *axis1*, *axis2*, *rtype*). Return the sum (using *rtype* as the data type of summation) over the *offset* diagonal elements of the 2-d arrays defined by *axis1* and *axis2* variables. A positive offset chooses diagonals above the main diagonal. A negative offset selects diagonals below the main diagonal.

PyObject* **PyArray_Clip**(*PyArrayObject* self*, PyObject* min*, PyObject* max*)
Equivalent to `ndarray.clip` (*self*, *min*, *max*). Clip an array, *self*, so that values larger than *max* are fixed to *max* and values less than *min* are fixed to *min*.

PyObject* **PyArray_Conjugate**(*PyArrayObject* self*)
Equivalent to `ndarray.conjugate` (*self*). Return the complex conjugate of *self*. If *self* is not of complex data type, then return *self* with a reference.

PyObject* **PyArray_Round**(*PyArrayObject* self*, int *decimals*, *PyArrayObject* out*)
Equivalent to `ndarray.round` (*self*, *decimals*, *out*). Returns the array with elements rounded to the nearest decimal place. The decimal place is defined as the $10^{-\text{decimals}}$ digit so that negative *decimals* cause rounding to the nearest 10's, 100's, etc. If out is `NULL`, then the output array is created, otherwise the output is placed in *out* which must be the correct size and type.

PyObject* **PyArray_Std**(*PyArrayObject* self*, int *axis*, int *rtype*, *PyArrayObject* out*)
Equivalent to `ndarray.std` (*self*, *axis*, *rtype*). Return the standard deviation using data along *axis* converted to data type *rtype*.

PyObject* **PyArray_Sum**(*PyArrayObject* self*, int *axis*, int *rtype*, *PyArrayObject* out*)
Equivalent to `ndarray.sum` (*self*, *axis*, *rtype*). Return 1-d vector sums of elements in *self* along *axis*. Perform the sum after converting data to data type *rtype*.

PyObject* **PyArray_CumSum**(*PyArrayObject* self*, int *axis*, int *rtype*, *PyArrayObject* out*)
Equivalent to `ndarray.cumsum` (*self*, *axis*, *rtype*). Return cumulative 1-d sums of elements in *self* along *axis*. Perform the sum after converting data to data type *rtype*.

PyObject* **PyArray_Prod**(*PyArrayObject* self*, int *axis*, int *rtype*, *PyArrayObject* out*)
Equivalent to `ndarray.prod` (*self*, *axis*, *rtype*). Return 1-d products of elements in *self* along *axis*. Perform the product after converting data to data type *rtype*.

PyObject* **PyArray_CumProd**(*PyArrayObject* self*, int *axis*, int *rtype*, *PyArrayObject* out*)
Equivalent to `ndarray.cumprod` (*self*, *axis*, *rtype*). Return 1-d cumulative products of elements in `self` along `axis`. Perform the product after converting data to data type `rtype`.

PyObject* **PyArray_All**(*PyArrayObject* self*, int *axis*, *PyArrayObject* out*)
Equivalent to `ndarray.all` (*self*, *axis*). Return an array with True elements for every 1-d sub-array of `self` defined by `axis` in which all the elements are True.

PyObject* **PyArray_Any**(*PyArrayObject* self*, int *axis*, *PyArrayObject* out*)
Equivalent to `ndarray.any` (*self*, *axis*). Return an array with True elements for every 1-d sub-array of *self* defined by *axis* in which any of the elements are True.

5.4.6 Functions

Array Functions

int **PyArray_AsCArray**(PyObject** *op*, void* *ptr*, npy_intp* *dims*, int *nd*, int *typenum*, int *itemsize*)
Sometimes it is useful to access a multidimensional array as a C-style multi-dimensional array so that algorithms can be implemented using C's a[i][j][k] syntax. This routine returns a pointer, *ptr*, that simulates this kind of C-style array, for 1-, 2-, and 3-d ndarrays.

Parameters

- **op** – The address to any Python object. This Python object will be replaced with an equivalent well-behaved, C-style contiguous, ndarray of the given data type specified by the last two arguments. Be sure that stealing a reference in this way to the input object is justified.
- **ptr** – The address to a (ctype* for 1-d, ctype** for 2-d or ctype*** for 3-d) variable where ctype is the equivalent C-type for the data type. On return, *ptr* will be addressable as a 1-d, 2-d, or 3-d array.
- **dims** – An output array that contains the shape of the array object. This array gives boundaries on any looping that will take place.
- **nd** – The dimensionality of the array (1, 2, or 3).
- **typenum** – The expected data type of the array.
- **itemsize** – This argument is only needed when *typenum* represents a flexible array. Otherwise it should be 0.

Note: The simulation of a C-style array is not complete for 2-d and 3-d arrays. For example, the simulated arrays of pointers cannot be passed to subroutines expecting specific, statically-defined 2-d and 3-d arrays. To pass to functions requiring those kind of inputs, you must statically define the required array and copy data.

int **PyArray_Free**(PyObject* *op*, void* *ptr*)
Must be called with the same objects and memory locations returned from *PyArray_AsCArray* (...). This function cleans up memory that otherwise would get leaked.

PyObject* **PyArray_Concatenate**(PyObject* *obj*, int *axis*)
Join the sequence of objects in *obj* together along *axis* into a single array. If the dimensions or types are not compatible an error is raised.

PyObject* **PyArray_InnerProduct**(PyObject* *obj1*, PyObject* *obj2*)
Compute a product-sum over the last dimensions of *obj1* and *obj2*. Neither array is conjugated.

PyObject* **PyArray_MatrixProduct**(PyObject* *obj1*, PyObject* *obj*)
Compute a product-sum over the last dimension of *obj1* and the second-to-last dimension of *obj2*. For 2-d arrays this is a matrix-product. Neither array is conjugated.

PyObject* **PyArray_MatrixProduct2**(PyObject* *obj1*, PyObject* *obj*, *PyArrayObject** *out*)
New in version 1.6.

Same as PyArray_MatrixProduct, but store the result in *out*. The output array must have the correct shape, type, and be C-contiguous, or an exception is raised.

PyObject* **PyArray_EinsteinSum**(char* *subscripts*, npy_intp *nop*, *PyArrayObject*** *op_in*, *PyArray_Descr** *dtype*, *NPY_ORDER* *order*, *NPY_CASTING* *casting*, *PyArrayObject** *out*)
New in version 1.6.

Applies the Einstein summation convention to the array operands provided, returning a new array or placing the result in *out*. The string in *subscripts* is a comma separated list of index letters. The number of operands is in *nop*, and *op_in* is an array containing those operands. The data type of the output can be forced with *dtype*, the output order can be forced with *order* (*NPY_KEEPORDER* is recommended), and when *dtype* is specified, *casting* indicates how permissive the data conversion should be.

See the *einsum* function for more details.

PyObject* **PyArray_CopyAndTranspose**(PyObject * *op*)
A specialized copy and transpose function that works only for 2-d arrays. The returned array is a transposed copy of *op*.

PyObject* **PyArray_Correlate**(PyObject* *op1*, PyObject* *op2*, int *mode*)
Compute the 1-d correlation of the 1-d arrays *op1* and *op2* . The correlation is computed at each output point by multiplying *op1* by a shifted version of *op2* and summing the result. As a result of the shift, needed values outside of the defined range of *op1* and *op2* are interpreted as zero. The mode determines how many shifts to return: 0 - return only shifts that did not need to assume zero- values; 1 - return an object that is the same size as *op1*, 2 - return all possible shifts (any overlap at all is accepted).

Notes

This does not compute the usual correlation: if op2 is larger than op1, the arguments are swapped, and the conjugate is never taken for complex arrays. See PyArray_Correlate2 for the usual signal processing correlation.

PyObject* **PyArray_Correlate2**(PyObject* *op1*, PyObject* *op2*, int *mode*)
Updated version of PyArray_Correlate, which uses the usual definition of correlation for 1d arrays. The correlation is computed at each output point by multiplying *op1* by a shifted version of *op2* and summing the result.

As a result of the shift, needed values outside of the defined range of *op1* and *op2* are interpreted as zero. The mode determines how many shifts to return: 0 - return only shifts that did not need to assume zero- values; 1 - return an object that is the same size as *op1*, 2 - return all possible shifts (any overlap at all is accepted).

Notes

Compute z as follows:

```
z[k] = sum_n op1[n] * conj(op2[n+k])
```

PyObject* **PyArray_Where**(PyObject* *condition*, PyObject* *x*, PyObject* *y*)

If both `x` and `y` are `NULL`, then return *PyArray_Nonzero*(*condition*). Otherwise, both *x* and *y* must be given and the object returned is shaped like *condition* and has elements of *x* and *y* where *condition* is respectively True or False.

Other functions

Bool **PyArray_CheckStrides**(int *elsize*, int *nd*, npy_intp *numbytes*, npy_intp* *dims*, npy_intp* *newstrides*)

Determine if *newstrides* is a strides array consistent with the memory of an *nd* -dimensional array with shape `dims` and element-size, *elsize*. The *newstrides* array is checked to see if jumping by the provided number of bytes in each direction will ever mean jumping more than *numbytes* which is the assumed size of the available memory segment. If *numbytes* is 0, then an equivalent *numbytes* is computed assuming *nd*, *dims*, and *elsize* refer to a single-segment array. Return *NPY_TRUE* if *newstrides* is acceptable, otherwise return *NPY_FALSE*.

npy_intp **PyArray_MultiplyList**(npy_intp* *seq*, int *n*)

int **PyArray_MultiplyIntList**(int* *seq*, int *n*)

Both of these routines multiply an *n* -length array, *seq*, of integers and return the result. No overflow checking is performed.

int **PyArray_CompareLists**(npy_intp* *l1*, npy_intp* *l2*, int *n*)

Given two *n* -length arrays of integers, *l1*, and *l2*, return 1 if the lists are identical; otherwise, return 0.

5.4.7 Auxiliary Data With Object Semantics

New in version 1.7.0.

NpyAuxData

When working with more complex dtypes which are composed of other dtypes, such as the struct dtype, creating inner loops that manipulate the dtypes requires carrying along additional data. NumPy supports this idea through a struct *NpyAuxData*, mandating a few conventions so that it is possible to do this.

Defining an *NpyAuxData* is similar to defining a class in C++, but the object semantics have to be tracked manually since the API is in C. Here's an example for a function which doubles up an element using an element copier function as a primitive.:

```
typedef struct {
    NpyAuxData base;
    ElementCopier_Func *func;
    NpyAuxData *funcdata;
} eldoubler_aux_data;

void free_element_doubler_aux_data(NpyAuxData *data)
```

(continues on next page)

(continued from previous page)

```
{
    eldoubler_aux_data *d = (eldoubler_aux_data *)data;
    /* Free the memory owned by this auxdata */
    NPY_AUXDATA_FREE(d->funcdata);
    PyArray_free(d);
}

NpyAuxData *clone_element_doubler_aux_data(NpyAuxData *data)
{
    eldoubler_aux_data *ret = PyArray_malloc(sizeof(eldoubler_aux_data));
    if (ret == NULL) {
        return NULL;
    }

    /* Raw copy of all data */
    memcpy(ret, data, sizeof(eldoubler_aux_data));

    /* Fix up the owned auxdata so we have our own copy */
    ret->funcdata = NPY_AUXDATA_CLONE(ret->funcdata);
    if (ret->funcdata == NULL) {
        PyArray_free(ret);
        return NULL;
    }

    return (NpyAuxData *)ret;
}

NpyAuxData *create_element_doubler_aux_data(
                            ElementCopier_Func *func,
                            NpyAuxData *funcdata)
{
    eldoubler_aux_data *ret = PyArray_malloc(sizeof(eldoubler_aux_data));
    if (ret == NULL) {
        PyErr_NoMemory();
        return NULL;
    }
    memset(&ret, 0, sizeof(eldoubler_aux_data));
    ret->base->free = &free_element_doubler_aux_data;
    ret->base->clone = &clone_element_doubler_aux_data;
    ret->func = func;
    ret->funcdata = funcdata;

    return (NpyAuxData *)ret;
}
```

NpyAuxData_FreeFunc
: The function pointer type for NpyAuxData free functions.

NpyAuxData_CloneFunc
: The function pointer type for NpyAuxData clone functions. These functions should never set the Python exception on error, because they may be called from a multi-threaded context.

NPY_AUXDATA_FREE(auxdata)
: A macro which calls the auxdata's free function appropriately, does nothing if auxdata is NULL.

NPY_AUXDATA_CLONE(auxdata)
: A macro which calls the auxdata's clone function appropriately, returning a deep copy of the auxiliary data.

5.4.8 Array Iterators

As of NumPy 1.6.0, these array iterators are superceded by the new array iterator, *NpyIter*.

An array iterator is a simple way to access the elements of an N-dimensional array quickly and efficiently. Section *2* provides more description and examples of this useful approach to looping over an array.

PyObject* **PyArray_IterNew**(PyObject* *arr*)
Return an array iterator object from the array, *arr*. This is equivalent to *arr*. **flat**. The array iterator object makes it easy to loop over an N-dimensional non-contiguous array in C-style contiguous fashion.

PyObject* **PyArray_IterAllButAxis**(PyObject* *arr*, int **axis*)
Return an array iterator that will iterate over all axes but the one provided in **axis*. The returned iterator cannot be used with *PyArray_ITER_GOTO1D*. This iterator could be used to write something similar to what ufuncs do wherein the loop over the largest axis is done by a separate sub-routine. If **axis* is negative then **axis* will be set to the axis having the smallest stride and that axis will be used.

PyObject ****PyArray_BroadcastToShape**(PyObject* *arr*, npy_intp ***dimensions*, int *nd*)
Return an array iterator that is broadcast to iterate as an array of the shape provided by *dimensions* and *nd*.

int **PyArrayIter_Check**(PyObject* *op*)
Evaluates true if *op* is an array iterator (or instance of a subclass of the array iterator type).

void **PyArray_ITER_RESET**(PyObject* *iterator*)
Reset an *iterator* to the beginning of the array.

void **PyArray_ITER_NEXT**(PyObject* *iterator*)
Incremement the index and the dataptr members of the *iterator* to point to the next element of the array. If the array is not (C-style) contiguous, also increment the N-dimensional coordinates array.

void ****PyArray_ITER_DATA**(PyObject* *iterator*)
A pointer to the current element of the array.

void **PyArray_ITER_GOTO**(PyObject* *iterator*, npy_intp* *destination*)
Set the *iterator* index, dataptr, and coordinates members to the location in the array indicated by the N-dimensional c-array, *destination*, which must have size at least *iterator* ->nd_m1+1.

PyArray_ITER_GOTO1D(PyObject* *iterator*, npy_intp *index*)
Set the *iterator* index and dataptr to the location in the array indicated by the integer *index* which points to an element in the C-styled flattened array.

int **PyArray_ITER_NOTDONE**(PyObject* *iterator*)
Evaluates TRUE as long as the iterator has not looped through all of the elements, otherwise it evaluates FALSE.

5.4.9 Broadcasting (multi-iterators)

PyObject* **PyArray_MultiIterNew**(int *num*, ...)
A simplified interface to broadcasting. This function takes the number of arrays to broadcast and then *num* extra (`PyObject *`) arguments. These arguments are converted to arrays and iterators are created. *PyArray_Broadcast* is then called on the resulting multi-iterator object. The resulting, broadcasted mult-iterator object is then returned. A broadcasted operation can then be performed using a single loop and using *PyArray_MultiIter_NEXT* (..)

void **PyArray_MultiIter_RESET**(PyObject* *multi*)
Reset all the iterators to the beginning in a multi-iterator object, *multi*.

void **PyArray_MultiIter_NEXT**(PyObject* *multi*)
Advance each iterator in a multi-iterator object, *multi*, to its next (broadcasted) element.

void *__PyArray_MultiIter_DATA__(PyObject* *multi*, int *i*)
Return the data-pointer of the i^{th} iterator in a multi-iterator object.

void __PyArray_MultiIter_NEXTi__(PyObject* *multi*, int *i*)
Advance the pointer of only the i^{th} iterator.

void __PyArray_MultiIter_GOTO__(PyObject* *multi*, npy_intp* *destination*)
Advance each iterator in a multi-iterator object, *multi*, to the given N -dimensional *destination* where N is the number of dimensions in the broadcasted array.

void __PyArray_MultiIter_GOTO1D__(PyObject* *multi*, npy_intp *index*)
Advance each iterator in a multi-iterator object, *multi*, to the corresponding location of the *index* into the flattened broadcasted array.

int __PyArray_MultiIter_NOTDONE__(PyObject* *multi*)
Evaluates TRUE as long as the multi-iterator has not looped through all of the elements (of the broadcasted result), otherwise it evaluates FALSE.

int __PyArray_Broadcast__(*PyArrayMultiIterObject** *mit*)
This function encapsulates the broadcasting rules. The *mit* container should already contain iterators for all the arrays that need to be broadcast. On return, these iterators will be adjusted so that iteration over each simultaneously will accomplish the broadcasting. A negative number is returned if an error occurs.

int __PyArray_RemoveSmallest__(*PyArrayMultiIterObject** *mit*)
This function takes a multi-iterator object that has been previously "broadcasted," finds the dimension with the smallest "sum of strides" in the broadcasted result and adapts all the iterators so as not to iterate over that dimension (by effectively making them of length-1 in that dimension). The corresponding dimension is returned unless *mit* ->nd is 0, then -1 is returned. This function is useful for constructing ufunc-like routines that broadcast their inputs correctly and then call a strided 1-d version of the routine as the inner-loop. This 1-d version is usually optimized for speed and for this reason the loop should be performed over the axis that won't require large stride jumps.

5.4.10 Neighborhood iterator

New in version 1.4.0.

Neighborhood iterators are subclasses of the iterator object, and can be used to iter over a neighborhood of a point. For example, you may want to iterate over every voxel of a 3d image, and for every such voxel, iterate over an hypercube. Neighborhood iterator automatically handle boundaries, thus making this kind of code much easier to write than manual boundaries handling, at the cost of a slight overhead.

PyObject* __PyArray_NeighborhoodIterNew__(*PyArrayIterObject** *iter*, npy_intp *bounds*, int *mode*, *PyArrayObject** *fill_value*)
This function creates a new neighborhood iterator from an existing iterator. The neighborhood will be computed relatively to the position currently pointed by *iter*, the bounds define the shape of the neighborhood iterator, and the mode argument the boundaries handling mode.

The *bounds* argument is expected to be a (2 * iter->ao->nd) arrays, such as the range bound[2*i]->bounds[2*i+1] defines the range where to walk for dimension i (both bounds are included in the walked coordinates). The bounds should be ordered for each dimension (bounds[2*i] <= bounds[2*i+1]).

The mode should be one of:

- NPY_NEIGHBORHOOD_ITER_ZERO_PADDING: zero padding. Outside bounds values will be 0.
- NPY_NEIGHBORHOOD_ITER_ONE_PADDING: one padding, Outside bounds values will be 1.
- NPY_NEIGHBORHOOD_ITER_CONSTANT_PADDING: constant padding. Outside bounds values will be the same as the first item in fill_value.

- NPY_NEIGHBORHOOD_ITER_MIRROR_PADDING: mirror padding. Outside bounds values will be as if the array items were mirrored. For example, for the array [1, 2, 3, 4], x[-2] will be 2, x[-2] will be 1, x[4] will be 4, x[5] will be 1, etc...
- NPY_NEIGHBORHOOD_ITER_CIRCULAR_PADDING: circular padding. Outside bounds values will be as if the array was repeated. For example, for the array [1, 2, 3, 4], x[-2] will be 3, x[-2] will be 4, x[4] will be 1, x[5] will be 2, etc...

If the mode is constant filling (NPY_NEIGHBORHOOD_ITER_CONSTANT_PADDING), fill_value should point to an array object which holds the filling value (the first item will be the filling value if the array contains more than one item). For other cases, fill_value may be NULL.

- The iterator holds a reference to iter
- Return NULL on failure (in which case the reference count of iter is not changed)
- iter itself can be a Neighborhood iterator: this can be useful for .e.g automatic boundaries handling
- the object returned by this function should be safe to use as a normal iterator
- If the position of iter is changed, any subsequent call to PyArrayNeighborhoodIter_Next is undefined behavior, and PyArrayNeighborhoodIter_Reset must be called.

```
PyArrayIterObject \*iter;
PyArrayNeighborhoodIterObject \*neigh_iter;
iter = PyArray_IterNew(x);

//For a 3x3 kernel
bounds = {-1, 1, -1, 1};
neigh_iter = (PyArrayNeighborhoodIterObject*)PyArrayNeighborhoodIter_New(
     iter, bounds, NPY_NEIGHBORHOOD_ITER_ZERO_PADDING, NULL);

for(i = 0; i < iter->size; ++i) {
     for (j = 0; j < neigh_iter->size; ++j) {
             // Walk around the item currently pointed by iter->dataptr
             PyArrayNeighborhoodIter_Next(neigh_iter);
     }

     // Move to the next point of iter
     PyArrayIter_Next(iter);
     PyArrayNeighborhoodIter_Reset(neigh_iter);
}
```

int **PyArrayNeighborhoodIter_Reset**(*PyArrayNeighborhoodIterObject** *iter*)

Reset the iterator position to the first point of the neighborhood. This should be called whenever the iter argument given at PyArray_NeighborhoodIterObject is changed (see example)

int **PyArrayNeighborhoodIter_Next**(*PyArrayNeighborhoodIterObject** *iter*)

After this call, iter->dataptr points to the next point of the neighborhood. Calling this function after every point of the neighborhood has been visited is undefined.

5.4.11 Array Scalars

PyObject* **PyArray_Return**(*PyArrayObject** *arr*)

This function steals a reference to *arr*.

This function checks to see if *arr* is a 0-dimensional array and, if so, returns the appropriate array scalar. It should be used whenever 0-dimensional arrays could be returned to Python.

PyObject* **PyArray_Scalar**(void* *data*, *PyArray_Descr** *dtype*, PyObject* *itemsize*)
Return an array scalar object of the given enumerated *typenum* and *itemsize* by **copying** from memory pointed to by *data* . If *swap* is nonzero then this function will byteswap the data if appropriate to the data-type because array scalars are always in correct machine-byte order.

PyObject* **PyArray_ToScalar**(void* *data*, *PyArrayObject** *arr*)
Return an array scalar object of the type and itemsize indicated by the array object *arr* copied from the memory pointed to by *data* and swapping if the data in *arr* is not in machine byte-order.

PyObject* **PyArray_FromScalar**(PyObject* *scalar*, *PyArray_Descr** *outcode*)
Return a 0-dimensional array of type determined by *outcode* from *scalar* which should be an array-scalar object. If *outcode* is NULL, then the type is determined from *scalar*.

void **PyArray_ScalarAsCtype**(PyObject* *scalar*, void* *ctypeptr*)
Return in *ctypeptr* a pointer to the actual value in an array scalar. There is no error checking so *scalar* must be an array-scalar object, and ctypeptr must have enough space to hold the correct type. For flexible-sized types, a pointer to the data is copied into the memory of *ctypeptr*, for all other types, the actual data is copied into the address pointed to by *ctypeptr*.

void **PyArray_CastScalarToCtype**(PyObject* *scalar*, void* *ctypeptr*, *PyArray_Descr** *outcode*)
Return the data (cast to the data type indicated by *outcode*) from the array-scalar, *scalar*, into the memory pointed to by *ctypeptr* (which must be large enough to handle the incoming memory).

PyObject* **PyArray_TypeObjectFromType**(int *type*)
Returns a scalar type-object from a type-number, *type* . Equivalent to *PyArray_DescrFromType*(*type*)->typeobj except for reference counting and error-checking. Returns a new reference to the typeobject on success or NULL on failure.

NPY_SCALARKIND **PyArray_ScalarKind**(int *typenum*, *PyArrayObject*** *arr*)
See the function *PyArray_MinScalarType* for an alternative mechanism introduced in NumPy 1.6.0.

Return the kind of scalar represented by *typenum* and the array in **arr* (if *arr* is not NULL). The array is assumed to be rank-0 and only used if *typenum* represents a signed integer. If *arr* is not NULL and the first element is negative then NPY_INTNEG_SCALAR is returned, otherwise NPY_INTPOS_SCALAR is returned. The possible return values are NPY_{kind}_SCALAR where {kind} can be **INTPOS**, **INTNEG**, **FLOAT**, **COMPLEX**, **BOOL**, or **OBJECT**. NPY_NOSCALAR is also an enumerated value *NPY_SCALARKIND* variables can take on.

int **PyArray_CanCoerceScalar**(char *thistype*, char *neededtype*, *NPY_SCALARKIND* *scalar*)
See the function *PyArray_ResultType* for details of NumPy type promotion, updated in NumPy 1.6.0.

Implements the rules for scalar coercion. Scalars are only silently coerced from thistype to neededtype if this function returns nonzero. If scalar is NPY_NOSCALAR, then this function is equivalent to *PyArray_CanCastSafely*. The rule is that scalars of the same KIND can be coerced into arrays of the same KIND. This rule means that high-precision scalars will never cause low-precision arrays of the same KIND to be upcast.

5.4.12 Data-type descriptors

Warning: Data-type objects must be reference counted so be aware of the action on the data-type reference of different C-API calls. The standard rule is that when a data-type object is returned it is a new reference. Functions that take *PyArray_Descr * * objects and return arrays steal references to the data-type their inputs unless otherwise noted. Therefore, you must own a reference to any data-type object used as input to such a function.

int **PyArray_DescrCheck**(PyObject* *obj*)
Evaluates as true if *obj* is a data-type object (`PyArray_Descr *`).

*PyArray_Descr** **PyArray_DescrNew**(*PyArray_Descr** *obj*)
Return a new data-type object copied from *obj* (the fields reference is just updated so that the new object points to the same fields dictionary if any).

*PyArray_Descr** **PyArray_DescrNewFromType**(int *typenum*)
Create a new data-type object from the built-in (or user-registered) data-type indicated by *typenum*. All builtin types should not have any of their fields changed. This creates a new copy of the `PyArray_Descr` structure so that you can fill it in as appropriate. This function is especially needed for flexible data-types which need to have a new elsize member in order to be meaningful in array construction.

*PyArray_Descr** **PyArray_DescrNewByteorder**(*PyArray_Descr** *obj*, char *newendian*)
Create a new data-type object with the byteorder set according to *newendian*. All referenced data-type objects (in subdescr and fields members of the data-type object) are also changed (recursively). If a byteorder of `NPY_IGNORE` is encountered it is left alone. If newendian is `NPY_SWAP`, then all byte-orders are swapped. Other valid newendian values are `NPY_NATIVE`, `NPY_LITTLE`, and `NPY_BIG` which all cause the returned data-typed descriptor (and all it's referenced data-type descriptors) to have the corresponding byte- order.

*PyArray_Descr** **PyArray_DescrFromObject**(PyObject* *op*, *PyArray_Descr** *mintype*)
Determine an appropriate data-type object from the object *op* (which should be a "nested" sequence object) and the minimum data-type descriptor mintype (which can be `NULL`). Similar in behavior to array(*op*).dtype. Don't confuse this function with `PyArray_DescrConverter`. This function essentially looks at all the objects in the (nested) sequence and determines the data-type from the elements it finds.

*PyArray_Descr** **PyArray_DescrFromScalar**(PyObject* *scalar*)
Return a data-type object from an array-scalar object. No checking is done to be sure that *scalar* is an array scalar. If no suitable data-type can be determined, then a data-type of `NPY_OBJECT` is returned by default.

*PyArray_Descr** **PyArray_DescrFromType**(int *typenum*)
Returns a data-type object corresponding to *typenum*. The *typenum* can be one of the enumerated types, a character code for one of the enumerated types, or a user-defined type.

int **PyArray_DescrConverter**(PyObject* *obj*, *PyArray_Descr*** *dtype*)
Convert any compatible Python object, *obj*, to a data-type object in *dtype*. A large number of Python objects can be converted to data-type objects. See *Data type objects (dtype)* for a complete description. This version of the converter converts None objects to a `NPY_DEFAULT_TYPE` data-type object. This function can be used with the "O&" character code in `PyArg_ParseTuple` processing.

int **PyArray_DescrConverter2**(PyObject* *obj*, *PyArray_Descr*** *dtype*)
Convert any compatible Python object, *obj*, to a data-type object in *dtype*. This version of the converter converts None objects so that the returned data-type is `NULL`. This function can also be used with the "O&" character in PyArg_ParseTuple processing.

int **Pyarray_DescrAlignConverter**(PyObject* *obj*, *PyArray_Descr*** *dtype*)
Like `PyArray_DescrConverter` except it aligns C-struct-like objects on word-boundaries as the compiler would.

int **Pyarray_DescrAlignConverter2**(PyObject* *obj*, *PyArray_Descr*** *dtype*)
Like `PyArray_DescrConverter2` except it aligns C-struct-like objects on word-boundaries as the compiler would.

PyObject ***PyArray_FieldNames**(PyObject* *dict*)
Take the fields dictionary, *dict*, such as the one attached to a data-type object and construct an ordered-list of field names such as is stored in the names field of the `PyArray_Descr` object.

5.4.13 Conversion Utilities

For use with `PyArg_ParseTuple`

All of these functions can be used in `PyArg_ParseTuple` (...) with the "O&" format specifier to automatically convert any Python object to the required C-object. All of these functions return *NPY_SUCCEED* if successful and *NPY_FAIL* if not. The first argument to all of these function is a Python object. The second argument is the **address** of the C-type to convert the Python object to.

Warning: Be sure to understand what steps you should take to manage the memory when using these conversion functions. These functions can require freeing memory, and/or altering the reference counts of specific objects based on your use.

int **PyArray_Converter** (PyObject* *obj*, PyObject** *address*)
Convert any Python object to a *PyArrayObject*. If *PyArray_Check* (*obj*) is TRUE then its reference count is incremented and a reference placed in *address*. If *obj* is not an array, then convert it to an array using *PyArray_FromAny* . No matter what is returned, you must DECREF the object returned by this routine in *address* when you are done with it.

int **PyArray_OutputConverter** (PyObject* *obj*, *PyArrayObject*** *address*)
This is a default converter for output arrays given to functions. If *obj* is `Py_None` or `NULL`, then **address* will be `NULL` but the call will succeed. If *PyArray_Check* (*obj*) is TRUE then it is returned in **address* without incrementing its reference count.

int **PyArray_IntpConverter** (PyObject* *obj*, *PyArray_Dims** *seq*)
Convert any Python sequence, *obj*, smaller than *NPY_MAXDIMS* to a C-array of `npy_intp`. The Python object could also be a single number. The *seq* variable is a pointer to a structure with members ptr and len. On successful return, *seq* ->ptr contains a pointer to memory that must be freed, by calling *PyDimMem_FREE*, to avoid a memory leak. The restriction on memory size allows this converter to be conveniently used for sequences intended to be interpreted as array shapes.

int **PyArray_BufferConverter** (PyObject* *obj*, *PyArray_Chunk** *buf*)
Convert any Python object, *obj*, with a (single-segment) buffer interface to a variable with members that detail the object's use of its chunk of memory. The *buf* variable is a pointer to a structure with base, ptr, len, and flags members. The *PyArray_Chunk* structure is binary compatible with the Python's buffer object (through its len member on 32-bit platforms and its ptr member on 64-bit platforms or in Python 2.5). On return, the base member is set to *obj* (or its base if *obj* is already a buffer object pointing to another object). If you need to hold on to the memory be sure to INCREF the base member. The chunk of memory is pointed to by *buf* ->ptr member and has length *buf* ->len. The flags member of *buf* is `NPY_BEHAVED_RO` with the *NPY_ARRAY_WRITEABLE* flag set if *obj* has a writeable buffer interface.

int **PyArray_AxisConverter** (PyObject * *obj*, int* *axis*)
Convert a Python object, *obj*, representing an axis argument to the proper value for passing to the functions that take an integer axis. Specifically, if *obj* is None, *axis* is set to *NPY_MAXDIMS* which is interpreted correctly by the C-API functions that take axis arguments.

int **PyArray_BoolConverter** (PyObject* *obj*, Bool* *value*)
Convert any Python object, *obj*, to *NPY_TRUE* or *NPY_FALSE*, and place the result in *value*.

int **PyArray_ByteorderConverter** (PyObject* *obj*, char* *endian*)
Convert Python strings into the corresponding byte-order character: '>', '<', 's', '=', or 'l'.

int **PyArray_SortkindConverter** (PyObject* *obj*, *NPY_SORTKIND** *sort*)
Convert Python strings into one of `NPY_QUICKSORT` (starts with 'q' or 'Q') , `NPY_HEAPSORT` (starts with 'h' or 'H'), or `NPY_MERGESORT` (starts with 'm' or 'M').

int **PyArray_SearchsideConverter** (PyObject* *obj*, NPY_SEARCHSIDE* *side*)
Convert Python strings into one of `NPY_SEARCHLEFT` (starts with 'l' or 'L'), or `NPY_SEARCHRIGHT` (starts

with ‘r’ or ‘R’).

int **PyArray_OrderConverter**(PyObject* *obj*, *NPY_ORDER** *order*)
Convert the Python strings ‘C’, ‘F’, ‘A’, and ‘K’ into the *NPY_ORDER* enumeration *NPY_CORDER*, *NPY_FORTRANORDER*, *NPY_ANYORDER*, and *NPY_KEEPORDER*.

int **PyArray_CastingConverter**(PyObject* *obj*, *NPY_CASTING** *casting*)
Convert the Python strings ‘no’, ‘equiv’, ‘safe’, ‘same_kind’, and ‘unsafe’ into the *NPY_CASTING* enumeration *NPY_NO_CASTING*, *NPY_EQUIV_CASTING*, *NPY_SAFE_CASTING*, *NPY_SAME_KIND_CASTING*, and *NPY_UNSAFE_CASTING*.

int **PyArray_ClipmodeConverter**(PyObject* *object*, *NPY_CLIPMODE** *val*)
Convert the Python strings ‘clip’, ‘wrap’, and ‘raise’ into the *NPY_CLIPMODE* enumeration *NPY_CLIP*, *NPY_WRAP*, and *NPY_RAISE*.

int **PyArray_ConvertClipmodeSequence**(PyObject* *object*, *NPY_CLIPMODE** *modes*, int *n*)
Converts either a sequence of clipmodes or a single clipmode into a C array of *NPY_CLIPMODE* values. The number of clipmodes *n* must be known before calling this function. This function is provided to help functions allow a different clipmode for each dimension.

Other conversions

int **PyArray_PyIntAsInt**(PyObject* *op*)
Convert all kinds of Python objects (including arrays and array scalars) to a standard integer. On error, -1 is returned and an exception set. You may find useful the macro:

```
#define error_converting(x)  (((x) == -1) && PyErr_Occurred()
```

npy_intp **PyArray_PyIntAsIntp**(PyObject* *op*)
Convert all kinds of Python objects (including arrays and array scalars) to a (platform-pointer-sized) integer. On error, -1 is returned and an exception set.

int **PyArray_IntpFromSequence**(PyObject* *seq*, npy_intp* *vals*, int *maxvals*)
Convert any Python sequence (or single Python number) passed in as *seq* to (up to) *maxvals* pointer-sized integers and place them in the *vals* array. The sequence can be smaller then *maxvals* as the number of converted objects is returned.

int **PyArray_TypestrConvert**(int *itemsize*, int *gentype*)
Convert typestring characters (with *itemsize*) to basic enumerated data types. The typestring character corresponding to signed and unsigned integers, floating point numbers, and complex-floating point numbers are recognized and converted. Other values of gentype are returned. This function can be used to convert, for example, the string ‘f4’ to *NPY_FLOAT32*.

5.4.14 Miscellaneous

Importing the API

In order to make use of the C-API from another extension module, the *import_array* function must be called. If the extension module is self-contained in a single .c file, then that is all that needs to be done. If, however, the extension module involves multiple files where the C-API is needed then some additional steps must be taken.

void **import_array**(void)
This function must be called in the initialization section of a module that will make use of the C-API. It imports the module where the function-pointer table is stored and points the correct variable to it.

PY_ARRAY_UNIQUE_SYMBOL

NO_IMPORT_ARRAY

Using these #defines you can use the C-API in multiple files for a single extension module. In each file you must define *PY_ARRAY_UNIQUE_SYMBOL* to some name that will hold the C-API (*e.g.* myextension_ARRAY_API). This must be done **before** including the numpy/arrayobject.h file. In the module initialization routine you call *import_array*. In addition, in the files that do not have the module initialization sub_routine define *NO_IMPORT_ARRAY* prior to including numpy/arrayobject.h.

Suppose I have two files coolmodule.c and coolhelper.c which need to be compiled and linked into a single extension module. Suppose coolmodule.c contains the required initcool module initialization function (with the import_array() function called). Then, coolmodule.c would have at the top:

```
#define PY_ARRAY_UNIQUE_SYMBOL cool_ARRAY_API
#include numpy/arrayobject.h
```

On the other hand, coolhelper.c would contain at the top:

```
#define NO_IMPORT_ARRAY
#define PY_ARRAY_UNIQUE_SYMBOL cool_ARRAY_API
#include numpy/arrayobject.h
```

You can also put the common two last lines into an extension-local header file as long as you make sure that NO_IMPORT_ARRAY is #defined before #including that file.

Internally, these #defines work as follows:

- If neither is defined, the C-API is declared to be `static void**`, so it is only visible within the compilation unit that #includes numpy/arrayobject.h.
- If *PY_ARRAY_UNIQUE_SYMBOL* is #defined, but *NO_IMPORT_ARRAY* is not, the C-API is declared to be `void**`, so that it will also be visible to other compilation units.
- If *NO_IMPORT_ARRAY* is #defined, regardless of whether *PY_ARRAY_UNIQUE_SYMBOL* is, the C-API is declared to be `extern void**`, so it is expected to be defined in another compilation unit.
- Whenever *PY_ARRAY_UNIQUE_SYMBOL* is #defined, it also changes the name of the variable holding the C-API, which defaults to `PyArray_API`, to whatever the macro is #defined to.

Checking the API Version

Because python extensions are not used in the same way as usual libraries on most platforms, some errors cannot be automatically detected at build time or even runtime. For example, if you build an extension using a function available only for numpy >= 1.3.0, and you import the extension later with numpy 1.2, you will not get an import error (but almost certainly a segmentation fault when calling the function). That's why several functions are provided to check for numpy versions. The macros *NPY_VERSION* and `NPY_FEATURE_VERSION` corresponds to the numpy version used to build the extension, whereas the versions returned by the functions PyArray_GetNDArrayCVersion and PyArray_GetNDArrayCFeatureVersion corresponds to the runtime numpy's version.

The rules for ABI and API compatibilities can be summarized as follows:

- Whenever *NPY_VERSION* != PyArray_GetNDArrayCVersion, the extension has to be recompiled (ABI incompatibility).
- *NPY_VERSION* == PyArray_GetNDArrayCVersion and `NPY_FEATURE_VERSION` <= PyArray_GetNDArrayCFeatureVersion means backward compatible changes.

ABI incompatibility is automatically detected in every numpy's version. API incompatibility detection was added in numpy 1.4.0. If you want to supported many different numpy versions with one extension binary, you have to build your extension with the lowest NPY_FEATURE_VERSION as possible.

unsigned int **PyArray_GetNDArrayCVersion** (void)
This just returns the value *NPY_VERSION*. *NPY_VERSION* changes whenever a backward incompatible change at the ABI level. Because it is in the C-API, however, comparing the output of this function from the value defined in the current header gives a way to test if the C-API has changed thus requiring a re-compilation of extension modules that use the C-API. This is automatically checked in the function *import_array*.

unsigned int **PyArray_GetNDArrayCFeatureVersion** (void)
New in version 1.4.0.

This just returns the value NPY_FEATURE_VERSION. NPY_FEATURE_VERSION changes whenever the API changes (e.g. a function is added). A changed value does not always require a recompile.

Internal Flexibility

int **PyArray_SetNumericOps** (PyObject* *dict*)
NumPy stores an internal table of Python callable objects that are used to implement arithmetic operations for arrays as well as certain array calculation methods. This function allows the user to replace any or all of these Python objects with their own versions. The keys of the dictionary, *dict*, are the named functions to replace and the paired value is the Python callable object to use. Care should be taken that the function used to replace an internal array operation does not itself call back to that internal array operation (unless you have designed the function to handle that), or an unchecked infinite recursion can result (possibly causing program crash). The key names that represent operations that can be replaced are:

> **add**, **subtract**, **multiply**, **divide**, **remainder**, **power**, **square**, **reciprocal**, **ones_like**, **sqrt**, **negative**, **positive**, **absolute**, **invert**, **left_shift**, **right_shift**, **bitwise_and**, **bitwise_xor**, **bitwise_or**, **less**, **less_equal**, **equal**, **not_equal**, **greater**, **greater_equal**, **floor_divide**, **true_divide**, **logical_or**, **logical_and**, **floor**, **ceil**, **maximum**, **minimum**, **rint**.

These functions are included here because they are used at least once in the array object's methods. The function returns -1 (without setting a Python Error) if one of the objects being assigned is not callable.

PyObject* **PyArray_GetNumericOps** (void)
Return a Python dictionary containing the callable Python objects stored in the internal arithmetic operation table. The keys of this dictionary are given in the explanation for *PyArray_SetNumericOps*.

void **PyArray_SetStringFunction** (PyObject* *op*, int *repr*)
This function allows you to alter the tp_str and tp_repr methods of the array object to any Python function. Thus you can alter what happens for all arrays when str(arr) or repr(arr) is called from Python. The function to be called is passed in as *op*. If *repr* is non-zero, then this function will be called in response to repr(arr), otherwise the function will be called in response to str(arr). No check on whether or not *op* is callable is performed. The callable passed in to *op* should expect an array argument and should return a string to be printed.

Memory management

char* **PyDataMem_NEW** (size_t *nbytes*)

PyDataMem_FREE (char* *ptr*)

char* **PyDataMem_RENEW** (void * *ptr*, size_t *newbytes*)
Macros to allocate, free, and reallocate memory. These macros are used internally to create arrays.

npy_intp* **PyDimMem_NEW** (nd)

PyDimMem_FREE (npy_intp* *ptr*)

npy_intp* **PyDimMem_RENEW** (npy_intp* *ptr*, npy_intp *newnd*)
Macros to allocate, free, and reallocate dimension and strides memory.

PyArray_malloc (nbytes)

PyArray_free(ptr)

PyArray_realloc(ptr, nbytes)

These macros use different memory allocators, depending on the constant NPY_USE_PYMEM. The system malloc is used when NPY_USE_PYMEM is 0, if NPY_USE_PYMEM is 1, then the Python memory allocator is used.

int **PyArray_ResolveWritebackIfCopy**(*PyArrayObject* obj*)

If obj.flags has *NPY_ARRAY_WRITEBACKIFCOPY* or (deprecated) *NPY_ARRAY_UPDATEIFCOPY*, this function clears the flags, *DECREF* s *obj->base* and makes it writeable, and sets obj->base to NULL. It then copies obj->data to *obj->base->data*, and returns the error state of the copy operation. This is the opposite of *PyArray_SetWritebackIfCopyBase*. Usually this is called once you are finished with obj, just before Py_DECREF(obj). It may be called multiple times, or with NULL input. See also *PyArray_DiscardWritebackIfCopy*.

Returns 0 if nothing was done, -1 on error, and 1 if action was taken.

Threading support

These macros are only meaningful if NPY_ALLOW_THREADS evaluates True during compilation of the extension module. Otherwise, these macros are equivalent to whitespace. Python uses a single Global Interpreter Lock (GIL) for each Python process so that only a single thread may execute at a time (even on multi-cpu machines). When calling out to a compiled function that may take time to compute (and does not have side-effects for other threads like updated global variables), the GIL should be released so that other Python threads can run while the time-consuming calculations are performed. This can be accomplished using two groups of macros. Typically, if one macro in a group is used in a code block, all of them must be used in the same code block. Currently, NPY_ALLOW_THREADS is defined to the python-defined WITH_THREADS constant unless the environment variable NPY_NOSMP is set in which case NPY_ALLOW_THREADS is defined to be 0.

Group 1

This group is used to call code that may take some time but does not use any Python C-API calls. Thus, the GIL should be released during its calculation.

NPY_BEGIN_ALLOW_THREADS

Equivalent to Py_BEGIN_ALLOW_THREADS except it uses NPY_ALLOW_THREADS to determine if the macro if replaced with white-space or not.

NPY_END_ALLOW_THREADS

Equivalent to Py_END_ALLOW_THREADS except it uses NPY_ALLOW_THREADS to determine if the macro if replaced with white-space or not.

NPY_BEGIN_THREADS_DEF

Place in the variable declaration area. This macro sets up the variable needed for storing the Python state.

NPY_BEGIN_THREADS

Place right before code that does not need the Python interpreter (no Python C-API calls). This macro saves the Python state and releases the GIL.

NPY_END_THREADS

Place right after code that does not need the Python interpreter. This macro acquires the GIL and restores the Python state from the saved variable.

NPY_BEGIN_THREADS_DESCR(*PyArray_Descr *dtype*)

Useful to release the GIL only if *dtype* does not contain arbitrary Python objects which may need the Python interpreter during execution of the loop. Equivalent to

NPY_END_THREADS_DESCR (*PyArray_Descr *dtype*)
Useful to regain the GIL in situations where it was released using the BEGIN form of this macro.

NPY_BEGIN_THREADS_THRESHOLDED (int *loop_size*)
Useful to release the GIL only if *loop_size* exceeds a minimum threshold, currently set to 500. Should be matched with a *NPY_END_THREADS* to regain the GIL.

Group 2

This group is used to re-acquire the Python GIL after it has been released. For example, suppose the GIL has been released (using the previous calls), and then some path in the code (perhaps in a different subroutine) requires use of the Python C-API, then these macros are useful to acquire the GIL. These macros accomplish essentially a reverse of the previous three (acquire the LOCK saving what state it had) and then re-release it with the saved state.

NPY_ALLOW_C_API_DEF
Place in the variable declaration area to set up the necessary variable.

NPY_ALLOW_C_API
Place before code that needs to call the Python C-API (when it is known that the GIL has already been released).

NPY_DISABLE_C_API
Place after code that needs to call the Python C-API (to re-release the GIL).

Tip: Never use semicolons after the threading support macros.

Priority

NPY_PRIORITY
Default priority for arrays.

NPY_SUBTYPE_PRIORITY
Default subtype priority.

NPY_SCALAR_PRIORITY
Default scalar priority (very small)

double **PyArray_GetPriority** (PyObject* *obj*, double *def*)
Return the *__array_priority__* attribute (converted to a double) of *obj* or *def* if no attribute of that name exists. Fast returns that avoid the attribute lookup are provided for objects of type *PyArray_Type*.

Default buffers

NPY_BUFSIZE
Default size of the user-settable internal buffers.

NPY_MIN_BUFSIZE
Smallest size of user-settable internal buffers.

NPY_MAX_BUFSIZE
Largest size allowed for the user-settable buffers.

Other constants

NPY_NUM_FLOATTYPE
The number of floating-point types

NPY_MAXDIMS
The maximum number of dimensions allowed in arrays.

NPY_VERSION
The current version of the ndarray object (check to see if this variable is defined to guarantee the numpy/arrayobject.h header is being used).

NPY_FALSE
Defined as 0 for use with Bool.

NPY_TRUE
Defined as 1 for use with Bool.

NPY_FAIL
The return value of failed converter functions which are called using the "O&" syntax in `PyArg_ParseTuple`-like functions.

NPY_SUCCEED
The return value of successful converter functions which are called using the "O&" syntax in `PyArg_ParseTuple`-like functions.

Miscellaneous Macros

PyArray_SAMESHAPE(a1, a2)
Evaluates as True if arrays *a1* and *a2* have the same shape.

PyArray_MAX(a, b)
Returns the maximum of *a* and *b*. If (*a*) or (*b*) are expressions they are evaluated twice.

PyArray_MIN(a, b)
Returns the minimum of *a* and *b*. If (*a*) or (*b*) are expressions they are evaluated twice.

PyArray_CLT(a, b)

PyArray_CGT(a, b)

PyArray_CLE(a, b)

PyArray_CGE(a, b)

PyArray_CEQ(a, b)

PyArray_CNE(a, b)
Implements the complex comparisons between two complex numbers (structures with a real and imag member) using NumPy's definition of the ordering which is lexicographic: comparing the real parts first and then the complex parts if the real parts are equal.

PyArray_REFCOUNT(PyObject* *op*)
Returns the reference count of any Python object.

PyArray_DiscardWritebackIfCopy(PyObject* *obj*)
If `obj.flags` has *NPY_ARRAY_WRITEBACKIFCOPY* or (deprecated) *NPY_ARRAY_UPDATEIFCOPY*, this function clears the flags, *DECREF* s *obj->base* and makes it writeable, and sets `obj->base` to NULL. In contrast to *PyArray_DiscardWritebackIfCopy* it makes no attempt to copy the data from *obj->base* This undoes *PyArray_SetWritebackIfCopyBase*. Usually this is called after an error when you are finished with `obj`, just before `Py_DECREF(obj)`. It may be called multiple times, or with `NULL` input.

PyArray_XDECREF_ERR (PyObject* *obj*)
Deprecated in 1.14, use *PyArray_DiscardWritebackIfCopy* followed by Py_XDECREF

DECREF's an array object which may have the (deprecated) *NPY_ARRAY_UPDATEIFCOPY* or *NPY_ARRAY_WRITEBACKIFCOPY* flag set without causing the contents to be copied back into the original array. Resets the *NPY_ARRAY_WRITEABLE* flag on the base object. This is useful for recovering from an error condition when writeback semantics are used, but will lead to wrong results.

Enumerated Types

NPY_SORTKIND
A special variable-type which can take on the values NPY_{KIND} where {KIND} is

QUICKSORT, **HEAPSORT**, **MERGESORT**

NPY_NSORTS
Defined to be the number of sorts.

NPY_SCALARKIND
A special variable type indicating the number of "kinds" of scalars distinguished in determining scalar-coercion rules. This variable can take on the values NPY_{KIND} where {KIND} can be

NOSCALAR, **BOOL_SCALAR**, **INTPOS_SCALAR**, **INTNEG_SCALAR**, **FLOAT_SCALAR**, **COMPLEX_SCALAR**, **OBJECT_SCALAR**

NPY_NSCALARKINDS
Defined to be the number of scalar kinds (not including NPY_NOSCALAR).

NPY_ORDER
An enumeration type indicating the element order that an array should be interpreted in. When a brand new array is created, generally only **NPY_CORDER** and **NPY_FORTRANORDER** are used, whereas when one or more inputs are provided, the order can be based on them.

NPY_ANYORDER
Fortran order if all the inputs are Fortran, C otherwise.

NPY_CORDER
C order.

NPY_FORTRANORDER
Fortran order.

NPY_KEEPORDER
An order as close to the order of the inputs as possible, even if the input is in neither C nor Fortran order.

NPY_CLIPMODE
A variable type indicating the kind of clipping that should be applied in certain functions.

NPY_RAISE
The default for most operations, raises an exception if an index is out of bounds.

NPY_CLIP
Clips an index to the valid range if it is out of bounds.

NPY_WRAP
Wraps an index to the valid range if it is out of bounds.

NPY_CASTING
New in version 1.6.

An enumeration type indicating how permissive data conversions should be. This is used by the iterator added in NumPy 1.6, and is intended to be used more broadly in a future version.

NPY_NO_CASTING
Only allow identical types.

NPY_EQUIV_CASTING
Allow identical and casts involving byte swapping.

NPY_SAFE_CASTING
Only allow casts which will not cause values to be rounded, truncated, or otherwise changed.

NPY_SAME_KIND_CASTING
Allow any safe casts, and casts between types of the same kind. For example, float64 -> float32 is permitted with this rule.

NPY_UNSAFE_CASTING
Allow any cast, no matter what kind of data loss may occur.

5.5 Array Iterator API

New in version 1.6.

5.5.1 Array Iterator

The array iterator encapsulates many of the key features in ufuncs, allowing user code to support features like output parameters, preservation of memory layouts, and buffering of data with the wrong alignment or type, without requiring difficult coding.

This page documents the API for the iterator. The iterator is named `NpyIter` and functions are named `NpyIter_*`.

There is an *introductory guide to array iteration* which may be of interest for those using this C API. In many instances, testing out ideas by creating the iterator in Python is a good idea before writing the C iteration code.

5.5.2 Simple Iteration Example

The best way to become familiar with the iterator is to look at its usage within the NumPy codebase itself. For example, here is a slightly tweaked version of the code for *PyArray_CountNonzero*, which counts the number of non-zero elements in an array.

```
npy_intp PyArray_CountNonzero(PyArrayObject* self)
{
    /* Nonzero boolean function */
    PyArray_NonzeroFunc* nonzero = PyArray_DESCR(self)->f->nonzero;

    NpyIter* iter;
    NpyIter_IterNextFunc *iternext;
    char** dataptr;
    npy_intp nonzero_count;
    npy_intp* strideptr,* innersizeptr;

    /* Handle zero-sized arrays specially */
    if (PyArray_SIZE(self) == 0) {
        return 0;
    }

    /*
```

(continues on next page)

(continued from previous page)

```
     * Create and use an iterator to count the nonzeros.
     *   flag NPY_ITER_READONLY
     *     - The array is never written to.
     *   flag NPY_ITER_EXTERNAL_LOOP
     *     - Inner loop is done outside the iterator for efficiency.
     *   flag NPY_ITER_NPY_ITER_REFS_OK
     *     - Reference types are acceptable.
     *   order NPY_KEEPORDER
     *     - Visit elements in memory order, regardless of strides.
     *       This is good for performance when the specific order
     *       elements are visited is unimportant.
     *   casting NPY_NO_CASTING
     *     - No casting is required for this operation.
     */
    iter = NpyIter_New(self, NPY_ITER_READONLY|
                             NPY_ITER_EXTERNAL_LOOP|
                             NPY_ITER_REFS_OK,
                        NPY_KEEPORDER, NPY_NO_CASTING,
                        NULL);
    if (iter == NULL) {
        return -1;
    }

    /*
     * The iternext function gets stored in a local variable
     * so it can be called repeatedly in an efficient manner.
     */
    iternext = NpyIter_GetIterNext(iter, NULL);
    if (iternext == NULL) {
        NpyIter_Deallocate(iter);
        return -1;
    }
    /* The location of the data pointer which the iterator may update */
    dataptr = NpyIter_GetDataPtrArray(iter);
    /* The location of the stride which the iterator may update */
    strideptr = NpyIter_GetInnerStrideArray(iter);
    /* The location of the inner loop size which the iterator may update */
    innersizeptr = NpyIter_GetInnerLoopSizePtr(iter);

    nonzero_count = 0;
    do {
        /* Get the inner loop data/stride/count values */
        char* data = *dataptr;
        npy_intp stride = *strideptr;
        npy_intp count = *innersizeptr;

        /* This is a typical inner loop for NPY_ITER_EXTERNAL_LOOP */
        while (count--) {
            if (nonzero(data, self)) {
                ++nonzero_count;
            }
            data += stride;
        }

        /* Increment the iterator to the next inner loop */
    } while(iternext(iter));
```

(continues on next page)

(continued from previous page)

```
    NpyIter_Deallocate(iter);

    return nonzero_count;
}
```

5.5.3 Simple Multi-Iteration Example

Here is a simple copy function using the iterator. The `order` parameter is used to control the memory layout of the allocated result, typically *NPY_KEEPORDER* is desired.

```
PyObject *CopyArray(PyObject *arr, NPY_ORDER order)
{
    NpyIter *iter;
    NpyIter_IterNextFunc *iternext;
    PyObject *op[2], *ret;
    npy_uint32 flags;
    npy_uint32 op_flags[2];
    npy_intp itemsize, *innersizeptr, innerstride;
    char **dataptrarray;

    /*
     * No inner iteration - inner loop is handled by CopyArray code
     */
    flags = NPY_ITER_EXTERNAL_LOOP;
    /*
     * Tell the constructor to automatically allocate the output.
     * The data type of the output will match that of the input.
     */
    op[0] = arr;
    op[1] = NULL;
    op_flags[0] = NPY_ITER_READONLY;
    op_flags[1] = NPY_ITER_WRITEONLY | NPY_ITER_ALLOCATE;

    /* Construct the iterator */
    iter = NpyIter_MultiNew(2, op, flags, order, NPY_NO_CASTING,
                            op_flags, NULL);
    if (iter == NULL) {
        return NULL;
    }

    /*
     * Make a copy of the iternext function pointer and
     * a few other variables the inner loop needs.
     */
    iternext = NpyIter_GetIterNext(iter, NULL);
    innerstride = NpyIter_GetInnerStrideArray(iter)[0];
    itemsize = NpyIter_GetDescrArray(iter)[0]->elsize;
    /*
     * The inner loop size and data pointers may change during the
     * loop, so just cache the addresses.
     */
    innersizeptr = NpyIter_GetInnerLoopSizePtr(iter);
    dataptrarray = NpyIter_GetDataPtrArray(iter);

    /*
```

(continues on next page)

(continued from previous page)

```
     * Note that because the iterator allocated the output,
     * it matches the iteration order and is packed tightly,
     * so we don't need to check it like the input.
     */
    if (innerstride == itemsize) {
        do {
            memcpy(dataptrarray[1], dataptrarray[0],
                                    itemsize * (*innersizeptr));
        } while (iternext(iter));
    } else {
        /* For efficiency, should specialize this based on item size... */
        npy_intp i;
        do {
            npy_intp size = *innersizeptr;
            char *src = dataptrarray[0], *dst = dataptrarray[1];
            for(i = 0; i < size; i++, src += innerstride, dst += itemsize) {
                memcpy(dst, src, itemsize);
            }
        } while (iternext(iter));
    }

    /* Get the result from the iterator object array */
    ret = NpyIter_GetOperandArray(iter)[1];
    Py_INCREF(ret);

    if (NpyIter_Deallocate(iter) != NPY_SUCCEED) {
        Py_DECREF(ret);
        return NULL;
    }

    return ret;
}
```

5.5.4 Iterator Data Types

The iterator layout is an internal detail, and user code only sees an incomplete struct.

NpyIter
: This is an opaque pointer type for the iterator. Access to its contents can only be done through the iterator API.

NpyIter_Type
: This is the type which exposes the iterator to Python. Currently, no API is exposed which provides access to the values of a Python-created iterator. If an iterator is created in Python, it must be used in Python and vice versa. Such an API will likely be created in a future version.

NpyIter_IterNextFunc
: This is a function pointer for the iteration loop, returned by *NpyIter_GetIterNext*.

NpyIter_GetMultiIndexFunc
: This is a function pointer for getting the current iterator multi-index, returned by *NpyIter_GetGetMultiIndex*.

5.5.5 Construction and Destruction

*NpyIter** **NpyIter_New**(*PyArrayObject** *op*, npy_uint32 *flags*, *NPY_ORDER order*, *NPY_CASTING casting*, *PyArray_Descr** *dtype*)

Creates an iterator for the given numpy array object `op`.

Flags that may be passed in `flags` are any combination of the global and per-operand flags documented in *NpyIter_MultiNew*, except for *NPY_ITER_ALLOCATE*.

Any of the *NPY_ORDER* enum values may be passed to `order`. For efficient iteration, *NPY_KEEPORDER* is the best option, and the other orders enforce the particular iteration pattern.

Any of the *NPY_CASTING* enum values may be passed to `casting`. The values include *NPY_NO_CASTING*, *NPY_EQUIV_CASTING*, *NPY_SAFE_CASTING*, *NPY_SAME_KIND_CASTING*, and *NPY_UNSAFE_CASTING*. To allow the casts to occur, copying or buffering must also be enabled.

If `dtype` isn't `NULL`, then it requires that data type. If copying is allowed, it will make a temporary copy if the data is castable. If *NPY_ITER_UPDATEIFCOPY* is enabled, it will also copy the data back with another cast upon iterator destruction.

Returns NULL if there is an error, otherwise returns the allocated iterator.

To make an iterator similar to the old iterator, this should work.

```
iter = NpyIter_New(op, NPY_ITER_READWRITE,
                   NPY_CORDER, NPY_NO_CASTING, NULL);
```

If you want to edit an array with aligned `double` code, but the order doesn't matter, you would use this.

```
dtype = PyArray_DescrFromType(NPY_DOUBLE);
iter = NpyIter_New(op, NPY_ITER_READWRITE|
                   NPY_ITER_BUFFERED|
                   NPY_ITER_NBO|
                   NPY_ITER_ALIGNED,
                   NPY_KEEPORDER,
                   NPY_SAME_KIND_CASTING,
                   dtype);
Py_DECREF(dtype);
```

*NpyIter** **NpyIter_MultiNew**(npy_intp *nop*, *PyArrayObject*** *op*, npy_uint32 *flags*, *NPY_ORDER order*, *NPY_CASTING casting*, npy_uint32* *op_flags*, *PyArray_Descr*** *op_dtypes*)

Creates an iterator for broadcasting the `nop` array objects provided in `op`, using regular NumPy broadcasting rules.

Any of the *NPY_ORDER* enum values may be passed to `order`. For efficient iteration, *NPY_KEEPORDER* is the best option, and the other orders enforce the particular iteration pattern. When using *NPY_KEEPORDER*, if you also want to ensure that the iteration is not reversed along an axis, you should pass the flag *NPY_ITER_DONT_NEGATE_STRIDES*.

Any of the *NPY_CASTING* enum values may be passed to `casting`. The values include *NPY_NO_CASTING*, *NPY_EQUIV_CASTING*, *NPY_SAFE_CASTING*, *NPY_SAME_KIND_CASTING*, and *NPY_UNSAFE_CASTING*. To allow the casts to occur, copying or buffering must also be enabled.

If `op_dtypes` isn't `NULL`, it specifies a data type or `NULL` for each `op[i]`.

Returns NULL if there is an error, otherwise returns the allocated iterator.

Flags that may be passed in `flags`, applying to the whole iterator, are:

NPY_ITER_C_INDEX
Causes the iterator to track a raveled flat index matching C order. This option cannot be used with *NPY_ITER_F_INDEX*.

NPY_ITER_F_INDEX
Causes the iterator to track a raveled flat index matching Fortran order. This option cannot be used with *NPY_ITER_C_INDEX*.

NPY_ITER_MULTI_INDEX
Causes the iterator to track a multi-index. This prevents the iterator from coalescing axes to produce bigger inner loops. If the loop is also not buffered and no index is being tracked (*NpyIter_RemoveAxis* can be called), then the iterator size can be `-1` to indicate that the iterator is too large. This can happen due to complex broadcasting and will result in errors being created when the setting the iterator range, removing the multi index, or getting the next function. However, it is possible to remove axes again and use the iterator normally if the size is small enough after removal.

NPY_ITER_EXTERNAL_LOOP
Causes the iterator to skip iteration of the innermost loop, requiring the user of the iterator to handle it.

This flag is incompatible with *NPY_ITER_C_INDEX*, *NPY_ITER_F_INDEX*, and *NPY_ITER_MULTI_INDEX*.

NPY_ITER_DONT_NEGATE_STRIDES
This only affects the iterator when *NPY_KEEPORDER* is specified for the order parameter. By default with *NPY_KEEPORDER*, the iterator reverses axes which have negative strides, so that memory is traversed in a forward direction. This disables this step. Use this flag if you want to use the underlying memory-ordering of the axes, but don't want an axis reversed. This is the behavior of `numpy.ravel(a, order='K')`, for instance.

NPY_ITER_COMMON_DTYPE
Causes the iterator to convert all the operands to a common data type, calculated based on the ufunc type promotion rules. Copying or buffering must be enabled.

If the common data type is known ahead of time, don't use this flag. Instead, set the requested dtype for all the operands.

NPY_ITER_REFS_OK
Indicates that arrays with reference types (object arrays or structured arrays containing an object type) may be accepted and used in the iterator. If this flag is enabled, the caller must be sure to check whether `NpyIter_IterationNeedsAPI(iter)` is true, in which case it may not release the GIL during iteration.

NPY_ITER_ZEROSIZE_OK
Indicates that arrays with a size of zero should be permitted. Since the typical iteration loop does not naturally work with zero-sized arrays, you must check that the IterSize is larger than zero before entering the iteration loop. Currently only the operands are checked, not a forced shape.

NPY_ITER_REDUCE_OK
Permits writeable operands with a dimension with zero stride and size greater than one. Note that such operands must be read/write.

When buffering is enabled, this also switches to a special buffering mode which reduces the loop length as necessary to not trample on values being reduced.

Note that if you want to do a reduction on an automatically allocated output, you must use *NpyIter_GetOperandArray* to get its reference, then set every value to the reduction unit before doing the iteration loop. In the case of a buffered reduction, this means you must also

specify the flag *NPY_ITER_DELAY_BUFALLOC*, then reset the iterator after initializing the allocated operand to prepare the buffers.

NPY_ITER_RANGED
Enables support for iteration of sub-ranges of the full `iterindex` range `[0, NpyIter_IterSize(iter))`. Use the function *NpyIter_ResetToIterIndexRange* to specify a range for iteration.

This flag can only be used with *NPY_ITER_EXTERNAL_LOOP* when *NPY_ITER_BUFFERED* is enabled. This is because without buffering, the inner loop is always the size of the innermost iteration dimension, and allowing it to get cut up would require special handling, effectively making it more like the buffered version.

NPY_ITER_BUFFERED
Causes the iterator to store buffering data, and use buffering to satisfy data type, alignment, and byte-order requirements. To buffer an operand, do not specify the *NPY_ITER_COPY* or *NPY_ITER_UPDATEIFCOPY* flags, because they will override buffering. Buffering is especially useful for Python code using the iterator, allowing for larger chunks of data at once to amortize the Python interpreter overhead.

If used with *NPY_ITER_EXTERNAL_LOOP*, the inner loop for the caller may get larger chunks than would be possible without buffering, because of how the strides are laid out.

Note that if an operand is given the flag *NPY_ITER_COPY* or *NPY_ITER_UPDATEIFCOPY*, a copy will be made in preference to buffering. Buffering will still occur when the array was broadcast so elements need to be duplicated to get a constant stride.

In normal buffering, the size of each inner loop is equal to the buffer size, or possibly larger if *NPY_ITER_GROWINNER* is specified. If *NPY_ITER_REDUCE_OK* is enabled and a reduction occurs, the inner loops may become smaller depending on the structure of the reduction.

NPY_ITER_GROWINNER
When buffering is enabled, this allows the size of the inner loop to grow when buffering isn't necessary. This option is best used if you're doing a straight pass through all the data, rather than anything with small cache-friendly arrays of temporary values for each inner loop.

NPY_ITER_DELAY_BUFALLOC
When buffering is enabled, this delays allocation of the buffers until *NpyIter_Reset* or another reset function is called. This flag exists to avoid wasteful copying of buffer data when making multiple copies of a buffered iterator for multi-threaded iteration.

Another use of this flag is for setting up reduction operations. After the iterator is created, and a reduction output is allocated automatically by the iterator (be sure to use READWRITE access), its value may be initialized to the reduction unit. Use *NpyIter_GetOperandArray* to get the object. Then, call *NpyIter_Reset* to allocate and fill the buffers with their initial values.

NPY_ITER_COPY_IF_OVERLAP
If any write operand has overlap with any read operand, eliminate all overlap by making temporary copies (enabling UPDATEIFCOPY for write operands, if necessary). A pair of operands has overlap if there is a memory address that contains data common to both arrays.

Because exact overlap detection has exponential runtime in the number of dimensions, the decision is made based on heuristics, which has false positives (needless copies in unusual cases) but has no false negatives.

If any read/write overlap exists, this flag ensures the result of the operation is the same as if all operands were copied. In cases where copies would need to be made, **the result of the computation may be undefined without this flag!**

Flags that may be passed in `op_flags[i]`, where `0 <= i < nop`:

NPY_ITER_READWRITE

NPY_ITER_READONLY

NPY_ITER_WRITEONLY
Indicate how the user of the iterator will read or write to `op[i]`. Exactly one of these flags must be specified per operand.

NPY_ITER_COPY
Allow a copy of `op[i]` to be made if it does not meet the data type or alignment requirements as specified by the constructor flags and parameters.

NPY_ITER_UPDATEIFCOPY
Triggers *NPY_ITER_COPY*, and when an array operand is flagged for writing and is copied, causes the data in a copy to be copied back to `op[i]` when the iterator is destroyed.

If the operand is flagged as write-only and a copy is needed, an uninitialized temporary array will be created and then copied to back to `op[i]` on destruction, instead of doing the unnecessary copy operation.

NPY_ITER_NBO

NPY_ITER_ALIGNED

NPY_ITER_CONTIG
Causes the iterator to provide data for `op[i]` that is in native byte order, aligned according to the dtype requirements, contiguous, or any combination.

By default, the iterator produces pointers into the arrays provided, which may be aligned or unaligned, and with any byte order. If copying or buffering is not enabled and the operand data doesn't satisfy the constraints, an error will be raised.

The contiguous constraint applies only to the inner loop, successive inner loops may have arbitrary pointer changes.

If the requested data type is in non-native byte order, the NBO flag overrides it and the requested data type is converted to be in native byte order.

NPY_ITER_ALLOCATE
This is for output arrays, and requires that the flag *NPY_ITER_WRITEONLY* or *NPY_ITER_READWRITE* be set. If `op[i]` is NULL, creates a new array with the final broadcast dimensions, and a layout matching the iteration order of the iterator.

When `op[i]` is NULL, the requested data type `op_dtypes[i]` may be NULL as well, in which case it is automatically generated from the dtypes of the arrays which are flagged as readable. The rules for generating the dtype are the same is for UFuncs. Of special note is handling of byte order in the selected dtype. If there is exactly one input, the input's dtype is used as is. Otherwise, if more than one input dtypes are combined together, the output will be in native byte order.

After being allocated with this flag, the caller may retrieve the new array by calling *NpyIter_GetOperandArray* and getting the i-th object in the returned C array. The caller must call Py_INCREF on it to claim a reference to the array.

NPY_ITER_NO_SUBTYPE
For use with *NPY_ITER_ALLOCATE*, this flag disables allocating an array subtype for the output, forcing it to be a straight ndarray.

TODO: Maybe it would be better to introduce a function `NpyIter_GetWrappedOutput` and remove this flag?

NPY_ITER_NO_BROADCAST
Ensures that the input or output matches the iteration dimensions exactly.

NPY_ITER_ARRAYMASK
New in version 1.7.

Indicates that this operand is the mask to use for selecting elements when writing to operands which have the *NPY_ITER_WRITEMASKED* flag applied to them. Only one operand may have *NPY_ITER_ARRAYMASK* flag applied to it.

The data type of an operand with this flag should be either *NPY_BOOL*, *NPY_MASK*, or a struct dtype whose fields are all valid mask dtypes. In the latter case, it must match up with a struct operand being WRITEMASKED, as it is specifying a mask for each field of that array.

This flag only affects writing from the buffer back to the array. This means that if the operand is also *NPY_ITER_READWRITE* or *NPY_ITER_WRITEONLY*, code doing iteration can write to this operand to control which elements will be untouched and which ones will be modified. This is useful when the mask should be a combination of input masks, for example. Mask values can be created with the `NpyMask_Create` function.

NPY_ITER_WRITEMASKED
New in version 1.7.

Indicates that only elements which the operand with the ARRAYMASK flag indicates are intended to be modified by the iteration. In general, the iterator does not enforce this, it is up to the code doing the iteration to follow that promise. Code can use the `NpyMask_IsExposed` inline function to test whether the mask at a particular element allows writing.

When this flag is used, and this operand is buffered, this changes how data is copied from the buffer into the array. A masked copying routine is used, which only copies the elements in the buffer for which `NpyMask_IsExposed` returns true from the corresponding element in the ARRAYMASK operand.

NPY_ITER_OVERLAP_ASSUME_ELEMENTWISE
In memory overlap checks, assume that operands with `NPY_ITER_OVERLAP_ASSUME_ELEMENTWISE` enabled are accessed only in the iterator order.

This enables the iterator to reason about data dependency, possibly avoiding unnecessary copies.

This flag has effect only if `NPY_ITER_COPY_IF_OVERLAP` is enabled on the iterator.

*NpyIter** **NpyIter_AdvancedNew**(npy_intp *nop*, *PyArrayObject*** *op*, npy_uint32 *flags*, *NPY_ORDER* *order*, *NPY_CASTING* *casting*, npy_uint32* *op_flags*, *PyArray_Descr*** *op_dtypes*, int *oa_ndim*, int** *op_axes*, npy_intp* *itershape*, npy_intp *buffersize*)
Extends *NpyIter_MultiNew* with several advanced options providing more control over broadcasting and buffering.

If -1/NULL values are passed to `oa_ndim`, `op_axes`, `itershape`, and `buffersize`, it is equivalent to *NpyIter_MultiNew*.

The parameter `oa_ndim`, when not zero or -1, specifies the number of dimensions that will be iterated with customized broadcasting. If it is provided, `op_axes` must and `itershape` can also be provided. The `op_axes` parameter let you control in detail how the axes of the operand arrays get matched together and iterated. In `op_axes`, you must provide an array of `nop` pointers to `oa_ndim`-sized arrays of type `npy_intp`. If an entry in `op_axes` is NULL, normal broadcasting rules will apply. In `op_axes[j][i]` is stored either a valid axis of `op[j]`, or -1 which means `newaxis`. Within each `op_axes[j]` array, axes may not be repeated. The following example is how normal broadcasting applies to a 3-D array, a 2-D array, a 1-D array and a scalar.

Note: Before NumPy 1.8 `oa_ndim == 0` was used for signalling that that ``op_axes and `itershape` are unused. This is deprecated and should be replaced with -1. Better backward compatibility may be achieved by using *NpyIter_MultiNew* for this case.

```
int oa_ndim = 3;                /* # iteration axes */
int op0_axes[] = {0, 1, 2};     /* 3-D operand */
int op1_axes[] = {-1, 0, 1};    /* 2-D operand */
int op2_axes[] = {-1, -1, 0};   /* 1-D operand */
int op3_axes[] = {-1, -1, -1}   /* 0-D (scalar) operand */
int* op_axes[] = {op0_axes, op1_axes, op2_axes, op3_axes};
```

The `itershape` parameter allows you to force the iterator to have a specific iteration shape. It is an array of length `oa_ndim`. When an entry is negative, its value is determined from the operands. This parameter allows automatically allocated outputs to get additional dimensions which don't match up with any dimension of an input.

If `buffersize` is zero, a default buffer size is used, otherwise it specifies how big of a buffer to use. Buffers which are powers of 2 such as 4096 or 8192 are recommended.

Returns NULL if there is an error, otherwise returns the allocated iterator.

*NpyIter** **NpyIter_Copy**(*NpyIter* iter*)

Makes a copy of the given iterator. This function is provided primarily to enable multi-threaded iteration of the data.

TODO: Move this to a section about multithreaded iteration.

The recommended approach to multithreaded iteration is to first create an iterator with the flags *NPY_ITER_EXTERNAL_LOOP*, *NPY_ITER_RANGED*, *NPY_ITER_BUFFERED*, *NPY_ITER_DELAY_BUFALLOC*, and possibly *NPY_ITER_GROWINNER*. Create a copy of this iterator for each thread (minus one for the first iterator). Then, take the iteration index range `[0, NpyIter_GetIterSize(iter))` and split it up into tasks, for example using a TBB parallel_for loop. When a thread gets a task to execute, it then uses its copy of the iterator by calling *NpyIter_ResetToIterIndexRange* and iterating over the full range.

When using the iterator in multi-threaded code or in code not holding the Python GIL, care must be taken to only call functions which are safe in that context. *NpyIter_Copy* cannot be safely called without the Python GIL, because it increments Python references. The `Reset*` and some other functions may be safely called by passing in the `errmsg` parameter as non-NULL, so that the functions will pass back errors through it instead of setting a Python exception.

int NpyIter_RemoveAxis(NpyIter* iter, int axis)``

Removes an axis from iteration. This requires that *NPY_ITER_MULTI_INDEX* was set for iterator creation, and does not work if buffering is enabled or an index is being tracked. This function also resets the iterator to its initial state.

This is useful for setting up an accumulation loop, for example. The iterator can first be created with all the dimensions, including the accumulation axis, so that the output gets created correctly. Then, the accumulation axis can be removed, and the calculation done in a nested fashion.

WARNING: This function may change the internal memory layout of the iterator. Any cached functions or pointers from the iterator must be retrieved again! The iterator range will be reset as well.

Returns `NPY_SUCCEED` or `NPY_FAIL`.

int **NpyIter_RemoveMultiIndex**(*NpyIter* iter*)

If the iterator is tracking a multi-index, this strips support for them, and does further iterator optimizations that are possible if multi-indices are not needed. This function also resets the iterator to its initial state.

WARNING: This function may change the internal memory layout of the iterator. Any cached functions or pointers from the iterator must be retrieved again!

After calling this function, `NpyIter_HasMultiIndex(iter)` will return false.

Returns `NPY_SUCCEED` or `NPY_FAIL`.

int **NpyIter_EnableExternalLoop** (*NpyIter** *iter*)

If *NpyIter_RemoveMultiIndex* was called, you may want to enable the flag *NPY_ITER_EXTERNAL_LOOP*. This flag is not permitted together with *NPY_ITER_MULTI_INDEX*, so this function is provided to enable the feature after *NpyIter_RemoveMultiIndex* is called. This function also resets the iterator to its initial state.

WARNING: This function changes the internal logic of the iterator. Any cached functions or pointers from the iterator must be retrieved again!

Returns `NPY_SUCCEED` or `NPY_FAIL`.

int **NpyIter_Deallocate** (*NpyIter** *iter*)

Deallocates the iterator object. This additionally frees any copies made, triggering UPDATEIFCOPY behavior where necessary.

Returns `NPY_SUCCEED` or `NPY_FAIL`.

int **NpyIter_Reset** (*NpyIter** *iter*, char** *errmsg*)

Resets the iterator back to its initial state, at the beginning of the iteration range.

Returns `NPY_SUCCEED` or `NPY_FAIL`. If errmsg is non-NULL, no Python exception is set when `NPY_FAIL` is returned. Instead, *errmsg is set to an error message. When errmsg is non-NULL, the function may be safely called without holding the Python GIL.

int **NpyIter_ResetToIterIndexRange** (*NpyIter** *iter*, npy_intp *istart*, npy_intp *iend*, char** *errmsg*)

Resets the iterator and restricts it to the `iterindex` range `[istart, iend)`. See *NpyIter_Copy* for an explanation of how to use this for multi-threaded iteration. This requires that the flag *NPY_ITER_RANGED* was passed to the iterator constructor.

If you want to reset both the `iterindex` range and the base pointers at the same time, you can do the following to avoid extra buffer copying (be sure to add the return code error checks when you copy this code).

```
/* Set to a trivial empty range */
NpyIter_ResetToIterIndexRange(iter, 0, 0);
/* Set the base pointers */
NpyIter_ResetBasePointers(iter, baseptrs);
/* Set to the desired range */
NpyIter_ResetToIterIndexRange(iter, istart, iend);
```

Returns `NPY_SUCCEED` or `NPY_FAIL`. If errmsg is non-NULL, no Python exception is set when `NPY_FAIL` is returned. Instead, *errmsg is set to an error message. When errmsg is non-NULL, the function may be safely called without holding the Python GIL.

int **NpyIter_ResetBasePointers** (*NpyIter *iter*, char** *baseptrs*, char** *errmsg*)

Resets the iterator back to its initial state, but using the values in `baseptrs` for the data instead of the pointers from the arrays being iterated. This functions is intended to be used, together with the `op_axes` parameter, by nested iteration code with two or more iterators.

Returns `NPY_SUCCEED` or `NPY_FAIL`. If errmsg is non-NULL, no Python exception is set when `NPY_FAIL` is returned. Instead, *errmsg is set to an error message. When errmsg is non-NULL, the function may be safely called without holding the Python GIL.

TODO: Move the following into a special section on nested iterators.

Creating iterators for nested iteration requires some care. All the iterator operands must match exactly, or the calls to *NpyIter_ResetBasePointers* will be invalid. This means that automatic copies and output allocation should not be used haphazardly. It is possible to still use the automatic data conversion and casting features of the iterator by creating one of the iterators with all the conversion parameters enabled, then grabbing

the allocated operands with the *NpyIter_GetOperandArray* function and passing them into the constructors for the rest of the iterators.

WARNING: When creating iterators for nested iteration, the code must not use a dimension more than once in the different iterators. If this is done, nested iteration will produce out-of-bounds pointers during iteration.

WARNING: When creating iterators for nested iteration, buffering can only be applied to the innermost iterator. If a buffered iterator is used as the source for `baseptrs`, it will point into a small buffer instead of the array and the inner iteration will be invalid.

The pattern for using nested iterators is as follows.

```
NpyIter *iter1, *iter1;
NpyIter_IterNextFunc *iternext1, *iternext2;
char **dataptrs1;

/*
 * With the exact same operands, no copies allowed, and
 * no axis in op_axes used both in iter1 and iter2.
 * Buffering may be enabled for iter2, but not for iter1.
 */
iter1 = ...; iter2 = ...;

iternext1 = NpyIter_GetIterNext(iter1);
iternext2 = NpyIter_GetIterNext(iter2);
dataptrs1 = NpyIter_GetDataPtrArray(iter1);

do {
    NpyIter_ResetBasePointers(iter2, dataptrs1);
    do {
        /* Use the iter2 values */
    } while (iternext2(iter2));
} while (iternext1(iter1));
```

int **NpyIter_GotoMultiIndex** (*NpyIter** *iter*, npy_intp* *multi_index*)

Adjusts the iterator to point to the `ndim` indices pointed to by `multi_index`. Returns an error if a multi-index is not being tracked, the indices are out of bounds, or inner loop iteration is disabled.

Returns `NPY_SUCCEED` or `NPY_FAIL`.

int **NpyIter_GotoIndex** (*NpyIter** *iter*, npy_intp *index*)

Adjusts the iterator to point to the `index` specified. If the iterator was constructed with the flag *NPY_ITER_C_INDEX*, `index` is the C-order index, and if the iterator was constructed with the flag *NPY_ITER_F_INDEX*, `index` is the Fortran-order index. Returns an error if there is no index being tracked, the index is out of bounds, or inner loop iteration is disabled.

Returns `NPY_SUCCEED` or `NPY_FAIL`.

npy_intp **NpyIter_GetIterSize** (*NpyIter** *iter*)

Returns the number of elements being iterated. This is the product of all the dimensions in the shape. When a multi index is being tracked (and *NpyIter_RemoveAxis* may be called) the size may be `-1` to indicate an iterator is too large. Such an iterator is invalid, but may become valid after *NpyIter_RemoveAxis* is called. It is not necessary to check for this case.

npy_intp **NpyIter_GetIterIndex** (*NpyIter** *iter*)

Gets the `iterindex` of the iterator, which is an index matching the iteration order of the iterator.

void **NpyIter_GetIterIndexRange** (*NpyIter** *iter*, npy_intp* *istart*, npy_intp* *iend*)

Gets the `iterindex` sub-range that is being iterated. If *NPY_ITER_RANGED* was not specified, this always returns the range `[0, NpyIter_IterSize(iter))`.

int **NpyIter_GotoIterIndex**(*NpyIter** *iter*, npy_intp *iterindex*)
Adjusts the iterator to point to the `iterindex` specified. The IterIndex is an index matching the iteration order of the iterator. Returns an error if the `iterindex` is out of bounds, buffering is enabled, or inner loop iteration is disabled.

Returns `NPY_SUCCEED` or `NPY_FAIL`.

npy_bool **NpyIter_HasDelayedBufAlloc**(*NpyIter** *iter*)
Returns 1 if the flag *NPY_ITER_DELAY_BUFALLOC* was passed to the iterator constructor, and no call to one of the Reset functions has been done yet, 0 otherwise.

npy_bool **NpyIter_HasExternalLoop**(*NpyIter** *iter*)
Returns 1 if the caller needs to handle the inner-most 1-dimensional loop, or 0 if the iterator handles all looping. This is controlled by the constructor flag *NPY_ITER_EXTERNAL_LOOP* or *NpyIter_EnableExternalLoop*.

npy_bool **NpyIter_HasMultiIndex**(*NpyIter** *iter*)
Returns 1 if the iterator was created with the *NPY_ITER_MULTI_INDEX* flag, 0 otherwise.

npy_bool **NpyIter_HasIndex**(*NpyIter** *iter*)
Returns 1 if the iterator was created with the *NPY_ITER_C_INDEX* or *NPY_ITER_F_INDEX* flag, 0 otherwise.

npy_bool **NpyIter_RequiresBuffering**(*NpyIter** *iter*)
Returns 1 if the iterator requires buffering, which occurs when an operand needs conversion or alignment and so cannot be used directly.

npy_bool **NpyIter_IsBuffered**(*NpyIter** *iter*)
Returns 1 if the iterator was created with the *NPY_ITER_BUFFERED* flag, 0 otherwise.

npy_bool **NpyIter_IsGrowInner**(*NpyIter** *iter*)
Returns 1 if the iterator was created with the *NPY_ITER_GROWINNER* flag, 0 otherwise.

npy_intp **NpyIter_GetBufferSize**(*NpyIter** *iter*)
If the iterator is buffered, returns the size of the buffer being used, otherwise returns 0.

int **NpyIter_GetNDim**(*NpyIter** *iter*)
Returns the number of dimensions being iterated. If a multi-index was not requested in the iterator constructor, this value may be smaller than the number of dimensions in the original objects.

int **NpyIter_GetNOp**(*NpyIter** *iter*)
Returns the number of operands in the iterator.

When `NPY_ITER_USE_MASKNA` is used on an operand, a new operand is added to the end of the operand list in the iterator to track that operand's NA mask. Thus, this equals the number of construction operands plus the number of operands for which the flag `NPY_ITER_USE_MASKNA` was specified.

int **NpyIter_GetFirstMaskNAOp**(*NpyIter** *iter*)
New in version 1.7.

Returns the index of the first NA mask operand in the array. This value is equal to the number of operands passed into the constructor.

npy_intp* **NpyIter_GetAxisStrideArray**(*NpyIter** *iter*, int *axis*)
Gets the array of strides for the specified axis. Requires that the iterator be tracking a multi-index, and that buffering not be enabled.

This may be used when you want to match up operand axes in some fashion, then remove them with `NpyIter_RemoveAxis` to handle their processing manually. By calling this function before removing the axes, you can get the strides for the manual processing.

Returns `NULL` on error.

int **NpyIter_GetShape**(*NpyIter** *iter*, npy_intp* *outshape*)
Returns the broadcast shape of the iterator in `outshape`. This can only be called on an iterator which is tracking a multi-index.

Returns `NPY_SUCCEED` or `NPY_FAIL`.

*PyArray_Descr*** **NpyIter_GetDescrArray**(*NpyIter** *iter*)
This gives back a pointer to the `nop` data type Descrs for the objects being iterated. The result points into `iter`, so the caller does not gain any references to the Descrs.

This pointer may be cached before the iteration loop, calling `iternext` will not change it.

PyObject** **NpyIter_GetOperandArray**(*NpyIter** *iter*)
This gives back a pointer to the `nop` operand PyObjects that are being iterated. The result points into `iter`, so the caller does not gain any references to the PyObjects.

npy_int8* **NpyIter_GetMaskNAIndexArray**(*NpyIter** *iter*)
New in version 1.7.

This gives back a pointer to the `nop` indices which map construction operands with `NPY_ITER_USE_MASKNA` flagged to their corresponding NA mask operands and vice versa. For operands which were not flagged with `NPY_ITER_USE_MASKNA`, this array contains negative values.

PyObject* **NpyIter_GetIterView**(*NpyIter** *iter*, npy_intp *i*)
This gives back a reference to a new ndarray view, which is a view into the i-th object in the array *NpyIter_GetOperandArray*, whose dimensions and strides match the internal optimized iteration pattern. A C-order iteration of this view is equivalent to the iterator's iteration order.

For example, if an iterator was created with a single array as its input, and it was possible to rearrange all its axes and then collapse it into a single strided iteration, this would return a view that is a one-dimensional array.

void **NpyIter_GetReadFlags**(*NpyIter** *iter*, char* *outreadflags*)
Fills `nop` flags. Sets `outreadflags[i]` to 1 if `op[i]` can be read from, and to 0 if not.

void **NpyIter_GetWriteFlags**(*NpyIter** *iter*, char* *outwriteflags*)
Fills `nop` flags. Sets `outwriteflags[i]` to 1 if `op[i]` can be written to, and to 0 if not.

int **NpyIter_CreateCompatibleStrides**(*NpyIter** *iter*, npy_intp *itemsize*, npy_intp* *outstrides*)
Builds a set of strides which are the same as the strides of an output array created using the *NPY_ITER_ALLOCATE* flag, where NULL was passed for op_axes. This is for data packed contiguously, but not necessarily in C or Fortran order. This should be used together with *NpyIter_GetShape* and *NpyIter_GetNDim* with the flag *NPY_ITER_MULTI_INDEX* passed into the constructor.

A use case for this function is to match the shape and layout of the iterator and tack on one or more dimensions. For example, in order to generate a vector per input value for a numerical gradient, you pass in ndim*itemsize for itemsize, then add another dimension to the end with size ndim and stride itemsize. To do the Hessian matrix, you do the same thing but add two dimensions, or take advantage of the symmetry and pack it into 1 dimension with a particular encoding.

This function may only be called if the iterator is tracking a multi-index and if *NPY_ITER_DONT_NEGATE_STRIDES* was used to prevent an axis from being iterated in reverse order.

If an array is created with this method, simply adding 'itemsize' for each iteration will traverse the new array matching the iterator.

Returns `NPY_SUCCEED` or `NPY_FAIL`.

npy_bool **NpyIter_IsFirstVisit**(*NpyIter** *iter*, int *iop*)
New in version 1.7.

Checks to see whether this is the first time the elements of the specified reduction operand which the iterator points at are being seen for the first time. The function returns a reasonable answer for reduction operands and when buffering is disabled. The answer may be incorrect for buffered non-reduction operands.

This function is intended to be used in EXTERNAL_LOOP mode only, and will produce some wrong answers when that mode is not enabled.

If this function returns true, the caller should also check the inner loop stride of the operand, because if that stride is 0, then only the first element of the innermost external loop is being visited for the first time.

WARNING: For performance reasons, 'iop' is not bounds-checked, it is not confirmed that 'iop' is actually a reduction operand, and it is not confirmed that EXTERNAL_LOOP mode is enabled. These checks are the responsibility of the caller, and should be done outside of any inner loops.

5.5.6 Functions For Iteration

*NpyIter_IterNextFunc** **NpyIter_GetIterNext** (*NpyIter** *iter*, char** *errmsg*)

Returns a function pointer for iteration. A specialized version of the function pointer may be calculated by this function instead of being stored in the iterator structure. Thus, to get good performance, it is required that the function pointer be saved in a variable rather than retrieved for each loop iteration.

Returns NULL if there is an error. If errmsg is non-NULL, no Python exception is set when `NPY_FAIL` is returned. Instead, *errmsg is set to an error message. When errmsg is non-NULL, the function may be safely called without holding the Python GIL.

The typical looping construct is as follows.

```
NpyIter_IterNextFunc *iternext = NpyIter_GetIterNext(iter, NULL);
char** dataptr = NpyIter_GetDataPtrArray(iter);

do {
    /* use the addresses dataptr[0], ... dataptr[nop-1] */
} while(iternext(iter));
```

When *NPY_ITER_EXTERNAL_LOOP* is specified, the typical inner loop construct is as follows.

```
NpyIter_IterNextFunc *iternext = NpyIter_GetIterNext(iter, NULL);
char** dataptr = NpyIter_GetDataPtrArray(iter);
npy_intp* stride = NpyIter_GetInnerStrideArray(iter);
npy_intp* size_ptr = NpyIter_GetInnerLoopSizePtr(iter), size;
npy_intp iop, nop = NpyIter_GetNOp(iter);

do {
    size = *size_ptr;
    while (size--) {
        /* use the addresses dataptr[0], ... dataptr[nop-1] */
        for (iop = 0; iop < nop; ++iop) {
            dataptr[iop] += stride[iop];
        }
    }
} while (iternext());
```

Observe that we are using the dataptr array inside the iterator, not copying the values to a local temporary. This is possible because when `iternext()` is called, these pointers will be overwritten with fresh values, not incrementally updated.

If a compile-time fixed buffer is being used (both flags *NPY_ITER_BUFFERED* and *NPY_ITER_EXTERNAL_LOOP*), the inner size may be used as a signal as well. The size is guaranteed

to become zero when `iternext()` returns false, enabling the following loop construct. Note that if you use this construct, you should not pass *NPY_ITER_GROWINNER* as a flag, because it will cause larger sizes under some circumstances.

```
/* The constructor should have buffersize passed as this value */
#define FIXED_BUFFER_SIZE 1024

NpyIter_IterNextFunc *iternext = NpyIter_GetIterNext(iter, NULL);
char **dataptr = NpyIter_GetDataPtrArray(iter);
npy_intp *stride = NpyIter_GetInnerStrideArray(iter);
npy_intp *size_ptr = NpyIter_GetInnerLoopSizePtr(iter), size;
npy_intp i, iop, nop = NpyIter_GetNOp(iter);

/* One loop with a fixed inner size */
size = *size_ptr;
while (size == FIXED_BUFFER_SIZE) {
    /*
     * This loop could be manually unrolled by a factor
     * which divides into FIXED_BUFFER_SIZE
     */
    for (i = 0; i < FIXED_BUFFER_SIZE; ++i) {
        /* use the addresses dataptr[0], ... dataptr[nop-1] */
        for (iop = 0; iop < nop; ++iop) {
            dataptr[iop] += stride[iop];
        }
    }
    iternext();
    size = *size_ptr;
}

/* Finish-up loop with variable inner size */
if (size > 0) do {
    size = *size_ptr;
    while (size--) {
        /* use the addresses dataptr[0], ... dataptr[nop-1] */
        for (iop = 0; iop < nop; ++iop) {
            dataptr[iop] += stride[iop];
        }
    }
} while (iternext());
```

NpyIter_GetMultiIndexFunc ***NpyIter_GetGetMultiIndex***(*NpyIter** *iter*, char** *errmsg*)

Returns a function pointer for getting the current multi-index of the iterator. Returns NULL if the iterator is not tracking a multi-index. It is recommended that this function pointer be cached in a local variable before the iteration loop.

Returns NULL if there is an error. If errmsg is non-NULL, no Python exception is set when `NPY_FAIL` is returned. Instead, *errmsg is set to an error message. When errmsg is non-NULL, the function may be safely called without holding the Python GIL.

char** ***NpyIter_GetDataPtrArray***(*NpyIter** *iter*)

This gives back a pointer to the `nop` data pointers. If *NPY_ITER_EXTERNAL_LOOP* was not specified, each data pointer points to the current data item of the iterator. If no inner iteration was specified, it points to the first data item of the inner loop.

This pointer may be cached before the iteration loop, calling `iternext` will not change it. This function may be safely called without holding the Python GIL.

char** ***NpyIter_GetInitialDataPtrArray***(*NpyIter** *iter*)

Gets the array of data pointers directly into the arrays (never into the buffers), corresponding to iteration index 0.

These pointers are different from the pointers accepted by `NpyIter_ResetBasePointers`, because the direction along some axes may have been reversed.

This function may be safely called without holding the Python GIL.

npy_intp* **NpyIter_GetIndexPtr**(*NpyIter** *iter*)
This gives back a pointer to the index being tracked, or NULL if no index is being tracked. It is only useable if one of the flags *NPY_ITER_C_INDEX* or *NPY_ITER_F_INDEX* were specified during construction.

When the flag *NPY_ITER_EXTERNAL_LOOP* is used, the code needs to know the parameters for doing the inner loop. These functions provide that information.

npy_intp* **NpyIter_GetInnerStrideArray**(*NpyIter** *iter*)
Returns a pointer to an array of the `nop` strides, one for each iterated object, to be used by the inner loop.

This pointer may be cached before the iteration loop, calling `iternext` will not change it. This function may be safely called without holding the Python GIL.

WARNING: While the pointer may be cached, its values may change if the iterator is buffered.

npy_intp* **NpyIter_GetInnerLoopSizePtr**(*NpyIter** *iter*)
Returns a pointer to the number of iterations the inner loop should execute.

This address may be cached before the iteration loop, calling `iternext` will not change it. The value itself may change during iteration, in particular if buffering is enabled. This function may be safely called without holding the Python GIL.

void **NpyIter_GetInnerFixedStrideArray**(*NpyIter** *iter*, npy_intp* *out_strides*)
Gets an array of strides which are fixed, or will not change during the entire iteration. For strides that may change, the value NPY_MAX_INTP is placed in the stride.

Once the iterator is prepared for iteration (after a reset if `NPY_DELAY_BUFALLOC` was used), call this to get the strides which may be used to select a fast inner loop function. For example, if the stride is 0, that means the inner loop can always load its value into a variable once, then use the variable throughout the loop, or if the stride equals the itemsize, a contiguous version for that operand may be used.

This function may be safely called without holding the Python GIL.

5.5.7 Converting from Previous NumPy Iterators

The old iterator API includes functions like PyArrayIter_Check, PyArray_Iter* and PyArray_ITER_*. The multi-iterator array includes PyArray_MultiIter*, PyArray_Broadcast, and PyArray_RemoveSmallest. The new iterator design replaces all of this functionality with a single object and associated API. One goal of the new API is that all uses of the existing iterator should be replaceable with the new iterator without significant effort. In 1.6, the major exception to this is the neighborhood iterator, which does not have corresponding features in this iterator.

Here is a conversion table for which functions to use with the new iterator:

Iterator Functions	
PyArray_IterNew	*NpyIter_New*
PyArray_IterAllButAxis	*NpyIter_New* + `axes` parameter **or** Iterator flag *NPY_ITER_EXTERNAL_LOOP*
PyArray_BroadcastToShape	**NOT SUPPORTED** (Use the support for multiple operands instead.)
PyArrayIter_Check	Will need to add this in Python exposure
PyArray_ITER_RESET	*NpyIter_Reset*
PyArray_ITER_NEXT	Function pointer from *NpyIter_GetIterNext*
PyArray_ITER_DATA	*NpyIter_GetDataPtrArray*
PyArray_ITER_GOTO	*NpyIter_GotoMultiIndex*
PyArray_ITER_GOTO1D	*NpyIter_GotoIndex* or *NpyIter_GotoIterIndex*
PyArray_ITER_NOTDONE	Return value of `iternext` function pointer
Multi-iterator Functions	
PyArray_MultiIterNew	*NpyIter_MultiNew*
PyArray_MultiIter_RESET	*NpyIter_Reset*
PyArray_MultiIter_NEXT	Function pointer from *NpyIter_GetIterNext*
PyArray_MultiIter_DATA	*NpyIter_GetDataPtrArray*
PyArray_MultiIter_NEXTi	**NOT SUPPORTED** (always lock-step iteration)
PyArray_MultiIter_GOTO	*NpyIter_GotoMultiIndex*
PyArray_MultiIter_GOTO1D	*NpyIter_GotoIndex* or *NpyIter_GotoIterIndex*
PyArray_MultiIter_NOTDONE	Return value of `iternext` function pointer
PyArray_Broadcast	Handled by *NpyIter_MultiNew*
PyArray_RemoveSmallest	Iterator flag *NPY_ITER_EXTERNAL_LOOP*
Other Functions	
PyArray_ConvertToCommonType	Iterator flag *NPY_ITER_COMMON_DTYPE*

5.6 UFunc API

5.6.1 Constants

UFUNC_ERR_{HANDLER}
`{HANDLER}` can be **IGNORE**, **WARN**, **RAISE**, or **CALL**

UFUNC_{THING}_{ERR}
`{THING}` can be **MASK**, **SHIFT**, or **FPE**, and `{ERR}` can be **DIVIDEBYZERO**, **OVERFLOW**, **UNDERFLOW**, and **INVALID**.

PyUFunc_{VALUE}
`{VALUE}` can be **One** (1), **Zero** (0), or **None** (-1)

5.6.2 Macros

NPY_LOOP_BEGIN_THREADS
Used in universal function code to only release the Python GIL if loop->obj is not true (*i.e.* this is not an OBJECT array loop). Requires use of *NPY_BEGIN_THREADS_DEF* in variable declaration area.

NPY_LOOP_END_THREADS
Used in universal function code to re-acquire the Python GIL if it was released (because loop->obj was not true).

UFUNC_CHECK_ERROR(loop)
A macro used internally to check for errors and goto fail if found. This macro requires a fail label in the current

code block. The *loop* variable must have at least members (obj, errormask, and errorobj). If *loop* ->obj is nonzero, then `PyErr_Occurred` () is called (meaning the GIL must be held). If *loop* ->obj is zero, then if *loop* ->errormask is nonzero, *`PyUFunc_checkfperr`* is called with arguments *loop* ->errormask and *loop* ->errobj. If the result of this check of the IEEE floating point registers is true then the code redirects to the fail label which must be defined.

`UFUNC_CHECK_STATUS` (ret)

Deprecated: use npy_clear_floatstatus from npy_math.h instead.

A macro that expands to platform-dependent code. The *ret* variable can be any integer. The `UFUNC_FPE_{ERR}` bits are set in *ret* according to the status of the corresponding error flags of the floating point processor.

5.6.3 Functions

PyObject* **`PyUFunc_FromFuncAndData`** (PyUFuncGenericFunction* *func*, void** *data*, char* *types*, int *ntypes*, int *nin*, int *nout*, int *identity*, char* *name*, char* *doc*, int *unused*)

Create a new broadcasting universal function from required variables. Each ufunc builds around the notion of an element-by-element operation. Each ufunc object contains pointers to 1-d loops implementing the basic functionality for each supported type.

Note: The *func*, *data*, *types*, *name*, and *doc* arguments are not copied by `PyUFunc_FromFuncAndData`. The caller must ensure that the memory used by these arrays is not freed as long as the ufunc object is alive.

Parameters

- **`func`** – Must to an array of length *ntypes* containing `PyUFuncGenericFunction` items. These items are pointers to functions that actually implement the underlying (element-by-element) function N times.
- **`data`** – Should be `NULL` or a pointer to an array of size *ntypes* . This array may contain arbitrary extra-data to be passed to the corresponding 1-d loop function in the func array.
- **`types`** – Must be of length (*nin* + *nout*) * *ntypes*, and it contains the data-types (built-in only) that the corresponding function in the *func* array can deal with.
- **`ntypes`** – How many different data-type "signatures" the ufunc has implemented.
- **`nin`** – The number of inputs to this operation.
- **`nout`** – The number of outputs
- **`name`** – The name for the ufunc. Specifying a name of 'add' or 'multiply' enables a special behavior for integer-typed reductions when no dtype is given. If the input type is an integer (or boolean) data type smaller than the size of the **int_** data type, it will be internally upcast to the **int_** (or uint) data type.
- **`doc`** – Allows passing in a documentation string to be stored with the ufunc. The documentation string should not contain the name of the function or the calling signature as that will be dynamically determined from the object and available when accessing the **__doc__** attribute of the ufunc.
- **`unused`** – Unused and present for backwards compatibility of the C-API.

PyObject* **PyUFunc_FromFuncAndDataAndSignature**(PyUFuncGenericFunction* *func*, void** *data*, char* *types*, int *ntypes*, int *nin*, int *nout*, int *identity*, char* *name*, char* *doc*, int *unused*, char **signature*)

This function is very similar to PyUFunc_FromFuncAndData above, but has an extra *signature* argument, to define generalized universal functions. Similarly to how ufuncs are built around an element-by-element operation, gufuncs are around subarray-by-subarray operations, the signature defining the subarrays to operate on.

Parameters

- **signature** – The signature for the new gufunc. Setting it to NULL is equivalent to calling PyUFunc_FromFuncAndData. A copy of the string is made, so the passed in buffer can be freed.

int **PyUFunc_RegisterLoopForType**(*PyUFuncObject** *ufunc*, int *usertype*, PyUFuncGenericFunction *function*, int* *arg_types*, void* *data*)

This function allows the user to register a 1-d loop with an already- created ufunc to be used whenever the ufunc is called with any of its input arguments as the user-defined data-type. This is needed in order to make ufuncs work with built-in data-types. The data-type must have been previously registered with the numpy system. The loop is passed in as *function*. This loop can take arbitrary data which should be passed in as *data*. The data-types the loop requires are passed in as *arg_types* which must be a pointer to memory at least as large as ufunc->nargs.

int **PyUFunc_RegisterLoopForDescr**(*PyUFuncObject** *ufunc*, *PyArray_Descr** *userdtype*, PyUFuncGenericFunction *function*, *PyArray_Descr*** *arg_dtypes*, void* *data*)

This function behaves like PyUFunc_RegisterLoopForType above, except that it allows the user to register a 1-d loop using PyArray_Descr objects instead of dtype type num values. This allows a 1-d loop to be registered for structured array data-dtypes and custom data-types instead of scalar data-types.

int **PyUFunc_ReplaceLoopBySignature**(*PyUFuncObject** *ufunc*, PyUFuncGenericFunction *newfunc*, int* *signature*, PyUFuncGenericFunction* *oldfunc*)

Replace a 1-d loop matching the given *signature* in the already-created *ufunc* with the new 1-d loop newfunc. Return the old 1-d loop function in *oldfunc*. Return 0 on success and -1 on failure. This function works only with built-in types (use `PyUFunc_RegisterLoopForType` for user-defined types). A signature is an array of data-type numbers indicating the inputs followed by the outputs assumed by the 1-d loop.

int **PyUFunc_GenericFunction**(*PyUFuncObject** *self*, PyObject* *args*, PyObject* *kwds*, *PyArrayObject*** *mps*)

A generic ufunc call. The ufunc is passed in as *self*, the arguments to the ufunc as *args* and *kwds*. The *mps* argument is an array of `PyArrayObject` pointers whose values are discarded and which receive the converted input arguments as well as the ufunc outputs when success is returned. The user is responsible for managing this array and receives a new reference for each array in *mps*. The total number of arrays in *mps* is given by *self* ->nin + *self* ->nout.

Returns 0 on success, -1 on error.

int **PyUFunc_checkfperr**(int *errmask*, PyObject* *errobj*)

A simple interface to the IEEE error-flag checking support. The *errmask* argument is a mask of `UFUNC_MASK_{ERR}` bitmasks indicating which errors to check for (and how to check for them). The *errobj* must be a Python tuple with two elements: a string containing the name which will be used in any communication of error and either a callable Python object (call-back function) or `Py_None`. The callable object will only be used if `UFUNC_ERR_CALL` is set as the desired error checking method. This routine manages the GIL and is safe to call even after releasing the GIL. If an error in the IEEE-compatible hardware is determined a -1 is returned, otherwise a 0 is returned.

void **PyUFunc_clearfperr**()

Clear the IEEE error flags.

void **PyUFunc_GetPyValues**(char* *name*, int* *bufsize*, int* *errmask*, PyObject** *errobj*)

Get the Python values used for ufunc processing from the thread-local storage area unless the defaults have been

set in which case the name lookup is bypassed. The name is placed as a string in the first element of **errobj*. The second element is the looked-up function to call on error callback. The value of the looked-up buffer-size to use is passed into *bufsize*, and the value of the error mask is placed into *errmask*.

5.6.4 Generic functions

At the core of every ufunc is a collection of type-specific functions that defines the basic functionality for each of the supported types. These functions must evaluate the underlying function $N \geq 1$ times. Extra-data may be passed in that may be used during the calculation. This feature allows some general functions to be used as these basic looping functions. The general function has all the code needed to point variables to the right place and set up a function call. The general function assumes that the actual function to call is passed in as the extra data and calls it with the correct values. All of these functions are suitable for placing directly in the array of functions stored in the functions member of the PyUFuncObject structure.

void **PyUFunc_f_f_As_d_d**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_d_d**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_f_f**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_g_g**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_F_F_As_D_D**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_F_F**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_D_D**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_G_G**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_e_e**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_e_e_As_f_f**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_e_e_As_d_d**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)
Type specific, core 1-d functions for ufuncs where each calculation is obtained by calling a function taking one input argument and returning one output. This function is passed in `func`. The letters correspond to dtypechar's of the supported data types (`e` - half, `f` - float, `d` - double, `g` - long double, `F` - cfloat, `D` - cdouble, `G` - clongdouble). The argument *func* must support the same signature. The _As_X_X variants assume ndarray's of one data type but cast the values to use an underlying function that takes a different data type. Thus, *PyUFunc_f_f_As_d_d* uses ndarrays of data type *NPY_FLOAT* but calls out to a C-function that takes double and returns double.

void **PyUFunc_ff_f_As_dd_d**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_ff_f**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_dd_d**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_gg_g**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_FF_F_As_DD_D**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_DD_D**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_FF_F**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_GG_G**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_ee_e**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_ee_e_As_ff_f**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_ee_e_As_dd_d**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)
Type specific, core 1-d functions for ufuncs where each calculation is obtained by calling a function taking two input arguments and returning one output. The underlying function to call is passed in as *func*. The letters correspond to dtypechar's of the specific data type supported by the general-purpose function. The argument `func` must support the corresponding signature. The `_As_XX_X` variants assume ndarrays of one data type but cast the values at each iteration of the loop to use the underlying function that takes a different data type.

void **PyUFunc_O_O**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)

void **PyUFunc_OO_O**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)
One-input, one-output, and two-input, one-output core 1-d functions for the *NPY_OBJECT* data type. These functions handle reference count issues and return early on error. The actual function to call is *func* and it must accept calls with the signature `(PyObject*) (PyObject*)` for *PyUFunc_O_O* or `(PyObject*)(PyObject *, PyObject *)` for *PyUFunc_OO_O*.

void **PyUFunc_O_O_method**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)
This general purpose 1-d core function assumes that *func* is a string representing a method of the input object. For each iteration of the loop, the Python object is extracted from the array and its *func* method is called returning the result to the output array.

void **PyUFunc_OO_O_method**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)
This general purpose 1-d core function assumes that *func* is a string representing a method of the input object that takes one argument. The first argument in *args* is the method whose function is called, the second argument in *args* is the argument passed to the function. The output of the function is stored in the third entry of *args*.

void **PyUFunc_On_Om**(char** *args*, npy_intp* *dimensions*, npy_intp* *steps*, void* *func*)
This is the 1-d core function used by the dynamic ufuncs created by umath.frompyfunc(function, nin, nout). In this case *func* is a pointer to a *PyUFunc_PyFuncData* structure which has definition

PyUFunc_PyFuncData

```
typedef struct {
    int nin;
    int nout;
    PyObject *callable;
} PyUFunc_PyFuncData;
```

At each iteration of the loop, the *nin* input objects are extracted from their object arrays and placed into an argument tuple, the Python *callable* is called with the input arguments, and the nout outputs are placed into their object arrays.

5.6.5 Importing the API

PY_UFUNC_UNIQUE_SYMBOL

NO_IMPORT_UFUNC

void **import_ufunc**(void)
These are the constants and functions for accessing the ufunc C-API from extension modules in precisely the same way as the array C-API can be accessed. The `import_ufunc` () function must always be called (in the initialization subroutine of the extension module). If your extension module is in one file then that is all that is required. The other two constants are useful if your extension module makes use of multiple files. In that case, define *PY_UFUNC_UNIQUE_SYMBOL* to something unique to your code and then in source files that do not contain the module initialization function but still need access to the UFUNC API, define *PY_UFUNC_UNIQUE_SYMBOL* to the same name used previously and also define *NO_IMPORT_UFUNC*.

The C-API is actually an array of function pointers. This array is created (and pointed to by a global variable) by import_ufunc. The global variable is either statically defined or allowed to be seen by other files depending on the state of *PY_UFUNC_UNIQUE_SYMBOL* and *NO_IMPORT_UFUNC*.

5.7 Generalized Universal Function API

There is a general need for looping over not only functions on scalars but also over functions on vectors (or arrays). This concept is realized in NumPy by generalizing the universal functions (ufuncs). In regular ufuncs, the elementary function is limited to element-by-element operations, whereas the generalized version (gufuncs) supports "sub-array" by "sub-array" operations. The Perl vector library PDL provides a similar functionality and its terms are re-used in the following.

Each generalized ufunc has information associated with it that states what the "core" dimensionality of the inputs is, as well as the corresponding dimensionality of the outputs (the element-wise ufuncs have zero core dimensions). The list of the core dimensions for all arguments is called the "signature" of a ufunc. For example, the ufunc numpy.add has signature `(),()->()` defining two scalar inputs and one scalar output.

Another example is the function `inner1d(a, b)` with a signature of `(i),(i)->()`. This applies the inner product along the last axis of each input, but keeps the remaining indices intact. For example, where `a` is of shape `(3, 5, N)` and `b` is of shape `(5, N)`, this will return an output of shape `(3,5)`. The underlying elementary function is called `3 * 5` times. In the signature, we specify one core dimension `(i)` for each input and zero core dimensions `()` for the output, since it takes two 1-d arrays and returns a scalar. By using the same name `i`, we specify that the two corresponding dimensions should be of the same size.

The dimensions beyond the core dimensions are called "loop" dimensions. In the above example, this corresponds to `(3, 5)`.

The signature determines how the dimensions of each input/output array are split into core and loop dimensions:

1. Each dimension in the signature is matched to a dimension of the corresponding passed-in array, starting from the end of the shape tuple. These are the core dimensions, and they must be present in the arrays, or an error will be raised.
2. Core dimensions assigned to the same label in the signature (e.g. the `i` in `inner1d`'s `(i),(i)->()`) must have exactly matching sizes, no broadcasting is performed.
3. The core dimensions are removed from all inputs and the remaining dimensions are broadcast together, defining the loop dimensions.
4. The shape of each output is determined from the loop dimensions plus the output's core dimensions

Typically, the size of all core dimensions in an output will be determined by the size of a core dimension with the same label in an input array. This is not a requirement, and it is possible to define a signature where a label comes up for the first time in an output, although some precautions must be taken when calling such a function. An example would be the function `euclidean_pdist(a)`, with signature `(n,d)->(p)`, that given an array of `n` `d`-dimensional vectors, computes all unique pairwise Euclidean distances among them. The output dimension `p` must therefore be equal to `n * (n - 1) / 2`, but it is the caller's responsibility to pass in an output array of the right size. If the size of a core dimension of an output cannot be determined from a passed in input or output array, an error will be raised.

Note: Prior to NumPy 1.10.0, less strict checks were in place: missing core dimensions were created by prepending 1's to the shape as necessary, core dimensions with the same label were broadcast together, and undetermined dimensions were created with size 1.

5.7.1 Definitions

Elementary Function Each ufunc consists of an elementary function that performs the most basic operation on the smallest portion of array arguments (e.g. adding two numbers is the most basic operation in adding two arrays). The ufunc applies the elementary function multiple times on different parts of the arrays. The input/output of elementary functions can be vectors; e.g., the elementary function of inner1d takes two vectors as input.

Signature A signature is a string describing the input/output dimensions of the elementary function of a ufunc. See section below for more details.

Core Dimension The dimensionality of each input/output of an elementary function is defined by its core dimensions (zero core dimensions correspond to a scalar input/output). The core dimensions are mapped to the last dimensions of the input/output arrays.

Dimension Name A dimension name represents a core dimension in the signature. Different dimensions may share a name, indicating that they are of the same size.

Dimension Index A dimension index is an integer representing a dimension name. It enumerates the dimension names according to the order of the first occurrence of each name in the signature.

5.7.2 Details of Signature

The signature defines "core" dimensionality of input and output variables, and thereby also defines the contraction of the dimensions. The signature is represented by a string of the following format:

- Core dimensions of each input or output array are represented by a list of dimension names in parentheses, `(i_1,...,i_N)`; a scalar input/output is denoted by `()`. Instead of `i_1`, `i_2`, etc, one can use any valid Python variable name.
- Dimension lists for different arguments are separated by `","`. Input/output arguments are separated by `"->"`.
- If one uses the same dimension name in multiple locations, this enforces the same size of the corresponding dimensions.

The formal syntax of signatures is as follows:

```
<Signature>            ::= <Input arguments> "->" <Output arguments>
<Input arguments>      ::= <Argument list>
<Output arguments>     ::= <Argument list>
<Argument list>        ::= nil | <Argument> | <Argument> "," <Argument list>
<Argument>             ::= "(" <Core dimension list> ")"
<Core dimension list>  ::= nil | <Dimension name> |
                           <Dimension name> "," <Core dimension list>
<Dimension name>       ::= valid Python variable name
```

Notes:

1. All quotes are for clarity.
2. Core dimensions that share the same name must have the exact same size. Each dimension name typically corresponds to one level of looping in the elementary function's implementation.
3. White spaces are ignored.

Here are some examples of signatures:

add	`(),()->()`	
inner1d	`(i),(i)->()`	
sum1d	`(i)->()`	
dot2d	`(m,n),(n,p)->(m,p)`	matrix multiplication
outer_inner	`(i,t),(j,t)->(i,j)`	inner over the last dimension, outer over the second to last, and loop/broadcast over the rest.

5.7.3 C-API for implementing Elementary Functions

The current interface remains unchanged, and `PyUFunc_FromFuncAndData` can still be used to implement (specialized) ufuncs, consisting of scalar elementary functions.

One can use `PyUFunc_FromFuncAndDataAndSignature` to declare a more general ufunc. The argument list is the same as `PyUFunc_FromFuncAndData`, with an additional argument specifying the signature as C string.

Furthermore, the callback function is of the same type as before, `void (*foo)(char **args, intp *dimensions, intp *steps, void *func)`. When invoked, `args` is a list of length `nargs` containing the data of all input/output arguments. For a scalar elementary function, `steps` is also of length `nargs`, denoting the strides used for the arguments. `dimensions` is a pointer to a single integer defining the size of the axis to be looped over.

For a non-trivial signature, `dimensions` will also contain the sizes of the core dimensions as well, starting at the second entry. Only one size is provided for each unique dimension name and the sizes are given according to the first occurrence of a dimension name in the signature.

The first `nargs` elements of `steps` remain the same as for scalar ufuncs. The following elements contain the strides of all core dimensions for all arguments in order.

For example, consider a ufunc with signature `(i,j),(i)->()`. In this case, `args` will contain three pointers to the data of the input/output arrays `a`, `b`, `c`. Furthermore, `dimensions` will be `[N, I, J]` to define the size of `N` of the loop and the sizes `I` and `J` for the core dimensions `i` and `j`. Finally, `steps` will be `[a_N, b_N, c_N, a_i, a_j, b_i]`, containing all necessary strides.

5.8 NumPy core libraries

New in version 1.3.0.

Starting from numpy 1.3.0, we are working on separating the pure C, "computational" code from the python dependent code. The goal is twofolds: making the code cleaner, and enabling code reuse by other extensions outside numpy (scipy, etc...).

5.8.1 NumPy core math library

The numpy core math library ('npymath') is a first step in this direction. This library contains most math-related C99 functionality, which can be used on platforms where C99 is not well supported. The core math functions have the same API as the C99 ones, except for the npy_* prefix.

The available functions are defined in <numpy/npy_math.h> - please refer to this header when in doubt.

Floating point classification

NPY_NAN
This macro is defined to a NaN (Not a Number), and is guaranteed to have the signbit unset ('positive' NaN). The corresponding single and extension precision macro are available with the suffix F and L.

NPY_INFINITY
This macro is defined to a positive inf. The corresponding single and extension precision macro are available with the suffix F and L.

NPY_PZERO
This macro is defined to positive zero. The corresponding single and extension precision macro are available with the suffix F and L.

NPY_NZERO
This macro is defined to negative zero (that is with the sign bit set). The corresponding single and extension precision macro are available with the suffix F and L.

int **npy_isnan**(x)
This is a macro, and is equivalent to C99 isnan: works for single, double and extended precision, and return a non 0 value is x is a NaN.

int **npy_isfinite**(x)
This is a macro, and is equivalent to C99 isfinite: works for single, double and extended precision, and return a non 0 value is x is neither a NaN nor an infinity.

int **npy_isinf**(x)
This is a macro, and is equivalent to C99 isinf: works for single, double and extended precision, and return a non 0 value is x is infinite (positive and negative).

int **npy_signbit**(x)
This is a macro, and is equivalent to C99 signbit: works for single, double and extended precision, and return a non 0 value is x has the signbit set (that is the number is negative).

double **npy_copysign**(double *x*, double *y*)
This is a function equivalent to C99 copysign: return x with the same sign as y. Works for any value, including inf and nan. Single and extended precisions are available with suffix f and l.

New in version 1.4.0.

Useful math constants

The following math constants are available in npy_math.h. Single and extended precision are also available by adding the F and L suffixes respectively.

NPY_E
Base of natural logarithm (e)

NPY_LOG2E
Logarithm to base 2 of the Euler constant ($\frac{\ln(e)}{\ln(2)}$)

NPY_LOG10E
Logarithm to base 10 of the Euler constant ($\frac{\ln(e)}{\ln(10)}$)

NPY_LOGE2
Natural logarithm of 2 ($\ln(2)$)

NPY_LOGE10
Natural logarithm of 10 ($\ln(10)$)

NPY_PI
Pi (π)

NPY_PI_2
Pi divided by 2 ($\frac{\pi}{2}$)

NPY_PI_4
Pi divided by 4 ($\frac{\pi}{4}$)

NPY_1_PI
Reciprocal of pi ($\frac{1}{\pi}$)

NPY_2_PI
Two times the reciprocal of pi ($\frac{2}{\pi}$)

NPY_EULER

The Euler constant $\lim_{n\to\infty}(\sum_{k=1}^{n}\frac{1}{k}-\ln n)$

Low-level floating point manipulation

Those can be useful for precise floating point comparison.

double **npy_nextafter**(double *x*, double *y*)
This is a function equivalent to C99 nextafter: return next representable floating point value from x in the direction of y. Single and extended precisions are available with suffix f and l.

New in version 1.4.0.

double **npy_spacing**(double *x*)
This is a function equivalent to Fortran intrinsic. Return distance between x and next representable floating point value from x, e.g. spacing(1) == eps. spacing of nan and +/- inf return nan. Single and extended precisions are available with suffix f and l.

New in version 1.4.0.

void **npy_set_floatstatus_divbyzero**()
Set the divide by zero floating point exception

New in version 1.6.0.

void **npy_set_floatstatus_overflow**()
Set the overflow floating point exception

New in version 1.6.0.

void **npy_set_floatstatus_underflow**()
Set the underflow floating point exception

New in version 1.6.0.

void **npy_set_floatstatus_invalid**()
Set the invalid floating point exception

New in version 1.6.0.

int **npy_get_floatstatus**()
Get floating point status. Returns a bitmask with following possible flags:

- NPY_FPE_DIVIDEBYZERO
- NPY_FPE_OVERFLOW
- NPY_FPE_UNDERFLOW

- NPY_FPE_INVALID

Note that *npy_get_floatstatus_barrier* is preferable as it prevents agressive compiler optimizations reordering the call relative to the code setting the status, which could lead to incorrect results.

New in version 1.9.0.

int **npy_get_floatstatus_barrier**(char*)
Get floating point status. A pointer to a local variable is passed in to prevent aggresive compiler optimizations from reodering this function call relative to the code setting the status, which could lead to incorrect results.

Returns a bitmask with following possible flags:

- NPY_FPE_DIVIDEBYZERO
- NPY_FPE_OVERFLOW
- NPY_FPE_UNDERFLOW
- NPY_FPE_INVALID

New in version 1.15.0.

int **npy_clear_floatstatus**()
Clears the floating point status. Returns the previous status mask.

Note that *npy_clear_floatstatus_barrier* is preferable as it prevents agressive compiler optimizations reordering the call relative to the code setting the status, which could lead to incorrect results.

New in version 1.9.0.

int **npy_clear_floatstatus_barrier**(char*)
Clears the floating point status. A pointer to a local variable is passed in to prevent aggresive compiler optimizations from reodering this function call. Returns the previous status mask.

New in version 1.15.0.

n Complex functions ~~~~~~~~~~~~~~~~~~

New in version 1.4.0.

C99-like complex functions have been added. Those can be used if you wish to implement portable C extensions. Since we still support platforms without C99 complex type, you need to restrict to C90-compatible syntax, e.g.:

```
/* a = 1 + 2i \*/
npy_complex a = npy_cpack(1, 2);
npy_complex b;

b = npy_log(a);
```

Linking against the core math library in an extension

New in version 1.4.0.

To use the core math library in your own extension, you need to add the npymath compile and link options to your extension in your setup.py:

```
>>> from numpy.distutils.misc_util import get_info
>>> info = get_info('npymath')
>>> config.add_extension('foo', sources=['foo.c'], extra_info=info)
```

In other words, the usage of info is exactly the same as when using blas_info and co.

Half-precision functions

New in version 2.0.0.

The header file <numpy/halffloat.h> provides functions to work with IEEE 754-2008 16-bit floating point values. While this format is not typically used for numerical computations, it is useful for storing values which require floating point but do not need much precision. It can also be used as an educational tool to understand the nature of floating point round-off error.

Like for other types, NumPy includes a typedef npy_half for the 16 bit float. Unlike for most of the other types, you cannot use this as a normal type in C, since it is a typedef for npy_uint16. For example, 1.0 looks like 0x3c00 to C, and if you do an equality comparison between the different signed zeros, you will get -0.0 != 0.0 (0x8000 != 0x0000), which is incorrect.

For these reasons, NumPy provides an API to work with npy_half values accessible by including <numpy/halffloat.h> and linking to 'npymath'. For functions that are not provided directly, such as the arithmetic operations, the preferred method is to convert to float or double and back again, as in the following example.

```
npy_half sum(int n, npy_half *array) {
    float ret = 0;
    while(n--) {
        ret += npy_half_to_float(*array++);
    }
    return npy_float_to_half(ret);
}
```

External Links:

- 754-2008 IEEE Standard for Floating-Point Arithmetic
- Half-precision Float Wikipedia Article.
- OpenGL Half Float Pixel Support
- The OpenEXR image format.

NPY_HALF_ZERO
This macro is defined to positive zero.

NPY_HALF_PZERO
This macro is defined to positive zero.

NPY_HALF_NZERO
This macro is defined to negative zero.

NPY_HALF_ONE
This macro is defined to 1.0.

NPY_HALF_NEGONE
This macro is defined to -1.0.

NPY_HALF_PINF
This macro is defined to +inf.

NPY_HALF_NINF
This macro is defined to -inf.

NPY_HALF_NAN
This macro is defined to a NaN value, guaranteed to have its sign bit unset.

float **npy_half_to_float**(npy_half *h*)
Converts a half-precision float to a single-precision float.

double **npy_half_to_double**(npy_half *h*)
Converts a half-precision float to a double-precision float.

npy_half **npy_float_to_half**(float *f*)
Converts a single-precision float to a half-precision float. The value is rounded to the nearest representable half, with ties going to the nearest even. If the value is too small or too big, the system's floating point underflow or overflow bit will be set.

npy_half **npy_double_to_half**(double *d*)
Converts a double-precision float to a half-precision float. The value is rounded to the nearest representable half, with ties going to the nearest even. If the value is too small or too big, the system's floating point underflow or overflow bit will be set.

int **npy_half_eq**(npy_half *h1*, npy_half *h2*)
Compares two half-precision floats (h1 == h2).

int **npy_half_ne**(npy_half *h1*, npy_half *h2*)
Compares two half-precision floats (h1 != h2).

int **npy_half_le**(npy_half *h1*, npy_half *h2*)
Compares two half-precision floats (h1 <= h2).

int **npy_half_lt**(npy_half *h1*, npy_half *h2*)
Compares two half-precision floats (h1 < h2).

int **npy_half_ge**(npy_half *h1*, npy_half *h2*)
Compares two half-precision floats (h1 >= h2).

int **npy_half_gt**(npy_half *h1*, npy_half *h2*)
Compares two half-precision floats (h1 > h2).

int **npy_half_eq_nonan**(npy_half *h1*, npy_half *h2*)
Compares two half-precision floats that are known to not be NaN (h1 == h2). If a value is NaN, the result is undefined.

int **npy_half_lt_nonan**(npy_half *h1*, npy_half *h2*)
Compares two half-precision floats that are known to not be NaN (h1 < h2). If a value is NaN, the result is undefined.

int **npy_half_le_nonan**(npy_half *h1*, npy_half *h2*)
Compares two half-precision floats that are known to not be NaN (h1 <= h2). If a value is NaN, the result is undefined.

int **npy_half_iszero**(npy_half *h*)
Tests whether the half-precision float has a value equal to zero. This may be slightly faster than calling npy_half_eq(h, NPY_ZERO).

int **npy_half_isnan**(npy_half *h*)
Tests whether the half-precision float is a NaN.

int **npy_half_isinf**(npy_half *h*)
Tests whether the half-precision float is plus or minus Inf.

int **npy_half_isfinite**(npy_half *h*)
Tests whether the half-precision float is finite (not NaN or Inf).

int **npy_half_signbit**(npy_half *h*)
Returns 1 is h is negative, 0 otherwise.

npy_half **npy_half_copysign**(npy_half *x*, npy_half *y*)
Returns the value of x with the sign bit copied from y. Works for any value, including Inf and NaN.

npy_half **npy_half_spacing**(npy_half *h*)
This is the same for half-precision float as npy_spacing and npy_spacingf described in the low-level floating point section.

npy_half **npy_half_nextafter**(npy_half *x*, npy_half *y*)
This is the same for half-precision float as npy_nextafter and npy_nextafterf described in the low-level floating point section.

npy_uint16 **npy_floatbits_to_halfbits**(npy_uint32 *f*)
Low-level function which converts a 32-bit single-precision float, stored as a uint32, into a 16-bit half-precision float.

npy_uint16 **npy_doublebits_to_halfbits**(npy_uint64 *d*)
Low-level function which converts a 64-bit double-precision float, stored as a uint64, into a 16-bit half-precision float.

npy_uint32 **npy_halfbits_to_floatbits**(npy_uint16 *h*)
Low-level function which converts a 16-bit half-precision float into a 32-bit single-precision float, stored as a uint32.

npy_uint64 **npy_halfbits_to_doublebits**(npy_uint16 *h*)
Low-level function which converts a 16-bit half-precision float into a 64-bit double-precision float, stored as a uint64.

5.9 C API Deprecations

5.9.1 Background

The API exposed by NumPy for third-party extensions has grown over years of releases, and has allowed programmers to directly access NumPy functionality from C. This API can be best described as "organic". It has emerged from multiple competing desires and from multiple points of view over the years, strongly influenced by the desire to make it easy for users to move to NumPy from Numeric and Numarray. The core API originated with Numeric in 1995 and there are patterns such as the heavy use of macros written to mimic Python's C-API as well as account for compiler technology of the late 90's. There is also only a small group of volunteers who have had very little time to spend on improving this API.

There is an ongoing effort to improve the API. It is important in this effort to ensure that code that compiles for NumPy 1.X continues to compile for NumPy 1.X. At the same time, certain API's will be marked as deprecated so that future-looking code can avoid these API's and follow better practices.

Another important role played by deprecation markings in the C API is to move towards hiding internal details of the NumPy implementation. For those needing direct, easy, access to the data of ndarrays, this will not remove this ability. Rather, there are many potential performance optimizations which require changing the implementation details, and NumPy developers have been unable to try them because of the high value of preserving ABI compatibility. By deprecating this direct access, we will in the future be able to improve NumPy's performance in ways we cannot presently.

5.9.2 Deprecation Mechanism NPY_NO_DEPRECATED_API

In C, there is no equivalent to the deprecation warnings that Python supports. One way to do deprecations is to flag them in the documentation and release notes, then remove or change the deprecated features in a future major version (NumPy 2.0 and beyond). Minor versions of NumPy should not have major C-API changes, however, that prevent code that worked on a previous minor release. For example, we will do our best to ensure that code that compiled and worked on NumPy 1.4 should continue to work on NumPy 1.7 (but perhaps with compiler warnings).

To use the NPY_NO_DEPRECATED_API mechanism, you need to #define it to the target API version of NumPy before #including any NumPy headers. If you want to confirm that your code is clean against 1.7, use:

```
#define NPY_NO_DEPRECATED_API NPY_1_7_API_VERSION
```

On compilers which support a #warning mechanism, NumPy issues a compiler warning if you do not define the symbol NPY_NO_DEPRECATED_API. This way, the fact that there are deprecations will be flagged for third-party developers who may not have read the release notes closely.

CHAPTER

SIX

NUMPY INTERNALS

6.1 NumPy C Code Explanations

> Fanaticism consists of redoubling your efforts when you have forgotten your aim. — *George Santayana*
>
> An authority is a person who can tell you more about something than you really care to know. — *Unknown*

This Chapter attempts to explain the logic behind some of the new pieces of code. The purpose behind these explanations is to enable somebody to be able to understand the ideas behind the implementation somewhat more easily than just staring at the code. Perhaps in this way, the algorithms can be improved on, borrowed from, and/or optimized.

6.1.1 Memory model

One fundamental aspect of the ndarray is that an array is seen as a "chunk" of memory starting at some location. The interpretation of this memory depends on the stride information. For each dimension in an N -dimensional array, an integer (stride) dictates how many bytes must be skipped to get to the next element in that dimension. Unless you have a single-segment array, this stride information must be consulted when traversing through an array. It is not difficult to write code that accepts strides, you just have to use (char *) pointers because strides are in units of bytes. Keep in mind also that strides do not have to be unit-multiples of the element size. Also, remember that if the number of dimensions of the array is 0 (sometimes called a rank-0 array), then the strides and dimensions variables are NULL.

Besides the structural information contained in the strides and dimensions members of the *PyArrayObject*, the flags contain important information about how the data may be accessed. In particular, the *NPY_ARRAY_ALIGNED* flag is set when the memory is on a suitable boundary according to the data-type array. Even if you have a contiguous chunk of memory, you cannot just assume it is safe to dereference a data- type-specific pointer to an element. Only if the *NPY_ARRAY_ALIGNED* flag is set is this a safe operation (on some platforms it will work but on others, like Solaris, it will cause a bus error). The *NPY_ARRAY_WRITEABLE* should also be ensured if you plan on writing to the memory area of the array. It is also possible to obtain a pointer to an unwritable memory area. Sometimes, writing to the memory area when the *NPY_ARRAY_WRITEABLE* flag is not set will just be rude. Other times it can cause program crashes (*e.g.* a data-area that is a read-only memory-mapped file).

6.1.2 Data-type encapsulation

The data-type is an important abstraction of the ndarray. Operations will look to the data-type to provide the key functionality that is needed to operate on the array. This functionality is provided in the list of function pointers pointed to by the 'f' member of the *PyArray_Descr* structure. In this way, the number of data-types can be extended simply by providing a *PyArray_Descr* structure with suitable function pointers in the 'f' member. For built-in types there are some optimizations that by-pass this mechanism, but the point of the data- type abstraction is to allow new data-types to be added.

One of the built-in data-types, the void data-type allows for arbitrary structured types containing 1 or more fields as elements of the array. A field is simply another data-type object along with an offset into the current structured type. In order to support arbitrarily nested fields, several recursive implementations of data-type access are implemented for the void type. A common idiom is to cycle through the elements of the dictionary and perform a specific operation based on the data-type object stored at the given offset. These offsets can be arbitrary numbers. Therefore, the possibility of encountering mis- aligned data must be recognized and taken into account if necessary.

6.1.3 N-D Iterators

A very common operation in much of NumPy code is the need to iterate over all the elements of a general, strided, N-dimensional array. This operation of a general-purpose N-dimensional loop is abstracted in the notion of an iterator object. To write an N-dimensional loop, you only have to create an iterator object from an ndarray, work with the dataptr member of the iterator object structure and call the macro *PyArray_ITER_NEXT* (it) on the iterator object to move to the next element. The "next" element is always in C-contiguous order. The macro works by first special casing the C-contiguous, 1-D, and 2-D cases which work very simply.

For the general case, the iteration works by keeping track of a list of coordinate counters in the iterator object. At each iteration, the last coordinate counter is increased (starting from 0). If this counter is smaller than one less than the size of the array in that dimension (a pre-computed and stored value), then the counter is increased and the dataptr member is increased by the strides in that dimension and the macro ends. If the end of a dimension is reached, the counter for the last dimension is reset to zero and the dataptr is moved back to the beginning of that dimension by subtracting the strides value times one less than the number of elements in that dimension (this is also pre-computed and stored in the backstrides member of the iterator object). In this case, the macro does not end, but a local dimension counter is decremented so that the next-to-last dimension replaces the role that the last dimension played and the previously-described tests are executed again on the next-to-last dimension. In this way, the dataptr is adjusted appropriately for arbitrary striding.

The coordinates member of the *PyArrayIterObject* structure maintains the current N-d counter unless the underlying array is C-contiguous in which case the coordinate counting is by-passed. The index member of the *PyArrayIterObject* keeps track of the current flat index of the iterator. It is updated by the *PyArray_ITER_NEXT* macro.

6.1.4 Broadcasting

In Numeric, broadcasting was implemented in several lines of code buried deep in ufuncobject.c. In NumPy, the notion of broadcasting has been abstracted so that it can be performed in multiple places. Broadcasting is handled by the function *PyArray_Broadcast*. This function requires a *PyArrayMultiIterObject* (or something that is a binary equivalent) to be passed in. The *PyArrayMultiIterObject* keeps track of the broadcast number of dimensions and size in each dimension along with the total size of the broadcast result. It also keeps track of the number of arrays being broadcast and a pointer to an iterator for each of the arrays being broadcast.

The *PyArray_Broadcast* function takes the iterators that have already been defined and uses them to determine the broadcast shape in each dimension (to create the iterators at the same time that broadcasting occurs then use the `PyMultiIter_New` function). Then, the iterators are adjusted so that each iterator thinks it is iterating over an array with the broadcast size. This is done by adjusting the iterators number of dimensions, and the shape in each dimension. This works because the iterator strides are also adjusted. Broadcasting only adjusts (or adds) length-1 dimensions. For these dimensions, the strides variable is simply set to 0 so that the data-pointer for the iterator over that array doesn't move as the broadcasting operation operates over the extended dimension.

Broadcasting was always implemented in Numeric using 0-valued strides for the extended dimensions. It is done in exactly the same way in NumPy. The big difference is that now the array of strides is kept track of in a *PyArrayIterObject*, the iterators involved in a broadcast result are kept track of in a *PyArrayMultiIterObject*, and the `PyArray_BroadCast` call implements the broad-casting rules.

6.1.5 Array Scalars

The array scalars offer a hierarchy of Python types that allow a one- to-one correspondence between the data-type stored in an array and the Python-type that is returned when an element is extracted from the array. An exception to this rule was made with object arrays. Object arrays are heterogeneous collections of arbitrary Python objects. When you select an item from an object array, you get back the original Python object (and not an object array scalar which does exist but is rarely used for practical purposes).

The array scalars also offer the same methods and attributes as arrays with the intent that the same code can be used to support arbitrary dimensions (including 0-dimensions). The array scalars are read-only (immutable) with the exception of the void scalar which can also be written to so that structured array field setting works more naturally (a[0]['f1'] = `value`).

6.1.6 Indexing

All python indexing operations `arr[index]` are organized by first preparing the index and finding the index type. The supported index types are:

- integer
- newaxis
- slice
- ellipsis
- integer arrays/array-likes (fancy)
- boolean (single boolean array); if there is more than one boolean array as index or the shape does not match exactly, the boolean array will be converted to an integer array instead.
- 0-d boolean (and also integer); 0-d boolean arrays are a special case which has to be handled in the advanced indexing code. They signal that a 0-d boolean array had to be interpreted as an integer array.

As well as the scalar array special case signaling that an integer array was interpreted as an integer index, which is important because an integer array index forces a copy but is ignored if a scalar is returned (full integer index). The prepared index is guaranteed to be valid with the exception of out of bound values and broadcasting errors for advanced indexing. This includes that an ellipsis is added for incomplete indices for example when a two dimensional array is indexed with a single integer.

The next step depends on the type of index which was found. If all dimensions are indexed with an integer a scalar is returned or set. A single boolean indexing array will call specialized boolean functions. Indices containing an ellipsis or slice but no advanced indexing will always create a view into the old array by calculating the new strides and memory offset. This view can then either be returned or, for assignments, filled using `PyArray_CopyObject`. Note that *PyArray_CopyObject* may also be called on temporary arrays in other branches to support complicated assignments when the array is of object dtype.

Advanced indexing

By far the most complex case is advanced indexing, which may or may not be combined with typical view based indexing. Here integer indices are interpreted as view based. Before trying to understand this, you may want to make yourself familiar with its subtleties. The advanced indexing code has three different branches and one special case:

- There is one indexing array and it, as well as the assignment array, can be iterated trivially. For example they may be contiguous. Also the indexing array must be of `intp` type and the value array in assignments should be of the correct type. This is purely a fast path.
- There are only integer array indices so that no subarray exists.

- View based and advanced indexing is mixed. In this case the view based indexing defines a collection of subarrays that are combined by the advanced indexing. For example, `arr[[1, 2, 3], :]` is created by vertically stacking the subarrays `arr[1, :]`, `arr[2,:]`, and `arr[3, :]`.
- There is a subarray but it has exactly one element. This case can be handled as if there is no subarray, but needs some care during setup.

Deciding what case applies, checking broadcasting, and determining the kind of transposition needed are all done in *PyArray_MapIterNew*. After setting up, there are two cases. If there is no subarray or it only has one element, no subarray iteration is necessary and an iterator is prepared which iterates all indexing arrays *as well as* the result or value array. If there is a subarray, there are three iterators prepared. One for the indexing arrays, one for the result or value array (minus its subarray), and one for the subarrays of the original and the result/assignment array. The first two iterators give (or allow calculation) of the pointers into the start of the subarray, which then allows to restart the subarray iteration.

When advanced indices are next to each other transposing may be necessary. All necessary transposing is handled by `PyArray_MapIterSwapAxes` and has to be handled by the caller unless *PyArray_MapIterNew* is asked to allocate the result.

After preparation, getting and setting is relatively straight forward, although the different modes of iteration need to be considered. Unless there is only a single indexing array during item getting, the validity of the indices is checked beforehand. Otherwise it is handled in the inner loop itself for optimization.

6.1.7 Universal Functions

Universal functions are callable objects that take N inputs and produce M outputs by wrapping basic 1-D loops that work element-by-element into full easy-to use functions that seamlessly implement broadcasting, type-checking and buffered coercion, and output-argument handling. New universal functions are normally created in C, although there is a mechanism for creating ufuncs from Python functions (*`frompyfunc`*). The user must supply a 1-D loop that implements the basic function taking the input scalar values and placing the resulting scalars into the appropriate output slots as explained in implementation.

Setup

Every ufunc calculation involves some overhead related to setting up the calculation. The practical significance of this overhead is that even though the actual calculation of the ufunc is very fast, you will be able to write array and type-specific code that will work faster for small arrays than the ufunc. In particular, using ufuncs to perform many calculations on 0-D arrays will be slower than other Python-based solutions (the silently-imported scalarmath module exists precisely to give array scalars the look-and-feel of ufunc based calculations with significantly reduced overhead).

When a ufunc is called, many things must be done. The information collected from these setup operations is stored in a loop-object. This loop object is a C-structure (that could become a Python object but is not initialized as such because it is only used internally). This loop object has the layout needed to be used with PyArray_Broadcast so that the broadcasting can be handled in the same way as it is handled in other sections of code.

The first thing done is to look-up in the thread-specific global dictionary the current values for the buffer-size, the error mask, and the associated error object. The state of the error mask controls what happens when an error condition is found. It should be noted that checking of the hardware error flags is only performed after each 1-D loop is executed. This means that if the input and output arrays are contiguous and of the correct type so that a single 1-D loop is performed, then the flags may not be checked until all elements of the array have been calculated. Looking up these values in a thread- specific dictionary takes time which is easily ignored for all but very small arrays.

After checking, the thread-specific global variables, the inputs are evaluated to determine how the ufunc should proceed and the input and output arrays are constructed if necessary. Any inputs which are not arrays are converted to arrays (using context if necessary). Which of the inputs are scalars (and therefore converted to 0-D arrays) is noted.

Next, an appropriate 1-D loop is selected from the 1-D loops available to the ufunc based on the input array types. This 1-D loop is selected by trying to match the signature of the data-types of the inputs against the available signatures. The signatures corresponding to built-in types are stored in the types member of the ufunc structure. The signatures corresponding to user-defined types are stored in a linked-list of function-information with the head element stored as a `CObject` in the userloops dictionary keyed by the data-type number (the first user-defined type in the argument list is used as the key). The signatures are searched until a signature is found to which the input arrays can all be cast safely (ignoring any scalar arguments which are not allowed to determine the type of the result). The implication of this search procedure is that "lesser types" should be placed below "larger types" when the signatures are stored. If no 1-D loop is found, then an error is reported. Otherwise, the argument_list is updated with the stored signature — in case casting is necessary and to fix the output types assumed by the 1-D loop.

If the ufunc has 2 inputs and 1 output and the second input is an Object array then a special-case check is performed so that NotImplemented is returned if the second input is not an ndarray, has the __array_priority__ attribute, and has an __r{op}__ special method. In this way, Python is signaled to give the other object a chance to complete the operation instead of using generic object-array calculations. This allows (for example) sparse matrices to override the multiplication operator 1-D loop.

For input arrays that are smaller than the specified buffer size, copies are made of all non-contiguous, mis-aligned, or out-of- byteorder arrays to ensure that for small arrays, a single loop is used. Then, array iterators are created for all the input arrays and the resulting collection of iterators is broadcast to a single shape.

The output arguments (if any) are then processed and any missing return arrays are constructed. If any provided output array doesn't have the correct type (or is mis-aligned) and is smaller than the buffer size, then a new output array is constructed with the special `WRITEBACKIFCOPY` flag set. At the end of the function, *`PyArray_ResolveWritebackIfCopy`* is called so that its contents will be copied back into the output array. Iterators for the output arguments are then processed.

Finally, the decision is made about how to execute the looping mechanism to ensure that all elements of the input arrays are combined to produce the output arrays of the correct type. The options for loop execution are one-loop (for contiguous, aligned, and correct data type), strided-loop (for non-contiguous but still aligned and correct data type), and a buffered loop (for mis-aligned or incorrect data type situations). Depending on which execution method is called for, the loop is then setup and computed.

Function call

This section describes how the basic universal function computation loop is setup and executed for each of the three different kinds of execution. If `NPY_ALLOW_THREADS` is defined during compilation, then as long as no object arrays are involved, the Python Global Interpreter Lock (GIL) is released prior to calling the loops. It is re-acquired if necessary to handle error conditions. The hardware error flags are checked only after the 1-D loop is completed.

One Loop

This is the simplest case of all. The ufunc is executed by calling the underlying 1-D loop exactly once. This is possible only when we have aligned data of the correct type (including byte-order) for both input and output and all arrays have uniform strides (either contiguous, 0-D, or 1-D). In this case, the 1-D computational loop is called once to compute the calculation for the entire array. Note that the hardware error flags are only checked after the entire calculation is complete.

Strided Loop

When the input and output arrays are aligned and of the correct type, but the striding is not uniform (non-contiguous and 2-D or larger), then a second looping structure is employed for the calculation. This approach converts all of the iterators for the input and output arguments to iterate over all but the largest dimension. The inner loop is then handled

by the underlying 1-D computational loop. The outer loop is a standard iterator loop on the converted iterators. The hardware error flags are checked after each 1-D loop is completed.

Buffered Loop

This is the code that handles the situation whenever the input and/or output arrays are either misaligned or of the wrong data-type (including being byte-swapped) from what the underlying 1-D loop expects. The arrays are also assumed to be non-contiguous. The code works very much like the strided-loop except for the inner 1-D loop is modified so that pre-processing is performed on the inputs and post- processing is performed on the outputs in bufsize chunks (where bufsize is a user-settable parameter). The underlying 1-D computational loop is called on data that is copied over (if it needs to be). The setup code and the loop code is considerably more complicated in this case because it has to handle:

- memory allocation of the temporary buffers
- deciding whether or not to use buffers on the input and output data (mis-aligned and/or wrong data-type)
- copying and possibly casting data for any inputs or outputs for which buffers are necessary.
- special-casing Object arrays so that reference counts are properly handled when copies and/or casts are necessary.
- breaking up the inner 1-D loop into bufsize chunks (with a possible remainder).

Again, the hardware error flags are checked at the end of each 1-D loop.

Final output manipulation

Ufuncs allow other array-like classes to be passed seamlessly through the interface in that inputs of a particular class will induce the outputs to be of that same class. The mechanism by which this works is the following. If any of the inputs are not ndarrays and define the *__array_wrap__* method, then the class with the largest *__array_priority__* attribute determines the type of all the outputs (with the exception of any output arrays passed in). The *__array_wrap__* method of the input array will be called with the ndarray being returned from the ufunc as it's input. There are two calling styles of the *__array_wrap__* function supported. The first takes the ndarray as the first argument and a tuple of "context" as the second argument. The context is (ufunc, arguments, output argument number). This is the first call tried. If a TypeError occurs, then the function is called with just the ndarray as the first argument.

Methods

There are three methods of ufuncs that require calculation similar to the general-purpose ufuncs. These are reduce, accumulate, and reduceat. Each of these methods requires a setup command followed by a loop. There are four loop styles possible for the methods corresponding to no-elements, one-element, strided-loop, and buffered- loop. These are the same basic loop styles as implemented for the general purpose function call except for the no-element and one-element cases which are special-cases occurring when the input array objects have 0 and 1 elements respectively.

Setup

The setup function for all three methods is `construct_reduce`. This function creates a reducing loop object and fills it with parameters needed to complete the loop. All of the methods only work on ufuncs that take 2-inputs and return 1 output. Therefore, the underlying 1-D loop is selected assuming a signature of [`otype`, `otype`, `otype`] where `otype` is the requested reduction data-type. The buffer size and error handling is then retrieved from (per-thread) global storage. For small arrays that are mis-aligned or have incorrect data-type, a copy is made so that the un-buffered section of code is used. Then, the looping strategy is selected. If there is 1 element or 0 elements in the array, then a simple looping method is selected. If the array is not mis-aligned and has the correct data-type, then

strided looping is selected. Otherwise, buffered looping must be performed. Looping parameters are then established, and the return array is constructed. The output array is of a different shape depending on whether the method is reduce, accumulate, or reduceat. If an output array is already provided, then it's shape is checked. If the output array is not C-contiguous, aligned, and of the correct data type, then a temporary copy is made with the WRITEBACKIFCOPY flag set. In this way, the methods will be able to work with a well-behaved output array but the result will be copied back into the true output array when `PyArray_ResolveWritebackIfCopy` is called at function completion. Finally, iterators are set up to loop over the correct axis (depending on the value of axis provided to the method) and the setup routine returns to the actual computation routine.

Reduce

All of the ufunc methods use the same underlying 1-D computational loops with input and output arguments adjusted so that the appropriate reduction takes place. For example, the key to the functioning of reduce is that the 1-D loop is called with the output and the second input pointing to the same position in memory and both having a step- size of 0. The first input is pointing to the input array with a step- size given by the appropriate stride for the selected axis. In this way, the operation performed is

$$
\begin{aligned}
o &= i[0] \\
o &= i[k]\text{<op>}o \quad k = 1 \ldots N
\end{aligned}
$$

where $N+1$ is the number of elements in the input, i, o is the output, and $i[k]$ is the k^{th} element of i along the selected axis. This basic operations is repeated for arrays with greater than 1 dimension so that the reduction takes place for every 1-D sub-array along the selected axis. An iterator with the selected dimension removed handles this looping.

For buffered loops, care must be taken to copy and cast data before the loop function is called because the underlying loop expects aligned data of the correct data-type (including byte-order). The buffered loop must handle this copying and casting prior to calling the loop function on chunks no greater than the user-specified bufsize.

Accumulate

The accumulate function is very similar to the reduce function in that the output and the second input both point to the output. The difference is that the second input points to memory one stride behind the current output pointer. Thus, the operation performed is

$$
\begin{aligned}
o[0] &= i[0] \\
o[k] &= i[k]\text{<op>}o[k-1] \quad k = 1 \ldots N.
\end{aligned}
$$

The output has the same shape as the input and each 1-D loop operates over N elements when the shape in the selected axis is $N+1$. Again, buffered loops take care to copy and cast the data before calling the underlying 1-D computational loop.

Reduceat

The reduceat function is a generalization of both the reduce and accumulate functions. It implements a reduce over ranges of the input array specified by indices. The extra indices argument is checked to be sure that every input is not too large for the input array along the selected dimension before the loop calculations take place. The loop implementation is handled using code that is very similar to the reduce code repeated as many times as there are elements in the indices input. In particular: the first input pointer passed to the underlying 1-D computational loop points to the input array at the correct location indicated by the index array. In addition, the output pointer and the second input pointer passed to the underlying 1-D loop point to the same position in memory. The size of the 1-D computational loop is fixed to be the difference between the current index and the next index (when the current index

is the last index, then the next index is assumed to be the length of the array along the selected dimension). In this way, the 1-D loop will implement a reduce over the specified indices.

Mis-aligned or a loop data-type that does not match the input and/or output data-type is handled using buffered code where-in data is copied to a temporary buffer and cast to the correct data-type if necessary prior to calling the underlying 1-D function. The temporary buffers are created in (element) sizes no bigger than the user settable buffer-size value. Thus, the loop must be flexible enough to call the underlying 1-D computational loop enough times to complete the total calculation in chunks no bigger than the buffer-size.

6.2 Internal organization of numpy arrays

It helps to understand a bit about how numpy arrays are handled under the covers to help understand numpy better. This section will not go into great detail. Those wishing to understand the full details are referred to Travis Oliphant's book "Guide to NumPy".

NumPy arrays consist of two major components, the raw array data (from now on, referred to as the data buffer), and the information about the raw array data. The data buffer is typically what people think of as arrays in C or Fortran, a contiguous (and fixed) block of memory containing fixed sized data items. NumPy also contains a significant set of data that describes how to interpret the data in the data buffer. This extra information contains (among other things):

1. The basic data element's size in bytes
2. The start of the data within the data buffer (an offset relative to the beginning of the data buffer).
3. The number of dimensions and the size of each dimension
4. The separation between elements for each dimension (the 'stride'). This does not have to be a multiple of the element size
5. The byte order of the data (which may not be the native byte order)
6. Whether the buffer is read-only
7. Information (via the dtype object) about the interpretation of the basic data element. The basic data element may be as simple as a int or a float, or it may be a compound object (e.g., struct-like), a fixed character field, or Python object pointers.
8. Whether the array is to interpreted as C-order or Fortran-order.

This arrangement allow for very flexible use of arrays. One thing that it allows is simple changes of the metadata to change the interpretation of the array buffer. Changing the byteorder of the array is a simple change involving no rearrangement of the data. The shape of the array can be changed very easily without changing anything in the data buffer or any data copying at all

Among other things that are made possible is one can create a new array metadata object that uses the same data buffer to create a new view of that data buffer that has a different interpretation of the buffer (e.g., different shape, offset, byte order, strides, etc) but shares the same data bytes. Many operations in numpy do just this such as slices. Other operations, such as transpose, don't move data elements around in the array, but rather change the information about the shape and strides so that the indexing of the array changes, but the data in the doesn't move.

Typically these new versions of the array metadata but the same data buffer are new 'views' into the data buffer. There is a different ndarray object, but it uses the same data buffer. This is why it is necessary to force copies through use of the .copy() method if one really wants to make a new and independent copy of the data buffer.

New views into arrays mean the object reference counts for the data buffer increase. Simply doing away with the original array object will not remove the data buffer if other views of it still exist.

6.3 Multidimensional Array Indexing Order Issues

What is the right way to index multi-dimensional arrays? Before you jump to conclusions about the one and true way to index multi-dimensional arrays, it pays to understand why this is a confusing issue. This section will try to explain in detail how numpy indexing works and why we adopt the convention we do for images, and when it may be appropriate to adopt other conventions.

The first thing to understand is that there are two conflicting conventions for indexing 2-dimensional arrays. Matrix notation uses the first index to indicate which row is being selected and the second index to indicate which column is selected. This is opposite the geometrically oriented-convention for images where people generally think the first index represents x position (i.e., column) and the second represents y position (i.e., row). This alone is the source of much confusion; matrix-oriented users and image-oriented users expect two different things with regard to indexing.

The second issue to understand is how indices correspond to the order the array is stored in memory. In Fortran the first index is the most rapidly varying index when moving through the elements of a two dimensional array as it is stored in memory. If you adopt the matrix convention for indexing, then this means the matrix is stored one column at a time (since the first index moves to the next row as it changes). Thus Fortran is considered a Column-major language. C has just the opposite convention. In C, the last index changes most rapidly as one moves through the array as stored in memory. Thus C is a Row-major language. The matrix is stored by rows. Note that in both cases it presumes that the matrix convention for indexing is being used, i.e., for both Fortran and C, the first index is the row. Note this convention implies that the indexing convention is invariant and that the data order changes to keep that so.

But that's not the only way to look at it. Suppose one has large two-dimensional arrays (images or matrices) stored in data files. Suppose the data are stored by rows rather than by columns. If we are to preserve our index convention (whether matrix or image) that means that depending on the language we use, we may be forced to reorder the data if it is read into memory to preserve our indexing convention. For example if we read row-ordered data into memory without reordering, it will match the matrix indexing convention for C, but not for Fortran. Conversely, it will match the image indexing convention for Fortran, but not for C. For C, if one is using data stored in row order, and one wants to preserve the image index convention, the data must be reordered when reading into memory.

In the end, which you do for Fortran or C depends on which is more important, not reordering data or preserving the indexing convention. For large images, reordering data is potentially expensive, and often the indexing convention is inverted to avoid that.

The situation with numpy makes this issue yet more complicated. The internal machinery of numpy arrays is flexible enough to accept any ordering of indices. One can simply reorder indices by manipulating the internal stride information for arrays without reordering the data at all. NumPy will know how to map the new index order to the data without moving the data.

So if this is true, why not choose the index order that matches what you most expect? In particular, why not define row-ordered images to use the image convention? (This is sometimes referred to as the Fortran convention vs the C convention, thus the 'C' and 'FORTRAN' order options for array ordering in numpy.) The drawback of doing this is potential performance penalties. It's common to access the data sequentially, either implicitly in array operations or explicitly by looping over rows of an image. When that is done, then the data will be accessed in non-optimal order. As the first index is incremented, what is actually happening is that elements spaced far apart in memory are being sequentially accessed, with usually poor memory access speeds. For example, for a two dimensional image 'im' defined so that im[0, 10] represents the value at x=0, y=10. To be consistent with usual Python behavior then im[0] would represent a column at x=0. Yet that data would be spread over the whole array since the data are stored in row order. Despite the flexibility of numpy's indexing, it can't really paper over the fact basic operations are rendered inefficient because of data order or that getting contiguous subarrays is still awkward (e.g., im[:,0] for the first row, vs im[0]), thus one can't use an idiom such as for row in im; for col in im does work, but doesn't yield contiguous column data.

As it turns out, numpy is smart enough when dealing with ufuncs to determine which index is the most rapidly varying one in memory and uses that for the innermost loop. Thus for ufuncs there is no large intrinsic advantage to either approach in most cases. On the other hand, use of .flat with an FORTRAN ordered array will lead to non-optimal memory access as adjacent elements in the flattened array (iterator, actually) are not contiguous in memory.

Indeed, the fact is that Python indexing on lists and other sequences naturally leads to an outside-to inside ordering (the first index gets the largest grouping, the next the next largest, and the last gets the smallest element). Since image data are normally stored by rows, this corresponds to position within rows being the last item indexed.

If you do want to use Fortran ordering realize that there are two approaches to consider: 1) accept that the first index is just not the most rapidly changing in memory and have all your I/O routines reorder your data when going from memory to disk or visa versa, or use numpy's mechanism for mapping the first index to the most rapidly varying data. We recommend the former if possible. The disadvantage of the latter is that many of numpy's functions will yield arrays without Fortran ordering unless you are careful to use the 'order' keyword. Doing this would be highly inconvenient.

Otherwise we recommend simply learning to reverse the usual order of indices when accessing elements of an array. Granted, it goes against the grain, but it is more in line with Python semantics and the natural order of the data.

CHAPTER

SEVEN

NUMPY AND SWIG

7.0.1 Introduction

The Simple Wrapper and Interface Generator (or SWIG) is a powerful tool for generating wrapper code for interfacing to a wide variety of scripting languages. SWIG can parse header files, and using only the code prototypes, create an interface to the target language. But SWIG is not omnipotent. For example, it cannot know from the prototype:

```
double rms(double* seq, int n);
```

what exactly `seq` is. Is it a single value to be altered in-place? Is it an array, and if so what is its length? Is it input-only? Output-only? Input-output? SWIG cannot determine these details, and does not attempt to do so.

If we designed `rms`, we probably made it a routine that takes an input-only array of length `n` of `double` values called `seq` and returns the root mean square. The default behavior of SWIG, however, will be to create a wrapper function that compiles, but is nearly impossible to use from the scripting language in the way the C routine was intended.

For Python, the preferred way of handling contiguous (or technically, *strided*) blocks of homogeneous data is with NumPy, which provides full object-oriented access to multidimensial arrays of data. Therefore, the most logical Python interface for the `rms` function would be (including doc string):

```
def rms(seq):
    """
    rms: return the root mean square of a sequence
    rms(numpy.ndarray) -> double
    rms(list) -> double
    rms(tuple) -> double
    """
```

where `seq` would be a NumPy array of `double` values, and its length `n` would be extracted from `seq` internally before being passed to the C routine. Even better, since NumPy supports construction of arrays from arbitrary Python sequences, `seq` itself could be a nearly arbitrary sequence (so long as each element can be converted to a `double`) and the wrapper code would internally convert it to a NumPy array before extracting its data and length.

SWIG allows these types of conversions to be defined via a mechanism called *typemaps*. This document provides information on how to use `numpy.i`, a SWIG interface file that defines a series of typemaps intended to make the type of array-related conversions described above relatively simple to implement. For example, suppose that the `rms` function prototype defined above was in a header file named `rms.h`. To obtain the Python interface discussed above, your SWIG interface file would need the following:

```
%{
#define SWIG_FILE_WITH_INIT
#include "rms.h"
%}
```

(continues on next page)

(continued from previous page)

```
%include "numpy.i"

%init %{
import_array();
%}

%apply (double* IN_ARRAY1, int DIM1) {(double* seq, int n)};
%include "rms.h"
```

Typemaps are keyed off a list of one or more function arguments, either by type or by type and name. We will refer to such lists as *signatures*. One of the many typemaps defined by `numpy.i` is used above and has the signature `(double* IN_ARRAY1, int DIM1)`. The argument names are intended to suggest that the `double*` argument is an input array of one dimension and that the `int` represents the size of that dimension. This is precisely the pattern in the `rms` prototype.

Most likely, no actual prototypes to be wrapped will have the argument names `IN_ARRAY1` and `DIM1`. We use the SWIG `%apply` directive to apply the typemap for one-dimensional input arrays of type `double` to the actual prototype used by `rms`. Using `numpy.i` effectively, therefore, requires knowing what typemaps are available and what they do.

A SWIG interface file that includes the SWIG directives given above will produce wrapper code that looks something like:

```
 1 PyObject *_wrap_rms(PyObject *args) {
 2   PyObject *resultobj = 0;
 3   double *arg1 = (double *) 0 ;
 4   int arg2 ;
 5   double result;
 6   PyArrayObject *array1 = NULL ;
 7   int is_new_object1 = 0 ;
 8   PyObject * obj0 = 0 ;
 9
10   if (!PyArg_ParseTuple(args,(char *)"O:rms",&obj0)) SWIG_fail;
11   {
12     array1 = obj_to_array_contiguous_allow_conversion(
13                  obj0, NPY_DOUBLE, &is_new_object1);
14     npy_intp size[1] = {
15       -1
16     };
17     if (!array1 || !require_dimensions(array1, 1) ||
18         !require_size(array1, size, 1)) SWIG_fail;
19     arg1 = (double*) array1->data;
20     arg2 = (int) array1->dimensions[0];
21   }
22   result = (double)rms(arg1,arg2);
23   resultobj = SWIG_From_double((double)(result));
24   {
25     if (is_new_object1 && array1) Py_DECREF(array1);
26   }
27   return resultobj;
28 fail:
29   {
30     if (is_new_object1 && array1) Py_DECREF(array1);
31   }
32   return NULL;
33 }
```

The typemaps from `numpy.i` are responsible for the following lines of code: 12–20, 25 and 30. Line 10 parses the input to the `rms` function. From the format string `"O:rms"`, we can see that the argument list is expected to be a single Python object (specified by the `O` before the colon) and whose pointer is stored in `obj0`. A number of functions, supplied by `numpy.i`, are called to make and check the (possible) conversion from a generic Python object to a NumPy array. These functions are explained in the section *Helper Functions*, but hopefully their names are self-explanatory. At line 12 we use `obj0` to construct a NumPy array. At line 17, we check the validity of the result: that it is non-null and that it has a single dimension of arbitrary length. Once these states are verified, we extract the data buffer and length in lines 19 and 20 so that we can call the underlying C function at line 22. Line 25 performs memory management for the case where we have created a new array that is no longer needed.

This code has a significant amount of error handling. Note the `SWIG_fail` is a macro for `goto fail`, referring to the label at line 28. If the user provides the wrong number of arguments, this will be caught at line 10. If construction of the NumPy array fails or produces an array with the wrong number of dimensions, these errors are caught at line 17. And finally, if an error is detected, memory is still managed correctly at line 30.

Note that if the C function signature was in a different order:

```
double rms(int n, double* seq);
```

that SWIG would not match the typemap signature given above with the argument list for `rms`. Fortunately, `numpy.i` has a set of typemaps with the data pointer given last:

```
%apply (int DIM1, double* IN_ARRAY1) {(int n, double* seq)};
```

This simply has the effect of switching the definitions of `arg1` and `arg2` in lines 3 and 4 of the generated code above, and their assignments in lines 19 and 20.

7.0.2 Using numpy.i

The `numpy.i` file is currently located in the `tools/swig` sub-directory under the `numpy` installation directory. Typically, you will want to copy it to the directory where you are developing your wrappers.

A simple module that only uses a single SWIG interface file should include the following:

```
%{
#define SWIG_FILE_WITH_INIT
%}
%include "numpy.i"
%init %{
import_array();
%}
```

Within a compiled Python module, `import_array()` should only get called once. This could be in a C/C++ file that you have written and is linked to the module. If this is the case, then none of your interface files should `#define SWIG_FILE_WITH_INIT` or call `import_array()`. Or, this initialization call could be in a wrapper file generated by SWIG from an interface file that has the `%init` block as above. If this is the case, and you have more than one SWIG interface file, then only one interface file should `#define SWIG_FILE_WITH_INIT` and call `import_array()`.

7.0.3 Available Typemaps

The typemap directives provided by `numpy.i` for arrays of different data types, say `double` and `int`, and dimensions of different types, say `int` or `long`, are identical to one another except for the C and NumPy type specifications. The typemaps are therefore implemented (typically behind the scenes) via a macro:

```
%numpy_typemaps(DATA_TYPE, DATA_TYPECODE, DIM_TYPE)
```

that can be invoked for appropriate `(DATA_TYPE, DATA_TYPECODE, DIM_TYPE)` triplets. For example:

```
%numpy_typemaps(double, NPY_DOUBLE, int)
%numpy_typemaps(int,    NPY_INT   , int)
```

The `numpy.i` interface file uses the `%numpy_typemaps` macro to implement typemaps for the following C data types and `int` dimension types:

- `signed char`
- `unsigned char`
- `short`
- `unsigned short`
- `int`
- `unsigned int`
- `long`
- `unsigned long`
- `long long`
- `unsigned long long`
- `float`
- `double`

In the following descriptions, we reference a generic `DATA_TYPE`, which could be any of the C data types listed above, and `DIM_TYPE` which should be one of the many types of integers.

The typemap signatures are largely differentiated on the name given to the buffer pointer. Names with `FARRAY` are for Fortran-ordered arrays, and names with `ARRAY` are for C-ordered (or 1D arrays).

Input Arrays

Input arrays are defined as arrays of data that are passed into a routine but are not altered in-place or returned to the user. The Python input array is therefore allowed to be almost any Python sequence (such as a list) that can be converted to the requested type of array. The input array signatures are

1D:

- `( DATA_TYPE IN_ARRAY1[ANY] )`
- `( DATA_TYPE* IN_ARRAY1, int DIM1 )`
- `( int DIM1, DATA_TYPE* IN_ARRAY1 )`

2D:

- `( DATA_TYPE IN_ARRAY2[ANY][ANY] )`
- `( DATA_TYPE* IN_ARRAY2, int DIM1, int DIM2 )`
- `( int DIM1, int DIM2, DATA_TYPE* IN_ARRAY2 )`
- `( DATA_TYPE* IN_FARRAY2, int DIM1, int DIM2 )`
- `( int DIM1, int DIM2, DATA_TYPE* IN_FARRAY2 )`

3D:

- `( DATA_TYPE IN_ARRAY3[ANY][ANY][ANY] )`
- `( DATA_TYPE* IN_ARRAY3, int DIM1, int DIM2, int DIM3 )`
- `( int DIM1, int DIM2, int DIM3, DATA_TYPE* IN_ARRAY3 )`
- `( DATA_TYPE* IN_FARRAY3, int DIM1, int DIM2, int DIM3 )`
- `( int DIM1, int DIM2, int DIM3, DATA_TYPE* IN_FARRAY3 )`

4D:

- `(DATA_TYPE IN_ARRAY4[ANY][ANY][ANY][ANY])`
- `(DATA_TYPE* IN_ARRAY4, DIM_TYPE DIM1, DIM_TYPE DIM2, DIM_TYPE DIM3, DIM_TYPE DIM4)`
- `(DIM_TYPE DIM1, DIM_TYPE DIM2, DIM_TYPE DIM3, , DIM_TYPE DIM4, DATA_TYPE* IN_ARRAY4)`
- `(DATA_TYPE* IN_FARRAY4, DIM_TYPE DIM1, DIM_TYPE DIM2, DIM_TYPE DIM3, DIM_TYPE DIM4)`
- `(DIM_TYPE DIM1, DIM_TYPE DIM2, DIM_TYPE DIM3, DIM_TYPE DIM4, DATA_TYPE* IN_FARRAY4)`

The first signature listed, `( DATA_TYPE IN_ARRAY[ANY] )` is for one-dimensional arrays with hard-coded dimensions. Likewise, `( DATA_TYPE IN_ARRAY2[ANY][ANY] )` is for two-dimensional arrays with hard-coded dimensions, and similarly for three-dimensional.

In-Place Arrays

In-place arrays are defined as arrays that are modified in-place. The input values may or may not be used, but the values at the time the function returns are significant. The provided Python argument must therefore be a NumPy array of the required type. The in-place signatures are

1D:

- `( DATA_TYPE INPLACE_ARRAY1[ANY] )`
- `( DATA_TYPE* INPLACE_ARRAY1, int DIM1 )`
- `( int DIM1, DATA_TYPE* INPLACE_ARRAY1 )`

2D:

- `( DATA_TYPE INPLACE_ARRAY2[ANY][ANY] )`
- `( DATA_TYPE* INPLACE_ARRAY2, int DIM1, int DIM2 )`
- `( int DIM1, int DIM2, DATA_TYPE* INPLACE_ARRAY2 )`
- `( DATA_TYPE* INPLACE_FARRAY2, int DIM1, int DIM2 )`
- `( int DIM1, int DIM2, DATA_TYPE* INPLACE_FARRAY2 )`

3D:

- `( DATA_TYPE INPLACE_ARRAY3[ANY][ANY][ANY] )`
- `( DATA_TYPE* INPLACE_ARRAY3, int DIM1, int DIM2, int DIM3 )`
- `( int DIM1, int DIM2, int DIM3, DATA_TYPE* INPLACE_ARRAY3 )`
- `( DATA_TYPE* INPLACE_FARRAY3, int DIM1, int DIM2, int DIM3 )`

- `( int DIM1, int DIM2, int DIM3, DATA_TYPE* INPLACE_FARRAY3 )`

4D:

- `(DATA_TYPE INPLACE_ARRAY4[ANY][ANY][ANY][ANY])`
- `(DATA_TYPE* INPLACE_ARRAY4, DIM_TYPE DIM1, DIM_TYPE DIM2, DIM_TYPE DIM3, DIM_TYPE DIM4)`
- `(DIM_TYPE DIM1, DIM_TYPE DIM2, DIM_TYPE DIM3, , DIM_TYPE DIM4, DATA_TYPE* INPLACE_ARRAY4)`
- `(DATA_TYPE* INPLACE_FARRAY4, DIM_TYPE DIM1, DIM_TYPE DIM2, DIM_TYPE DIM3, DIM_TYPE DIM4)`
- `(DIM_TYPE DIM1, DIM_TYPE DIM2, DIM_TYPE DIM3, DIM_TYPE DIM4, DATA_TYPE* INPLACE_FARRAY4)`

These typemaps now check to make sure that the `INPLACE_ARRAY` arguments use native byte ordering. If not, an exception is raised.

There is also a "flat" in-place array for situations in which you would like to modify or process each element, regardless of the number of dimensions. One example is a "quantization" function that quantizes each element of an array in-place, be it 1D, 2D or whatever. This form checks for continuity but allows either C or Fortran ordering.

ND:

- `(DATA_TYPE* INPLACE_ARRAY_FLAT, DIM_TYPE DIM_FLAT)`

Argout Arrays

Argout arrays are arrays that appear in the input arguments in C, but are in fact output arrays. This pattern occurs often when there is more than one output variable and the single return argument is therefore not sufficient. In Python, the conventional way to return multiple arguments is to pack them into a sequence (tuple, list, etc.) and return the sequence. This is what the argout typemaps do. If a wrapped function that uses these argout typemaps has more than one return argument, they are packed into a tuple or list, depending on the version of Python. The Python user does not pass these arrays in, they simply get returned. For the case where a dimension is specified, the python user must provide that dimension as an argument. The argout signatures are

1D:

- `( DATA_TYPE ARGOUT_ARRAY1[ANY] )`
- `( DATA_TYPE* ARGOUT_ARRAY1, int DIM1 )`
- `( int DIM1, DATA_TYPE* ARGOUT_ARRAY1 )`

2D:

- `( DATA_TYPE ARGOUT_ARRAY2[ANY][ANY] )`

3D:

- `( DATA_TYPE ARGOUT_ARRAY3[ANY][ANY][ANY] )`

4D:

- `( DATA_TYPE ARGOUT_ARRAY4[ANY][ANY][ANY][ANY] )`

These are typically used in situations where in C/C++, you would allocate a(n) array(s) on the heap, and call the function to fill the array(s) values. In Python, the arrays are allocated for you and returned as new array objects.

Note that we support `DATA_TYPE*` argout typemaps in 1D, but not 2D or 3D. This is because of a quirk with the SWIG typemap syntax and cannot be avoided. Note that for these types of 1D typemaps, the Python function will take a single argument representing `DIM1`.

Argout View Arrays

Argoutview arrays are for when your C code provides you with a view of its internal data and does not require any memory to be allocated by the user. This can be dangerous. There is almost no way to guarantee that the internal data from the C code will remain in existence for the entire lifetime of the NumPy array that encapsulates it. If the user destroys the object that provides the view of the data before destroying the NumPy array, then using that array may result in bad memory references or segmentation faults. Nevertheless, there are situations, working with large data sets, where you simply have no other choice.

The C code to be wrapped for argoutview arrays are characterized by pointers: pointers to the dimensions and double pointers to the data, so that these values can be passed back to the user. The argoutview typemap signatures are therefore

1D:

- `( DATA_TYPE** ARGOUTVIEW_ARRAY1, DIM_TYPE* DIM1 )`
- `( DIM_TYPE* DIM1, DATA_TYPE** ARGOUTVIEW_ARRAY1 )`

2D:

- `( DATA_TYPE** ARGOUTVIEW_ARRAY2, DIM_TYPE* DIM1, DIM_TYPE* DIM2 )`
- `( DIM_TYPE* DIM1, DIM_TYPE* DIM2, DATA_TYPE** ARGOUTVIEW_ARRAY2 )`
- `( DATA_TYPE** ARGOUTVIEW_FARRAY2, DIM_TYPE* DIM1, DIM_TYPE* DIM2 )`
- `( DIM_TYPE* DIM1, DIM_TYPE* DIM2, DATA_TYPE** ARGOUTVIEW_FARRAY2 )`

3D:

- `( DATA_TYPE** ARGOUTVIEW_ARRAY3, DIM_TYPE* DIM1, DIM_TYPE* DIM2, DIM_TYPE* DIM3)`
- `( DIM_TYPE* DIM1, DIM_TYPE* DIM2, DIM_TYPE* DIM3, DATA_TYPE** ARGOUTVIEW_ARRAY3)`
- `( DATA_TYPE** ARGOUTVIEW_FARRAY3, DIM_TYPE* DIM1, DIM_TYPE* DIM2, DIM_TYPE* DIM3)`
- `( DIM_TYPE* DIM1, DIM_TYPE* DIM2, DIM_TYPE* DIM3, DATA_TYPE** ARGOUTVIEW_FARRAY3)`

4D:

- `(DATA_TYPE** ARGOUTVIEW_ARRAY4, DIM_TYPE* DIM1, DIM_TYPE* DIM2, DIM_TYPE* DIM3, DIM_TYPE* DIM4)`
- `(DIM_TYPE* DIM1, DIM_TYPE* DIM2, DIM_TYPE* DIM3, DIM_TYPE* DIM4, DATA_TYPE** ARGOUTVIEW_ARRAY4)`
- `(DATA_TYPE** ARGOUTVIEW_FARRAY4, DIM_TYPE* DIM1, DIM_TYPE* DIM2, DIM_TYPE* DIM3, DIM_TYPE* DIM4)`
- `(DIM_TYPE* DIM1, DIM_TYPE* DIM2, DIM_TYPE* DIM3, DIM_TYPE* DIM4, DATA_TYPE** ARGOUTVIEW_FARRAY4)`

Note that arrays with hard-coded dimensions are not supported. These cannot follow the double pointer signatures of these typemaps.

Memory Managed Argout View Arrays

A recent addition to `numpy.i` are typemaps that permit argout arrays with views into memory that is managed. See the discussion here.

1D:

- `(DATA_TYPE** ARGOUTVIEWM_ARRAY1, DIM_TYPE* DIM1)`
- `(DIM_TYPE* DIM1, DATA_TYPE** ARGOUTVIEWM_ARRAY1)`

2D:

- `(DATA_TYPE** ARGOUTVIEWM_ARRAY2, DIM_TYPE* DIM1, DIM_TYPE* DIM2)`
- `(DIM_TYPE* DIM1, DIM_TYPE* DIM2, DATA_TYPE** ARGOUTVIEWM_ARRAY2)`
- `(DATA_TYPE** ARGOUTVIEWM_FARRAY2, DIM_TYPE* DIM1, DIM_TYPE* DIM2)`
- `(DIM_TYPE* DIM1, DIM_TYPE* DIM2, DATA_TYPE** ARGOUTVIEWM_FARRAY2)`

3D:

- `(DATA_TYPE** ARGOUTVIEWM_ARRAY3, DIM_TYPE* DIM1, DIM_TYPE* DIM2, DIM_TYPE* DIM3)`
- `(DIM_TYPE* DIM1, DIM_TYPE* DIM2, DIM_TYPE* DIM3, DATA_TYPE** ARGOUTVIEWM_ARRAY3)`
- `(DATA_TYPE** ARGOUTVIEWM_FARRAY3, DIM_TYPE* DIM1, DIM_TYPE* DIM2, DIM_TYPE* DIM3)`
- `(DIM_TYPE* DIM1, DIM_TYPE* DIM2, DIM_TYPE* DIM3, DATA_TYPE** ARGOUTVIEWM_FARRAY3)`

4D:

- `(DATA_TYPE** ARGOUTVIEWM_ARRAY4, DIM_TYPE* DIM1, DIM_TYPE* DIM2, DIM_TYPE* DIM3, DIM_TYPE* DIM4)`
- `(DIM_TYPE* DIM1, DIM_TYPE* DIM2, DIM_TYPE* DIM3, DIM_TYPE* DIM4, DATA_TYPE** ARGOUTVIEWM_ARRAY4)`
- `(DATA_TYPE** ARGOUTVIEWM_FARRAY4, DIM_TYPE* DIM1, DIM_TYPE* DIM2, DIM_TYPE* DIM3, DIM_TYPE* DIM4)`
- `(DIM_TYPE* DIM1, DIM_TYPE* DIM2, DIM_TYPE* DIM3, DIM_TYPE* DIM4, DATA_TYPE** ARGOUTVIEWM_FARRAY4)`

Output Arrays

The `numpy.i` interface file does not support typemaps for output arrays, for several reasons. First, C/C++ return arguments are limited to a single value. This prevents obtaining dimension information in a general way. Second, arrays with hard-coded lengths are not permitted as return arguments. In other words:

```
double[3] newVector(double x, double y, double z);
```

is not legal C/C++ syntax. Therefore, we cannot provide typemaps of the form:

```
%typemap(out) (TYPE[ANY]);
```

If you run into a situation where a function or method is returning a pointer to an array, your best bet is to write your own version of the function to be wrapped, either with `%extend` for the case of class methods or `%ignore` and `%rename` for the case of functions.

Other Common Types: bool

Note that C++ type `bool` is not supported in the list in the *Available Typemaps* section. NumPy bools are a single byte, while the C++ `bool` is four bytes (at least on my system). Therefore:

```
%numpy_typemaps(bool, NPY_BOOL, int)
```

will result in typemaps that will produce code that reference improper data lengths. You can implement the following macro expansion:

```
%numpy_typemaps(bool, NPY_UINT, int)
```

to fix the data length problem, and *Input Arrays* will work fine, but *In-Place Arrays* might fail type-checking.

Other Common Types: complex

Typemap conversions for complex floating-point types is also not supported automatically. This is because Python and NumPy are written in C, which does not have native complex types. Both Python and NumPy implement their own (essentially equivalent) `struct` definitions for complex variables:

```
/* Python */
typedef struct {double real; double imag;} Py_complex;

/* NumPy */
typedef struct {float  real, imag;} npy_cfloat;
typedef struct {double real, imag;} npy_cdouble;
```

We could have implemented:

```
%numpy_typemaps(Py_complex , NPY_CDOUBLE, int)
%numpy_typemaps(npy_cfloat , NPY_CFLOAT , int)
%numpy_typemaps(npy_cdouble, NPY_CDOUBLE, int)
```

which would have provided automatic type conversions for arrays of type `Py_complex`, `npy_cfloat` and `npy_cdouble`. However, it seemed unlikely that there would be any independent (non-Python, non-NumPy) application code that people would be using SWIG to generate a Python interface to, that also used these definitions for complex types. More likely, these application codes will define their own complex types, or in the case of C++, use `std::complex`. Assuming these data structures are compatible with Python and NumPy complex types, `%numpy_typemap` expansions as above (with the user's complex type substituted for the first argument) should work.

7.0.4 NumPy Array Scalars and SWIG

SWIG has sophisticated type checking for numerical types. For example, if your C/C++ routine expects an integer as input, the code generated by SWIG will check for both Python integers and Python long integers, and raise an overflow error if the provided Python integer is too big to cast down to a C integer. With the introduction of NumPy scalar arrays into your Python code, you might conceivably extract an integer from a NumPy array and attempt to pass this to a SWIG-wrapped C/C++ function that expects an `int`, but the SWIG type checking will not recognize the NumPy array scalar as an integer. (Often, this does in fact work – it depends on whether NumPy recognizes the

integer type you are using as inheriting from the Python integer type on the platform you are using. Sometimes, this means that code that works on a 32-bit machine will fail on a 64-bit machine.)

If you get a Python error that looks like the following:

```
TypeError: in method 'MyClass_MyMethod', argument 2 of type 'int'
```

and the argument you are passing is an integer extracted from a NumPy array, then you have stumbled upon this problem. The solution is to modify the SWIG type conversion system to accept NumPy array scalars in addition to the standard integer types. Fortunately, this capability has been provided for you. Simply copy the file:

```
pyfragments.swg
```

to the working build directory for you project, and this problem will be fixed. It is suggested that you do this anyway, as it only increases the capabilities of your Python interface.

Why is There a Second File?

The SWIG type checking and conversion system is a complicated combination of C macros, SWIG macros, SWIG typemaps and SWIG fragments. Fragments are a way to conditionally insert code into your wrapper file if it is needed, and not insert it if not needed. If multiple typemaps require the same fragment, the fragment only gets inserted into your wrapper code once.

There is a fragment for converting a Python integer to a C `long`. There is a different fragment that converts a Python integer to a C `int`, that calls the routine defined in the `long` fragment. We can make the changes we want here by changing the definition for the `long` fragment. SWIG determines the active definition for a fragment using a "first come, first served" system. That is, we need to define the fragment for `long` conversions prior to SWIG doing it internally. SWIG allows us to do this by putting our fragment definitions in the file `pyfragments.swg`. If we were to put the new fragment definitions in `numpy.i`, they would be ignored.

7.0.5 Helper Functions

The `numpy.i` file contains several macros and routines that it uses internally to build its typemaps. However, these functions may be useful elsewhere in your interface file. These macros and routines are implemented as fragments, which are described briefly in the previous section. If you try to use one or more of the following macros or functions, but your compiler complains that it does not recognize the symbol, then you need to force these fragments to appear in your code using:

```
%fragment("NumPy_Fragments");
```

in your SWIG interface file.

Macros

is_array(a) Evaluates as true if `a` is non-`NULL` and can be cast to a `PyArrayObject*`.

array_type(a) Evaluates to the integer data type code of `a`, assuming `a` can be cast to a `PyArrayObject*`.

array_numdims(a) Evaluates to the integer number of dimensions of `a`, assuming `a` can be cast to a `PyArrayObject*`.

array_dimensions(a) Evaluates to an array of type `npy_intp` and length `array_numdims(a)`, giving the lengths of all of the dimensions of `a`, assuming `a` can be cast to a `PyArrayObject*`.

array_size(a,i) Evaluates to the `i`-th dimension size of `a`, assuming `a` can be cast to a `PyArrayObject*`.

array_strides(a) Evaluates to an array of type `npy_intp` and length `array_numdims(a)`, giving the stridess of all of the dimensions of `a`, assuming `a` can be cast to a `PyArrayObject*`. A stride is the distance in bytes between an element and its immediate neighbor along the same axis.

array_stride(a,i) Evaluates to the `i`-th stride of `a`, assuming `a` can be cast to a `PyArrayObject*`.

array_data(a) Evaluates to a pointer of type `void*` that points to the data buffer of `a`, assuming `a` can be cast to a `PyArrayObject*`.

array_descr(a) Returns a borrowed reference to the dtype property (`PyArray_Descr*`) of `a`, assuming `a` can be cast to a `PyArrayObject*`.

array_flags(a) Returns an integer representing the flags of `a`, assuming `a` can be cast to a `PyArrayObject*`.

array_enableflags(a,f) Sets the flag represented by `f` of `a`, assuming `a` can be cast to a `PyArrayObject*`.

array_is_contiguous(a) Evaluates as true if `a` is a contiguous array. Equivalent to `(PyArray_ISCONTIGUOUS(a))`.

array_is_native(a) Evaluates as true if the data buffer of `a` uses native byte order. Equivalent to `(PyArray_ISNOTSWAPPED(a))`.

array_is_fortran(a) Evaluates as true if `a` is FORTRAN ordered.

Routines

pytype_string()

Return type: `const char*`

Arguments:

- `PyObject* py_obj`, a general Python object.

Return a string describing the type of `py_obj`.

typecode_string()

Return type: `const char*`

Arguments:

- `int typecode`, a NumPy integer typecode.

Return a string describing the type corresponding to the NumPy `typecode`.

type_match()

Return type: `int`

Arguments:

- `int actual_type`, the NumPy typecode of a NumPy array.
- `int desired_type`, the desired NumPy typecode.

Make sure that `actual_type` is compatible with `desired_type`. For example, this allows character and byte types, or int and long types, to match. This is now equivalent to `PyArray_EquivTypenums()`.

obj_to_array_no_conversion()

Return type: `PyArrayObject*`

Arguments:

- `PyObject* input`, a general Python object.
- `int typecode`, the desired NumPy typecode.

Cast `input` to a `PyArrayObject*` if legal, and ensure that it is of type `typecode`. If `input` cannot be cast, or the `typecode` is wrong, set a Python error and return `NULL`.

obj_to_array_allow_conversion()

Return type: `PyArrayObject*`

Arguments:

- `PyObject* input`, a general Python object.
- `int typecode`, the desired NumPy typecode of the resulting array.
- `int* is_new_object`, returns a value of 0 if no conversion performed, else 1.

Convert `input` to a NumPy array with the given `typecode`. On success, return a valid `PyArrayObject*` with the correct type. On failure, the Python error string will be set and the routine returns `NULL`.

make_contiguous()

Return type: `PyArrayObject*`

Arguments:

- `PyArrayObject* ary`, a NumPy array.
- `int* is_new_object`, returns a value of 0 if no conversion performed, else 1.
- `int min_dims`, minimum allowable dimensions.
- `int max_dims`, maximum allowable dimensions.

Check to see if `ary` is contiguous. If so, return the input pointer and flag it as not a new object. If it is not contiguous, create a new `PyArrayObject*` using the original data, flag it as a new object and return the pointer.

make_fortran()

Return type: `PyArrayObject*`

Arguments

- `PyArrayObject* ary`, a NumPy array.
- `int* is_new_object`, returns a value of 0 if no conversion performed, else 1.

Check to see if `ary` is Fortran contiguous. If so, return the input pointer and flag it as not a new object. If it is not Fortran contiguous, create a new `PyArrayObject*` using the original data, flag it as a new object and return the pointer.

obj_to_array_contiguous_allow_conversion()

Return type: `PyArrayObject*`

Arguments:

- `PyObject* input`, a general Python object.
- `int typecode`, the desired NumPy typecode of the resulting array.

- `int* is_new_object`, returns a value of 0 if no conversion performed, else 1.

Convert `input` to a contiguous `PyArrayObject*` of the specified type. If the input object is not a contiguous `PyArrayObject*`, a new one will be created and the new object flag will be set.

obj_to_array_fortran_allow_conversion()

Return type: `PyArrayObject*`

Arguments:

- `PyObject* input`, a general Python object.
- `int typecode`, the desired NumPy typecode of the resulting array.
- `int* is_new_object`, returns a value of 0 if no conversion performed, else 1.

Convert `input` to a Fortran contiguous `PyArrayObject*` of the specified type. If the input object is not a Fortran contiguous `PyArrayObject*`, a new one will be created and the new object flag will be set.

require_contiguous()

Return type: `int`

Arguments:

- `PyArrayObject* ary`, a NumPy array.

Test whether `ary` is contiguous. If so, return 1. Otherwise, set a Python error and return 0.

require_native()

Return type: `int`

Arguments:

- `PyArray_Object* ary`, a NumPy array.

Require that `ary` is not byte-swapped. If the array is not byte-swapped, return 1. Otherwise, set a Python error and return 0.

require_dimensions()

Return type: `int`

Arguments:

- `PyArrayObject* ary`, a NumPy array.
- `int exact_dimensions`, the desired number of dimensions.

Require `ary` to have a specified number of dimensions. If the array has the specified number of dimensions, return 1. Otherwise, set a Python error and return 0.

require_dimensions_n()

Return type: `int`

Arguments:

- `PyArrayObject* ary`, a NumPy array.
- `int* exact_dimensions`, an array of integers representing acceptable numbers of dimensions.
- `int n`, the length of `exact_dimensions`.

Require `ary` to have one of a list of specified number of dimensions. If the array has one of the specified number of dimensions, return 1. Otherwise, set the Python error string and return 0.

require_size()

Return type: `int`

Arguments:

- `PyArrayObject* ary`, a NumPy array.
- `npy_int* size`, an array representing the desired lengths of each dimension.
- `int n`, the length of `size`.

Require `ary` to have a specified shape. If the array has the specified shape, return 1. Otherwise, set the Python error string and return 0.

require_fortran()

Return type: `int`

Arguments:

- `PyArrayObject* ary`, a NumPy array.

Require the given `PyArrayObject` to to be Fortran ordered. If the `PyArrayObject` is already Fortran ordered, do nothing. Else, set the Fortran ordering flag and recompute the strides.

7.0.6 Beyond the Provided Typemaps

There are many C or C++ array/NumPy array situations not covered by a simple `%include "numpy.i"` and subsequent `%apply` directives.

A Common Example

Consider a reasonable prototype for a dot product function:

```
double dot(int len, double* vec1, double* vec2);
```

The Python interface that we want is:

```
def dot(vec1, vec2):
    """
    dot(PyObject,PyObject) -> double
    """
```

The problem here is that there is one dimension argument and two array arguments, and our typemaps are set up for dimensions that apply to a single array (in fact, SWIG does not provide a mechanism for associating `len` with `vec2` that takes two Python input arguments). The recommended solution is the following:

```
%apply (int DIM1, double* IN_ARRAY1) {(int len1, double* vec1),
                                      (int len2, double* vec2)}
%rename (dot) my_dot;
%exception my_dot {
    $action
    if (PyErr_Occurred()) SWIG_fail;
```

(continues on next page)

(continued from previous page)

```
}
%inline %{
double my_dot(int len1, double* vec1, int len2, double* vec2) {
    if (len1 != len2) {
        PyErr_Format(PyExc_ValueError,
                     "Arrays of lengths (%d,%d) given",
                     len1, len2);
        return 0.0;
    }
    return dot(len1, vec1, vec2);
}
%}
```

If the header file that contains the prototype for `double dot()` also contains other prototypes that you want to wrap, so that you need to `%include` this header file, then you will also need a `%ignore dot;` directive, placed after the `%rename` and before the `%include` directives. Or, if the function in question is a class method, you will want to use `%extend` rather than `%inline` in addition to `%ignore`.

A note on error handling: Note that `my_dot` returns a `double` but that it can also raise a Python error. The resulting wrapper function will return a Python float representation of 0.0 when the vector lengths do not match. Since this is not `NULL`, the Python interpreter will not know to check for an error. For this reason, we add the `%exception` directive above for `my_dot` to get the behavior we want (note that `$action` is a macro that gets expanded to a valid call to `my_dot`). In general, you will probably want to write a SWIG macro to perform this task.

Other Situations

There are other wrapping situations in which `numpy.i` may be helpful when you encounter them.

- In some situations, it is possible that you could use the `%numpy_typemaps` macro to implement typemaps for your own types. See the *Other Common Types: bool* or *Other Common Types: complex* sections for examples. Another situation is if your dimensions are of a type other than `int` (say `long` for example):

  ```
  %numpy_typemaps(double, NPY_DOUBLE, long)
  ```

- You can use the code in `numpy.i` to write your own typemaps. For example, if you had a five-dimensional array as a function argument, you could cut-and-paste the appropriate four-dimensional typemaps into your interface file. The modifications for the fourth dimension would be trivial.
- Sometimes, the best approach is to use the `%extend` directive to define new methods for your classes (or overload existing ones) that take a `PyObject*` (that either is or can be converted to a `PyArrayObject*`) instead of a pointer to a buffer. In this case, the helper routines in `numpy.i` can be very useful.
- Writing typemaps can be a bit nonintuitive. If you have specific questions about writing SWIG typemaps for NumPy, the developers of `numpy.i` do monitor the Numpy-discussion and Swig-user mail lists.

A Final Note

When you use the `%apply` directive, as is usually necessary to use `numpy.i`, it will remain in effect until you tell SWIG that it shouldn't be. If the arguments to the functions or methods that you are wrapping have common names, such as `length` or `vector`, these typemaps may get applied in situations you do not expect or want. Therefore, it is always a good idea to add a `%clear` directive after you are done with a specific typemap:

```
%apply (double* IN_ARRAY1, int DIM1) {(double* vector, int length)}
%include "my_header.h"
%clear (double* vector, int length);
```

In general, you should target these typemap signatures specifically where you want them, and then clear them after you are done.

7.0.7 Summary

Out of the box, `numpy.i` provides typemaps that support conversion between NumPy arrays and C arrays:

- That can be one of 12 different scalar types: `signed char`, `unsigned char`, `short`, `unsigned short`, `int`, `unsigned int`, `long`, `unsigned long`, `long long`, `unsigned long long`, `float` and `double`.
- That support 74 different argument signatures for each data type, including:
  - One-dimensional, two-dimensional, three-dimensional and four-dimensional arrays.
  - Input-only, in-place, argout, argoutview, and memory managed argoutview behavior.
  - Hard-coded dimensions, data-buffer-then-dimensions specification, and dimensions-then-data-buffer specification.
  - Both C-ordering ("last dimension fastest") or Fortran-ordering ("first dimension fastest") support for 2D, 3D and 4D arrays.

The `numpy.i` interface file also provides additional tools for wrapper developers, including:

- A SWIG macro (`%numpy_typemaps`) with three arguments for implementing the 74 argument signatures for the user's choice of (1) C data type, (2) NumPy data type (assuming they match), and (3) dimension type.
- Fourteen C macros and fifteen C functions that can be used to write specialized typemaps, extensions, or inlined functions that handle cases not covered by the provided typemaps. Note that the macros and functions are coded specifically to work with the NumPy C/API regardless of NumPy version number, both before and after the deprecation of some aspects of the API after version 1.6.

7.1 Testing the numpy.i Typemaps

7.1.1 Introduction

Writing tests for the `numpy.i` SWIG interface file is a combinatorial headache. At present, 12 different data types are supported, each with 74 different argument signatures, for a total of 888 typemaps supported "out of the box". Each of these typemaps, in turn, might require several unit tests in order to verify expected behavior for both proper and improper inputs. Currently, this results in more than 1,000 individual unit tests executed when `make test` is run in the `numpy/tools/swig` subdirectory.

To facilitate this many similar unit tests, some high-level programming techniques are employed, including C and SWIG macros, as well as Python inheritance. The purpose of this document is to describe the testing infrastructure employed to verify that the `numpy.i` typemaps are working as expected.

7.1.2 Testing Organization

There are three indepedent testing frameworks supported, for one-, two-, and three-dimensional arrays respectively. For one-dimensional arrays, there are two C++ files, a header and a source, named:

```
Vector.h
Vector.cxx
```

that contain prototypes and code for a variety of functions that have one-dimensional arrays as function arguments. The file:

```
Vector.i
```

is a SWIG interface file that defines a python module `Vector` that wraps the functions in `Vector.h` while utilizing the typemaps in `numpy.i` to correctly handle the C arrays.

The `Makefile` calls `swig` to generate `Vector.py` and `Vector_wrap.cxx`, and also executes the `setup.py` script that compiles `Vector_wrap.cxx` and links together the extension module `_Vector.so` or `_Vector.dylib`, depending on the platform. This extension module and the proxy file `Vector.py` are both placed in a subdirectory under the `build` directory.

The actual testing takes place with a Python script named:

```
testVector.py
```

that uses the standard Python library module `unittest`, which performs several tests of each function defined in `Vector.h` for each data type supported.

Two-dimensional arrays are tested in exactly the same manner. The above description applies, but with `Matrix` substituted for `Vector`. For three-dimensional tests, substitute `Tensor` for `Vector`. For four-dimensional tests, substitute `SuperTensor` for `Vector`. For flat in-place array tests, substitute `Flat` for `Vector`. For the descriptions that follow, we will reference the `Vector` tests, but the same information applies to `Matrix`, `Tensor` and `SuperTensor` tests.

The command `make test` will ensure that all of the test software is built and then run all three test scripts.

7.1.3 Testing Header Files

`Vector.h` is a C++ header file that defines a C macro called `TEST_FUNC_PROTOS` that takes two arguments: `TYPE`, which is a data type name such as `unsigned int`; and `SNAME`, which is a short name for the same data type with no spaces, e.g. `uint`. This macro defines several function prototypes that have the prefix `SNAME` and have at least one argument that is an array of type `TYPE`. Those functions that have return arguments return a `TYPE` value.

`TEST_FUNC_PROTOS` is then implemented for all of the data types supported by `numpy.i`:

- `signed char`
- `unsigned char`
- `short`
- `unsigned short`
- `int`
- `unsigned int`
- `long`
- `unsigned long`
- `long long`
- `unsigned long long`
- `float`
- `double`

7.1.4 Testing Source Files

`Vector.cxx` is a C++ source file that implements compilable code for each of the function prototypes specified in `Vector.h`. It defines a C macro `TEST_FUNCS` that has the same arguments and works in the same way as `TEST_FUNC_PROTOS` does in `Vector.h`. `TEST_FUNCS` is implemented for each of the 12 data types as above.

7.1.5 Testing SWIG Interface Files

`Vector.i` is a SWIG interface file that defines python module `Vector`. It follows the conventions for using `numpy.i` as described in this chapter. It defines a SWIG macro `%apply_numpy_typemaps` that has a single argument `TYPE`. It uses the SWIG directive `%apply` to apply the provided typemaps to the argument signatures found in `Vector.h`. This macro is then implemented for all of the data types supported by `numpy.i`. It then does a `%include "Vector.h"` to wrap all of the function prototypes in `Vector.h` using the typemaps in `numpy.i`.

7.1.6 Testing Python Scripts

After `make` is used to build the testing extension modules, `testVector.py` can be run to execute the tests. As with other scripts that use `unittest` to facilitate unit testing, `testVector.py` defines a class that inherits from `unittest.TestCase`:

```
class VectorTestCase(unittest.TestCase):
```

However, this class is not run directly. Rather, it serves as a base class to several other python classes, each one specific to a particular data type. The `VectorTestCase` class stores two strings for typing information:

self.typeStr A string that matches one of the `SNAME` prefixes used in `Vector.h` and `Vector.cxx`. For example, `"double"`.

self.typeCode A short (typically single-character) string that represents a data type in numpy and corresponds to `self.typeStr`. For example, if `self.typeStr` is `"double"`, then `self.typeCode` should be `"d"`.

Each test defined by the `VectorTestCase` class extracts the python function it is trying to test by accessing the `Vector` module's dictionary:

```
length = Vector.__dict__[self.typeStr + "Length"]
```

In the case of double precision tests, this will return the python function `Vector.doubleLength`.

We then define a new test case class for each supported data type with a short definition such as:

```
class doubleTestCase(VectorTestCase):
    def __init__(self, methodName="runTest"):
        VectorTestCase.__init__(self, methodName)
        self.typeStr  = "double"
        self.typeCode = "d"
```

Each of these 12 classes is collected into a `unittest.TestSuite`, which is then executed. Errors and failures are summed together and returned as the exit argument. Any non-zero result indicates that at least one test did not pass.

CHAPTER

EIGHT

ACKNOWLEDGEMENTS

Large parts of this manual originate from Travis E. Oliphant's book Guide to NumPy (which generously entered Public Domain in August 2008). The reference documentation for many of the functions are written by numerous contributors and developers of NumPy, both prior to and during the NumPy Documentation Marathon.

Please help to improve NumPy's documentation! Instructions on how to join the ongoing documentation marathon can be found on the scipy.org website

BIBLIOGRAPHY

[R57] : G. H. Golub and C. F. van Loan, *Matrix Computations*, 3rd ed., Baltimore, MD, Johns Hopkins University Press, 1996, pg. 8.

[R58] : G. H. Golub and C. F. van Loan, *Matrix Computations*, 3rd ed., Baltimore, MD, Johns Hopkins University Press, 1996, pg. 8.

[R59] Wikipedia, "Curve fitting", http://en.wikipedia.org/wiki/Curve_fitting

[R60] Wikipedia, "Polynomial interpolation", http://en.wikipedia.org/wiki/Polynomial_interpolation

[R290] http://en.wikipedia.org/wiki/IEEE_754

[R37] Wikipedia, "Two's complement", http://en.wikipedia.org/wiki/Two's_complement

[R16] Wikipedia, "Two's complement", http://en.wikipedia.org/wiki/Two's_complement

[R1] Press, Teukolsky, Vetterling and Flannery, "Numerical Recipes in C++," 2nd ed, Cambridge University Press, 2002, p. 31.

[CT19] Cooley, James W., and John W. Tukey, 1965, "An algorithm for the machine calculation of complex Fourier series," *Math. Comput.* 19: 297-301.

[CT309] Cooley, James W., and John W. Tukey, 1965, "An algorithm for the machine calculation of complex Fourier series," *Math. Comput.* 19: 297-301.

[NR309] Press, W., Teukolsky, S., Vetterline, W.T., and Flannery, B.P., 2007, *Numerical Recipes: The Art of Scientific Computing*, ch. 12-13. Cambridge Univ. Press, Cambridge, UK.

[WRW20] Wheeler, D. A., E. Rathke, and R. Weir (Eds.) (2009, May). Open Document Format for Office Applications (OpenDocument)v1.2, Part 2: Recalculated Formula (OpenFormula) Format - Annotated Version, Pre-Draft 12. Organization for the Advancement of Structured Information Standards (OASIS). Billerica, MA, USA. [ODT Document]. Available: http://www.oasis-open.org/committees/documents.php?wg_abbrev=office-formula OpenDocument-formula-20090508.odt

[WRW73] Wheeler, D. A., E. Rathke, and R. Weir (Eds.) (2009, May). Open Document Format for Office Applications (OpenDocument)v1.2, Part 2: Recalculated Formula (OpenFormula) Format - Annotated Version, Pre-Draft 12. Organization for the Advancement of Structured Information Standards (OASIS). Billerica, MA, USA. [ODT Document]. Available: http://www.oasis-open.org/committees/documents.php?wg_abbrev=office-formula OpenDocument-formula-20090508.odt

[G60] L. J. Gitman, "Principles of Managerial Finance, Brief," 3rd ed., Addison-Wesley, 2003, pg. 346.

[WRW62] Wheeler, D. A., E. Rathke, and R. Weir (Eds.) (2009, May). Open Document Format for Office Applications (OpenDocument)v1.2, Part 2: Recalculated Formula (OpenFormula) Format - Annotated Version, Pre-Draft 12. Organization for the Advancement of Structured Information Standards (OASIS). Billerica, MA, USA. [ODT Document]. Available: http://www.oasis-open.org/committees/documents.php ?wg_abbrev=office-formulaOpenDocument-formula-20090508.odt

[G37] L. J. Gitman, "Principles of Managerial Finance, Brief," 3rd ed., Addison-Wesley, 2003, pg. 348.

[R297] NumPy Reference, section Generalized Universal Function API.

[R289] Format Specification Mini-Language, Python Documentation.

[R22] NumPy User Guide, section I/O with NumPy.

[R46] Cormen, "Introduction to Algorithms", Chapter 15.2, p. 370-378

[R47] http://en.wikipedia.org/wiki/Matrix_chain_multiplication

[R62] : G. H. Golub and C. F. van Loan, *Matrix Computations*, 3rd ed., Baltimore, MD, Johns Hopkins University Press, 1996, pg. 8.

[R43] G. Strang, *Linear Algebra and Its Applications*, 2nd Ed., Orlando, FL, Academic Press, Inc., 1980, pg. 222.

[R48] G. H. Golub and C. F. Van Loan, *Matrix Computations*, Baltimore, MD, Johns Hopkins University Press, 1985, pg. 15

[R42] G. Strang, *Linear Algebra and Its Applications*, Orlando, FL, Academic Press, Inc., 1980, pg. 285.

[R44] MATLAB reference documention, "Rank" http://www.mathworks.com/help/techdoc/ref/rank.html

[R45] W. H. Press, S. A. Teukolsky, W. T. Vetterling and B. P. Flannery, "Numerical Recipes (3rd edition)", Cambridge University Press, 2007, page 795.

[R50] G. Strang, *Linear Algebra and Its Applications*, 2nd Ed., Orlando, FL, Academic Press, Inc., 1980, pg. 22.

[R49] G. Strang, *Linear Algebra and Its Applications*, 2nd Ed., Orlando, FL, Academic Press, Inc., 1980, pp. 139-142.

[R6] ISO/IEC standard 9899:1999, "Programming language C."

[R293] M. Abramowitz and I. A. Stegun, Handbook of Mathematical Functions. New York, NY: Dover, 1972, pg. 83. http://www.math.sfu.ca/~cbm/aands/

[R294] Wikipedia, "Hyperbolic function", http://en.wikipedia.org/wiki/Hyperbolic_function

[R4] M. Abramowitz and I.A. Stegun, "Handbook of Mathematical Functions", 10th printing, 1964, pp. 86. http://www.math.sfu.ca/~cbm/aands/

[R5] Wikipedia, "Inverse hyperbolic function", http://en.wikipedia.org/wiki/Arcsinh

[R2] M. Abramowitz and I.A. Stegun, "Handbook of Mathematical Functions", 10th printing, 1964, pp. 86. http://www.math.sfu.ca/~cbm/aands/

[R3] Wikipedia, "Inverse hyperbolic function", http://en.wikipedia.org/wiki/Arccosh

[R7] M. Abramowitz and I.A. Stegun, "Handbook of Mathematical Functions", 10th printing, 1964, pp. 86. http://www.math.sfu.ca/~cbm/aands/

[R8] Wikipedia, "Inverse hyperbolic function", http://en.wikipedia.org/wiki/Arctanh

[R9] "Lecture Notes on the Status of IEEE 754", William Kahan, http://www.cs.berkeley.edu/~wkahan/ieee754status/IEEE754.PDF

[R10] "How Futile are Mindless Assessments of Roundoff in Floating-Point Computation?", William Kahan, http://www.cs.berkeley.edu/~wkahan/Mindless.pdf

[R23] Quarteroni A., Sacco R., Saleri F. (2007) Numerical Mathematics (Texts in Applied Mathematics). New York: Springer.

[R24] Durran D. R. (1999) Numerical Methods for Wave Equations in Geophysical Fluid Dynamics. New York: Springer.

[R25] Fornberg B. (1988) Generation of Finite Difference Formulas on Arbitrarily Spaced Grids, Mathematics of Computation 51, no. 184 : 699-706. PDF.

[R295] Wikipedia page: http://en.wikipedia.org/wiki/Trapezoidal_rule

[R296] Illustration image: http://en.wikipedia.org/wiki/File:Composite_trapezoidal_rule_illustration.png

[R18] Wikipedia, "Exponential function", http://en.wikipedia.org/wiki/Exponential_function

[R19] M. Abramovitz and I. A. Stegun, "Handbook of Mathematical Functions with Formulas, Graphs, and Mathematical Tables," Dover, 1964, p. 69, http://www.math.sfu.ca/~cbm/aands/page_69.htm

[R51] M. Abramowitz and I.A. Stegun, "Handbook of Mathematical Functions", 10th printing, 1964, pp. 67. http://www.math.sfu.ca/~cbm/aands/

[R52] Wikipedia, "Logarithm". http://en.wikipedia.org/wiki/Logarithm

[R53] M. Abramowitz and I.A. Stegun, "Handbook of Mathematical Functions", 10th printing, 1964, pp. 67. http://www.math.sfu.ca/~cbm/aands/

[R54] Wikipedia, "Logarithm". http://en.wikipedia.org/wiki/Logarithm

[R55] M. Abramowitz and I.A. Stegun, "Handbook of Mathematical Functions", 10th printing, 1964, pp. 67. http://www.math.sfu.ca/~cbm/aands/

[R56] Wikipedia, "Logarithm". http://en.wikipedia.org/wiki/Logarithm

[R34] C. W. Clenshaw, "Chebyshev series for mathematical functions", in *National Physical Laboratory Mathematical Tables*, vol. 5, London: Her Majesty's Stationery Office, 1962.

[R35] M. Abramowitz and I. A. Stegun, *Handbook of Mathematical Functions*, 10th printing, New York: Dover, 1964, pp. 379. http://www.math.sfu.ca/~cbm/aands/page_379.htm

[R36] http://kobesearch.cpan.org/htdocs/Math-Cephes/Math/Cephes.html

[R291] Weisstein, Eric W. "Sinc Function." From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/SincFunction.html

[R292] Wikipedia, "Sinc function", http://en.wikipedia.org/wiki/Sinc_function

[R17] Wikipedia, "Convolution", http://en.wikipedia.org/wiki/Convolution.

[R68] Wikipedia, "Curve fitting", http://en.wikipedia.org/wiki/Curve_fitting

[R72] Wikipedia, "Curve fitting", http://en.wikipedia.org/wiki/Curve_fitting

[R71] Wikipedia, "Curve fitting", http://en.wikipedia.org/wiki/Curve_fitting

[R69] Wikipedia, "Curve fitting", http://en.wikipedia.org/wiki/Curve_fitting

[R70] Wikipedia, "Curve fitting", http://en.wikipedia.org/wiki/Curve_fitting

[R73] I. N. Bronshtein, K. A. Semendyayev, and K. A. Hirsch (Eng. trans. Ed.), *Handbook of Mathematics*, New York, Van Nostrand Reinhold Co., 1985, pg. 720.

[R64] M. Sullivan and M. Sullivan, III, "Algebra and Trignometry, Enhanced With Graphing Utilities," Prentice-Hall, pg. 318, 1996.

[R65] G. Strang, "Linear Algebra and Its Applications, 2nd Edition," Academic Press, pg. 182, 1980.

[R288] R. A. Horn & C. R. Johnson, *Matrix Analysis*. Cambridge, UK: Cambridge University Press, 1999, pp. 146-7.

[R66] Wikipedia, "Curve fitting", http://en.wikipedia.org/wiki/Curve_fitting

[R67] Wikipedia, "Polynomial interpolation", http://en.wikipedia.org/wiki/Polynomial_interpolation

[R217] Dalgaard, Peter, "Introductory Statistics with R", Springer-Verlag, 2002.

[R218] Glantz, Stanton A. "Primer of Biostatistics.", McGraw-Hill, Fifth Edition, 2002.

[R219] Lentner, Marvin, "Elementary Applied Statistics", Bogden and Quigley, 1972.

[R220] Weisstein, Eric W. “Binomial Distribution.” From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/BinomialDistribution.html

[R221] Wikipedia, “Binomial distribution”, http://en.wikipedia.org/wiki/Binomial_distribution

[R222] NIST “Engineering Statistics Handbook” http://www.itl.nist.gov/div898/handbook/eda/section3/eda3666.htm

[R223] David McKay, “Information Theory, Inference and Learning Algorithms,” chapter 23, http://www.inference.phy.cam.ac.uk/mackay/

[R224] Wikipedia, “Dirichlet distribution”, http://en.wikipedia.org/wiki/Dirichlet_distribution

[R225] Peyton Z. Peebles Jr., “Probability, Random Variables and Random Signal Principles”, 4th ed, 2001, p. 57.

[R226] Wikipedia, “Poisson process”, http://en.wikipedia.org/wiki/Poisson_process

[R227] Wikipedia, “Exponential distribution”, http://en.wikipedia.org/wiki/Exponential_distribution

[R228] Glantz, Stanton A. “Primer of Biostatistics.”, McGraw-Hill, Fifth Edition, 2002.

[R229] Wikipedia, “F-distribution”, http://en.wikipedia.org/wiki/F-distribution

[R230] Weisstein, Eric W. “Gamma Distribution.” From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/GammaDistribution.html

[R231] Wikipedia, “Gamma distribution”, http://en.wikipedia.org/wiki/Gamma_distribution

[R232] Gumbel, E. J., “Statistics of Extremes,” New York: Columbia University Press, 1958.

[R233] Reiss, R.-D. and Thomas, M., “Statistical Analysis of Extreme Values from Insurance, Finance, Hydrology and Other Fields,” Basel: Birkhauser Verlag, 2001.

[R234] Lentner, Marvin, “Elementary Applied Statistics”, Bogden and Quigley, 1972.

[R235] Weisstein, Eric W. “Hypergeometric Distribution.” From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/HypergeometricDistribution.html

[R236] Wikipedia, “Hypergeometric distribution”, http://en.wikipedia.org/wiki/Hypergeometric_distribution

[R237] Abramowitz, M. and Stegun, I. A. (Eds.). “Handbook of Mathematical Functions with Formulas, Graphs, and Mathematical Tables, 9th printing,” New York: Dover, 1972.

[R238] Kotz, Samuel, et. al. “The Laplace Distribution and Generalizations, ” Birkhauser, 2001.

[R239] Weisstein, Eric W. “Laplace Distribution.” From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/LaplaceDistribution.html

[R240] Wikipedia, “Laplace distribution”, http://en.wikipedia.org/wiki/Laplace_distribution

[R241] Reiss, R.-D. and Thomas M. (2001), “Statistical Analysis of Extreme Values, from Insurance, Finance, Hydrology and Other Fields,” Birkhauser Verlag, Basel, pp 132-133.

[R242] Weisstein, Eric W. “Logistic Distribution.” From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/LogisticDistribution.html

[R243] Wikipedia, “Logistic-distribution”, http://en.wikipedia.org/wiki/Logistic_distribution

[R244] Limpert, E., Stahel, W. A., and Abbt, M., “Log-normal Distributions across the Sciences: Keys and Clues,” BioScience, Vol. 51, No. 5, May, 2001. http://stat.ethz.ch/~stahel/lognormal/bioscience.pdf

[R245] Reiss, R.D. and Thomas, M., “Statistical Analysis of Extreme Values,” Basel: Birkhauser Verlag, 2001, pp. 31-32.

[R246] Buzas, Martin A.; Culver, Stephen J., Understanding regional species diversity through the log series distribution of occurrences: BIODIVERSITY RESEARCH Diversity & Distributions, Volume 5, Number 5, September 1999 , pp. 187-195(9).

[R247] Fisher, R.A,, A.S. Corbet, and C.B. Williams. 1943. The relation between the number of species and the number of individuals in a random sample of an animal population. Journal of Animal Ecology, 12:42-58.

[R248] D. J. Hand, F. Daly, D. Lunn, E. Ostrowski, A Handbook of Small Data Sets, CRC Press, 1994.

[R249] Wikipedia, "Logarithmic distribution", http://en.wikipedia.org/wiki/Logarithmic_distribution

[R250] Papoulis, A., "Probability, Random Variables, and Stochastic Processes," 3rd ed., New York: McGraw-Hill, 1991.

[R251] Duda, R. O., Hart, P. E., and Stork, D. G., "Pattern Classification," 2nd ed., New York: Wiley, 2001.

[R252] Weisstein, Eric W. "Negative Binomial Distribution." From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/NegativeBinomialDistribution.html

[R253] Wikipedia, "Negative binomial distribution", http://en.wikipedia.org/wiki/Negative_binomial_distribution

[R254] Delhi, M.S. Holla, "On a noncentral chi-square distribution in the analysis of weapon systems effectiveness", Metrika, Volume 15, Number 1 / December, 1970.

[R255] Wikipedia, "Noncentral chi-square distribution" http://en.wikipedia.org/wiki/Noncentral_chi-square_distribution

[R256] Weisstein, Eric W. "Noncentral F-Distribution." From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/NoncentralF-Distribution.html

[R257] Wikipedia, "Noncentral F-distribution", http://en.wikipedia.org/wiki/Noncentral_F-distribution

[R258] Wikipedia, "Normal distribution", http://en.wikipedia.org/wiki/Normal_distribution

[R259] P. R. Peebles Jr., "Central Limit Theorem" in "Probability, Random Variables and Random Signal Principles", 4th ed., 2001, pp. 51, 51, 125.

[R260] Francis Hunt and Paul Johnson, On the Pareto Distribution of Sourceforge projects.

[R261] Pareto, V. (1896). Course of Political Economy. Lausanne.

[R262] Reiss, R.D., Thomas, M.(2001), Statistical Analysis of Extreme Values, Birkhauser Verlag, Basel, pp 23-30.

[R263] Wikipedia, "Pareto distribution", http://en.wikipedia.org/wiki/Pareto_distribution

[R264] Weisstein, Eric W. "Poisson Distribution." From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/PoissonDistribution.html

[R265] Wikipedia, "Poisson distribution", http://en.wikipedia.org/wiki/Poisson_distribution

[R266] Christian Kleiber, Samuel Kotz, "Statistical size distributions in economics and actuarial sciences", Wiley, 2003.

[R267] Heckert, N. A. and Filliben, James J. "NIST Handbook 148: Dataplot Reference Manual, Volume 2: Let Subcommands and Library Functions", National Institute of Standards and Technology Handbook Series, June 2003. http://www.itl.nist.gov/div898/software/dataplot/refman2/auxillar/powpdf.pdf

[R268] Brighton Webs Ltd., "Rayleigh Distribution," http://www.brighton-webs.co.uk/distributions/rayleigh.asp

[R269] Wikipedia, "Rayleigh distribution" http://en.wikipedia.org/wiki/Rayleigh_distribution

[R271] NIST/SEMATECH e-Handbook of Statistical Methods, "Cauchy Distribution", http://www.itl.nist.gov/div898/handbook/eda/section3/eda3663.htm

[R272] Weisstein, Eric W. "Cauchy Distribution." From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/CauchyDistribution.html

[R273] Wikipedia, "Cauchy distribution" http://en.wikipedia.org/wiki/Cauchy_distribution

[R274] Weisstein, Eric W. "Gamma Distribution." From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/GammaDistribution.html

[R275] Wikipedia, "Gamma distribution", http://en.wikipedia.org/wiki/Gamma_distribution

[R276] Dalgaard, Peter, "Introductory Statistics With R", Springer, 2002.

[R277] Wikipedia, "Student's t-distribution" http://en.wikipedia.org/wiki/Student's_t-distribution

[R278] Wikipedia, "Triangular distribution" http://en.wikipedia.org/wiki/Triangular_distribution

[R279] Abramowitz, M. and Stegun, I. A. (Eds.). "Handbook of Mathematical Functions with Formulas, Graphs, and Mathematical Tables, 9th printing," New York: Dover, 1972.

[R280] von Mises, R., "Mathematical Theory of Probability and Statistics", New York: Academic Press, 1964.

[R281] Brighton Webs Ltd., Wald Distribution, http://www.brighton-webs.co.uk/distributions/wald.asp

[R282] Chhikara, Raj S., and Folks, J. Leroy, "The Inverse Gaussian Distribution: Theory : Methodology, and Applications", CRC Press, 1988.

[R283] Wikipedia, "Wald distribution" http://en.wikipedia.org/wiki/Wald_distribution

[R284] Waloddi Weibull, Royal Technical University, Stockholm, 1939 "A Statistical Theory Of The Strength Of Materials", Ingeniorsvetenskapsakademiens Handlingar Nr 151, 1939, Generalstabens Litografiska Anstalts Forlag, Stockholm.

[R285] Waloddi Weibull, "A Statistical Distribution Function of Wide Applicability", Journal Of Applied Mechanics ASME Paper 1951.

[R286] Wikipedia, "Weibull distribution", http://en.wikipedia.org/wiki/Weibull_distribution

[R287] Zipf, G. K., "Selected Studies of the Principle of Relative Frequency in Language," Cambridge, MA: Harvard Univ. Press, 1932.

[R146] Dalgaard, Peter, "Introductory Statistics with R", Springer-Verlag, 2002.

[R147] Glantz, Stanton A. "Primer of Biostatistics.", McGraw-Hill, Fifth Edition, 2002.

[R148] Lentner, Marvin, "Elementary Applied Statistics", Bogden and Quigley, 1972.

[R149] Weisstein, Eric W. "Binomial Distribution." From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/BinomialDistribution.html

[R150] Wikipedia, "Binomial distribution", http://en.wikipedia.org/wiki/Binomial_distribution

[R151] NIST "Engineering Statistics Handbook" http://www.itl.nist.gov/div898/handbook/eda/section3/eda3666.htm

[R152] David McKay, "Information Theory, Inference and Learning Algorithms," chapter 23, http://www.inference.phy.cam.ac.uk/mackay/

[R153] Wikipedia, "Dirichlet distribution", http://en.wikipedia.org/wiki/Dirichlet_distribution

[R154] Peyton Z. Peebles Jr., "Probability, Random Variables and Random Signal Principles", 4th ed, 2001, p. 57.

[R155] Wikipedia, "Poisson process", http://en.wikipedia.org/wiki/Poisson_process

[R156] Wikipedia, "Exponential distribution", http://en.wikipedia.org/wiki/Exponential_distribution

[R157] Glantz, Stanton A. "Primer of Biostatistics.", McGraw-Hill, Fifth Edition, 2002.

[R158] Wikipedia, "F-distribution", http://en.wikipedia.org/wiki/F-distribution

[R159] Weisstein, Eric W. "Gamma Distribution." From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/GammaDistribution.html

[R160] Wikipedia, "Gamma distribution", http://en.wikipedia.org/wiki/Gamma_distribution

[R161] Gumbel, E. J., "Statistics of Extremes," New York: Columbia University Press, 1958.

[R162] Reiss, R.-D. and Thomas, M., "Statistical Analysis of Extreme Values from Insurance, Finance, Hydrology and Other Fields," Basel: Birkhauser Verlag, 2001.

[R163] Lentner, Marvin, "Elementary Applied Statistics", Bogden and Quigley, 1972.

[R164] Weisstein, Eric W. "Hypergeometric Distribution." From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/HypergeometricDistribution.html

[R165] Wikipedia, "Hypergeometric distribution", http://en.wikipedia.org/wiki/Hypergeometric_distribution

[R166] Abramowitz, M. and Stegun, I. A. (Eds.). "Handbook of Mathematical Functions with Formulas, Graphs, and Mathematical Tables, 9th printing," New York: Dover, 1972.

[R167] Kotz, Samuel, et. al. "The Laplace Distribution and Generalizations, " Birkhauser, 2001.

[R168] Weisstein, Eric W. "Laplace Distribution." From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/LaplaceDistribution.html

[R169] Wikipedia, "Laplace distribution", http://en.wikipedia.org/wiki/Laplace_distribution

[R170] Reiss, R.-D. and Thomas M. (2001), "Statistical Analysis of Extreme Values, from Insurance, Finance, Hydrology and Other Fields," Birkhauser Verlag, Basel, pp 132-133.

[R171] Weisstein, Eric W. "Logistic Distribution." From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/LogisticDistribution.html

[R172] Wikipedia, "Logistic-distribution", http://en.wikipedia.org/wiki/Logistic_distribution

[R173] Limpert, E., Stahel, W. A., and Abbt, M., "Log-normal Distributions across the Sciences: Keys and Clues," BioScience, Vol. 51, No. 5, May, 2001. http://stat.ethz.ch/~stahel/lognormal/bioscience.pdf

[R174] Reiss, R.D. and Thomas, M., "Statistical Analysis of Extreme Values," Basel: Birkhauser Verlag, 2001, pp. 31-32.

[R175] Buzas, Martin A.; Culver, Stephen J., Understanding regional species diversity through the log series distribution of occurrences: BIODIVERSITY RESEARCH Diversity & Distributions, Volume 5, Number 5, September 1999 , pp. 187-195(9).

[R176] Fisher, R.A,, A.S. Corbet, and C.B. Williams. 1943. The relation between the number of species and the number of individuals in a random sample of an animal population. Journal of Animal Ecology, 12:42-58.

[R177] D. J. Hand, F. Daly, D. Lunn, E. Ostrowski, A Handbook of Small Data Sets, CRC Press, 1994.

[R178] Wikipedia, "Logarithmic distribution", http://en.wikipedia.org/wiki/Logarithmic_distribution

[R179] Papoulis, A., "Probability, Random Variables, and Stochastic Processes," 3rd ed., New York: McGraw-Hill, 1991.

[R180] Duda, R. O., Hart, P. E., and Stork, D. G., "Pattern Classification," 2nd ed., New York: Wiley, 2001.

[R181] Weisstein, Eric W. "Negative Binomial Distribution." From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/NegativeBinomialDistribution.html

[R182] Wikipedia, "Negative binomial distribution", http://en.wikipedia.org/wiki/Negative_binomial_distribution

[R183] Delhi, M.S. Holla, "On a noncentral chi-square distribution in the analysis of weapon systems effectiveness", Metrika, Volume 15, Number 1 / December, 1970.

[R184] Wikipedia, "Noncentral chi-square distribution" http://en.wikipedia.org/wiki/Noncentral_chi-square_distribution

[R185] Weisstein, Eric W. "Noncentral F-Distribution." From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/NoncentralF-Distribution.html

[R186] Wikipedia, "Noncentral F-distribution", http://en.wikipedia.org/wiki/Noncentral_F-distribution

[R187] Wikipedia, “Normal distribution”, http://en.wikipedia.org/wiki/Normal_distribution

[R188] P. R. Peebles Jr., “Central Limit Theorem” in “Probability, Random Variables and Random Signal Principles”, 4th ed., 2001, pp. 51, 51, 125.

[R189] Francis Hunt and Paul Johnson, On the Pareto Distribution of Sourceforge projects.

[R190] Pareto, V. (1896). Course of Political Economy. Lausanne.

[R191] Reiss, R.D., Thomas, M.(2001), Statistical Analysis of Extreme Values, Birkhauser Verlag, Basel, pp 23-30.

[R192] Wikipedia, “Pareto distribution”, http://en.wikipedia.org/wiki/Pareto_distribution

[R193] Weisstein, Eric W. “Poisson Distribution.” From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/PoissonDistribution.html

[R194] Wikipedia, “Poisson distribution”, http://en.wikipedia.org/wiki/Poisson_distribution

[R195] Christian Kleiber, Samuel Kotz, “Statistical size distributions in economics and actuarial sciences”, Wiley, 2003.

[R196] Heckert, N. A. and Filliben, James J. “NIST Handbook 148: Dataplot Reference Manual, Volume 2: Let Subcommands and Library Functions”, National Institute of Standards and Technology Handbook Series, June 2003. http://www.itl.nist.gov/div898/software/dataplot/refman2/auxillar/powpdf.pdf

[R197] Brighton Webs Ltd., “Rayleigh Distribution,” http://www.brighton-webs.co.uk/distributions/rayleigh.asp

[R198] Wikipedia, “Rayleigh distribution” http://en.wikipedia.org/wiki/Rayleigh_distribution

[R199] M. Matsumoto and T. Nishimura, “Mersenne Twister: A 623-dimensionally equidistributed uniform pseudorandom number generator,” *ACM Trans. on Modeling and Computer Simulation*, Vol. 8, No. 1, pp. 3-30, Jan. 1998.

[R200] NIST/SEMATECH e-Handbook of Statistical Methods, “Cauchy Distribution”, http://www.itl.nist.gov/div898/handbook/eda/section3/eda3663.htm

[R201] Weisstein, Eric W. “Cauchy Distribution.” From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/CauchyDistribution.html

[R202] Wikipedia, “Cauchy distribution” http://en.wikipedia.org/wiki/Cauchy_distribution

[R203] Weisstein, Eric W. “Gamma Distribution.” From MathWorld–A Wolfram Web Resource. http://mathworld.wolfram.com/GammaDistribution.html

[R204] Wikipedia, “Gamma distribution”, http://en.wikipedia.org/wiki/Gamma_distribution

[R205] Dalgaard, Peter, “Introductory Statistics With R”, Springer, 2002.

[R206] Wikipedia, “Student’s t-distribution” http://en.wikipedia.org/wiki/Student’s_t-distribution

[R207] Wikipedia, “Triangular distribution” http://en.wikipedia.org/wiki/Triangular_distribution

[R208] Abramowitz, M. and Stegun, I. A. (Eds.). “Handbook of Mathematical Functions with Formulas, Graphs, and Mathematical Tables, 9th printing,” New York: Dover, 1972.

[R209] von Mises, R., “Mathematical Theory of Probability and Statistics”, New York: Academic Press, 1964.

[R210] Brighton Webs Ltd., Wald Distribution, http://www.brighton-webs.co.uk/distributions/wald.asp

[R211] Chhikara, Raj S., and Folks, J. Leroy, “The Inverse Gaussian Distribution: Theory : Methodology, and Applications”, CRC Press, 1988.

[R212] Wikipedia, “Wald distribution” http://en.wikipedia.org/wiki/Wald_distribution

[R213] Waloddi Weibull, Royal Technical University, Stockholm, 1939 “A Statistical Theory Of The Strength Of Materials”, Ingeniorsvetenskapsakademiens Handlingar Nr 151, 1939, Generalstabens Litografiska Anstalts Forlag, Stockholm.

[R214] Waloddi Weibull, “A Statistical Distribution Function of Wide Applicability”, Journal Of Applied Mechanics ASME Paper 1951.

[R215] Wikipedia, “Weibull distribution”, http://en.wikipedia.org/wiki/Weibull_distribution

[R216] Zipf, G. K., “Selected Studies of the Principle of Relative Frequency in Language,” Cambridge, MA: Harvard Univ. Press, 1932.

[R270] M. Matsumoto and T. Nishimura, “Mersenne Twister: A 623-dimensionally equidistributed uniform pseudorandom number generator,” *ACM Trans. on Modeling and Computer Simulation*, Vol. 8, No. 1, pp. 3-30, Jan. 1998.

[R11] M.S. Bartlett, “Periodogram Analysis and Continuous Spectra”, Biometrika 37, 1-16, 1950.

[R12] E.R. Kanasewich, “Time Sequence Analysis in Geophysics”, The University of Alberta Press, 1975, pp. 109-110.

[R13] A.V. Oppenheim and R.W. Schafer, “Discrete-Time Signal Processing”, Prentice-Hall, 1999, pp. 468-471.

[R14] Wikipedia, “Window function”, http://en.wikipedia.org/wiki/Window_function

[R15] W.H. Press, B.P. Flannery, S.A. Teukolsky, and W.T. Vetterling, “Numerical Recipes”, Cambridge University Press, 1986, page 429.

[R26] Blackman, R.B. and Tukey, J.W., (1958) The measurement of power spectra, Dover Publications, New York.

[R27] E.R. Kanasewich, “Time Sequence Analysis in Geophysics”, The University of Alberta Press, 1975, pp. 109-110.

[R28] Wikipedia, “Window function”, http://en.wikipedia.org/wiki/Window_function

[R29] W.H. Press, B.P. Flannery, S.A. Teukolsky, and W.T. Vetterling, “Numerical Recipes”, Cambridge University Press, 1986, page 425.

[R30] Blackman, R.B. and Tukey, J.W., (1958) The measurement of power spectra, Dover Publications, New York.

[R31] E.R. Kanasewich, “Time Sequence Analysis in Geophysics”, The University of Alberta Press, 1975, pp. 106-108.

[R32] Wikipedia, “Window function”, http://en.wikipedia.org/wiki/Window_function

[R33] W.H. Press, B.P. Flannery, S.A. Teukolsky, and W.T. Vetterling, “Numerical Recipes”, Cambridge University Press, 1986, page 425.

[R39] J. F. Kaiser, “Digital Filters” - Ch 7 in “Systems analysis by digital computer”, Editors: F.F. Kuo and J.F. Kaiser, p 218-285. John Wiley and Sons, New York, (1966).

[R40] E.R. Kanasewich, “Time Sequence Analysis in Geophysics”, The University of Alberta Press, 1975, pp. 177-178.

[R41] Wikipedia, “Window function”, http://en.wikipedia.org/wiki/Window_function

PYTHON MODULE INDEX

n

numpy, 1
numpy.distutils, 1223
numpy.distutils.exec_command, 1233
numpy.distutils.misc_util, 1223
numpy.doc.internals, 1338
numpy.dual, 567
numpy.fft, 572
numpy.lib.scimath, 568
numpy.polynomial.polyutils, 1010

INDEX

Symbols

__abs__ (numpy.ma.MaskedArray attribute), 281
__abs__ (numpy.ndarray attribute), 43
__add__ (numpy.ndarray attribute), 43
__add__() (numpy.ma.MaskedArray method), 281
__and__ (numpy.ma.MaskedArray attribute), 282
__and__ (numpy.ndarray attribute), 44
__array__() (numpy.class method), 100
__array__() (numpy.generic method), 62
__array__() (numpy.ma.MaskedArray method), 286
__array__() (numpy.ndarray method), 46
__array_finalize__() (numpy.class method), 99
__array_interface__ (built-in variable), 374
__array_interface__ (numpy.generic attribute), 52
__array_prepare__() (numpy.class method), 99
__array_priority__ (numpy.class attribute), 99
__array_priority__ (numpy.generic attribute), 52
__array_priority__ (numpy.ma.MaskedArray attribute), 252
__array_struct__ (C variable), 376
__array_struct__ (numpy.generic attribute), 52
__array_ufunc__() (numpy.class method), 97
__array_wrap__() (numpy.class method), 99
__array_wrap__() (numpy.generic method), 52
__array_wrap__() (numpy.ma.MaskedArray method), 286
__array_wrap__() (numpy.ndarray method), 46
__call__() (numpy.poly1d method), 1017
__call__() (numpy.polynomial.chebyshev.Chebyshev method), 878
__call__() (numpy.polynomial.hermite.Hermite method), 958
__call__() (numpy.polynomial.hermite_e.HermiteE method), 984
__call__() (numpy.polynomial.laguerre.Laguerre method), 931
__call__() (numpy.polynomial.legendre.Legendre method), 905
__call__() (numpy.polynomial.polynomial.Polynomial method), 853
__call__() (numpy.testing.suppress_warnings method), 1214
__call__() (numpy.vectorize method), 611
__contains__ (numpy.ma.MaskedArray attribute), 286
__contains__ (numpy.ndarray attribute), 46
__copy__() (numpy.ma.MaskedArray method), 285
__copy__() (numpy.ndarray method), 45
__deepcopy__() (numpy.ma.MaskedArray method), 285
__deepcopy__() (numpy.ndarray method), 45
__delitem__ (numpy.ma.MaskedArray attribute), 286
__div__() (numpy.ma.MaskedArray method), 282
__divmod__ (numpy.ma.MaskedArray attribute), 282
__divmod__ (numpy.ndarray attribute), 43
__eq__ (numpy.ndarray attribute), 42
__eq__() (numpy.ma.MaskedArray method), 280
__float__ (numpy.ndarray attribute), 47
__float__() (numpy.ma.MaskedArray method), 253
__floordiv__ (numpy.ndarray attribute), 43
__floordiv__() (numpy.ma.MaskedArray method), 282
__ge__ (numpy.ma.MaskedArray attribute), 280
__ge__ (numpy.ndarray attribute), 42
__getitem__ (numpy.ndarray attribute), 46
__getitem__() (numpy.ma.MaskedArray method), 286
__getstate__() (numpy.ma.MaskedArray method), 285
__gt__ (numpy.ma.MaskedArray attribute), 280
__gt__ (numpy.ndarray attribute), 42
__iadd__ (numpy.ndarray attribute), 44
__iadd__() (numpy.ma.MaskedArray method), 283
__iand__ (numpy.ma.MaskedArray attribute), 283
__iand__ (numpy.ndarray attribute), 45
__idiv__() (numpy.ma.MaskedArray method), 283
__ifloordiv__ (numpy.ndarray attribute), 44
__ifloordiv__() (numpy.ma.MaskedArray method), 283
__ilshift__ (numpy.ma.MaskedArray attribute), 283
__ilshift__ (numpy.ndarray attribute), 45
__imod__ (numpy.ma.MaskedArray attribute), 283
__imod__ (numpy.ndarray attribute), 44
__imul__ (numpy.ndarray attribute), 44
__imul__() (numpy.ma.MaskedArray method), 283
__int__ (numpy.ndarray attribute), 47
__int__() (numpy.ma.MaskedArray method), 253
__invert__ (numpy.ndarray attribute), 43
__ior__ (numpy.ma.MaskedArray attribute), 283
__ior__ (numpy.ndarray attribute), 45

__ipow__ (numpy.ndarray attribute), 45
__ipow__() (numpy.ma.MaskedArray method), 283
__irshift__ (numpy.ma.MaskedArray attribute), 283
__irshift__ (numpy.ndarray attribute), 45
__isub__ (numpy.ndarray attribute), 44
__isub__() (numpy.ma.MaskedArray method), 283
__itruediv__ (numpy.ndarray attribute), 44
__itruediv__() (numpy.ma.MaskedArray method), 283
__ixor__ (numpy.ma.MaskedArray attribute), 283
__ixor__ (numpy.ndarray attribute), 45
__le__ (numpy.ma.MaskedArray attribute), 280
__le__ (numpy.ndarray attribute), 42
__len__ (numpy.ma.MaskedArray attribute), 286
__len__ (numpy.ndarray attribute), 46
__long__() (numpy.ma.MaskedArray method), 253
__lshift__ (numpy.ma.MaskedArray attribute), 282
__lshift__ (numpy.ndarray attribute), 43
__lt__ (numpy.ma.MaskedArray attribute), 280
__lt__ (numpy.ndarray attribute), 42
__matmul__ (numpy.ndarray attribute), 45
__mod__ (numpy.ma.MaskedArray attribute), 282
__mod__ (numpy.ndarray attribute), 43
__mul__ (numpy.ndarray attribute), 43
__mul__() (numpy.ma.MaskedArray method), 281
__ne__ (numpy.ndarray attribute), 42
__ne__() (numpy.ma.MaskedArray method), 280
__neg__ (numpy.ndarray attribute), 43
__new__() (numpy.ma.MaskedArray static method), 285
__new__() (numpy.ndarray method), 46
__or__ (numpy.ma.MaskedArray attribute), 282
__or__ (numpy.ndarray attribute), 44
__pos__ (numpy.ndarray attribute), 43
__pow__ (numpy.ndarray attribute), 43
__pow__() (numpy.ma.MaskedArray method), 282
__radd__() (numpy.ma.MaskedArray method), 281
__rand__ (numpy.ma.MaskedArray attribute), 282
__rdivmod__ (numpy.ma.MaskedArray attribute), 282
__reduce__() (numpy.dtype method), 77
__reduce__() (numpy.generic method), 62
__reduce__() (numpy.ma.MaskedArray method), 285
__reduce__() (numpy.ndarray method), 45
__repr__ (numpy.ndarray attribute), 47
__repr__() (numpy.ma.MaskedArray method), 284
__rfloordiv__() (numpy.ma.MaskedArray method), 282
__rlshift__ (numpy.ma.MaskedArray attribute), 282
__rmod__ (numpy.ma.MaskedArray attribute), 282
__rmul__() (numpy.ma.MaskedArray method), 282
__ror__ (numpy.ma.MaskedArray attribute), 282
__rpow__() (numpy.ma.MaskedArray method), 282
__rrshift__ (numpy.ma.MaskedArray attribute), 282
__rshift__ (numpy.ma.MaskedArray attribute), 282
__rshift__ (numpy.ndarray attribute), 44
__rsub__() (numpy.ma.MaskedArray method), 281
__rtruediv__() (numpy.ma.MaskedArray method), 282
__rxor__ (numpy.ma.MaskedArray attribute), 283
__setitem__ (numpy.ndarray attribute), 46
__setitem__() (numpy.ma.MaskedArray method), 286
__setmask__() (numpy.ma.MaskedArray method), 286
__setstate__() (numpy.dtype method), 77
__setstate__() (numpy.generic method), 62
__setstate__() (numpy.ma.MaskedArray method), 285
__setstate__() (numpy.ndarray method), 46
__str__ (numpy.ndarray attribute), 47
__str__() (numpy.ma.MaskedArray method), 284
__sub__ (numpy.ndarray attribute), 43
__sub__() (numpy.ma.MaskedArray method), 281
__truediv__ (numpy.ndarray attribute), 43
__truediv__() (numpy.ma.MaskedArray method), 282
__xor__ (numpy.ma.MaskedArray attribute), 282
__xor__ (numpy.ndarray attribute), 44

A

A (numpy.matrix attribute), 102
A1 (numpy.matrix attribute), 103
absolute (in module numpy), 821
abspath() (numpy.DataSource method), 675
accumulate
    ufunc methods, 1337
accumulate() (numpy.ufunc method), 400
add (in module numpy), 800
add() (in module numpy.core.defchararray), 497
add_data_dir() (numpy.distutils.misc_util.Configuration method), 1227
add_data_files() (numpy.distutils.misc_util.Configuration method), 1225
add_extension() (numpy.distutils.misc_util.Configuration method), 1228
add_headers() (numpy.distutils.misc_util.Configuration method), 1228
add_include_dirs() (numpy.distutils.misc_util.Configuration method), 1227
add_installed_library() (numpy.distutils.misc_util.Configuration method), 1229
add_library() (numpy.distutils.misc_util.Configuration method), 1229
add_npy_pkg_config() (numpy.distutils.misc_util.Configuration method), 1230
add_scripts() (numpy.distutils.misc_util.Configuration method), 1229
add_subpackage() (numpy.distutils.misc_util.Configuration method), 1225
aligned, 37
alignment (numpy.dtype attribute), 77
all (in module numpy.ma), 298
all() (in module numpy), 720
all() (numpy.generic method), 54
all() (numpy.ma.MaskedArray method), 273
all() (numpy.matrix method), 113

all() (numpy.ndarray method), 16
all() (numpy.recarray method), 189
all() (numpy.record method), 212
all_strings() (in module numpy.distutils.misc_util), 1224
allclose() (in module numpy), 735
allclose() (in module numpy.ma), 367
allequal() (in module numpy.ma), 366
allpath() (in module numpy.distutils.misc_util), 1224
amax() (in module numpy), 1164
amin() (in module numpy), 1163
angle() (in module numpy), 815
anom (in module numpy.ma), 339
anom() (numpy.ma.MaskedArray method), 273
anomalies (in module numpy.ma), 340
any (in module numpy.ma), 298
any() (in module numpy), 721
any() (numpy.generic method), 54
any() (numpy.ma.MaskedArray method), 273
any() (numpy.matrix method), 114
any() (numpy.ndarray method), 16
any() (numpy.recarray method), 189
any() (numpy.record method), 212
append() (in module numpy), 478
append() (in module numpy.ma), 320
appendpath() (in module numpy.distutils.misc_util), 1224
apply_along_axis() (in module numpy), 605
apply_along_axis() (in module numpy.ma), 368
apply_over_axes() (in module numpy), 607
arange (in module numpy.ma), 370
arange() (in module numpy), 432
arccos (in module numpy), 747
arccosh (in module numpy), 760
arcsin (in module numpy), 746
arcsinh (in module numpy), 759
arctan (in module numpy), 748
arctan2 (in module numpy), 751
arctanh (in module numpy), 761
argmax (in module numpy.ma), 349
argmax() (in module numpy), 1155
argmax() (numpy.generic method), 55
argmax() (numpy.ma.MaskedArray method), 263
argmax() (numpy.matrix method), 114
argmax() (numpy.ndarray method), 16
argmax() (numpy.recarray method), 189
argmax() (numpy.record method), 212
argmin (in module numpy.ma), 349
argmin() (in module numpy), 1157
argmin() (numpy.generic method), 55
argmin() (numpy.ma.MaskedArray method), 263
argmin() (numpy.matrix method), 114
argmin() (numpy.ndarray method), 16
argmin() (numpy.recarray method), 189
argmin() (numpy.record method), 212
argpartition() (in module numpy), 1154
argpartition() (numpy.matrix method), 115
argpartition() (numpy.ndarray method), 16
argpartition() (numpy.recarray method), 189
argsort() (in module numpy), 1150
argsort() (in module numpy.ma), 351
argsort() (numpy.chararray method), 160
argsort() (numpy.core.defchararray.chararray method), 527
argsort() (numpy.generic method), 55
argsort() (numpy.ma.MaskedArray method), 264
argsort() (numpy.matrix method), 115
argsort() (numpy.ndarray method), 16
argsort() (numpy.recarray method), 190
argsort() (numpy.record method), 212
argwhere() (in module numpy), 1159
arithmetic, 42, 280
around (in module numpy.ma), 365
around() (in module numpy), 762
array
    C-API, 1257
    interface, 373
    protocol, 373
array iterator, 220, 1332
array scalars, 1333
array() (in module numpy), 418
array() (in module numpy.core.defchararray), 176
array() (in module numpy.core.records), 429
array() (in module numpy.ma), 226
array2string() (in module numpy), 663
array_equal() (in module numpy), 737
array_equiv() (in module numpy), 738
array_repr() (in module numpy), 665
array_split() (in module numpy), 471
array_str() (in module numpy), 666
Arrayterator (class in numpy.lib), 649
as_array() (in module numpy.ctypeslib), 543
as_ctypes() (in module numpy.ctypeslib), 543
as_series() (in module numpy.polynomial.polyutils), 1011
as_strided() (in module numpy.lib.stride_tricks), 637
asanyarray() (in module numpy), 421
asanyarray() (in module numpy.ma), 229
asarray() (in module numpy), 420
asarray() (in module numpy.core.defchararray), 431
asarray() (in module numpy.ma), 228
asarray_chkfinite() (in module numpy), 459
ascontiguousarray() (in module numpy), 422
asfarray() (in module numpy), 458
asfortranarray() (in module numpy), 459
asmatrix() (in module numpy), 141
asscalar() (in module numpy), 460
assert_allclose() (in module numpy.testing), 1203
assert_almost_equal() (in module numpy.testing), 1199
assert_approx_equal() (in module numpy.testing), 1200

assert_array_almost_equal() (in module numpy.testing), 1201
assert_array_almost_equal_nulp() (in module numpy.testing), 1203
assert_array_equal() (in module numpy.testing), 1205
assert_array_less() (in module numpy.testing), 1206
assert_array_max_ulp() (in module numpy.testing), 1204
assert_equal() (in module numpy.testing), 1207
assert_raises() (in module numpy.testing), 1207
assert_raises_regex() (in module numpy.testing), 1208
assert_string_equal() (in module numpy.testing), 1208
assert_warns() (in module numpy.testing), 1208
astype() (numpy.chararray method), 159
astype() (numpy.core.defchararray.chararray method), 526
astype() (numpy.generic method), 55
astype() (numpy.ma.MaskedArray method), 254
astype() (numpy.matrix method), 115
astype() (numpy.ndarray method), 17
astype() (numpy.recarray method), 190
astype() (numpy.record method), 212
at() (numpy.ufunc method), 404
atleast_1d (in module numpy.ma), 310
atleast_1d() (in module numpy), 453
atleast_2d (in module numpy.ma), 311
atleast_2d() (in module numpy), 453
atleast_3d (in module numpy.ma), 311
atleast_3d() (in module numpy), 454
attributes
    ufunc, 394
average() (in module numpy), 1174
average() (in module numpy.ma), 340
axis, 40

B

bartlett() (in module numpy), 1215
base, 3
base (numpy.chararray attribute), 149
base (numpy.core.defchararray.chararray attribute), 516
base (numpy.dtype attribute), 66
base (numpy.generic attribute), 52
base (numpy.ma.MaskedArray attribute), 246
base (numpy.matrix attribute), 104
base (numpy.ndarray attribute), 14
base (numpy.recarray attribute), 180
base (numpy.record attribute), 210
base_repr() (in module numpy), 673
baseclass (numpy.ma.MaskedArray attribute), 245
basis() (numpy.polynomial.chebyshev.Chebyshev class method), 878
basis() (numpy.polynomial.hermite.Hermite class method), 958
basis() (numpy.polynomial.hermite_e.HermiteE class method), 984
basis() (numpy.polynomial.laguerre.Laguerre class method), 931
basis() (numpy.polynomial.legendre.Legendre class method), 905
basis() (numpy.polynomial.polynomial.Polynomial class method), 853
beta() (in module numpy.random), 1039
beta() (numpy.random.RandomState method), 1086
binary_repr() (in module numpy), 495
bincount() (in module numpy), 1196
binomial() (in module numpy.random), 1040
binomial() (numpy.random.RandomState method), 1087
bitwise_and (in module numpy), 487
bitwise_or (in module numpy), 488
bitwise_xor (in module numpy), 489
blackman() (in module numpy), 1216
block() (in module numpy), 467
blue_text() (in module numpy.distutils.misc_util), 1224
bmat() (in module numpy), 141
broadcast (class in numpy), 222
broadcast_arrays() (in module numpy), 455
broadcast_to() (in module numpy), 455
broadcastable, 387
broadcasting, 387, 1332
buffers, 388
busday_count() (in module numpy), 550
busday_offset() (in module numpy), 549
busdaycalendar (class in numpy), 547
byteorder (numpy.dtype attribute), 75
bytes() (in module numpy.random), 1037
bytes() (numpy.random.RandomState method), 1088
byteswap() (numpy.generic method), 55
byteswap() (numpy.ma.MaskedArray method), 255
byteswap() (numpy.matrix method), 116
byteswap() (numpy.ndarray method), 18
byteswap() (numpy.recarray method), 191
byteswap() (numpy.record method), 213

C

c (numpy.poly1d attribute), 1017
C-API
    array, 1257
    iterator, 1298, 1314
    ndarray, 1257, 1298
    ufunc, 1315, 1320
C-order, 37
c_ (in module numpy), 616
can_cast() (in module numpy), 552
capitalize() (in module numpy.core.defchararray), 497
cast() (numpy.polynomial.chebyshev.Chebyshev class method), 879
cast() (numpy.polynomial.hermite.Hermite class method), 958

cast() (numpy.polynomial.hermite_e.HermiteE class method), 985
cast() (numpy.polynomial.laguerre.Laguerre class method), 931
cast() (numpy.polynomial.legendre.Legendre class method), 905
cast() (numpy.polynomial.polynomial.Polynomial class method), 853
casting rules
ufunc, 391
cbrt (in module numpy), 820
ceil (in module numpy), 765
center() (in module numpy.core.defchararray), 498
char (numpy.dtype attribute), 75
character arrays, 146
chararray (class in numpy), 147
chararray (class in numpy.core.defchararray), 514
cheb2poly() (in module numpy.polynomial.chebyshev), 903
chebadd() (in module numpy.polynomial.chebyshev), 897
chebcompanion() (in module numpy.polynomial.chebyshev), 901
chebder() (in module numpy.polynomial.chebyshev), 894
chebdiv() (in module numpy.polynomial.chebyshev), 899
chebdomain (in module numpy.polynomial.chebyshev), 901
chebfit() (in module numpy.polynomial.chebyshev), 891
chebfromroots() (in module numpy.polynomial.chebyshev), 890
chebgauss() (in module numpy.polynomial.chebyshev), 900
chebgrid2d() (in module numpy.polynomial.chebyshev), 888
chebgrid3d() (in module numpy.polynomial.chebyshev), 888
chebint() (in module numpy.polynomial.chebyshev), 895
chebline() (in module numpy.polynomial.chebyshev), 902
chebmul() (in module numpy.polynomial.chebyshev), 898
chebmulx() (in module numpy.polynomial.chebyshev), 899
chebone (in module numpy.polynomial.chebyshev), 902
chebpow() (in module numpy.polynomial.chebyshev), 900
chebroots() (in module numpy.polynomial.chebyshev), 889
chebsub() (in module numpy.polynomial.chebyshev), 897
chebtrim() (in module numpy.polynomial.chebyshev), 902
chebval() (in module numpy.polynomial.chebyshev), 885
chebval2d() (in module numpy.polynomial.chebyshev), 886
chebval3d() (in module numpy.polynomial.chebyshev), 887
chebvander() (in module numpy.polynomial.chebyshev), 892
chebvander2d() (in module numpy.polynomial.chebyshev), 893
chebvander3d() (in module numpy.polynomial.chebyshev), 893
chebweight() (in module numpy.polynomial.chebyshev), 901
chebx (in module numpy.polynomial.chebyshev), 902
Chebyshev (class in numpy.polynomial.chebyshev), 877
chebzero (in module numpy.polynomial.chebyshev), 902
chisquare() (in module numpy.random), 1041
chisquare() (numpy.random.RandomState method), 1088
choice() (in module numpy.random), 1035
choice() (numpy.random.RandomState method), 1089
cholesky() (in module numpy.linalg), 694
choose() (in module numpy), 632
choose() (in module numpy.ma), 371
choose() (numpy.generic method), 55
choose() (numpy.ma.MaskedArray method), 265
choose() (numpy.matrix method), 117
choose() (numpy.ndarray method), 18
choose() (numpy.recarray method), 191
choose() (numpy.record method), 213
clip() (in module numpy), 819
clip() (in module numpy.ma), 365
clip() (numpy.generic method), 56
clip() (numpy.ma.MaskedArray method), 274
clip() (numpy.matrix method), 117
clip() (numpy.ndarray method), 18
clip() (numpy.recarray method), 192
clip() (numpy.record method), 213
clump_masked() (in module numpy.ma), 327
clump_unmasked() (in module numpy.ma), 328
code generation, 1235
coef (numpy.poly1d attribute), 1017
coefficients (numpy.poly1d attribute), 1017
coeffs (numpy.poly1d attribute), 1017
column-major, 37
column_stack (in module numpy.ma), 314
column_stack() (in module numpy), 464
common_fill_value() (in module numpy.ma), 336
common_type() (in module numpy), 556
comparison, 42, 280
compress() (in module numpy), 633
compress() (numpy.generic method), 56
compress() (numpy.ma.MaskedArray method), 265
compress() (numpy.matrix method), 117
compress() (numpy.ndarray method), 18
compress() (numpy.recarray method), 192
compress() (numpy.record method), 213
compress_cols() (in module numpy.ma), 332
compress_rowcols() (in module numpy.ma), 332
compress_rows() (in module numpy.ma), 333

compressed() (in module numpy.ma), 333
compressed() (numpy.ma.MaskedArray method), 255
concatenate() (in module numpy), 462
concatenate() (in module numpy.ma), 314
cond() (in module numpy.linalg), 707
Configuration (class in numpy.distutils.misc_util), 1224
conj (in module numpy), 816
conj() (numpy.generic method), 56
conj() (numpy.ma.MaskedArray method), 274
conj() (numpy.matrix method), 117
conj() (numpy.ndarray method), 19
conj() (numpy.recarray method), 192
conj() (numpy.record method), 213
conjugate (in module numpy.ma), 341
conjugate() (numpy.generic method), 56
conjugate() (numpy.ma.MaskedArray method), 274
conjugate() (numpy.matrix method), 118
conjugate() (numpy.ndarray method), 19
conjugate() (numpy.recarray method), 192
conjugate() (numpy.record method), 213
construction
    from dict, dtype, 73
    from dtype, dtype, 69
    from list, dtype, 72
    from None, dtype, 69
    from string, dtype, 70
    from tuple, dtype, 72
    from type, dtype, 69
container (class in numpy.lib.user_array), 220
container class, 220
contiguous, 37
convert() (numpy.polynomial.chebyshev.Chebyshev method), 879
convert() (numpy.polynomial.hermite.Hermite method), 959
convert() (numpy.polynomial.hermite_e.HermiteE method), 985
convert() (numpy.polynomial.laguerre.Laguerre method), 932
convert() (numpy.polynomial.legendre.Legendre method), 906
convert() (numpy.polynomial.polynomial.Polynomial method), 854
convolve() (in module numpy), 817
coords (numpy.flatiter attribute), 649
copy (in module numpy.ma), 290
copy() (in module numpy), 422
copy() (numpy.chararray method), 160
copy() (numpy.core.defchararray.chararray method), 527
copy() (numpy.flatiter method), 649
copy() (numpy.generic method), 56
copy() (numpy.ma.MaskedArray method), 271
copy() (numpy.matrix method), 118
copy() (numpy.ndarray method), 19
copy() (numpy.nditer method), 646
copy() (numpy.polynomial.chebyshev.Chebyshev method), 880
copy() (numpy.polynomial.hermite.Hermite method), 959
copy() (numpy.polynomial.hermite_e.HermiteE method), 986
copy() (numpy.polynomial.laguerre.Laguerre method), 932
copy() (numpy.polynomial.legendre.Legendre method), 906
copy() (numpy.polynomial.polynomial.Polynomial method), 854
copy() (numpy.recarray method), 192
copy() (numpy.record method), 213
copysign (in module numpy), 796
copyto() (in module numpy), 446
corrcoef() (in module numpy), 1186
corrcoef() (in module numpy.ma), 342
correlate() (in module numpy), 1186
cos (in module numpy), 744
cosh (in module numpy), 757
count (in module numpy.ma), 298
count() (in module numpy.core.defchararray), 509
count() (numpy.chararray method), 160
count() (numpy.core.defchararray.chararray method), 527
count() (numpy.ma.MaskedArray method), 288
count_masked() (in module numpy.ma), 299
count_nonzero() (in module numpy), 1162
cov() (in module numpy), 1187
cov() (in module numpy.ma), 342
cpu (in module numpy.distutils.cpuinfo), 1233
cross() (in module numpy), 781
ctypes (numpy.chararray attribute), 149
ctypes (numpy.core.defchararray.chararray attribute), 516
ctypes (numpy.ma.MaskedArray attribute), 246
ctypes (numpy.matrix attribute), 104
ctypes (numpy.ndarray attribute), 12
ctypes (numpy.recarray attribute), 180
ctypes_load_library() (in module numpy.ctypeslib), 543
cumprod (in module numpy.ma), 344
cumprod() (in module numpy), 773
cumprod() (numpy.generic method), 56
cumprod() (numpy.ma.MaskedArray method), 274
cumprod() (numpy.matrix method), 118
cumprod() (numpy.ndarray method), 20
cumprod() (numpy.recarray method), 193
cumprod() (numpy.record method), 214
cumsum (in module numpy.ma), 343
cumsum() (in module numpy), 774
cumsum() (numpy.generic method), 56
cumsum() (numpy.ma.MaskedArray method), 274
cumsum() (numpy.matrix method), 119
cumsum() (numpy.ndarray method), 20
cumsum() (numpy.recarray method), 193

cumsum() (numpy.record method), 214
cutdeg() (numpy.polynomial.chebyshev.Chebyshev method), 880
cutdeg() (numpy.polynomial.hermite.Hermite method), 959
cutdeg() (numpy.polynomial.hermite_e.HermiteE method), 986
cutdeg() (numpy.polynomial.laguerre.Laguerre method), 933
cutdeg() (numpy.polynomial.legendre.Legendre method), 907
cutdeg() (numpy.polynomial.polynomial.Polynomial method), 854
cyan_text() (in module numpy.distutils.misc_util), 1224
cyg2win32() (in module numpy.distutils.misc_util), 1224

D

data (numpy.chararray attribute), 150
data (numpy.core.defchararray.chararray attribute), 517
data (numpy.generic attribute), 51
data (numpy.ma.MaskedArray attribute), 244, 307
data (numpy.matrix attribute), 105
data (numpy.ndarray attribute), 6
data (numpy.recarray attribute), 182
data (numpy.record attribute), 210
DataSource (class in numpy), 674
datetime_as_string() (in module numpy), 545
datetime_data() (in module numpy), 546
debug_print() (numpy.nditer method), 647
decode() (in module numpy.core.defchararray), 498
decode() (numpy.chararray method), 161
decode() (numpy.core.defchararray.chararray method), 528
decorate_methods() (in module numpy.testing), 1211
default_fill_value() (in module numpy.ma), 336
deg2rad (in module numpy), 755
degree() (numpy.polynomial.chebyshev.Chebyshev method), 880
degree() (numpy.polynomial.hermite.Hermite method), 959
degree() (numpy.polynomial.hermite_e.HermiteE method), 986
degree() (numpy.polynomial.laguerre.Laguerre method), 933
degree() (numpy.polynomial.legendre.Legendre method), 907
degree() (numpy.polynomial.polynomial.Polynomial method), 855
degrees (in module numpy), 752
delete() (in module numpy), 476
deprecated() (in module numpy.testing.decorators), 1209
deriv() (numpy.poly1d method), 1017
deriv() (numpy.polynomial.chebyshev.Chebyshev method), 880
deriv() (numpy.polynomial.hermite.Hermite method), 959
deriv() (numpy.polynomial.hermite_e.HermiteE method), 986
deriv() (numpy.polynomial.laguerre.Laguerre method), 933
deriv() (numpy.polynomial.legendre.Legendre method), 907
deriv() (numpy.polynomial.polynomial.Polynomial method), 855
descr (numpy.dtype attribute), 66
det() (in module numpy.linalg), 709
diag() (in module numpy), 441
diag() (in module numpy.ma), 354
diag_indices() (in module numpy), 624
diag_indices_from() (in module numpy), 625
diagflat() (in module numpy), 442
diagonal() (in module numpy), 634
diagonal() (numpy.generic method), 56
diagonal() (numpy.ma.MaskedArray method), 266
diagonal() (numpy.matrix method), 119
diagonal() (numpy.ndarray method), 20
diagonal() (numpy.recarray method), 193
diagonal() (numpy.record method), 214
dict_append() (in module numpy.distutils.misc_util), 1224
diff() (in module numpy), 777
digitize() (in module numpy), 1197
dirichlet() (in module numpy.random), 1042
dirichlet() (numpy.random.RandomState method), 1091
distutils, 1223
divide (in module numpy), 804
divmod (in module numpy), 814
dot() (in module numpy), 676
dot() (in module numpy.ma), 354
dot() (numpy.matrix method), 119
dot() (numpy.ndarray method), 20
dot() (numpy.recarray method), 193
dot_join() (in module numpy.distutils.misc_util), 1224
dsplit() (in module numpy), 471
dstack (in module numpy.ma), 315
dstack() (in module numpy), 465
dtype, 1331
  construction from dict, 73
  construction from dtype, 69
  construction from list, 72
  construction from None, 69
  construction from string, 70
  construction from tuple, 72
  construction from type, 69
  field, 63
  scalar, 63
  sub-array, 63, 72
dtype (class in numpy), 64

dtype (numpy.chararray attribute), 150
dtype (numpy.core.defchararray.chararray attribute), 517
dtype (numpy.generic attribute), 52
dtype (numpy.ma.MaskedArray attribute), 247
dtype (numpy.matrix attribute), 105
dtype (numpy.ndarray attribute), 6
dtype (numpy.recarray attribute), 182
dtype (numpy.record attribute), 210
dump() (in module numpy.ma), 334
dump() (numpy.chararray method), 161
dump() (numpy.core.defchararray.chararray method), 528
dump() (numpy.generic method), 57
dump() (numpy.ma.MaskedArray method), 272
dump() (numpy.matrix method), 119
dump() (numpy.ndarray method), 20
dump() (numpy.recarray method), 194
dump() (numpy.record method), 214
dumps() (in module numpy.ma), 335
dumps() (numpy.chararray method), 161
dumps() (numpy.core.defchararray.chararray method), 528
dumps() (numpy.generic method), 57
dumps() (numpy.ma.MaskedArray method), 272
dumps() (numpy.matrix method), 119
dumps() (numpy.ndarray method), 21
dumps() (numpy.recarray method), 194
dumps() (numpy.record method), 214

E

ediff1d() (in module numpy), 778
ediff1d() (in module numpy.ma), 371
eig() (in module numpy.linalg), 699
eigh() (in module numpy.linalg), 700
eigvals() (in module numpy.linalg), 702
eigvalsh() (in module numpy.linalg), 703
einsum() (in module numpy), 686
einsum_path() (in module numpy), 690
ellipsis, 77
empty (in module numpy.ma), 292
empty() (in module numpy), 409
empty() (in module numpy.matlib), 834
empty_like (in module numpy.ma), 293
empty_like() (in module numpy), 410
enable_external_loop() (numpy.nditer method), 647
encode() (in module numpy.core.defchararray), 499
encode() (numpy.chararray method), 161
encode() (numpy.core.defchararray.chararray method), 528
endswith() (numpy.chararray method), 161
endswith() (numpy.core.defchararray.chararray method), 528
equal (in module numpy), 741
equal() (in module numpy.core.defchararray), 507
error handling, 389
errstate (class in numpy), 569
exists() (numpy.DataSource method), 675
exp (in module numpy), 784
exp2 (in module numpy), 787
expand_dims() (in module numpy), 456
expand_dims() (in module numpy.ma), 312
expandtabs() (numpy.chararray method), 161
expandtabs() (numpy.core.defchararray.chararray method), 528
expm1 (in module numpy), 785
exponential() (in module numpy.random), 1043
exponential() (numpy.random.RandomState method), 1091
extract() (in module numpy), 1161
eye() (in module numpy), 411
eye() (in module numpy.matlib), 836

F

f() (in module numpy.random), 1043
f() (numpy.random.RandomState method), 1092
fabs (in module numpy), 822
fft() (in module numpy.fft), 573
fft2() (in module numpy.fft), 576
fftfreq() (in module numpy.fft), 591
fftn() (in module numpy.fft), 579
fftshift() (in module numpy.fft), 593
field
    dtype, 63
field() (numpy.recarray method), 194
fields (numpy.dtype attribute), 66
fill() (numpy.chararray method), 161
fill() (numpy.core.defchararray.chararray method), 528
fill() (numpy.generic method), 57
fill() (numpy.ma.MaskedArray method), 266
fill() (numpy.matrix method), 119
fill() (numpy.ndarray method), 21
fill() (numpy.recarray method), 194
fill() (numpy.record method), 214
fill_diagonal() (in module numpy), 640
fill_value (numpy.ma.MaskedArray attribute), 245, 338
filled() (in module numpy.ma), 334
filled() (numpy.ma.MaskedArray method), 256
filter() (numpy.testing.suppress_warnings method), 1214
filter_sources() (in module numpy.distutils.misc_util), 1224
find() (in module numpy.core.defchararray), 510
find() (numpy.chararray method), 161
find() (numpy.core.defchararray.chararray method), 528
find_common_type() (in module numpy), 563
finfo (class in numpy), 558
fit() (numpy.polynomial.chebyshev.Chebyshev class method), 880
fit() (numpy.polynomial.hermite.Hermite class method), 960

fit() (numpy.polynomial.hermite_e.HermiteE class method), 986
fit() (numpy.polynomial.laguerre.Laguerre class method), 933
fit() (numpy.polynomial.legendre.Legendre class method), 907
fit() (numpy.polynomial.polynomial.Polynomial class method), 855
fix() (in module numpy), 764
fix_invalid() (in module numpy.ma), 229
flags (numpy.chararray attribute), 151
flags (numpy.core.defchararray.chararray attribute), 518
flags (numpy.dtype attribute), 76
flags (numpy.generic attribute), 51
flags (numpy.ma.MaskedArray attribute), 248
flags (numpy.matrix attribute), 106
flags (numpy.ndarray attribute), 7
flags (numpy.recarray attribute), 182
flags (numpy.record attribute), 210
flat (numpy.chararray attribute), 152
flat (numpy.core.defchararray.chararray attribute), 519
flat (numpy.generic attribute), 52
flat (numpy.lib.Arrayterator attribute), 650
flat (numpy.ma.MaskedArray attribute), 252
flat (numpy.matrix attribute), 107
flat (numpy.ndarray attribute), 8
flat (numpy.recarray attribute), 183
flat (numpy.record attribute), 210
flatiter (class in numpy), 648
flatnonzero() (in module numpy), 1159
flatnotmasked_contiguous() (in module numpy.ma), 324
flatnotmasked_edges() (in module numpy.ma), 325
flatten() (numpy.chararray method), 162
flatten() (numpy.core.defchararray.chararray method), 529
flatten() (numpy.generic method), 57
flatten() (numpy.ma.MaskedArray method), 259
flatten() (numpy.matrix method), 120
flatten() (numpy.ndarray method), 21
flatten() (numpy.recarray method), 194
flatten() (numpy.record method), 214
flip() (in module numpy), 482
fliplr() (in module numpy), 483
flipud() (in module numpy), 484
float_power (in module numpy), 808
floor (in module numpy), 765
floor_divide (in module numpy), 807
flush() (numpy.memmap method), 146
fmax (in module numpy), 828
fmin (in module numpy), 829
fmod (in module numpy), 809
format_float_positional() (in module numpy), 666
format_float_scientific() (in module numpy), 668
format_parser (class in numpy), 557
Fortran-order, 37
frexp (in module numpy), 797
from dict
    dtype construction, 73
from dtype
    dtype construction, 69
from list
    dtype construction, 72
from None
    dtype construction, 69
from string
    dtype construction, 70
from tuple
    dtype construction, 72
from type
    dtype construction, 69
fromarrays() (in module numpy.core.records), 429
frombuffer (in module numpy.ma), 290
frombuffer() (in module numpy), 423
fromfile() (in module numpy), 424
fromfile() (in module numpy.core.records), 430
fromfunction (in module numpy.ma), 291
fromfunction() (in module numpy), 425
fromiter() (in module numpy), 426
frompyfunc() (in module numpy), 611
fromrecords() (in module numpy.core.records), 429
fromregex() (in module numpy), 661
fromroots() (numpy.polynomial.chebyshev.Chebyshev class method), 881
fromroots() (numpy.polynomial.hermite.Hermite class method), 961
fromroots() (numpy.polynomial.hermite_e.HermiteE class method), 987
fromroots() (numpy.polynomial.laguerre.Laguerre class method), 934
fromroots() (numpy.polynomial.legendre.Legendre class method), 908
fromroots() (numpy.polynomial.polynomial.Polynomial class method), 856
fromstring() (in module numpy), 426
fromstring() (in module numpy.core.records), 430
full() (in module numpy), 416
full_like() (in module numpy), 417
fv() (in module numpy), 596

G

gamma() (in module numpy.random), 1044
gamma() (numpy.random.RandomState method), 1093
generate_config_py() (in module numpy.distutils.misc_util), 1224
generic (class in numpy), 53
genfromtxt() (in module numpy), 658
geometric() (in module numpy.random), 1045
geometric() (numpy.random.RandomState method), 1094

geomspace() (in module numpy), 435
get_build_temp_dir() (numpy.distutils.misc_util.Configuration method), 1231
get_cmd() (in module numpy.distutils.misc_util), 1224
get_config_cmd() (numpy.distutils.misc_util.Configuration method), 1231
get_dependencies() (in module numpy.distutils.misc_util), 1224
get_distribution() (numpy.distutils.misc_util.Configuration method), 1225
get_ext_source_files() (in module numpy.distutils.misc_util), 1224
get_fill_value() (numpy.ma.MaskedArray method), 287
get_info() (in module numpy.distutils.system_info), 1233
get_info() (numpy.distutils.misc_util.Configuration method), 1232
get_numpy_include_dirs() (in module numpy.distutils.misc_util), 1224
get_printoptions() (in module numpy), 671
get_script_files() (in module numpy.distutils.misc_util), 1224
get_standard_file() (in module numpy.distutils.system_info), 1233
get_state() (in module numpy.random), 1141
get_state() (numpy.random.RandomState method), 1095
get_subpackage() (numpy.distutils.misc_util.Configuration method), 1225
get_version() (numpy.distutils.misc_util.Configuration method), 1232
getA() (numpy.matrix method), 120
getA1() (numpy.matrix method), 121
getbufsize() (in module numpy), 839
getdata() (in module numpy.ma), 302
getdomain() (in module numpy.polynomial.polyutils), 1012
geterr() (in module numpy), 568
geterrcall() (in module numpy), 569
geterrobj() (in module numpy), 571
getfield() (numpy.chararray method), 162
getfield() (numpy.core.defchararray.chararray method), 529
getfield() (numpy.generic method), 57
getfield() (numpy.matrix method), 122
getfield() (numpy.ndarray method), 21
getfield() (numpy.recarray method), 195
getfield() (numpy.record method), 215
getH() (numpy.matrix method), 121
getI() (numpy.matrix method), 121
getitem
    ndarray special methods, 77
getmask() (in module numpy.ma), 300
getmaskarray() (in module numpy.ma), 301
getT() (numpy.matrix method), 122
gradient() (in module numpy), 779
greater (in module numpy), 738
greater() (in module numpy.core.defchararray), 508
greater_equal (in module numpy), 739
greater_equal() (in module numpy.core.defchararray), 507
green_text() (in module numpy.distutils.misc_util), 1224
gumbel() (in module numpy.random), 1046
gumbel() (numpy.random.RandomState method), 1096

H

H (numpy.matrix attribute), 101
hamming() (in module numpy), 1217
hanning() (in module numpy), 1219
harden_mask (in module numpy.ma), 331
harden_mask() (numpy.ma.MaskedArray method), 286
hardmask (numpy.ma.MaskedArray attribute), 245
has_cxx_sources() (in module numpy.distutils.misc_util), 1224
has_f_sources() (in module numpy.distutils.misc_util), 1224
has_samecoef() (numpy.polynomial.chebyshev.Chebyshev method), 882
has_samecoef() (numpy.polynomial.hermite.Hermite method), 961
has_samecoef() (numpy.polynomial.hermite_e.HermiteE method), 988
has_samecoef() (numpy.polynomial.laguerre.Laguerre method), 935
has_samecoef() (numpy.polynomial.legendre.Legendre method), 909
has_samecoef() (numpy.polynomial.polynomial.Polynomial method), 856
has_samedomain() (numpy.polynomial.chebyshev.Chebyshev method), 882
has_samedomain() (numpy.polynomial.hermite.Hermite method), 961
has_samedomain() (numpy.polynomial.hermite_e.HermiteE method), 988
has_samedomain() (numpy.polynomial.laguerre.Laguerre method), 935
has_samedomain() (numpy.polynomial.legendre.Legendre method), 909
has_samedomain() (numpy.polynomial.polynomial.Polynomial method), 857
has_sametype() (numpy.polynomial.chebyshev.Chebyshev method), 882
has_sametype() (numpy.polynomial.hermite.Hermite method), 961
has_sametype() (numpy.polynomial.hermite_e.HermiteE method), 988
has_sametype() (numpy.polynomial.laguerre.Laguerre method), 935
has_sametype() (numpy.polynomial.legendre.Legendre method), 909

has_sametype() (numpy.polynomial.polynomial.Polynomial method), 857
has_samewindow() (numpy.polynomial.chebyshev.Chebyshev method), 882
has_samewindow() (numpy.polynomial.hermite.Hermite method), 962
has_samewindow() (numpy.polynomial.hermite_e.HermiteE method), 988
has_samewindow() (numpy.polynomial.laguerre.Laguerre method), 935
has_samewindow() (numpy.polynomial.legendre.Legendre method), 909
has_samewindow() (numpy.polynomial.polynomial.Polynomial method), 857
hasobject (numpy.dtype attribute), 66
have_f77c() (numpy.distutils.misc_util.Configuration method), 1231
have_f90c() (numpy.distutils.misc_util.Configuration method), 1231
heaviside (in module numpy), 825
herm2poly() (in module numpy.polynomial.hermite), 982
hermadd() (in module numpy.polynomial.hermite), 976
hermcompanion() (in module numpy.polynomial.hermite), 981
hermder() (in module numpy.polynomial.hermite), 974
hermdiv() (in module numpy.polynomial.hermite), 978
hermdomain (in module numpy.polynomial.hermite), 981
herme2poly() (in module numpy.polynomial.hermite_e), 1009
hermeadd() (in module numpy.polynomial.hermite_e), 1003
hermecompanion() (in module numpy.polynomial.hermite_e), 1007
hermeder() (in module numpy.polynomial.hermite_e), 1000
hermediv() (in module numpy.polynomial.hermite_e), 1005
hermedomain (in module numpy.polynomial.hermite_e), 1007
hermefit() (in module numpy.polynomial.hermite_e), 996
hermefromroots() (in module numpy.polynomial.hermite_e), 995
hermegauss() (in module numpy.polynomial.hermite_e), 1006
hermegrid2d() (in module numpy.polynomial.hermite_e), 993
hermegrid3d() (in module numpy.polynomial.hermite_e), 994
hermeint() (in module numpy.polynomial.hermite_e), 1001
hermeline() (in module numpy.polynomial.hermite_e), 1008
hermemul() (in module numpy.polynomial.hermite_e), 1004
hermemulx() (in module numpy.polynomial.hermite_e), 1004
hermeone (in module numpy.polynomial.hermite_e), 1007
hermepow() (in module numpy.polynomial.hermite_e), 1005
hermeroots() (in module numpy.polynomial.hermite_e), 995
hermesub() (in module numpy.polynomial.hermite_e), 1003
hermetrim() (in module numpy.polynomial.hermite_e), 1007
hermeval() (in module numpy.polynomial.hermite_e), 991
hermeval2d() (in module numpy.polynomial.hermite_e), 992
hermeval3d() (in module numpy.polynomial.hermite_e), 993
hermevander() (in module numpy.polynomial.hermite_e), 998
hermevander2d() (in module numpy.polynomial.hermite_e), 999
hermevander3d() (in module numpy.polynomial.hermite_e), 999
hermeweight() (in module numpy.polynomial.hermite_e), 1006
hermex (in module numpy.polynomial.hermite_e), 1007
hermezero (in module numpy.polynomial.hermite_e), 1007
hermfit() (in module numpy.polynomial.hermite), 970
hermfromroots() (in module numpy.polynomial.hermite), 969
hermgauss() (in module numpy.polynomial.hermite), 980
hermgrid2d() (in module numpy.polynomial.hermite), 967
hermgrid3d() (in module numpy.polynomial.hermite), 967
hermint() (in module numpy.polynomial.hermite), 975
Hermite (class in numpy.polynomial.hermite), 957
HermiteE (class in numpy.polynomial.hermite_e), 984
hermline() (in module numpy.polynomial.hermite), 982
hermmul() (in module numpy.polynomial.hermite), 977
hermmulx() (in module numpy.polynomial.hermite), 978
hermone (in module numpy.polynomial.hermite), 981
hermpow() (in module numpy.polynomial.hermite), 979
hermroots() (in module numpy.polynomial.hermite), 968
hermsub() (in module numpy.polynomial.hermite), 977
hermtrim() (in module numpy.polynomial.hermite), 981
hermval() (in module numpy.polynomial.hermite), 964
hermval2d() (in module numpy.polynomial.hermite), 965
hermval3d() (in module numpy.polynomial.hermite), 966
hermvander() (in module numpy.polynomial.hermite), 971
hermvander2d() (in module numpy.polynomial.hermite),

972
hermvander3d() (in module numpy.polynomial.hermite), 973
hermweight() (in module numpy.polynomial.hermite), 980
hermx (in module numpy.polynomial.hermite), 981
hermzero (in module numpy.polynomial.hermite), 981
hfft() (in module numpy.fft), 589
histogram() (in module numpy), 1190
histogram2d() (in module numpy), 1193
histogramdd() (in module numpy), 1195
holidays (numpy.busdaycalendar attribute), 548
hsplit (in module numpy.ma), 317
hsplit() (in module numpy), 472
hstack (in module numpy.ma), 316
hstack() (in module numpy), 465
hypergeometric() (in module numpy.random), 1048
hypergeometric() (numpy.random.RandomState method), 1098
hypot (in module numpy), 750

I

I (numpy.matrix attribute), 101
i0() (in module numpy), 793
identity (in module numpy.ma), 355
identity (numpy.ufunc attribute), 397
identity() (in module numpy), 412
identity() (in module numpy.matlib), 837
identity() (numpy.polynomial.chebyshev.Chebyshev class method), 882
identity() (numpy.polynomial.hermite.Hermite class method), 962
identity() (numpy.polynomial.hermite_e.HermiteE class method), 989
identity() (numpy.polynomial.laguerre.Laguerre class method), 935
identity() (numpy.polynomial.legendre.Legendre class method), 909
identity() (numpy.polynomial.polynomial.Polynomial class method), 857
ids() (numpy.ma.MaskedArray method), 284
ifft() (in module numpy.fft), 574
ifft2() (in module numpy.fft), 578
ifftn() (in module numpy.fft), 581
ifftshift() (in module numpy.fft), 593
ihfft() (in module numpy.fft), 590
iinfo (class in numpy), 559
imag (numpy.chararray attribute), 153
imag (numpy.core.defchararray.chararray attribute), 520
imag (numpy.generic attribute), 52
imag (numpy.ma.MaskedArray attribute), 252
imag (numpy.matrix attribute), 108
imag (numpy.ndarray attribute), 9
imag (numpy.recarray attribute), 184
imag (numpy.record attribute), 210
imag() (in module numpy), 816
import_array (C function), 1291
import_ufunc (C function), 1319
in1d() (in module numpy), 1143
index (numpy.broadcast attribute), 223
index() (in module numpy.core.defchararray), 510
index() (numpy.chararray method), 163
index() (numpy.core.defchararray.chararray method), 530
indexing, 77, 85, 1333
indices() (in module numpy), 621
indices() (in module numpy.ma), 372
info() (in module numpy), 614
inner() (in module numpy), 679
inner() (in module numpy.ma), 355
innerproduct() (in module numpy.ma), 357
insert() (in module numpy), 477
integ() (numpy.poly1d method), 1018
integ() (numpy.polynomial.chebyshev.Chebyshev method), 883
integ() (numpy.polynomial.hermite.Hermite method), 962
integ() (numpy.polynomial.hermite_e.HermiteE method), 989
integ() (numpy.polynomial.laguerre.Laguerre method), 936
integ() (numpy.polynomial.legendre.Legendre method), 910
integ() (numpy.polynomial.polynomial.Polynomial method), 857
interface
  array, 373
interp() (in module numpy), 832
interpolate() (numpy.polynomial.chebyshev.Chebyshev class method), 883
intersect1d() (in module numpy), 1144
inv() (in module numpy.linalg), 716
invert (in module numpy), 490
ipmt() (in module numpy), 601
irfft() (in module numpy.fft), 584
irfft2() (in module numpy.fft), 586
irfftn() (in module numpy.fft), 588
irr() (in module numpy), 602
is_busday() (in module numpy), 548
is_local_src_dir() (in module numpy.distutils.misc_util), 1224
is_mask() (in module numpy.ma), 306
is_masked() (in module numpy.ma), 305
isalignedstruct (numpy.dtype attribute), 67
isalnum() (numpy.chararray method), 163
isalnum() (numpy.core.defchararray.chararray method), 530
isalpha() (in module numpy.core.defchararray), 511
isalpha() (numpy.chararray method), 163

isalpha() (numpy.core.defchararray.chararray method), 530
isbuiltin (numpy.dtype attribute), 67
isclose() (in module numpy), 736
iscomplex() (in module numpy), 729
iscomplexobj() (in module numpy), 729
iscontiguous() (numpy.ma.MaskedArray method), 284
isdecimal() (in module numpy.core.defchararray), 511
isdecimal() (numpy.chararray method), 163
isdecimal() (numpy.core.defchararray.chararray method), 530
isdigit() (in module numpy.core.defchararray), 511
isdigit() (numpy.chararray method), 163
isdigit() (numpy.core.defchararray.chararray method), 530
isfinite (in module numpy), 723
isfortran() (in module numpy), 730
isin() (in module numpy), 1144
isinf (in module numpy), 724
islower() (in module numpy.core.defchararray), 511
islower() (numpy.chararray method), 163
islower() (numpy.core.defchararray.chararray method), 530
isnan (in module numpy), 725
isnat (in module numpy), 726
isnative (numpy.dtype attribute), 67
isneginf() (in module numpy), 727
isnumeric() (in module numpy.core.defchararray), 512
isnumeric() (numpy.chararray method), 163
isnumeric() (numpy.core.defchararray.chararray method), 530
isposinf() (in module numpy), 728
isreal() (in module numpy), 730
isrealobj() (in module numpy), 731
isscalar() (in module numpy), 731
issctype() (in module numpy), 562
isspace() (in module numpy.core.defchararray), 512
isspace() (numpy.chararray method), 163
isspace() (numpy.core.defchararray.chararray method), 530
issubclass_() (in module numpy), 563
issubdtype() (in module numpy), 562
issubsctype() (in module numpy), 563
istitle() (in module numpy.core.defchararray), 512
istitle() (numpy.chararray method), 163
istitle() (numpy.core.defchararray.chararray method), 530
isupper() (in module numpy.core.defchararray), 512
isupper() (numpy.chararray method), 164
isupper() (numpy.core.defchararray.chararray method), 531
item() (numpy.chararray method), 164
item() (numpy.core.defchararray.chararray method), 531
item() (numpy.generic method), 57
item() (numpy.ma.MaskedArray method), 266
item() (numpy.matrix method), 123
item() (numpy.ndarray method), 22
item() (numpy.recarray method), 195
item() (numpy.record method), 215
itemset() (numpy.generic method), 57
itemset() (numpy.matrix method), 124
itemset() (numpy.ndarray method), 23
itemset() (numpy.recarray method), 196
itemset() (numpy.record method), 215
itemsize (numpy.chararray attribute), 153
itemsize (numpy.core.defchararray.chararray attribute), 520
itemsize (numpy.dtype attribute), 75
itemsize (numpy.generic attribute), 51
itemsize (numpy.ma.MaskedArray attribute), 249
itemsize (numpy.matrix attribute), 108
itemsize (numpy.ndarray attribute), 10
itemsize (numpy.recarray attribute), 184
itemsize (numpy.record attribute), 210
iterator
    C-API, 1298, 1314
iternext() (numpy.nditer method), 647
iters (numpy.broadcast attribute), 223
ix_() (in module numpy), 622

J

join() (in module numpy.core.defchararray), 499
join() (numpy.chararray method), 164
join() (numpy.core.defchararray.chararray method), 531

K

kaiser() (in module numpy), 1220
keyword arguments
    ufunc, 393
kind (numpy.dtype attribute), 75
knownfailureif() (in module numpy.testing.decorators), 1209
kron() (in module numpy), 693

L

lag2poly() (in module numpy.polynomial.laguerre), 955
lagadd() (in module numpy.polynomial.laguerre), 950
lagcompanion() (in module numpy.polynomial.laguerre), 954
lagder() (in module numpy.polynomial.laguerre), 947
lagdiv() (in module numpy.polynomial.laguerre), 952
lagdomain (in module numpy.polynomial.laguerre), 954
lagfit() (in module numpy.polynomial.laguerre), 943
lagfromroots() (in module numpy.polynomial.laguerre), 942
laggauss() (in module numpy.polynomial.laguerre), 953
laggrid2d() (in module numpy.polynomial.laguerre), 940
laggrid3d() (in module numpy.polynomial.laguerre), 941
lagint() (in module numpy.polynomial.laguerre), 948

lagline() (in module numpy.polynomial.laguerre), 955
lagmul() (in module numpy.polynomial.laguerre), 951
lagmulx() (in module numpy.polynomial.laguerre), 951
lagone (in module numpy.polynomial.laguerre), 954
lagpow() (in module numpy.polynomial.laguerre), 952
lagroots() (in module numpy.polynomial.laguerre), 941
lagsub() (in module numpy.polynomial.laguerre), 950
lagtrim() (in module numpy.polynomial.laguerre), 954
Laguerre (class in numpy.polynomial.laguerre), 930
lagval() (in module numpy.polynomial.laguerre), 938
lagval2d() (in module numpy.polynomial.laguerre), 939
lagval3d() (in module numpy.polynomial.laguerre), 939
lagvander() (in module numpy.polynomial.laguerre), 945
lagvander2d() (in module numpy.polynomial.laguerre), 946
lagvander3d() (in module numpy.polynomial.laguerre), 946
lagweight() (in module numpy.polynomial.laguerre), 953
lagx (in module numpy.polynomial.laguerre), 954
lagzero (in module numpy.polynomial.laguerre), 954
laplace() (in module numpy.random), 1050
laplace() (numpy.random.RandomState method), 1099
ldexp (in module numpy), 798
left_shift (in module numpy), 491
leg2poly() (in module numpy.polynomial.legendre), 929
legadd() (in module numpy.polynomial.legendre), 923
legcompanion() (in module numpy.polynomial.legendre), 927
legder() (in module numpy.polynomial.legendre), 921
legdiv() (in module numpy.polynomial.legendre), 925
legdomain (in module numpy.polynomial.legendre), 928
Legendre (class in numpy.polynomial.legendre), 904
legfit() (in module numpy.polynomial.legendre), 917
legfromroots() (in module numpy.polynomial.legendre), 916
leggauss() (in module numpy.polynomial.legendre), 926
leggrid2d() (in module numpy.polynomial.legendre), 914
leggrid3d() (in module numpy.polynomial.legendre), 914
legint() (in module numpy.polynomial.legendre), 921
legline() (in module numpy.polynomial.legendre), 928
legmul() (in module numpy.polynomial.legendre), 924
legmulx() (in module numpy.polynomial.legendre), 925
legone (in module numpy.polynomial.legendre), 928
legpow() (in module numpy.polynomial.legendre), 926
legroots() (in module numpy.polynomial.legendre), 915
legsub() (in module numpy.polynomial.legendre), 924
legtrim() (in module numpy.polynomial.legendre), 928
legval() (in module numpy.polynomial.legendre), 912
legval2d() (in module numpy.polynomial.legendre), 912
legval3d() (in module numpy.polynomial.legendre), 913
legvander() (in module numpy.polynomial.legendre), 918
legvander2d() (in module numpy.polynomial.legendre), 919
legvander3d() (in module numpy.polynomial.legendre), 920
legweight() (in module numpy.polynomial.legendre), 927
legx (in module numpy.polynomial.legendre), 928
legzero (in module numpy.polynomial.legendre), 928
less (in module numpy), 740
less() (in module numpy.core.defchararray), 508
less_equal (in module numpy), 740
less_equal() (in module numpy.core.defchararray), 508
lexsort() (in module numpy), 1149
LinAlgError, 719
linspace() (in module numpy), 432
linspace() (numpy.polynomial.chebyshev.Chebyshev method), 884
linspace() (numpy.polynomial.hermite.Hermite method), 963
linspace() (numpy.polynomial.hermite_e.HermiteE method), 989
linspace() (numpy.polynomial.laguerre.Laguerre method), 936
linspace() (numpy.polynomial.legendre.Legendre method), 910
linspace() (numpy.polynomial.polynomial.Polynomial method), 858
ljust() (in module numpy.core.defchararray), 500
ljust() (numpy.chararray method), 165
ljust() (numpy.core.defchararray.chararray method), 532
load() (in module numpy), 651
load() (in module numpy.ma), 335
load_library() (in module numpy.ctypeslib), 544
loads() (in module numpy.ma), 335
loadtxt() (in module numpy), 427
log (in module numpy), 787
log10 (in module numpy), 788
log1p (in module numpy), 790
log2 (in module numpy), 789
logaddexp (in module numpy), 791
logaddexp2 (in module numpy), 792
logical_and (in module numpy), 732
logical_not (in module numpy), 733
logical_or (in module numpy), 733
logical_xor (in module numpy), 734
logistic() (in module numpy.random), 1051
logistic() (numpy.random.RandomState method), 1100
lognormal() (in module numpy.random), 1052
lognormal() (numpy.random.RandomState method), 1102
logseries() (in module numpy.random), 1054
logseries() (numpy.random.RandomState method), 1104
logspace() (in module numpy), 434
lookfor() (in module numpy), 613
lower() (in module numpy.core.defchararray), 500
lower() (numpy.chararray method), 165
lower() (numpy.core.defchararray.chararray method), 532
lstrip() (in module numpy.core.defchararray), 500

lstrip() (numpy.chararray method), 165
lstrip() (numpy.core.defchararray.chararray method), 532
lstsq() (in module numpy.linalg), 715

M

MachAr (class in numpy), 560
make_config_py() (numpy.distutils.misc_util.Configuration method), 1232
make_mask() (in module numpy.ma), 321
make_mask_descr() (in module numpy.ma), 323
make_mask_none() (in module numpy.ma), 322
make_svn_version_py() (numpy.distutils.misc_util.Configuration method), 1232
mapdomain() (in module numpy.polynomial.polyutils), 1013
mapparms() (in module numpy.polynomial.polyutils), 1014
mapparms() (numpy.polynomial.chebyshev.Chebyshev method), 884
mapparms() (numpy.polynomial.hermite.Hermite method), 963
mapparms() (numpy.polynomial.hermite_e.HermiteE method), 990
mapparms() (numpy.polynomial.laguerre.Laguerre method), 936
mapparms() (numpy.polynomial.legendre.Legendre method), 910
mapparms() (numpy.polynomial.polynomial.Polynomial method), 858
mask (numpy.ma.masked_array attribute), 324
mask (numpy.ma.MaskedArray attribute), 244, 307
mask_cols() (in module numpy.ma), 328
mask_indices() (in module numpy), 625
mask_or() (in module numpy.ma), 323
mask_rowcols() (in module numpy.ma), 329
mask_rows() (in module numpy.ma), 330
masked (in module numpy.ma), 243
masked arrays, 225
masked_all() (in module numpy.ma), 294
masked_all_like() (in module numpy.ma), 295
masked_array (in module numpy.ma), 227
masked_equal() (in module numpy.ma), 230
masked_greater() (in module numpy.ma), 231
masked_greater_equal() (in module numpy.ma), 231
masked_inside() (in module numpy.ma), 231
masked_invalid() (in module numpy.ma), 232
masked_less() (in module numpy.ma), 232
masked_less_equal() (in module numpy.ma), 233
masked_not_equal() (in module numpy.ma), 233
masked_object() (in module numpy.ma), 234
masked_outside() (in module numpy.ma), 235
masked_print_options (in module numpy.ma), 244
masked_values() (in module numpy.ma), 235
masked_where() (in module numpy.ma), 236
MaskedArray (class in numpy.ma), 244
MaskType (in module numpy.ma), 289
mat() (in module numpy), 445
matmul() (in module numpy), 682
matrix, 42, 100
matrix (class in numpy), 102
matrix_power() (in module numpy.linalg), 691
matrix_rank() (in module numpy.linalg), 709
max (numpy.iinfo attribute), 560
max() (in module numpy.ma), 350
max() (numpy.generic method), 58
max() (numpy.ma.MaskedArray method), 275
max() (numpy.matrix method), 124
max() (numpy.ndarray method), 23
max() (numpy.recarray method), 197
max() (numpy.record method), 215
maximum (in module numpy), 826
maximum_fill_value() (in module numpy.ma), 336
may_share_memory() (in module numpy), 840
mean (in module numpy.ma), 344
mean() (in module numpy), 1175
mean() (numpy.generic method), 58
mean() (numpy.ma.MaskedArray method), 275
mean() (numpy.matrix method), 125
mean() (numpy.ndarray method), 24
mean() (numpy.recarray method), 197
mean() (numpy.record method), 215
median() (in module numpy), 1173
median() (in module numpy.ma), 345
memmap (class in numpy), 143
memory maps, 143
memory model
    ndarray, 1331
meshgrid() (in module numpy), 437
metadata (numpy.dtype attribute), 67
methods
    accumulate, ufunc, 1337
    reduce, ufunc, 1337
    reduceat, ufunc, 1337
    ufunc, 398
mgrid (in module numpy), 439
min (numpy.iinfo attribute), 560
min() (in module numpy.ma), 350
min() (numpy.generic method), 58
min() (numpy.ma.MaskedArray method), 276
min() (numpy.matrix method), 125
min() (numpy.ndarray method), 24
min() (numpy.recarray method), 197
min() (numpy.record method), 215
min_scalar_type() (in module numpy), 554
minimum (in module numpy), 827
mintypecode() (in module numpy), 566
mirr() (in module numpy), 603
mod (in module numpy), 811

mod() (in module numpy.core.defchararray), 497
modf (in module numpy), 812
moveaxis() (in module numpy), 450
mr_ (in module numpy.ma), 318
msort() (in module numpy), 1152
multi_dot() (in module numpy.linalg), 677
multinomial() (in module numpy.random), 1056
multinomial() (numpy.random.RandomState method), 1105
multiply (in module numpy), 803
multiply() (in module numpy.core.defchararray), 497
multivariate_normal() (in module numpy.random), 1057
multivariate_normal() (numpy.random.RandomState method), 1106

N

name (numpy.dtype attribute), 67
names (numpy.dtype attribute), 67
nan_to_num() (in module numpy), 830
nanargmax() (in module numpy), 1156
nanargmin() (in module numpy), 1158
nancumprod() (in module numpy), 775
nancumsum() (in module numpy), 776
nanmax() (in module numpy), 1167
nanmean() (in module numpy), 1181
nanmedian() (in module numpy), 1180
nanmin() (in module numpy), 1165
nanpercentile() (in module numpy), 1170
nanprod() (in module numpy), 770
nanstd() (in module numpy), 1182
nansum() (in module numpy), 771
nanvar() (in module numpy), 1184
nargs (numpy.ufunc attribute), 395
nbytes (numpy.chararray attribute), 153
nbytes (numpy.core.defchararray.chararray attribute), 520
nbytes (numpy.generic attribute), 53
nbytes (numpy.ma.MaskedArray attribute), 249
nbytes (numpy.matrix attribute), 108
nbytes (numpy.ndarray attribute), 10
nbytes (numpy.recarray attribute), 184
nbytes (numpy.record attribute), 210
ndarray, 85
    C-API, 1257, 1298
    memory model, 1331
    special methods getitem, 77
    special methods setitem, 77
    view, 79
ndarray (class in numpy), 4
NDArrayOperatorsMixin (class in numpy.lib.mixins), 841
ndenumerate (class in numpy), 221
ndim (numpy.chararray attribute), 154
ndim (numpy.core.defchararray.chararray attribute), 521
ndim (numpy.dtype attribute), 67
ndim (numpy.generic attribute), 51
ndim (numpy.ma.MaskedArray attribute), 250
ndim (numpy.matrix attribute), 109
ndim (numpy.ndarray attribute), 10
ndim (numpy.recarray attribute), 185
ndim (numpy.record attribute), 210
ndincr() (numpy.ndindex method), 648
ndindex (class in numpy), 647
nditer (class in numpy), 642
ndpointer() (in module numpy.ctypeslib), 544
negative (in module numpy), 802
negative_binomial() (in module numpy.random), 1058
negative_binomial() (numpy.random.RandomState method), 1108
newaxis, 77
newaxis (in module numpy), 79
newbyteorder() (numpy.dtype method), 68
newbyteorder() (numpy.generic method), 58
newbyteorder() (numpy.matrix method), 126
newbyteorder() (numpy.ndarray method), 24
newbyteorder() (numpy.recarray method), 197
newbyteorder() (numpy.record method), 215
next() (numpy.ndenumerate method), 222
next() (numpy.ndindex method), 648
nextafter (in module numpy), 799
nin (numpy.ufunc attribute), 395
NO_IMPORT_ARRAY (C macro), 1291
NO_IMPORT_UFUNC (C variable), 1319
nomask (in module numpy.ma), 244
non-contiguous, 37
noncentral_chisquare() (in module numpy.random), 1059
noncentral_chisquare() (numpy.random.RandomState method), 1109
noncentral_f() (in module numpy.random), 1061
noncentral_f() (numpy.random.RandomState method), 1110
nonzero (in module numpy.ma), 302
nonzero() (in module numpy), 618
nonzero() (numpy.chararray method), 165
nonzero() (numpy.core.defchararray.chararray method), 532
nonzero() (numpy.generic method), 59
nonzero() (numpy.ma.MaskedArray method), 267
nonzero() (numpy.matrix method), 126
nonzero() (numpy.ndarray method), 24
nonzero() (numpy.recarray method), 198
nonzero() (numpy.record method), 216
norm() (in module numpy.linalg), 705
normal() (in module numpy.random), 1063
normal() (numpy.random.RandomState method), 1112
not_equal (in module numpy), 742
not_equal() (in module numpy.core.defchararray), 507
notmasked_contiguous() (in module numpy.ma), 326
notmasked_edges() (in module numpy.ma), 326
nout (numpy.ufunc attribute), 395

nper() (in module numpy), 603
npv() (in module numpy), 598
NPY_1_PI (C variable), 1324
NPY_2_PI (C variable), 1324
NPY_ALLOW_C_API (C macro), 1295
NPY_ALLOW_C_API_DEF (C macro), 1295
NPY_ANYORDER (C variable), 1297
NPY_ARRAY_ALIGNED (C variable), 1262, 1273
NPY_ARRAY_BEHAVED (C variable), 1262, 1274
NPY_ARRAY_BEHAVED_NS (C variable), 1264, 1274
NPY_ARRAY_C_CONTIGUOUS (C variable), 1262, 1273
NPY_ARRAY_CARRAY (C variable), 1262, 1274
NPY_ARRAY_CARRAY_RO (C variable), 1262, 1274
NPY_ARRAY_DEFAULT (C variable), 1263, 1274
NPY_ARRAY_ELEMENTSTRIDES (C variable), 1264
NPY_ARRAY_ENSUREARRAY (C variable), 1262, 1274
NPY_ARRAY_ENSURECOPY (C variable), 1262, 1274
NPY_ARRAY_F_CONTIGUOUS (C variable), 1262, 1273
NPY_ARRAY_FARRAY (C variable), 1262, 1274
NPY_ARRAY_FARRAY_RO (C variable), 1262, 1274
NPY_ARRAY_FORCECAST (C variable), 1262, 1274
NPY_ARRAY_IN_ARRAY (C variable), 1263
NPY_ARRAY_IN_FARRAY (C variable), 1263
NPY_ARRAY_INOUT_ARRAY (C variable), 1263
NPY_ARRAY_INOUT_FARRAY (C variable), 1263
NPY_ARRAY_NOTSWAPPED (C variable), 1264, 1274
NPY_ARRAY_OUT_FARRAY (C variable), 1263
NPY_ARRAY_OWNDATA (C variable), 1273
NPY_ARRAY_UPDATE_ALL (C variable), 1274
NPY_ARRAY_UPDATEIFCOPY (C variable), 1262, 1274
NPY_ARRAY_WRITEABLE (C variable), 1262, 1273
NPY_ARRAY_WRITEBACKIFCOPY (C variable), 1262, 1273
NPY_AUXDATA_CLONE (C function), 1284
NPY_AUXDATA_FREE (C function), 1284
NPY_BEGIN_ALLOW_THREADS (C macro), 1294
NPY_BEGIN_THREADS (C macro), 1294
NPY_BEGIN_THREADS_DEF (C macro), 1294
NPY_BEGIN_THREADS_DESCR (C function), 1294
NPY_BEGIN_THREADS_THRESHOLDED (C function), 1295
NPY_BIG_ENDIAN (C variable), 1252
npy_bool (C type), 1256
NPY_BOOL (C variable), 1253
NPY_BUFSIZE (C variable), 1295
NPY_BYTE (C variable), 1253
NPY_BYTE_ORDER (C variable), 1252
NPY_CASTING (C type), 1297
NPY_CDOUBLE (C variable), 1254
NPY_CFLOAT (C variable), 1254
npy_clear_floatstatus (C function), 1325
npy_clear_floatstatus_barrier (C function), 1325
NPY_CLIP (C variable), 1278, 1297
NPY_CLIPMODE (C type), 1297
NPY_CLONGDOUBLE (C variable), 1254
NPY_COMPLEX128 (C variable), 1254
NPY_COMPLEX64 (C variable), 1254
npy_copysign (C function), 1323
NPY_CORDER (C variable), 1297
NPY_CPU_AMD64 (C variable), 1252
NPY_CPU_IA64 (C variable), 1252
NPY_CPU_PARISC (C variable), 1252
NPY_CPU_PPC (C variable), 1252
NPY_CPU_PPC64 (C variable), 1252
NPY_CPU_S390 (C variable), 1252
NPY_CPU_SPARC (C variable), 1252
NPY_CPU_SPARC64 (C variable), 1252
NPY_CPU_X86 (C variable), 1252
NPY_DATETIME (C variable), 1254
NPY_DEFAULT_TYPE (C variable), 1255
NPY_DISABLE_C_API (C macro), 1295
NPY_DOUBLE (C variable), 1254
npy_double_to_half (C function), 1327
npy_doublebits_to_halfbits (C function), 1328
NPY_E (C variable), 1323
NPY_END_ALLOW_THREADS (C macro), 1294
NPY_END_THREADS (C macro), 1294
NPY_END_THREADS_DESCR (C function), 1294
NPY_EQUIV_CASTING (C variable), 1298
NPY_EULER (C variable), 1324
NPY_FAIL (C variable), 1296
NPY_FALSE (C variable), 1296
NPY_FLOAT (C variable), 1254
NPY_FLOAT16 (C variable), 1254
NPY_FLOAT32 (C variable), 1254
NPY_FLOAT64 (C variable), 1254
npy_float_to_half (C function), 1327
npy_floatbits_to_halfbits (C function), 1328
NPY_FORTRANORDER (C variable), 1297
NPY_FROM_FIELDS (C variable), 1240
npy_get_floatstatus (C function), 1324
npy_get_floatstatus_barrier (C function), 1325
NPY_HALF (C variable), 1254
npy_half_copysign (C function), 1327
npy_half_eq (C function), 1327
npy_half_eq_nonan (C function), 1327
npy_half_ge (C function), 1327
npy_half_gt (C function), 1327
npy_half_isfinite (C function), 1327
npy_half_isinf (C function), 1327
npy_half_isnan (C function), 1327
npy_half_iszero (C function), 1327
npy_half_le (C function), 1327
npy_half_le_nonan (C function), 1327

npy_half_lt (C function), 1327
npy_half_lt_nonan (C function), 1327
NPY_HALF_NAN (C variable), 1326
npy_half_ne (C function), 1327
NPY_HALF_NEGONE (C variable), 1326
npy_half_nextafter (C function), 1328
NPY_HALF_NINF (C variable), 1326
NPY_HALF_NZERO (C variable), 1326
NPY_HALF_ONE (C variable), 1326
NPY_HALF_PINF (C variable), 1326
NPY_HALF_PZERO (C variable), 1326
npy_half_signbit (C function), 1327
npy_half_spacing (C function), 1327
npy_half_to_double (C function), 1326
npy_half_to_float (C function), 1326
NPY_HALF_ZERO (C variable), 1326
npy_halfbits_to_doublebits (C function), 1328
npy_halfbits_to_floatbits (C function), 1328
NPY_INFINITY (C variable), 1323
NPY_INT (C variable), 1253
NPY_INT16 (C variable), 1253
NPY_INT32 (C variable), 1253
NPY_INT64 (C variable), 1253
NPY_INT8 (C variable), 1253
NPY_INTP (C variable), 1255
npy_isfinite (C function), 1323
npy_isinf (C function), 1323
npy_isnan (C function), 1323
NPY_ITEM_HASOBJECT (C variable), 1240
NPY_ITEM_IS_POINTER (C variable), 1240
NPY_ITEM_REFCOUNT (C variable), 1240
NPY_ITER_ALIGNED (C variable), 1305
NPY_ITER_ALLOCATE (C variable), 1305
NPY_ITER_ARRAYMASK (C variable), 1306
NPY_ITER_BUFFERED (C variable), 1304
NPY_ITER_C_INDEX (C variable), 1303
NPY_ITER_COMMON_DTYPE (C variable), 1303
NPY_ITER_CONTIG (C variable), 1305
NPY_ITER_COPY (C variable), 1305
NPY_ITER_COPY_IF_OVERLAP (C variable), 1304
NPY_ITER_DELAY_BUFALLOC (C variable), 1304
NPY_ITER_DONT_NEGATE_STRIDES (C variable), 1303
NPY_ITER_EXTERNAL_LOOP (C variable), 1303
NPY_ITER_F_INDEX (C variable), 1303
NPY_ITER_GROWINNER (C variable), 1304
NPY_ITER_MULTI_INDEX (C variable), 1303
NPY_ITER_NBO (C variable), 1305
NPY_ITER_NO_BROADCAST (C variable), 1305
NPY_ITER_NO_SUBTYPE (C variable), 1305
NPY_ITER_OVERLAP_ASSUME_ELEMENTWISE (C variable), 1306
NPY_ITER_RANGED (C variable), 1304
NPY_ITER_READONLY (C variable), 1305
NPY_ITER_READWRITE (C variable), 1305
NPY_ITER_REDUCE_OK (C variable), 1303
NPY_ITER_REFS_OK (C variable), 1303
NPY_ITER_UPDATEIFCOPY (C variable), 1305
NPY_ITER_WRITEMASKED (C variable), 1306
NPY_ITER_WRITEONLY (C variable), 1305
NPY_ITER_ZEROSIZE_OK (C variable), 1303
NPY_KEEPORDER (C variable), 1297
NPY_LIST_PICKLE (C variable), 1240
NPY_LITTLE_ENDIAN (C variable), 1252
NPY_LOG10E (C variable), 1323
NPY_LOG2E (C variable), 1323
NPY_LOGE10 (C variable), 1323
NPY_LOGE2 (C variable), 1323
NPY_LONG (C variable), 1253
NPY_LONGDOUBLE (C variable), 1254
NPY_LONGLONG (C variable), 1253
NPY_LOOP_BEGIN_THREADS (C macro), 1315
NPY_LOOP_END_THREADS (C macro), 1315
NPY_MASK (C variable), 1255
NPY_MAX_BUFSIZE (C variable), 1295
NPY_MAXDIMS (C variable), 1296
NPY_MIN_BUFSIZE (C variable), 1295
NPY_NAN (C variable), 1323
NPY_NEEDS_INIT (C variable), 1240
NPY_NEEDS_PYAPI (C variable), 1240
npy_nextafter (C function), 1324
NPY_NO_CASTING (C variable), 1297
NPY_NOTYPE (C variable), 1255
NPY_NSCALARKINDS (C variable), 1297
NPY_NSORTS (C variable), 1297
NPY_NTYPES (C variable), 1255
NPY_NUM_FLOATTYPE (C variable), 1296
NPY_NZERO (C variable), 1323
NPY_OBJECT (C variable), 1254
NPY_OBJECT_DTYPE_FLAGS (C variable), 1240
NPY_ORDER (C type), 1297
NPY_OUT_ARRAY (C variable), 1263
NPY_PI (C variable), 1323
NPY_PI_2 (C variable), 1324
NPY_PI_4 (C variable), 1324
NPY_PRIORITY (C variable), 1295
NPY_PZERO (C variable), 1323
NPY_RAISE (C variable), 1278, 1297
NPY_SAFE_CASTING (C variable), 1298
NPY_SAME_KIND_CASTING (C variable), 1298
NPY_SCALAR_PRIORITY (C variable), 1295
NPY_SCALARKIND (C type), 1297
npy_set_floatstatus_divbyzero (C function), 1324
npy_set_floatstatus_invalid (C function), 1324
npy_set_floatstatus_overflow (C function), 1324
npy_set_floatstatus_underflow (C function), 1324
NPY_SHORT (C variable), 1253
npy_signbit (C function), 1323

NPY_SIZEOF_DOUBLE (C variable), 1252
NPY_SIZEOF_FLOAT (C variable), 1252
NPY_SIZEOF_INT (C variable), 1252
NPY_SIZEOF_LONG (C variable), 1252
NPY_SIZEOF_LONG_DOUBLE (C variable), 1252
NPY_SIZEOF_LONGLONG (C variable), 1252
NPY_SIZEOF_PY_INTPTR_T (C variable), 1252
NPY_SIZEOF_PY_LONG_LONG (C variable), 1252
NPY_SIZEOF_SHORT (C variable), 1252
NPY_SORTKIND (C type), 1297
npy_spacing (C function), 1324
NPY_STRING (C variable), 1254
NPY_SUBTYPE_PRIORITY (C variable), 1295
NPY_SUCCEED (C variable), 1296
NPY_TIMEDELTA (C variable), 1254
NPY_TRUE (C variable), 1296
NPY_UBYTE (C variable), 1253
NPY_UINT (C variable), 1254
NPY_UINT16 (C variable), 1253
NPY_UINT32 (C variable), 1254
NPY_UINT64 (C variable), 1254
NPY_UINT8 (C variable), 1253
NPY_UINTP (C variable), 1255
NPY_ULONG (C variable), 1254
NPY_ULONGLONG (C variable), 1254
NPY_UNICODE (C variable), 1254
NPY_UNSAFE_CASTING (C variable), 1298
NPY_USE_GETITEM (C variable), 1240
NPY_USE_SETITEM (C variable), 1240
NPY_USERDEF (C variable), 1255
NPY_USHORT (C variable), 1253
NPY_VERSION (C variable), 1296
NPY_VOID (C variable), 1255
NPY_WRAP (C variable), 1278, 1297
NpyAuxData (C type), 1283
NpyAuxData_CloneFunc (C type), 1284
NpyAuxData_FreeFunc (C type), 1284
NpyIter (C type), 1301
NpyIter_AdvancedNew (C function), 1306
NpyIter_Copy (C function), 1307
NpyIter_CreateCompatibleStrides (C function), 1311
NpyIter_Deallocate (C function), 1308
NpyIter_EnableExternalLoop (C function), 1308
NpyIter_GetAxisStrideArray (C function), 1310
NpyIter_GetBufferSize (C function), 1310
NpyIter_GetDataPtrArray (C function), 1313
NpyIter_GetDescrArray (C function), 1311
NpyIter_GetFirstMaskNAOp (C function), 1310
NpyIter_GetGetMultiIndex (C function), 1313
NpyIter_GetIndexPtr (C function), 1314
NpyIter_GetInitialDataPtrArray (C function), 1313
NpyIter_GetInnerFixedStrideArray (C function), 1314
NpyIter_GetInnerLoopSizePtr (C function), 1314
NpyIter_GetInnerStrideArray (C function), 1314
NpyIter_GetIterIndex (C function), 1309
NpyIter_GetIterIndexRange (C function), 1309
NpyIter_GetIterNext (C function), 1312
NpyIter_GetIterSize (C function), 1309
NpyIter_GetIterView (C function), 1311
NpyIter_GetMaskNAIndexArray (C function), 1311
NpyIter_GetMultiIndexFunc (C type), 1301
NpyIter_GetNDim (C function), 1310
NpyIter_GetNOp (C function), 1310
NpyIter_GetOperandArray (C function), 1311
NpyIter_GetReadFlags (C function), 1311
NpyIter_GetShape (C function), 1310
NpyIter_GetWriteFlags (C function), 1311
NpyIter_GotoIndex (C function), 1309
NpyIter_GotoIterIndex (C function), 1309
NpyIter_GotoMultiIndex (C function), 1309
NpyIter_HasDelayedBufAlloc (C function), 1310
NpyIter_HasExternalLoop (C function), 1310
NpyIter_HasIndex (C function), 1310
NpyIter_HasMultiIndex (C function), 1310
NpyIter_IsBuffered (C function), 1310
NpyIter_IsFirstVisit (C function), 1311
NpyIter_IsGrowInner (C function), 1310
NpyIter_IterNextFunc (C type), 1301
NpyIter_MultiNew (C function), 1302
NpyIter_New (C function), 1302
NpyIter_RemoveMultiIndex (C function), 1307
NpyIter_RequiresBuffering (C function), 1310
NpyIter_Reset (C function), 1308
NpyIter_ResetBasePointers (C function), 1308
NpyIter_ResetToIterIndexRange (C function), 1308
NpyIter_Type (C type), 1301
ntypes (numpy.ufunc attribute), 396
num (numpy.dtype attribute), 75
numpy (module), 1
numpy.distutils (module), 1223
numpy.distutils.exec_command (module), 1233
numpy.distutils.misc_util (module), 1223
numpy.doc.internals (module), 1338
numpy.dual (module), 567
numpy.fft (module), 572
numpy.lib.scimath (module), 568
numpy.polynomial.polyutils (module), 1010
NumpyVersion (class in numpy.lib), 842

O

o (numpy.poly1d attribute), 1017
obj2sctype() (in module numpy), 556
offset, 37
ogrid (in module numpy), 440
ones (in module numpy.ma), 295
ones() (in module numpy), 412
ones() (in module numpy.matlib), 835
ones_like() (in module numpy), 413

open() (numpy.DataSource method), 675
operation, 42, 280
operator, 42, 280
order (numpy.poly1d attribute), 1017
outer() (in module numpy), 680
outer() (in module numpy.ma), 358
outer() (numpy.ufunc method), 403
outerproduct() (in module numpy.ma), 359

P

packbits() (in module numpy), 493
pad() (in module numpy), 843
pareto() (in module numpy.random), 1064
pareto() (numpy.random.RandomState method), 1114
partition() (in module numpy), 1153
partition() (in module numpy.core.defchararray), 501
partition() (numpy.matrix method), 127
partition() (numpy.ndarray method), 24
partition() (numpy.recarray method), 198
paths() (numpy.distutils.misc_util.Configuration method), 1231
percentile() (in module numpy), 1169
permutation() (in module numpy.random), 1038
permutation() (numpy.random.RandomState method), 1115
piecewise() (in module numpy), 611
pinv() (in module numpy.linalg), 717
place() (in module numpy), 638
pmt() (in module numpy), 599
poisson() (in module numpy.random), 1065
poisson() (numpy.random.RandomState method), 1116
poly() (in module numpy), 1019
poly1d (class in numpy), 1015
poly2cheb() (in module numpy.polynomial.chebyshev), 903
poly2herm() (in module numpy.polynomial.hermite), 983
poly2herme() (in module numpy.polynomial.hermite_e), 1009
poly2lag() (in module numpy.polynomial.laguerre), 956
poly2leg() (in module numpy.polynomial.legendre), 929
polyadd() (in module numpy), 1026
polyadd() (in module numpy.polynomial.polynomial), 873
PolyBase (class in numpy.polynomial.polyutils), 1010
polycompanion() (in module numpy.polynomial.polynomial), 876
polyder() (in module numpy), 1024
polyder() (in module numpy.polynomial.polynomial), 870
polydiv() (in module numpy), 1027
polydiv() (in module numpy.polynomial.polynomial), 874
polydomain (in module numpy.polynomial.polynomial), 876
PolyDomainError, 1010
PolyError, 1010
polyfit() (in module numpy), 1021
polyfit() (in module numpy.ma), 362
polyfit() (in module numpy.polynomial.polynomial), 866
polyfromroots() (in module numpy.polynomial.polynomial), 864
polygrid2d() (in module numpy.polynomial.polynomial), 862
polygrid3d() (in module numpy.polynomial.polynomial), 863
polyint() (in module numpy), 1025
polyint() (in module numpy.polynomial.polynomial), 871
polyline() (in module numpy.polynomial.polynomial), 877
polymul() (in module numpy), 1027
polymul() (in module numpy.polynomial.polynomial), 874
polymulx() (in module numpy.polynomial.polynomial), 874
Polynomial (class in numpy.polynomial.polynomial), 852
polyone (in module numpy.polynomial.polynomial), 876
polypow() (in module numpy.polynomial.polynomial), 875
polyroots() (in module numpy.polynomial.polynomial), 863
polysub() (in module numpy), 1028
polysub() (in module numpy.polynomial.polynomial), 873
polytrim() (in module numpy.polynomial.polynomial), 876
polyval() (in module numpy), 1018
polyval() (in module numpy.polynomial.polynomial), 859
polyval2d() (in module numpy.polynomial.polynomial), 861
polyval3d() (in module numpy.polynomial.polynomial), 861
polyvalfromroots() (in module numpy.polynomial.polynomial), 865
polyvander() (in module numpy.polynomial.polynomial), 868
polyvander2d() (in module numpy.polynomial.polynomial), 869
polyvander3d() (in module numpy.polynomial.polynomial), 869
polyx (in module numpy.polynomial.polynomial), 876
polyzero (in module numpy.polynomial.polynomial), 876
positive (in module numpy), 802
power (in module numpy), 805
power() (in module numpy.ma), 346
power() (in module numpy.random), 1067
power() (numpy.random.RandomState method), 1117
ppmt() (in module numpy), 600
pprint() (numpy.record method), 216
prod (in module numpy.ma), 346

prod() (in module numpy), 767
prod() (numpy.generic method), 59
prod() (numpy.ma.MaskedArray method), 276
prod() (numpy.matrix method), 128
prod() (numpy.ndarray method), 25
prod() (numpy.recarray method), 199
prod() (numpy.record method), 216
product() (numpy.ma.MaskedArray method), 276
promote_types() (in module numpy), 554
protocol
    array, 373
ptp() (in module numpy), 1168
ptp() (in module numpy.ma), 351
ptp() (numpy.generic method), 59
ptp() (numpy.ma.MaskedArray method), 277
ptp() (numpy.matrix method), 128
ptp() (numpy.ndarray method), 26
ptp() (numpy.recarray method), 199
ptp() (numpy.record method), 216
put() (in module numpy), 638
put() (numpy.chararray method), 165
put() (numpy.core.defchararray.chararray method), 532
put() (numpy.generic method), 59
put() (numpy.ma.MaskedArray method), 269
put() (numpy.matrix method), 129
put() (numpy.ndarray method), 26
put() (numpy.recarray method), 199
put() (numpy.record method), 216
putmask() (in module numpy), 639
pv() (in module numpy), 597
PY_ARRAY_UNIQUE_SYMBOL (C macro), 1291
PY_UFUNC_UNIQUE_SYMBOL (C variable), 1319
PyArray_All (C function), 1281
PyArray_Any (C function), 1281
PyArray_Arange (C function), 1261
PyArray_ArangeObj (C function), 1261
PyArray_ArgMax (C function), 1279
PyArray_ArgMin (C function), 1280
PyArray_ArgPartition (C function), 1279
PyArray_ArgSort (C function), 1278
PyArray_ArrayDescr.base (C member), 1241
PyArray_ArrayDescr.shape (C member), 1241
PyArray_ArrayType (C function), 1270
PyArray_ArrFuncs (C type), 1241
PyArray_ArrFuncs.argmax (C member), 1243
PyArray_ArrFuncs.argmin (C member), 1244
PyArray_ArrFuncs.argsort (C member), 1243
PyArray_ArrFuncs.cancastscalarkindto (C member), 1244
PyArray_ArrFuncs.cancastto (C member), 1244
PyArray_ArrFuncs.cast (C member), 1242
PyArray_ArrFuncs.castdict (C member), 1243
PyArray_ArrFuncs.compare (C member), 1242
PyArray_ArrFuncs.copyswap (C member), 1242
PyArray_ArrFuncs.copyswapn (C member), 1242
PyArray_ArrFuncs.dotfunc (C member), 1243
PyArray_ArrFuncs.fastclip (C member), 1244
PyArray_ArrFuncs.fastputmask (C member), 1244
PyArray_ArrFuncs.fasttake (C member), 1244
PyArray_ArrFuncs.fill (C member), 1243
PyArray_ArrFuncs.fillwithscalar (C member), 1243
PyArray_ArrFuncs.fromstr (C member), 1243
PyArray_ArrFuncs.getitem (C member), 1242
PyArray_ArrFuncs.nonzero (C member), 1243
PyArray_ArrFuncs.scalarkind (C member), 1243
PyArray_ArrFuncs.scanfunc (C member), 1243
PyArray_ArrFuncs.setitem (C member), 1242
PyArray_ArrFuncs.sort (C member), 1243
PyArray_AsCArray (C function), 1281
PyArray_AxisConverter (C function), 1290
PyArray_BASE (C function), 1258
PyArray_BoolConverter (C function), 1290
PyArray_Broadcast (C function), 1286
PyArray_BroadcastToShape (C function), 1285
PyArray_BufferConverter (C function), 1290
PyArray_ByteorderConverter (C function), 1290
PyArray_BYTES (C function), 1258
PyArray_Byteswap (C function), 1276
PyArray_CanCastArrayTo (C function), 1270
PyArray_CanCastSafely (C function), 1269
PyArray_CanCastTo (C function), 1269
PyArray_CanCastTypeTo (C function), 1269
PyArray_CanCoerceScalar (C function), 1288
PyArray_Cast (C function), 1269
PyArray_CastingConverter (C function), 1291
PyArray_CastScalarToCtype (C function), 1288
PyArray_CastTo (C function), 1269
PyArray_CastToType (C function), 1269
PyArray_CEQ (C function), 1296
PyArray_CGE (C function), 1296
PyArray_CGT (C function), 1296
PyArray_Check (C function), 1266
PyArray_CheckAnyScalar (C function), 1267
PyArray_CheckAxis (C function), 1266
PyArray_CheckExact (C function), 1266
PyArray_CheckFromAny (C function), 1264
PyArray_CheckScalar (C function), 1267
PyArray_CheckStrides (C function), 1283
PyArray_CHKFLAGS (C function), 1274
PyArray_Choose (C function), 1278
PyArray_Chunk (C type), 1249
PyArray_Chunk.PyArray_Chunk.base (C member), 1250
PyArray_Chunk.PyArray_Chunk.flags (C member), 1250
PyArray_Chunk.PyArray_Chunk.len (C member), 1250
PyArray_Chunk.PyArray_Chunk.ptr (C member), 1250
PyArray_CLE (C function), 1296
PyArray_CLEARFLAGS (C function), 1258
PyArray_Clip (C function), 1280

PyArray_ClipmodeConverter (C function), 1291
PyArray_CLT (C function), 1296
PyArray_CNE (C function), 1296
PyArray_CompareLists (C function), 1283
PyArray_Compress (C function), 1279
PyArray_Concatenate (C function), 1282
PyArray_Conjugate (C function), 1280
PyArray_ContiguousFromAny (C function), 1265
PyArray_ConvertClipmodeSequence (C function), 1291
PyArray_Converter (C function), 1290
PyArray_ConvertToCommonType (C function), 1271
PyArray_CopyAndTranspose (C function), 1282
PyArray_CopyInto (C function), 1265
PyArray_Correlate (C function), 1282
PyArray_Correlate2 (C function), 1282
PyArray_CountNonzero (C function), 1279
PyArray_CumProd (C function), 1281
PyArray_CumSum (C function), 1281
PyArray_DATA (C function), 1258
PyArray_DESCR (C function), 1258
PyArray_Descr (C type), 1239
PyArray_Descr.alignment (C member), 1241
PyArray_Descr.byteorder (C member), 1240
PyArray_Descr.elsize (C member), 1241
PyArray_Descr.f (C member), 1241
PyArray_Descr.fields (C member), 1241
PyArray_Descr.flags (C member), 1240
PyArray_Descr.kind (C member), 1240
PyArray_Descr.subarray (C member), 1241
PyArray_Descr.type (C member), 1240
PyArray_Descr.type_num (C member), 1240
PyArray_Descr.typeobj (C member), 1239
Pyarray_DescrAlignConverter (C function), 1289
Pyarray_DescrAlignConverter2 (C function), 1289
PyArray_DescrCheck (C function), 1289
PyArray_DescrConverter (C function), 1289
PyArray_DescrConverter2 (C function), 1289
PyArray_DescrFromObject (C function), 1289
PyArray_DescrFromScalar (C function), 1289
PyArray_DescrFromType (C function), 1289
PyArray_DescrNew (C function), 1289
PyArray_DescrNewByteorder (C function), 1289
PyArray_DescrNewFromType (C function), 1289
PyArray_Diagonal (C function), 1279
PyArray_DIM (C function), 1258
PyArray_DIMS (C function), 1258
PyArray_Dims (C type), 1249
PyArray_Dims.PyArray_Dims.len (C member), 1249
PyArray_Dims.PyArray_Dims.ptr (C member), 1249
PyArray_DiscardWritebackIfCopy (C function), 1296
PyArray_DTYPE (C function), 1258
PyArray_Dump (C function), 1276
PyArray_Dumps (C function), 1276
PyArray_EinsteinSum (C function), 1282
PyArray_EMPTY (C function), 1261
PyArray_Empty (C function), 1261
PyArray_ENABLEFLAGS (C function), 1258
PyArray_EnsureArray (C function), 1265
PyArray_EquivArrTypes (C function), 1269
PyArray_EquivByteorders (C function), 1269
PyArray_EquivTypenums (C function), 1269
PyArray_EquivTypes (C function), 1269
PyArray_FieldNames (C function), 1289
PyArray_FillObjectArray (C function), 1272
PyArray_FILLWBYTE (C function), 1261
PyArray_FillWithScalar (C function), 1276
PyArray_FLAGS (C function), 1259
PyArray_Flatten (C function), 1277
PyArray_Free (C function), 1282
PyArray_free (C function), 1294
PyArray_FROM_O (C function), 1265
PyArray_FROM_OF (C function), 1266
PyArray_FROM_OT (C function), 1266
PyArray_FROM_OTF (C function), 1266
PyArray_FROMANY (C function), 1266
PyArray_FromAny (C function), 1261
PyArray_FromArray (C function), 1264
PyArray_FromArrayAttr (C function), 1264
PyArray_FromBuffer (C function), 1265
PyArray_FromFile (C function), 1265
PyArray_FromInterface (C function), 1264
PyArray_FromObject (C function), 1265
PyArray_FromScalar (C function), 1288
PyArray_FromString (C function), 1265
PyArray_FromStructInterface (C function), 1264
PyArray_GetArrayParamsFromObject (C function), 1263
PyArray_GetCastFunc (C function), 1269
PyArray_GETCONTIGUOUS (C function), 1265
PyArray_GetEndianness (C function), 1253
PyArray_GetField (C function), 1276
PyArray_GETITEM (C function), 1259
PyArray_GetNDArrayCFeatureVersion (C function), 1293
PyArray_GetNDArrayCVersion (C function), 1292
PyArray_GetNumericOps (C function), 1293
PyArray_GetPriority (C function), 1295
PyArray_GetPtr (C function), 1259
PyArray_GETPTR1 (C function), 1259
PyArray_GETPTR2 (C function), 1259
PyArray_GETPTR3 (C function), 1259
PyArray_GETPTR4 (C function), 1259
PyArray_HasArrayInterface (C function), 1266
PyArray_HasArrayInterfaceType (C function), 1266
PyArray_HASFIELDS (C function), 1268
PyArray_INCREF (C function), 1272
PyArray_InitArrFuncs (C function), 1271
PyArray_InnerProduct (C function), 1282
PyArray_IntpConverter (C function), 1290

PyArray_IntpFromSequence (C function), 1291
PyArray_IS_C_CONTIGUOUS (C function), 1275
PyArray_IS_F_CONTIGUOUS (C function), 1275
PyArray_ISALIGNED (C function), 1275
PyArray_IsAnyScalar (C function), 1267
PyArray_ISBEHAVED (C function), 1275
PyArray_ISBEHAVED_RO (C function), 1275
PyArray_ISBOOL (C function), 1268
PyArray_ISBYTESWAPPED (C function), 1268
PyArray_ISCARRAY (C function), 1275
PyArray_ISCARRAY_RO (C function), 1275
PyArray_ISCOMPLEX (C function), 1267
PyArray_ISEXTENDED (C function), 1268
PyArray_ISFARRAY (C function), 1275
PyArray_ISFARRAY_RO (C function), 1275
PyArray_ISFLEXIBLE (C function), 1268
PyArray_ISFLOAT (C function), 1267
PyArray_ISFORTRAN (C function), 1275
PyArray_ISINTEGER (C function), 1267
PyArray_ISNOTSWAPPED (C function), 1268
PyArray_ISNUMBER (C function), 1268
PyArray_ISOBJECT (C function), 1268
PyArray_ISONESEGMENT (C function), 1275
PyArray_ISPYTHON (C function), 1268
PyArray_IsPythonNumber (C function), 1267
PyArray_IsPythonScalar (C function), 1267
PyArray_IsScalar (C function), 1266
PyArray_ISSIGNED (C function), 1267
PyArray_ISSTRING (C function), 1268
PyArray_ISUNSIGNED (C function), 1267
PyArray_ISUSERDEF (C function), 1268
PyArray_ISWRITEABLE (C function), 1275
PyArray_IsZeroDim (C function), 1266
PyArray_Item_INCREF (C function), 1272
PyArray_Item_XDECREF (C function), 1272
PyArray_ITEMSIZE (C function), 1259
PyArray_ITER_DATA (C function), 1285
PyArray_ITER_GOTO (C function), 1285
PyArray_ITER_GOTO1D (C function), 1285
PyArray_ITER_NEXT (C function), 1285
PyArray_ITER_NOTDONE (C function), 1285
PyArray_ITER_RESET (C function), 1285
PyArray_IterAllButAxis (C function), 1285
PyArray_IterNew (C function), 1285
PyArray_LexSort (C function), 1278
PyArray_malloc (C function), 1293
PyArray_MatrixProduct (C function), 1282
PyArray_MatrixProduct2 (C function), 1282
PyArray_MAX (C function), 1296
PyArray_Max (C function), 1280
PyArray_Mean (C function), 1280
PyArray_MIN (C function), 1296
PyArray_Min (C function), 1280
PyArray_MinScalarType (C function), 1270
PyArray_MoveInto (C function), 1265
PyArray_MultiIter_DATA (C function), 1285
PyArray_MultiIter_GOTO (C function), 1286
PyArray_MultiIter_GOTO1D (C function), 1286
PyArray_MultiIter_NEXT (C function), 1285
PyArray_MultiIter_NEXTi (C function), 1286
PyArray_MultiIter_NOTDONE (C function), 1286
PyArray_MultiIter_RESET (C function), 1285
PyArray_MultiIterNew (C function), 1285
PyArray_MultiplyIntList (C function), 1283
PyArray_MultiplyList (C function), 1283
PyArray_NBYTES (C function), 1259
PyArray_NDIM (C function), 1258
PyArray_NeighborhoodIterNew (C function), 1286
PyArray_New (C function), 1260
PyArray_NewCopy (C function), 1276
PyArray_NewFromDescr (C function), 1260
PyArray_NewLikeArray (C function), 1260
PyArray_Newshape (C function), 1277
PyArray_Nonzero (C function), 1279
PyArray_ObjectType (C function), 1270
PyArray_One (C function), 1271
PyArray_OrderConverter (C function), 1291
PyArray_OutputConverter (C function), 1290
PyArray_Partition (C function), 1279
PyArray_Prod (C function), 1281
PyArray_PromoteTypes (C function), 1270
PyArray_Ptp (C function), 1280
PyArray_PutMask (C function), 1278
PyArray_PutTo (C function), 1278
PyArray_PyIntAsInt (C function), 1291
PyArray_PyIntAsIntp (C function), 1291
PyArray_Ravel (C function), 1277
PyArray_realloc (C function), 1294
PyArray_REFCOUNT (C function), 1296
PyArray_RegisterCanCast (C function), 1272
PyArray_RegisterCastFunc (C function), 1271
PyArray_RegisterDataType (C function), 1271
PyArray_RemoveSmallest (C function), 1286
PyArray_Repeat (C function), 1278
PyArray_Reshape (C function), 1277
PyArray_Resize (C function), 1277
PyArray_ResolveWritebackIfCopy (C function), 1294
PyArray_ResultType (C function), 1270
PyArray_Return (C function), 1287
PyArray_Round (C function), 1280
PyArray_SAMESHAPE (C function), 1296
PyArray_Scalar (C function), 1287
PyArray_ScalarAsCtype (C function), 1288
PyArray_ScalarKind (C function), 1288
PyArray_SearchsideConverter (C function), 1290
PyArray_SearchSorted (C function), 1279
PyArray_SetBaseObject (C function), 1261
PyArray_SetField (C function), 1276

PyArray_SETITEM (C function), 1259
PyArray_SetNumericOps (C function), 1293
PyArray_SetStringFunction (C function), 1293
PyArray_SetUpdateIfCopyBase (C function), 1272
PyArray_SetWritebackIfCopyBase (C function), 1272
PyArray_SHAPE (C function), 1258
PyArray_SimpleNew (C function), 1260
PyArray_SimpleNewFromData (C function), 1260
PyArray_SimpleNewFromDescr (C function), 1261
PyArray_SIZE (C function), 1259
PyArray_Size (C function), 1259
PyArray_Sort (C function), 1278
PyArray_SortkindConverter (C function), 1290
PyArray_Squeeze (C function), 1277
PyArray_Std (C function), 1280
PyArray_STRIDE (C function), 1258
PyArray_STRIDES (C function), 1258
PyArray_Sum (C function), 1281
PyArray_SwapAxes (C function), 1277
PyArray_TakeFrom (C function), 1278
PyArray_ToFile (C function), 1276
PyArray_ToList (C function), 1276
PyArray_ToScalar (C function), 1288
PyArray_ToString (C function), 1276
PyArray_Trace (C function), 1280
PyArray_Transpose (C function), 1277
PyArray_TYPE (C function), 1259
PyArray_Type (C variable), 1238
PyArray_TypeObjectFromType (C function), 1288
PyArray_TypestrConvert (C function), 1291
PyArray_UpdateFlags (C function), 1275
PyArray_ValidType (C function), 1271
PyArray_View (C function), 1276
PyArray_Where (C function), 1283
PyArray_XDECREF (C function), 1272
PyArray_XDECREF_ERR (C function), 1296
PyArray_Zero (C function), 1271
PyArray_ZEROS (C function), 1261
PyArray_Zeros (C function), 1261
PyArrayDescr_Type (C variable), 1239
PyArrayFlags_Type (C variable), 1248
PyArrayInterface (C type), 1250
PyArrayInterface.PyArrayInterface.data (C member), 1251
PyArrayInterface.PyArrayInterface.descr (C member), 1251
PyArrayInterface.PyArrayInterface.flags (C member), 1250
PyArrayInterface.PyArrayInterface.itemsize (C member), 1250
PyArrayInterface.PyArrayInterface.nd (C member), 1250
PyArrayInterface.PyArrayInterface.shape (C member), 1251
PyArrayInterface.PyArrayInterface.strides (C member), 1251
PyArrayInterface.PyArrayInterface.two (C member), 1250
PyArrayInterface.PyArrayInterface.typekind (C member), 1250
PyArrayIter_Check (C function), 1285
PyArrayIter_Type (C variable), 1246
PyArrayIterObject (C type), 1246
PyArrayIterObject.PyArrayIterObject.ao (C member), 1247
PyArrayIterObject.PyArrayIterObject.backstrides (C member), 1247
PyArrayIterObject.PyArrayIterObject.contiguous (C member), 1247
PyArrayIterObject.PyArrayIterObject.coordinates (C member), 1247
PyArrayIterObject.PyArrayIterObject.dataptr (C member), 1247
PyArrayIterObject.PyArrayIterObject.dims_m1 (C member), 1247
PyArrayIterObject.PyArrayIterObject.factors (C member), 1247
PyArrayIterObject.PyArrayIterObject.index (C member), 1247
PyArrayIterObject.PyArrayIterObject.nd_m1 (C member), 1247
PyArrayIterObject.PyArrayIterObject.size (C member), 1247
PyArrayIterObject.PyArrayIterObject.strides (C member), 1247
PyArrayMapIter_Type (C variable), 1251
PyArrayMultiIter_Type (C variable), 1247
PyArrayMultiIterObject (C type), 1248
PyArrayMultiIterObject.PyArrayMultiIterObject.dimensions (C member), 1248
PyArrayMultiIterObject.PyArrayMultiIterObject.index (C member), 1248
PyArrayMultiIterObject.PyArrayMultiIterObject.iters (C member), 1248
PyArrayMultiIterObject.PyArrayMultiIterObject.nd (C member), 1248
PyArrayMultiIterObject.PyArrayMultiIterObject.numiter (C member), 1248
PyArrayMultiIterObject.PyArrayMultiIterObject.size (C member), 1248
PyArrayNeighborhoodIter_Next (C function), 1287
PyArrayNeighborhoodIter_Reset (C function), 1287
PyArrayNeighborhoodIter_Type (C variable), 1248
PyArrayNeighborhoodIterObject (C type), 1248
PyArrayObject (C type), 1238
PyArrayObject.base (C member), 1239
PyArrayObject.data (C member), 1238
PyArrayObject.descr (C member), 1239

PyArrayObject.dimensions (C member), 1238
PyArrayObject.flags (C member), 1239
PyArrayObject.nd (C member), 1238
PyArrayObject.strides (C member), 1238
PyArrayObject.weakreflist (C member), 1239
PyDataMem_FREE (C function), 1293
PyDataMem_NEW (C function), 1293
PyDataMem_RENEW (C function), 1293
PyDataType_FLAGCHK (C function), 1240
PyDataType_HASFIELDS (C function), 1268
PyDataType_ISBOOL (C function), 1268
PyDataType_ISCOMPLEX (C function), 1267
PyDataType_ISEXTENDED (C function), 1268
PyDataType_ISFLEXIBLE (C function), 1268
PyDataType_ISFLOAT (C function), 1267
PyDataType_ISINTEGER (C function), 1267
PyDataType_ISNUMBER (C function), 1267
PyDataType_ISOBJECT (C function), 1268
PyDataType_ISPYTHON (C function), 1268
PyDataType_ISSIGNED (C function), 1267
PyDataType_ISSTRING (C function), 1268
PyDataType_ISUNSIGNED (C function), 1267
PyDataType_ISUSERDEF (C function), 1268
PyDataType_REFCHK (C function), 1240
PyDimMem_FREE (C function), 1293
PyDimMem_NEW (C function), 1293
PyDimMem_RENEW (C function), 1293
Python Enhancement Proposals
    PEP 3118, 373
PyTypeNum_ISBOOL (C function), 1268
PyTypeNum_ISCOMPLEX (C function), 1267
PyTypeNum_ISEXTENDED (C function), 1268
PyTypeNum_ISFLEXIBLE (C function), 1268
PyTypeNum_ISFLOAT (C function), 1267
PyTypeNum_ISINTEGER (C function), 1267
PyTypeNum_ISNUMBER (C function), 1267
PyTypeNum_ISOBJECT (C function), 1268
PyTypeNum_ISPYTHON (C function), 1268
PyTypeNum_ISSIGNED (C function), 1267
PyTypeNum_ISSTRING (C function), 1268
PyTypeNum_ISUNSIGNED (C function), 1267
PyTypeNum_ISUSERDEF (C function), 1268
PyUFunc_checkfperr (C function), 1317
PyUFunc_clearfperr (C function), 1317
PyUFunc_D_D (C function), 1318
PyUFunc_d_d (C function), 1318
PyUFunc_DD_D (C function), 1318
PyUFunc_dd_d (C function), 1318
PyUFunc_e_e (C function), 1318
PyUFunc_e_e_As_d_d (C function), 1318
PyUFunc_e_e_As_f_f (C function), 1318
PyUFunc_ee_e (C function), 1318
PyUFunc_ee_e_As_dd_d (C function), 1318
PyUFunc_ee_e_As_ff_f (C function), 1318
PyUFunc_F_F (C function), 1318
PyUFunc_f_f (C function), 1318
PyUFunc_F_F_As_D_D (C function), 1318
PyUFunc_f_f_As_d_d (C function), 1318
PyUFunc_FF_F (C function), 1318
PyUFunc_ff_f (C function), 1318
PyUFunc_FF_F_As_DD_D (C function), 1318
PyUFunc_ff_f_As_dd_d (C function), 1318
PyUFunc_FromFuncAndData (C function), 1316
PyUFunc_FromFuncAndDataAndSignature (C function), 1316
PyUFunc_G_G (C function), 1318
PyUFunc_g_g (C function), 1318
PyUFunc_GenericFunction (C function), 1317
PyUFunc_GetPyValues (C function), 1317
PyUFunc_GG_G (C function), 1318
PyUFunc_gg_g (C function), 1318
PyUFunc_Loop1d (C type), 1251
PyUFunc_O_O (C function), 1319
PyUFunc_O_O_method (C function), 1319
PyUFunc_On_Om (C function), 1319
PyUFunc_OO_O (C function), 1319
PyUFunc_OO_O_method (C function), 1319
PyUFunc_PyFuncData (C type), 1319
PyUFunc_RegisterLoopForDescr (C function), 1317
PyUFunc_RegisterLoopForType (C function), 1317
PyUFunc_ReplaceLoopBySignature (C function), 1317
PyUFunc_Type (C variable), 1244
PyUFuncLoopObject (C type), 1251
PyUFuncObject (C type), 1245
PyUFuncObject.PyUFuncObject.data (C member), 1245
PyUFuncObject.PyUFuncObject.doc (C member), 1246
PyUFuncObject.PyUFuncObject.identity (C member), 1245
PyUFuncObject.PyUFuncObject.iter_flags (C member), 1246
PyUFuncObject.PyUFuncObject.name (C member), 1246
PyUFuncObject.PyUFuncObject.nargs (C member), 1245
PyUFuncObject.PyUFuncObject.nin (C member), 1245
PyUFuncObject.PyUFuncObject.nout (C member), 1245
PyUFuncObject.PyUFuncObject.ntypes (C member), 1245
PyUFuncObject.PyUFuncObject.obj (C member), 1246
PyUFuncObject.PyUFuncObject.op_flags (C member), 1246
PyUFuncObject.PyUFuncObject.ptr (C member), 1246
PyUFuncObject.PyUFuncObject.types (C member), 1246
PyUFuncObject.PyUFuncObject.userloops (C member), 1246
PyUFuncReduceObject (C type), 1251

Q

qr() (in module numpy.linalg), 695

R

r (numpy.poly1d attribute), 1017
r_ (in module numpy), 616
rad2deg (in module numpy), 755
radians (in module numpy), 753
rand() (in module numpy.matlib), 838
rand() (in module numpy.random), 1029
rand() (numpy.random.RandomState method), 1119
randint() (in module numpy.random), 1031
randint() (numpy.random.RandomState method), 1121
randn() (in module numpy.matlib), 838
randn() (in module numpy.random), 1030
randn() (numpy.random.RandomState method), 1122
random() (in module numpy.random), 1034
random_integers() (in module numpy.random), 1031
random_integers() (numpy.random.RandomState method), 1123
random_sample() (in module numpy.random), 1033
random_sample() (numpy.random.RandomState method), 1124
RandomState (class in numpy.random), 1085
ranf() (in module numpy.random), 1034
RankWarning, 1010, 1029
rate() (in module numpy), 604
ravel (in module numpy.ma), 307
ravel() (in module numpy), 448
ravel() (numpy.chararray method), 165
ravel() (numpy.core.defchararray.chararray method), 532
ravel() (numpy.generic method), 59
ravel() (numpy.ma.MaskedArray method), 260
ravel() (numpy.matrix method), 129
ravel() (numpy.ndarray method), 26
ravel() (numpy.recarray method), 199
ravel() (numpy.record method), 217
ravel_multi_index() (in module numpy), 623
rayleigh() (in module numpy.random), 1069
rayleigh() (numpy.random.RandomState method), 1125
real (numpy.chararray attribute), 154
real (numpy.core.defchararray.chararray attribute), 521
real (numpy.generic attribute), 52
real (numpy.ma.MaskedArray attribute), 252
real (numpy.matrix attribute), 109
real (numpy.ndarray attribute), 9
real (numpy.recarray attribute), 185
real (numpy.record attribute), 210
real() (in module numpy), 815
real_if_close() (in module numpy), 831
recarray (class in numpy), 177
reciprocal (in module numpy), 801
record (class in numpy), 209
record() (numpy.testing.suppress_warnings method), 1214
recordmask (numpy.ma.MaskedArray attribute), 244, 307
red_text() (in module numpy.distutils.misc_util), 1224
reduce
    ufunc methods, 1337
reduce() (numpy.ufunc method), 398
reduceat
    ufunc methods, 1337
reduceat() (numpy.ufunc method), 401
remainder (in module numpy), 813
remove_axis() (numpy.nditer method), 647
remove_multi_index() (numpy.nditer method), 647
repeat() (in module numpy), 475
repeat() (numpy.chararray method), 165
repeat() (numpy.core.defchararray.chararray method), 532
repeat() (numpy.generic method), 59
repeat() (numpy.ma.MaskedArray method), 269
repeat() (numpy.matrix method), 129
repeat() (numpy.ndarray method), 26
repeat() (numpy.recarray method), 199
repeat() (numpy.record method), 217
replace() (in module numpy.core.defchararray), 501
replace() (numpy.chararray method), 166
replace() (numpy.core.defchararray.chararray method), 533
repmat() (in module numpy.matlib), 837
require() (in module numpy), 460
reset() (numpy.broadcast method), 224
reset() (numpy.nditer method), 647
reshape() (in module numpy), 446
reshape() (in module numpy.ma), 308
reshape() (numpy.chararray method), 166
reshape() (numpy.core.defchararray.chararray method), 533
reshape() (numpy.generic method), 59
reshape() (numpy.ma.MaskedArray method), 260
reshape() (numpy.matrix method), 129
reshape() (numpy.ndarray method), 26
reshape() (numpy.recarray method), 199
reshape() (numpy.record method), 217
resize() (in module numpy), 479
resize() (in module numpy.ma), 308
resize() (numpy.chararray method), 166
resize() (numpy.core.defchararray.chararray method), 533
resize() (numpy.generic method), 60
resize() (numpy.ma.MaskedArray method), 261
resize() (numpy.matrix method), 130
resize() (numpy.ndarray method), 26
resize() (numpy.recarray method), 200
resize() (numpy.record method), 217
result_type() (in module numpy), 555
rfft() (in module numpy.fft), 583
rfft2() (in module numpy.fft), 585
rfftfreq() (in module numpy.fft), 592
rfftn() (in module numpy.fft), 586
rfind() (in module numpy.core.defchararray), 513

rfind() (numpy.chararray method), 167
rfind() (numpy.core.defchararray.chararray method), 534
right_shift (in module numpy), 492
rindex() (in module numpy.core.defchararray), 513
rindex() (numpy.chararray method), 167
rindex() (numpy.core.defchararray.chararray method), 534
rint (in module numpy), 763
rjust() (in module numpy.core.defchararray), 502
rjust() (numpy.chararray method), 167
rjust() (numpy.core.defchararray.chararray method), 534
roll() (in module numpy), 485
rollaxis() (in module numpy), 450
roots (numpy.poly1d attribute), 1017
roots() (in module numpy), 1020
roots() (numpy.polynomial.chebyshev.Chebyshev method), 884
roots() (numpy.polynomial.hermite.Hermite method), 963
roots() (numpy.polynomial.hermite_e.HermiteE method), 990
roots() (numpy.polynomial.laguerre.Laguerre method), 937
roots() (numpy.polynomial.legendre.Legendre method), 911
roots() (numpy.polynomial.polynomial.Polynomial method), 859
rot90() (in module numpy), 486
round() (in module numpy.ma), 366
round() (numpy.generic method), 60
round() (numpy.ma.MaskedArray method), 277
round() (numpy.matrix method), 131
round() (numpy.ndarray method), 28
round() (numpy.recarray method), 201
round() (numpy.record method), 217
round_() (in module numpy), 763
row-major, 37
row_stack (in module numpy.ma), 318
rpartition() (in module numpy.core.defchararray), 502
rsplit() (in module numpy.core.defchararray), 502
rsplit() (numpy.chararray method), 168
rsplit() (numpy.core.defchararray.chararray method), 535
rstrip() (in module numpy.core.defchararray), 503
rstrip() (numpy.chararray method), 168
rstrip() (numpy.core.defchararray.chararray method), 535
run_module_suite() (in module numpy.testing), 1211
rundocs() (in module numpy.testing), 1212

S

s_ (in module numpy), 618
sample() (in module numpy.random), 1035
save() (in module numpy), 653
savetxt() (in module numpy), 656
savez() (in module numpy), 654
savez_compressed() (in module numpy), 655
scalar
    dtype, 63
sctype2char() (in module numpy), 565
searchsorted() (in module numpy), 1160
searchsorted() (numpy.chararray method), 168
searchsorted() (numpy.core.defchararray.chararray method), 535
searchsorted() (numpy.generic method), 60
searchsorted() (numpy.ma.MaskedArray method), 270
searchsorted() (numpy.matrix method), 131
searchsorted() (numpy.ndarray method), 28
searchsorted() (numpy.recarray method), 201
searchsorted() (numpy.record method), 217
seed() (in module numpy.random), 1141
seed() (numpy.random.RandomState method), 1126
select() (in module numpy), 636
set_fill_value() (in module numpy.ma), 337
set_fill_value() (numpy.ma.MaskedArray method), 288
set_printoptions() (in module numpy), 669
set_state() (in module numpy.random), 1142
set_state() (numpy.random.RandomState method), 1126
set_string_function() (in module numpy), 672
set_verbosity() (in module numpy.distutils.log), 1233
setastest() (in module numpy.testing.decorators), 1210
setbufsize() (in module numpy), 388
setdiff1d() (in module numpy), 1146
seterr() (in module numpy), 389
seterrcall() (in module numpy), 390
seterrobj() (in module numpy), 570
setfield() (numpy.chararray method), 168
setfield() (numpy.core.defchararray.chararray method), 535
setfield() (numpy.generic method), 60
setfield() (numpy.matrix method), 131
setfield() (numpy.ndarray method), 28
setfield() (numpy.recarray method), 201
setfield() (numpy.record method), 217
setflags() (numpy.chararray method), 169
setflags() (numpy.core.defchararray.chararray method), 536
setflags() (numpy.generic method), 60
setflags() (numpy.matrix method), 132
setflags() (numpy.ndarray method), 29
setflags() (numpy.recarray method), 202
setflags() (numpy.record method), 218
setitem
    ndarray special methods, 77
setxor1d() (in module numpy), 1146
shape (numpy.broadcast attribute), 224
shape (numpy.chararray attribute), 154
shape (numpy.core.defchararray.chararray attribute), 521
shape (numpy.dtype attribute), 68
shape (numpy.generic attribute), 51

shape (numpy.lib.Arrayterator attribute), 650
shape (numpy.ma.MaskedArray attribute), 250
shape (numpy.matrix attribute), 109
shape (numpy.ndarray attribute), 10
shape (numpy.recarray attribute), 185
shape (numpy.record attribute), 210
shape() (in module numpy.ma), 304
sharedmask (numpy.ma.MaskedArray attribute), 245
shares_memory() (in module numpy), 840
shrink_mask() (numpy.ma.MaskedArray method), 287
shuffle() (in module numpy.random), 1037
shuffle() (numpy.random.RandomState method), 1127
sign (in module numpy), 824
signature (numpy.ufunc attribute), 397
signbit (in module numpy), 795
sin (in module numpy), 743
sinc() (in module numpy), 794
single-segment, 37
sinh (in module numpy), 756
size (numpy.broadcast attribute), 224
size (numpy.chararray attribute), 155
size (numpy.core.defchararray.chararray attribute), 522
size (numpy.generic attribute), 51
size (numpy.ma.MaskedArray attribute), 251
size (numpy.matrix attribute), 110
size (numpy.ndarray attribute), 9
size (numpy.recarray attribute), 186
size (numpy.record attribute), 210
size() (in module numpy.ma), 304
skipif() (in module numpy.testing.decorators), 1210
slicing, 77
slogdet() (in module numpy.linalg), 711
slow() (in module numpy.testing.decorators), 1210
soften_mask (in module numpy.ma), 331
soften_mask() (numpy.ma.MaskedArray method), 287
solve() (in module numpy.linalg), 713
sort() (in module numpy), 1148
sort() (in module numpy.ma), 352
sort() (numpy.chararray method), 170
sort() (numpy.core.defchararray.chararray method), 537
sort() (numpy.generic method), 60
sort() (numpy.ma.MaskedArray method), 270
sort() (numpy.matrix method), 133
sort() (numpy.ndarray method), 30
sort() (numpy.recarray method), 203
sort() (numpy.record method), 218
sort_complex() (in module numpy), 1152
source() (in module numpy), 615
spacing (in module numpy), 799
special methods
    getitem, ndarray, 77
    setitem, ndarray, 77
split() (in module numpy), 470
split() (in module numpy.core.defchararray), 503
split() (numpy.chararray method), 171
split() (numpy.core.defchararray.chararray method), 538
splitlines() (in module numpy.core.defchararray), 504
splitlines() (numpy.chararray method), 171
splitlines() (numpy.core.defchararray.chararray method), 538
sqrt (in module numpy), 819
square (in module numpy), 821
squeeze() (in module numpy), 457
squeeze() (in module numpy.ma), 313
squeeze() (numpy.chararray method), 171
squeeze() (numpy.core.defchararray.chararray method), 538
squeeze() (numpy.generic method), 60
squeeze() (numpy.ma.MaskedArray method), 261
squeeze() (numpy.matrix method), 134
squeeze() (numpy.ndarray method), 31
squeeze() (numpy.recarray method), 204
squeeze() (numpy.record method), 218
stack() (in module numpy), 463
standard_cauchy() (in module numpy.random), 1071
standard_cauchy() (numpy.random.RandomState method), 1127
standard_exponential() (in module numpy.random), 1072
standard_exponential() (numpy.random.RandomState method), 1128
standard_gamma() (in module numpy.random), 1072
standard_gamma() (numpy.random.RandomState method), 1128
standard_normal() (in module numpy.random), 1073
standard_normal() (numpy.random.RandomState method), 1129
standard_t() (in module numpy.random), 1074
standard_t() (numpy.random.RandomState method), 1130
startswith() (in module numpy.core.defchararray), 513
startswith() (numpy.chararray method), 171
startswith() (numpy.core.defchararray.chararray method), 538
std (in module numpy.ma), 346
std() (in module numpy), 1177
std() (numpy.generic method), 61
std() (numpy.ma.MaskedArray method), 277
std() (numpy.matrix method), 135
std() (numpy.ndarray method), 31
std() (numpy.recarray method), 204
std() (numpy.record method), 218
str (numpy.dtype attribute), 68
stride, 37
strides (numpy.chararray attribute), 155
strides (numpy.core.defchararray.chararray attribute), 522
strides (numpy.generic attribute), 51
strides (numpy.ma.MaskedArray attribute), 251
strides (numpy.matrix attribute), 110
strides (numpy.ndarray attribute), 11

strides (numpy.recarray attribute), 186
strides (numpy.record attribute), 211
strip() (in module numpy.core.defchararray), 504
strip() (numpy.chararray method), 171
strip() (numpy.core.defchararray.chararray method), 538
sub-array
    dtype, 63, 72
subdtype (numpy.dtype attribute), 68
subtract (in module numpy), 806
sum (in module numpy.ma), 346
sum() (in module numpy), 769
sum() (numpy.generic method), 61
sum() (numpy.ma.MaskedArray method), 277
sum() (numpy.matrix method), 135
sum() (numpy.ndarray method), 31
sum() (numpy.recarray method), 205
sum() (numpy.record method), 218
suppress_warnings (class in numpy.testing), 1212
svd() (in module numpy.linalg), 697
swapaxes (in module numpy.ma), 309
swapaxes() (in module numpy), 451
swapaxes() (numpy.chararray method), 171
swapaxes() (numpy.core.defchararray.chararray method), 538
swapaxes() (numpy.generic method), 61
swapaxes() (numpy.ma.MaskedArray method), 261
swapaxes() (numpy.matrix method), 136
swapaxes() (numpy.ndarray method), 31
swapaxes() (numpy.recarray method), 205
swapaxes() (numpy.record method), 218
swapcase() (in module numpy.core.defchararray), 505
swapcase() (numpy.chararray method), 172
swapcase() (numpy.core.defchararray.chararray method), 539

T

T (numpy.chararray attribute), 148
T (numpy.core.defchararray.chararray attribute), 515
T (numpy.generic attribute), 52
T (numpy.ma.MaskedArray attribute), 262
T (numpy.matrix attribute), 100
T (numpy.ndarray attribute), 6
T (numpy.recarray attribute), 180
T (numpy.record attribute), 210
take() (in module numpy), 630
take() (numpy.chararray method), 172
take() (numpy.core.defchararray.chararray method), 539
take() (numpy.generic method), 61
take() (numpy.ma.MaskedArray method), 271
take() (numpy.matrix method), 136
take() (numpy.ndarray method), 32
take() (numpy.recarray method), 205
take() (numpy.record method), 218
tan (in module numpy), 745
tanh (in module numpy), 758
tensordot() (in module numpy), 684
tensorinv() (in module numpy.linalg), 718
tensorsolve() (in module numpy.linalg), 714
terminal_has_colors() (in module numpy.distutils.misc_util), 1224
Tester (in module numpy.testing), 1211
tile() (in module numpy), 474
title() (in module numpy.core.defchararray), 505
title() (numpy.chararray method), 172
title() (numpy.core.defchararray.chararray method), 539
tobytes() (numpy.generic method), 61
tobytes() (numpy.ma.MaskedArray method), 258
tobytes() (numpy.matrix method), 136
tobytes() (numpy.ndarray method), 32
tobytes() (numpy.recarray method), 205
tobytes() (numpy.record method), 219
todict() (numpy.distutils.misc_util.Configuration method), 1224
tofile() (numpy.chararray method), 172
tofile() (numpy.core.defchararray.chararray method), 539
tofile() (numpy.generic method), 61
tofile() (numpy.ma.MaskedArray method), 256
tofile() (numpy.matrix method), 137
tofile() (numpy.ndarray method), 32
tofile() (numpy.recarray method), 205
tofile() (numpy.record method), 219
toflex() (numpy.ma.MaskedArray method), 257
tolist() (numpy.chararray method), 172
tolist() (numpy.core.defchararray.chararray method), 539
tolist() (numpy.generic method), 61
tolist() (numpy.ma.MaskedArray method), 257
tolist() (numpy.matrix method), 137
tolist() (numpy.ndarray method), 33
tolist() (numpy.recarray method), 206
tolist() (numpy.record method), 219
tomaxint() (numpy.random.RandomState method), 1131
torecords() (numpy.ma.MaskedArray method), 258
tostring() (numpy.chararray method), 173
tostring() (numpy.core.defchararray.chararray method), 540
tostring() (numpy.generic method), 61
tostring() (numpy.ma.MaskedArray method), 258
tostring() (numpy.matrix method), 137
tostring() (numpy.ndarray method), 33
tostring() (numpy.recarray method), 206
tostring() (numpy.record method), 219
trace (in module numpy.ma), 360
trace() (in module numpy), 712
trace() (numpy.generic method), 62
trace() (numpy.ma.MaskedArray method), 278
trace() (numpy.matrix method), 138
trace() (numpy.ndarray method), 34
trace() (numpy.recarray method), 207

trace() (numpy.record method), 219
translate() (in module numpy.core.defchararray), 506
translate() (numpy.chararray method), 173
translate() (numpy.core.defchararray.chararray method), 540
transpose() (in module numpy), 452
transpose() (in module numpy.ma), 309
transpose() (numpy.chararray method), 173
transpose() (numpy.core.defchararray.chararray method), 540
transpose() (numpy.generic method), 62
transpose() (numpy.ma.MaskedArray method), 261
transpose() (numpy.matrix method), 138
transpose() (numpy.ndarray method), 34
transpose() (numpy.recarray method), 207
transpose() (numpy.record method), 219
trapz() (in module numpy), 783
tri() (in module numpy), 442
triangular() (in module numpy.random), 1075
triangular() (numpy.random.RandomState method), 1132
tril() (in module numpy), 443
tril_indices() (in module numpy), 626
tril_indices_from() (in module numpy), 628
trim() (numpy.polynomial.chebyshev.Chebyshev method), 885
trim() (numpy.polynomial.hermite.Hermite method), 963
trim() (numpy.polynomial.hermite_e.HermiteE method), 990
trim() (numpy.polynomial.laguerre.Laguerre method), 937
trim() (numpy.polynomial.legendre.Legendre method), 911
trim() (numpy.polynomial.polynomial.Polynomial method), 859
trim_zeros() (in module numpy), 480
trimcoef() (in module numpy.polynomial.polyutils), 1012
trimseq() (in module numpy.polynomial.polyutils), 1011
triu() (in module numpy), 443
triu_indices() (in module numpy), 628
triu_indices_from() (in module numpy), 629
true_divide (in module numpy), 806
trunc (in module numpy), 766
truncate() (numpy.polynomial.chebyshev.Chebyshev method), 885
truncate() (numpy.polynomial.hermite.Hermite method), 964
truncate() (numpy.polynomial.hermite_e.HermiteE method), 990
truncate() (numpy.polynomial.laguerre.Laguerre method), 937
truncate() (numpy.polynomial.legendre.Legendre method), 911
truncate() (numpy.polynomial.polynomial.Polynomial method), 859
type (numpy.dtype attribute), 74
typename() (in module numpy), 564
types (numpy.ufunc attribute), 396

U

ufunc, 1334, 1337
    attributes, 394
    C-API, 1315, 1320
    casting rules, 391
    keyword arguments, 393
    methods, 398
    methods accumulate, 1337
    methods reduce, 1337
    methods reduceat, 1337
UFUNC_CHECK_ERROR (C function), 1315
UFUNC_CHECK_STATUS (C function), 1316
uniform() (in module numpy.random), 1077
uniform() (numpy.random.RandomState method), 1133
union1d() (in module numpy), 1147
unique() (in module numpy), 480
unpackbits() (in module numpy), 494
unravel_index() (in module numpy), 624
unshare_mask() (numpy.ma.MaskedArray method), 287
unwrap() (in module numpy), 754
upper() (in module numpy.core.defchararray), 506
upper() (numpy.chararray method), 174
upper() (numpy.core.defchararray.chararray method), 541
user_array, 220

V

vander() (in module numpy), 444
vander() (in module numpy.ma), 361
var (in module numpy.ma), 347
var() (in module numpy), 1178
var() (numpy.generic method), 62
var() (numpy.ma.MaskedArray method), 278
var() (numpy.matrix method), 139
var() (numpy.ndarray method), 35
var() (numpy.recarray method), 208
var() (numpy.record method), 219
variable (numpy.poly1d attribute), 1017
vdot() (in module numpy), 679
vectorize (class in numpy), 608
view, 3
    ndarray, 79
view() (numpy.chararray method), 174
view() (numpy.core.defchararray.chararray method), 541
view() (numpy.generic method), 62
view() (numpy.ma.MaskedArray method), 253
view() (numpy.matrix method), 139
view() (numpy.ndarray method), 35
view() (numpy.recarray method), 208
view() (numpy.record method), 220
vonmises() (in module numpy.random), 1078

vonmises() (numpy.random.RandomState method), 1135
vsplit() (in module numpy), 473
vstack (in module numpy.ma), 319
vstack() (in module numpy), 466

W

wald() (in module numpy.random), 1080
wald() (numpy.random.RandomState method), 1136
weekmask (numpy.busdaycalendar attribute), 548
weibull() (in module numpy.random), 1081
weibull() (numpy.random.RandomState method), 1138
where() (in module numpy), 620
where() (in module numpy.ma), 373

Y

yellow_text() (in module numpy.distutils.misc_util), 1224

Z

zeros (in module numpy.ma), 296
zeros() (in module numpy), 414
zeros() (in module numpy.matlib), 835
zeros_like() (in module numpy), 415
zfill() (in module numpy.core.defchararray), 506
zfill() (numpy.chararray method), 176
zfill() (numpy.core.defchararray.chararray method), 543
zipf() (in module numpy.random), 1082
zipf() (numpy.random.RandomState method), 1139